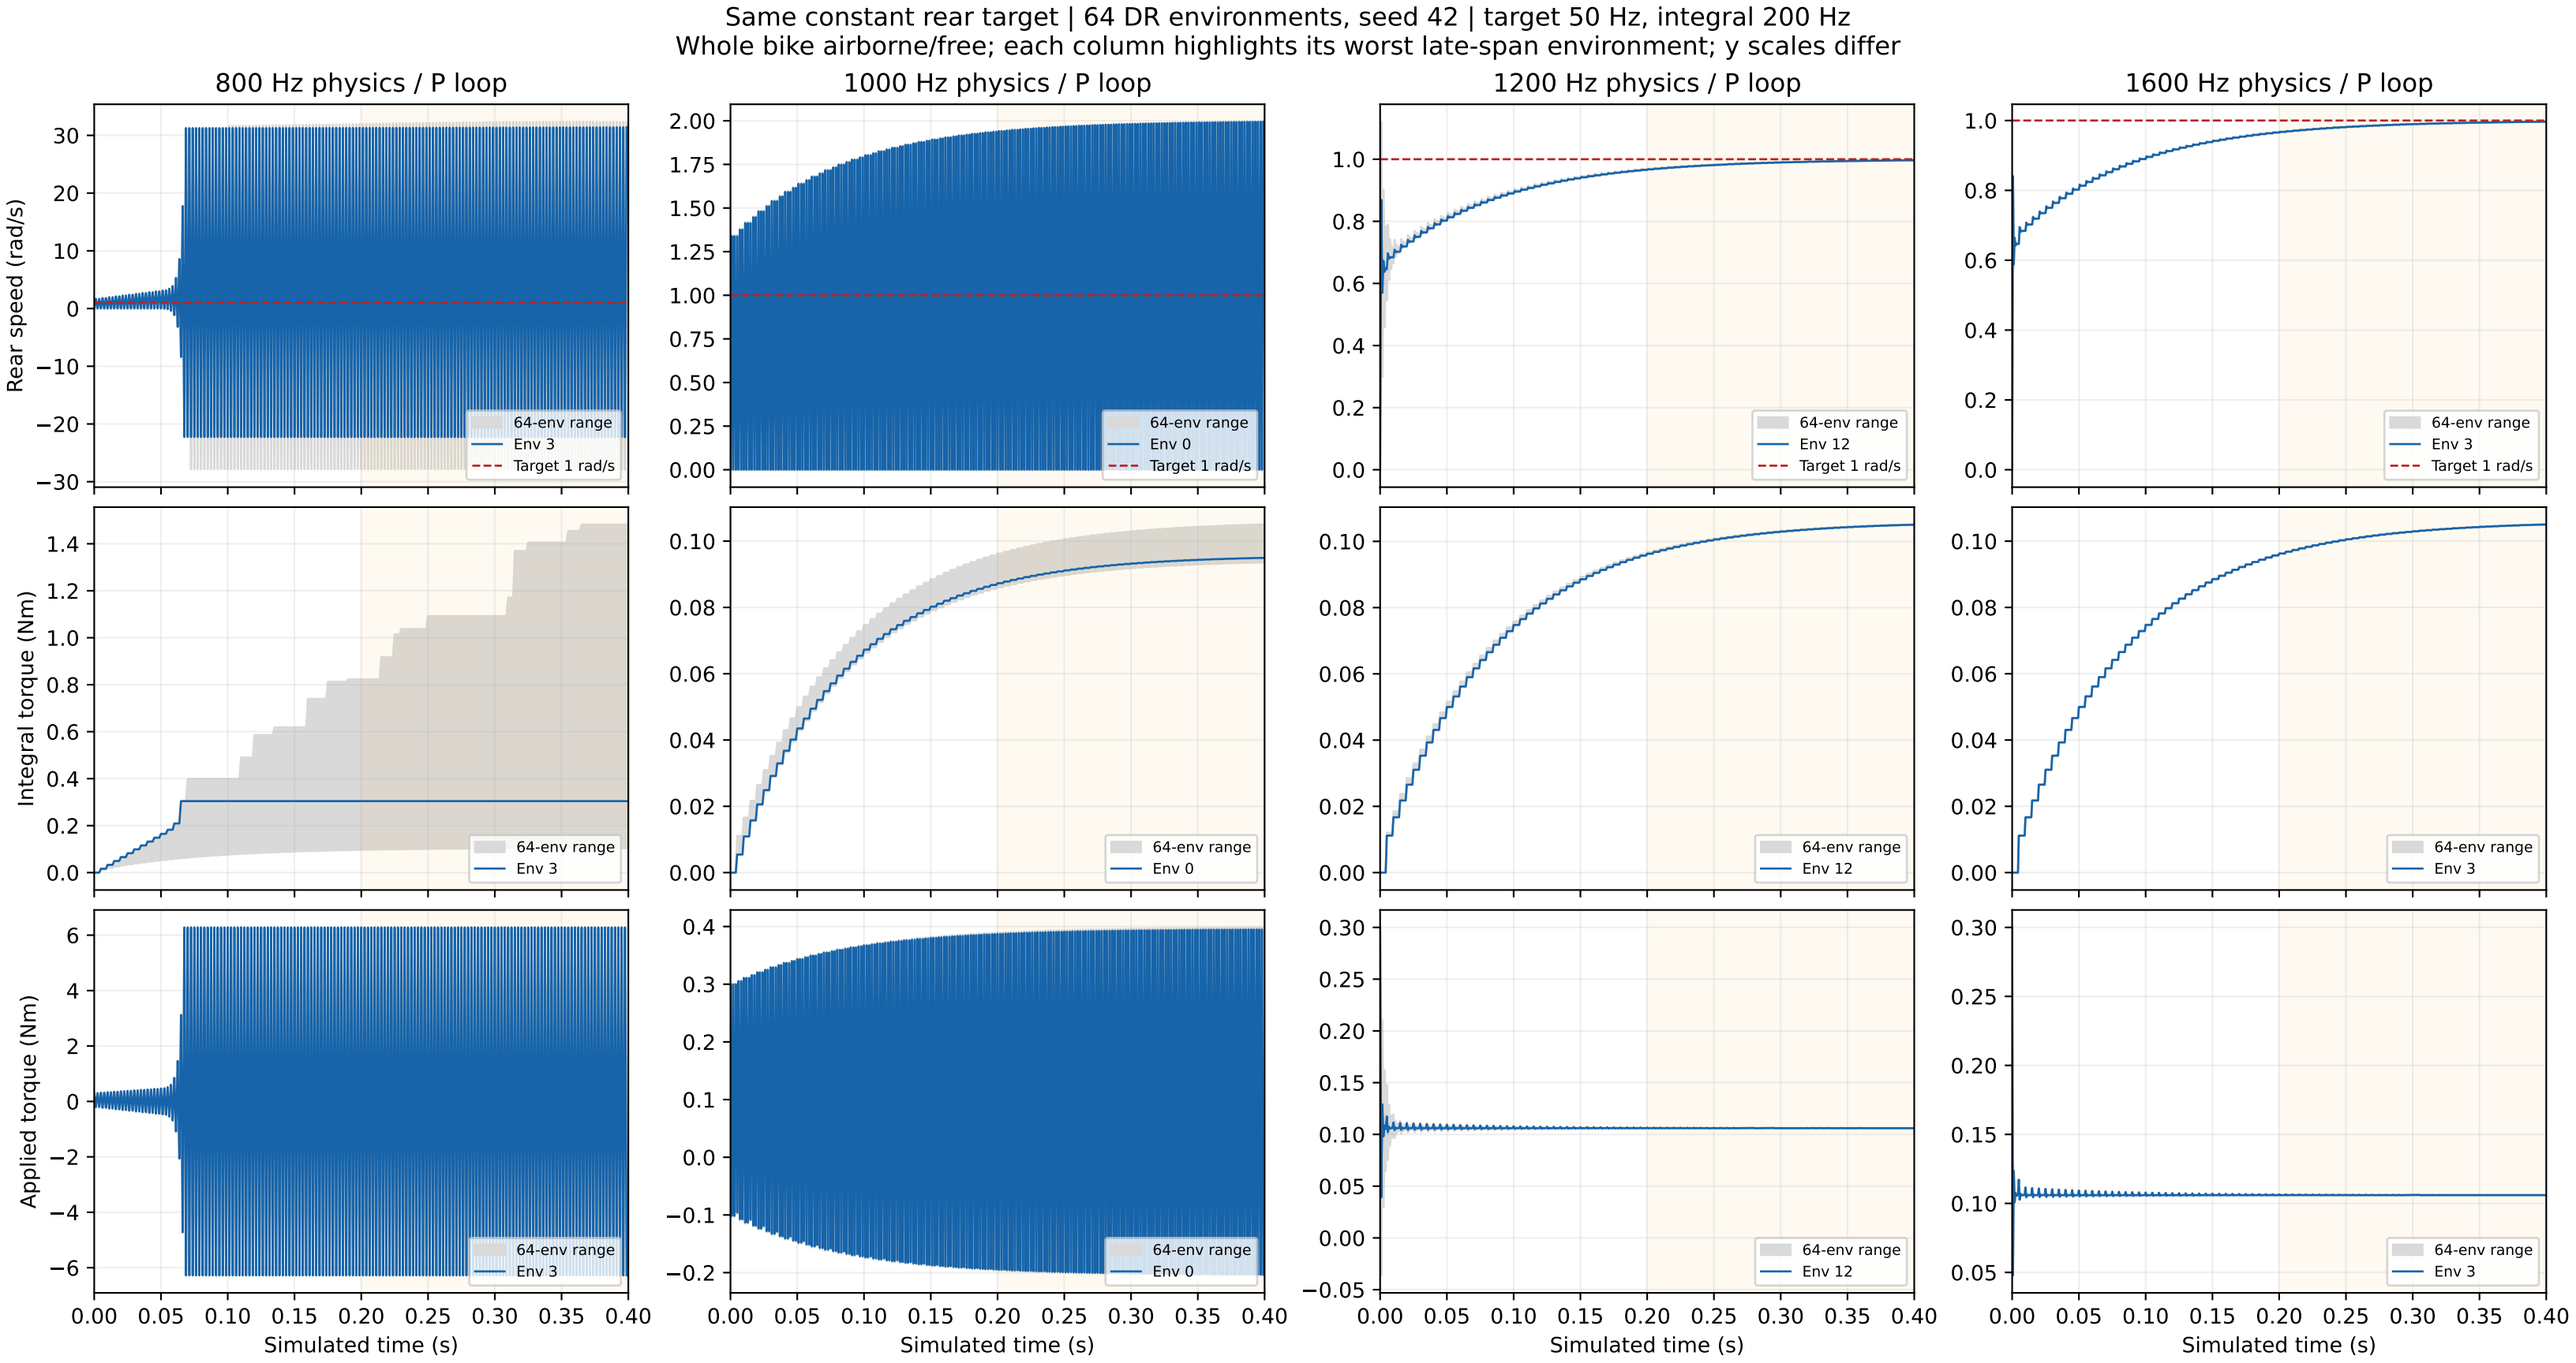

Same constant rear target | 64 DR environments, seed 42 | target 50 Hz, integral 200 Hz
Whole bike airborne/free; each column highlights its worst late-span environment; y scales differ
800 Hz physics / P loop
1000 Hz physics / P loop
1200 Hz physics / P loop
1600 Hz physics / P loop
Rear speed (rad/s)
Integral torque (Nm)
Applied torque (Nm)
Simulated time (s)
64-env range
Env 3
Env 0
Env 12
Target 1 rad/s