

Identical 50 Hz-held targets: supported bike, wheels airborne, same nominal Kp=10/Kd=0.2
No policy inference or DR resampling; 2-7s is replay core; only steering losses change in OFF pairs


1 Hz sine, 0.1 rad | steering friction ON

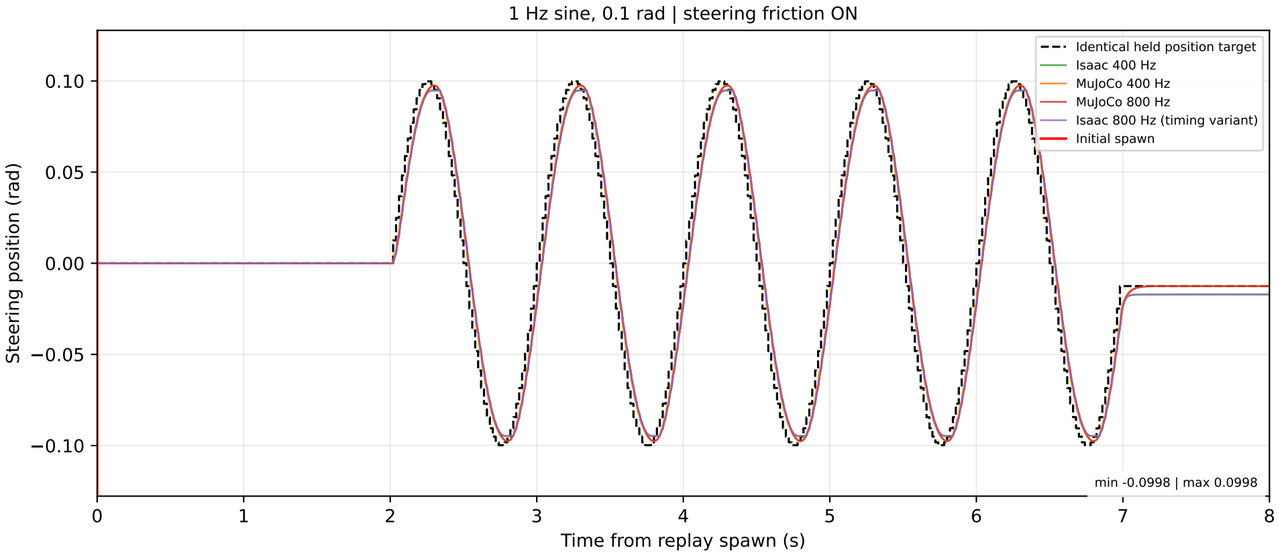


1 Hz sine, 0.1 rad | steering friction OFF

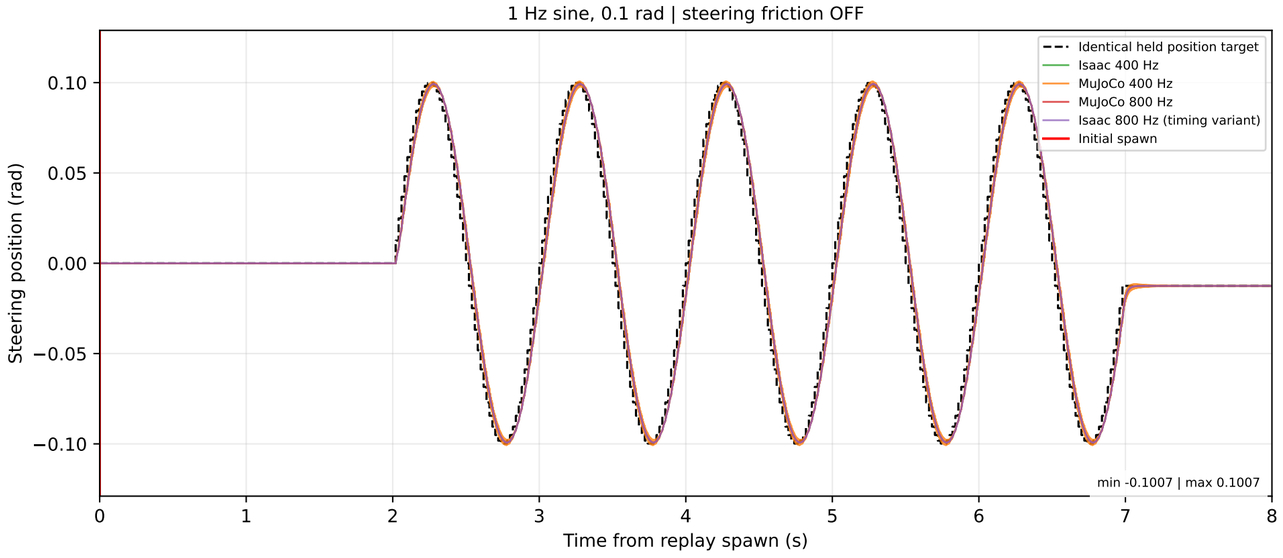


25 Hz alternating target, +/-0.1 rad | steering friction ON

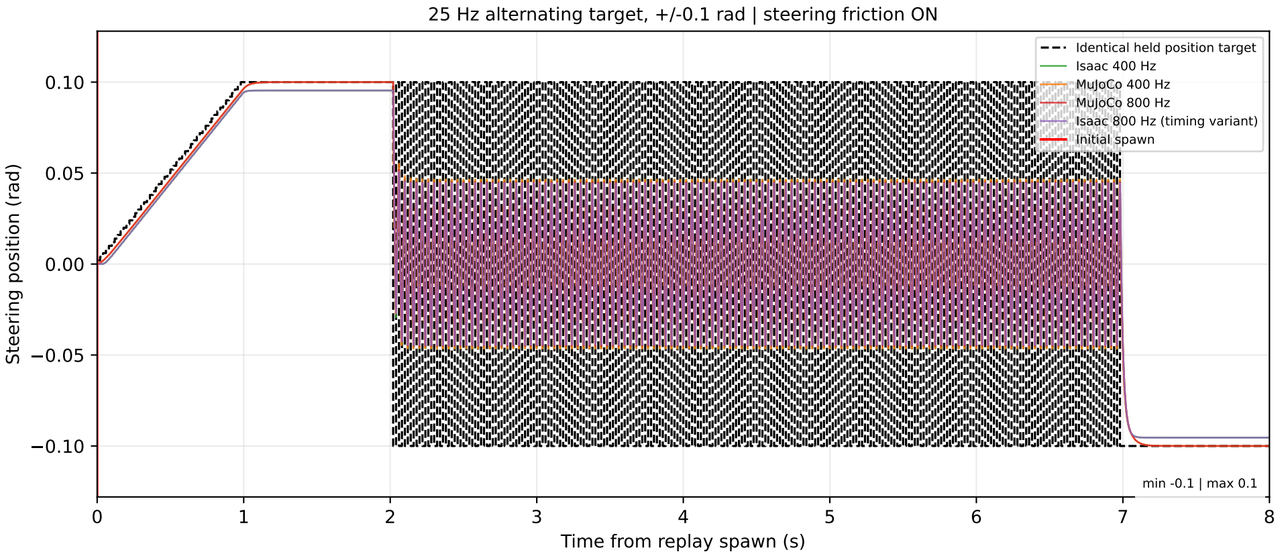


25 Hz alternating target, +/-0.1 rad | steering friction OFF

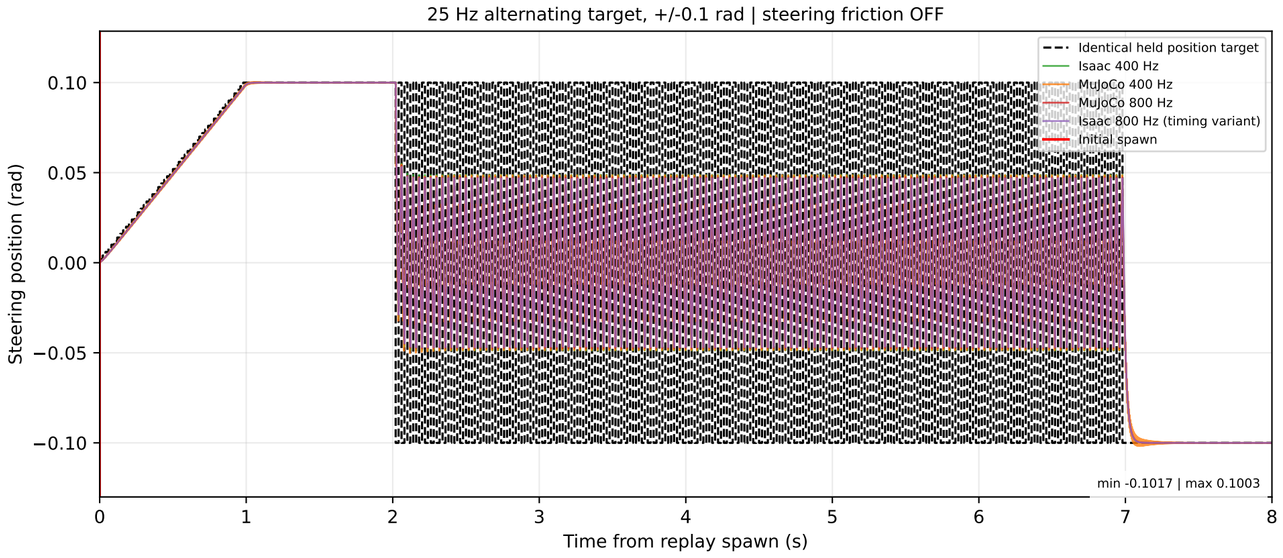


Recorded Isaac DR targets | steering friction ON

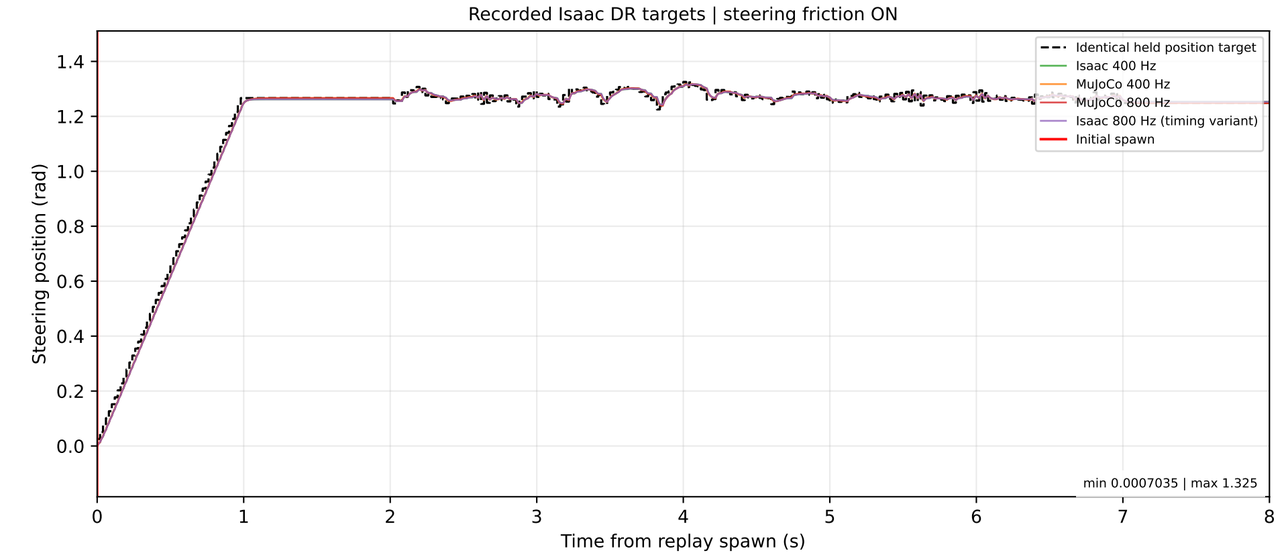


Recorded Isaac DR targets | steering friction OFF

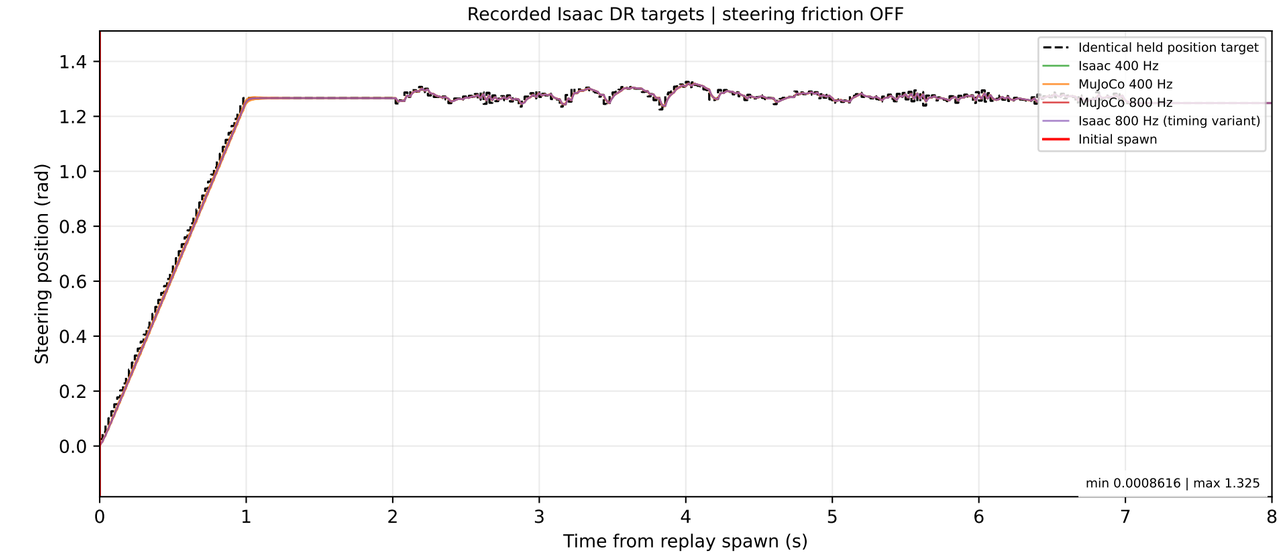


Recorded MuJoCo 400 Hz DR targets | steering friction ON

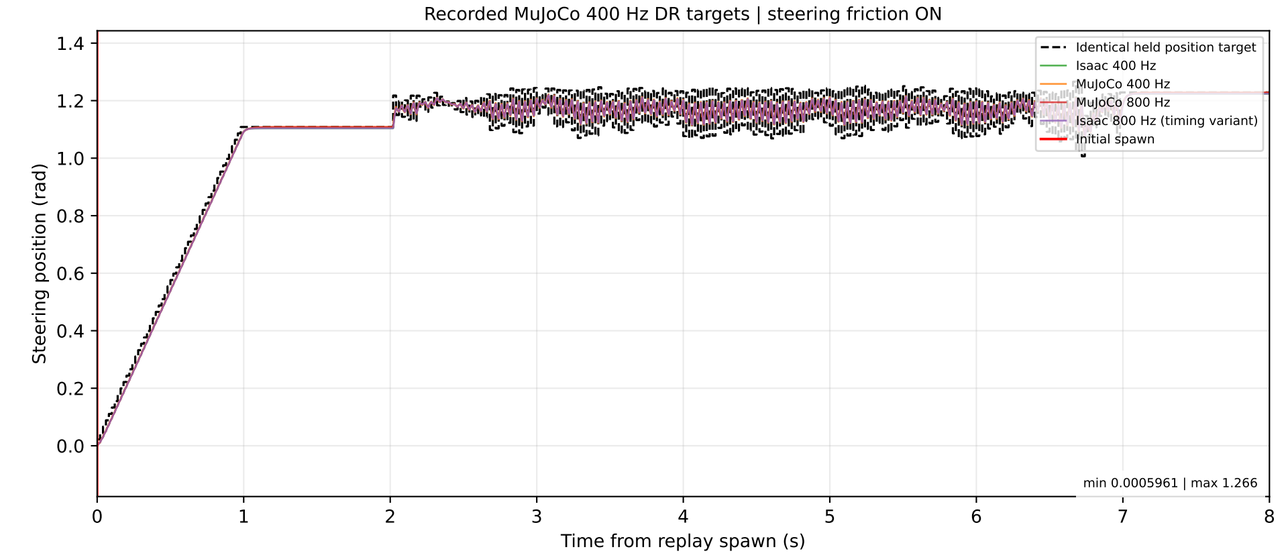

Recorded MuJoCo 400 Hz DR targets | steering friction OFF

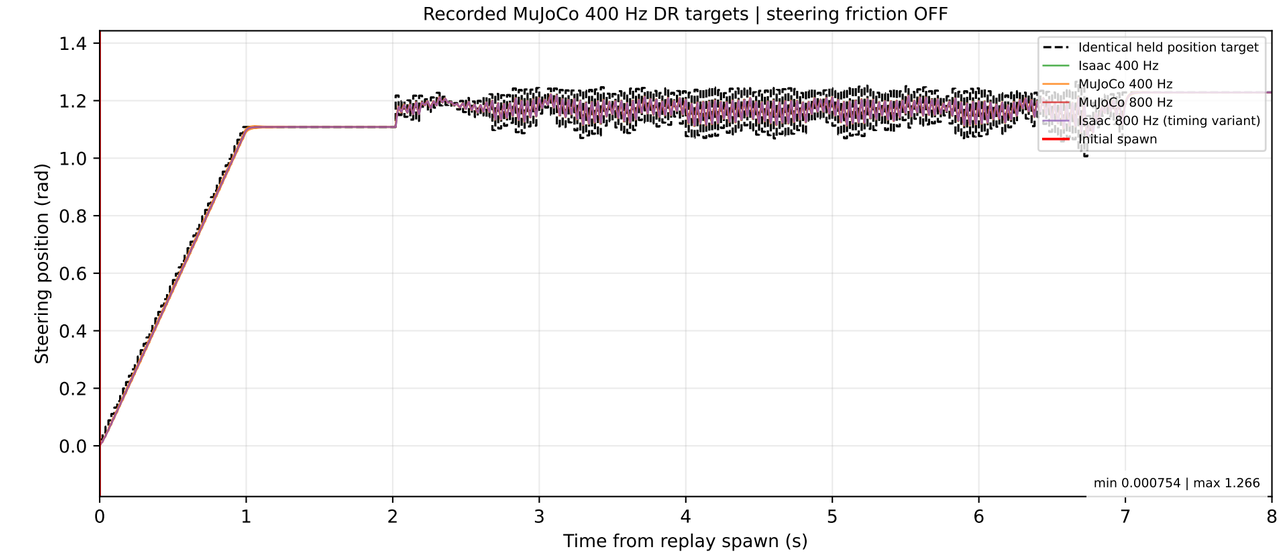

Recorded MuJoCo 800 Hz DR targets | steering friction ON

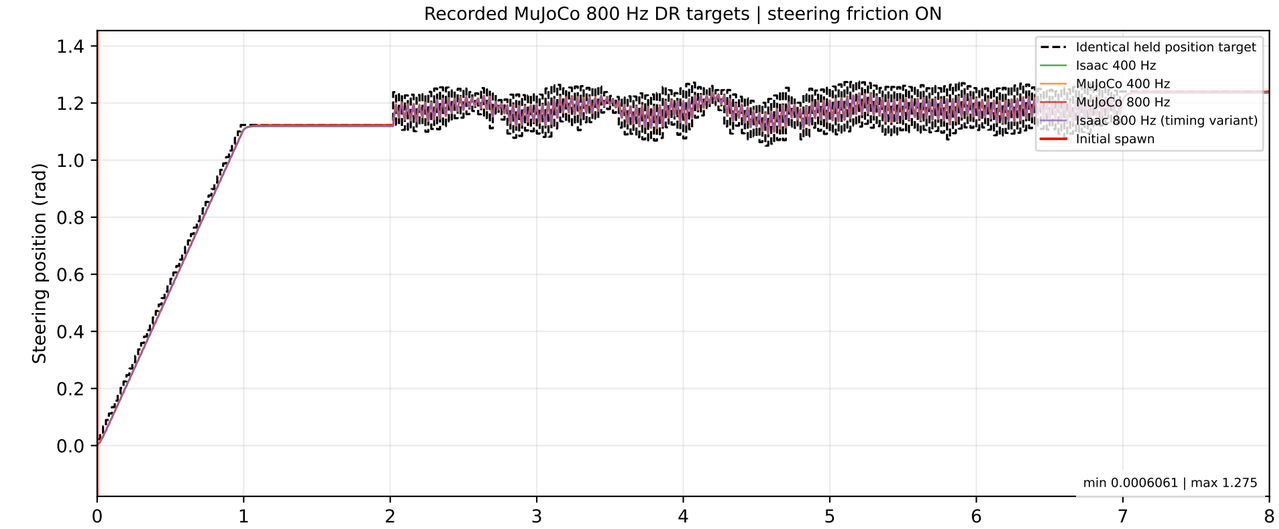

Recorded MuJoCo 800 Hz DR targets | steering friction OFF

