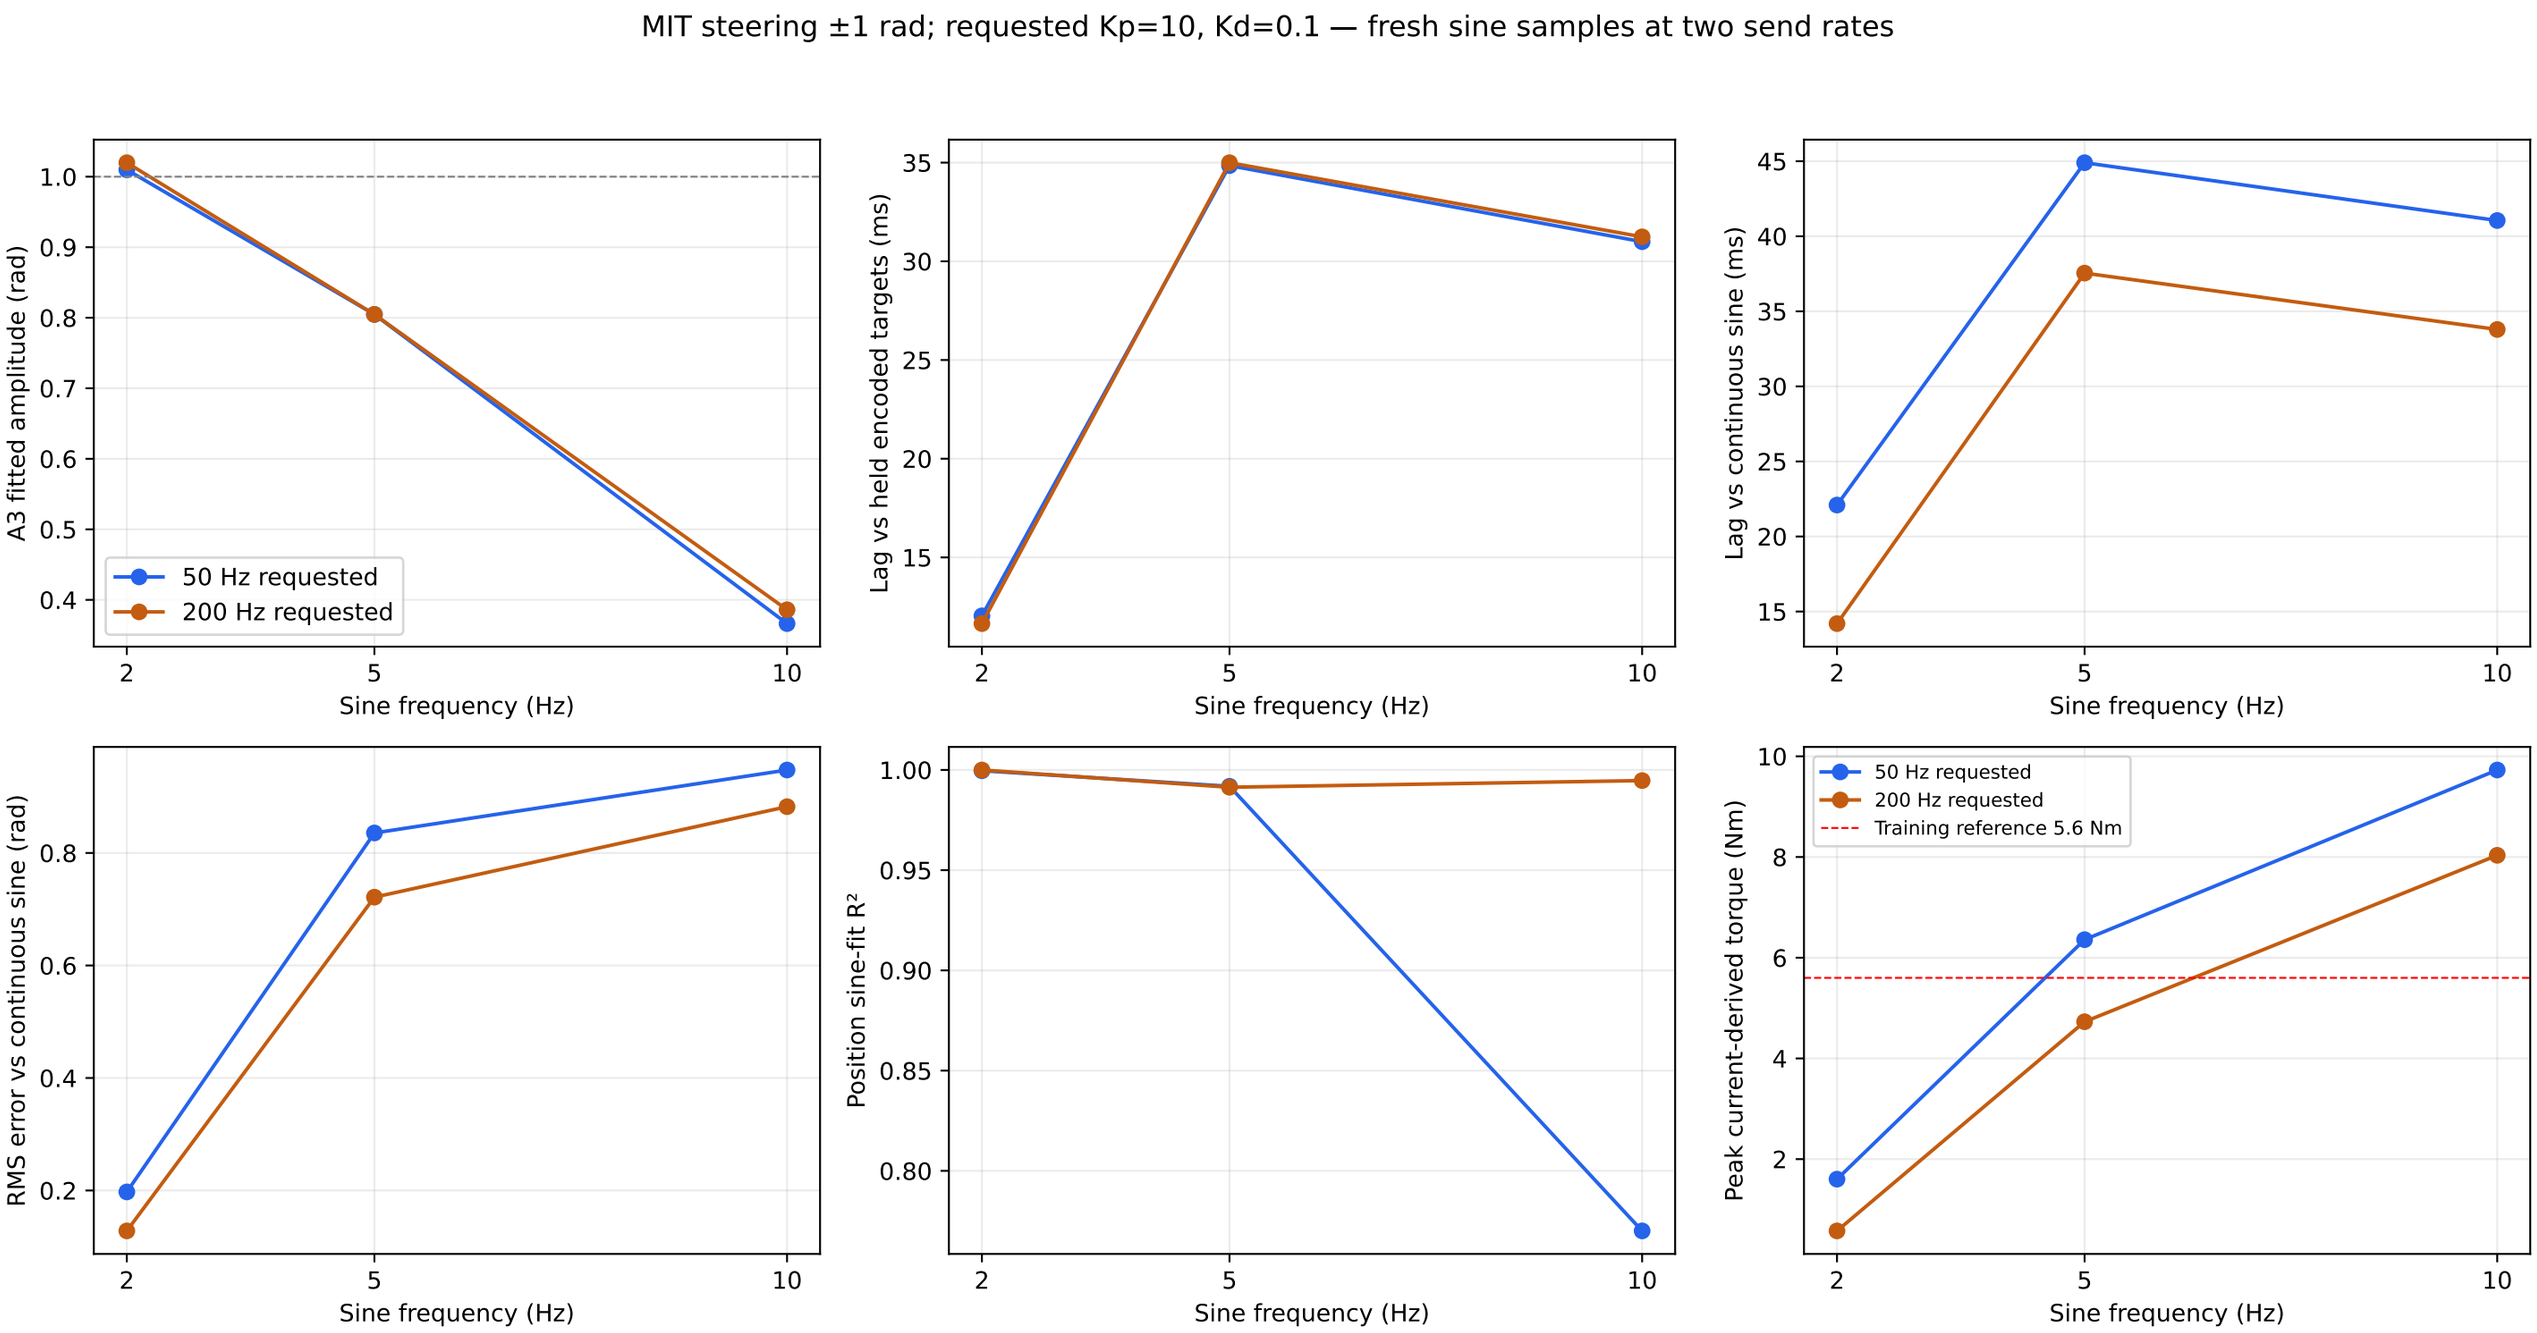
MIT steering ±1 rad; requested Kp=10, Kd=0.1 — fresh sine samples at two send rates
A3 fitted amplitude (rad)
Sine frequency (Hz)
50 Hz requested
200 Hz requested
Lag vs held encoded targets (ms)
Lag vs continuous sine (ms)
RMS error vs continuous sine (rad)
Position sine-fit R²
Peak current-derived torque (Nm)
Training reference 5.6 Nm
Measured sends: 49.72 Hz versus 196.06–196.32 Hz. Host-clock lags; current-derived torque. Unloaded tests, not a policy replay or firmware-loop measurement.