Three-cycle tracking windows: both signals retain their measured relative timing

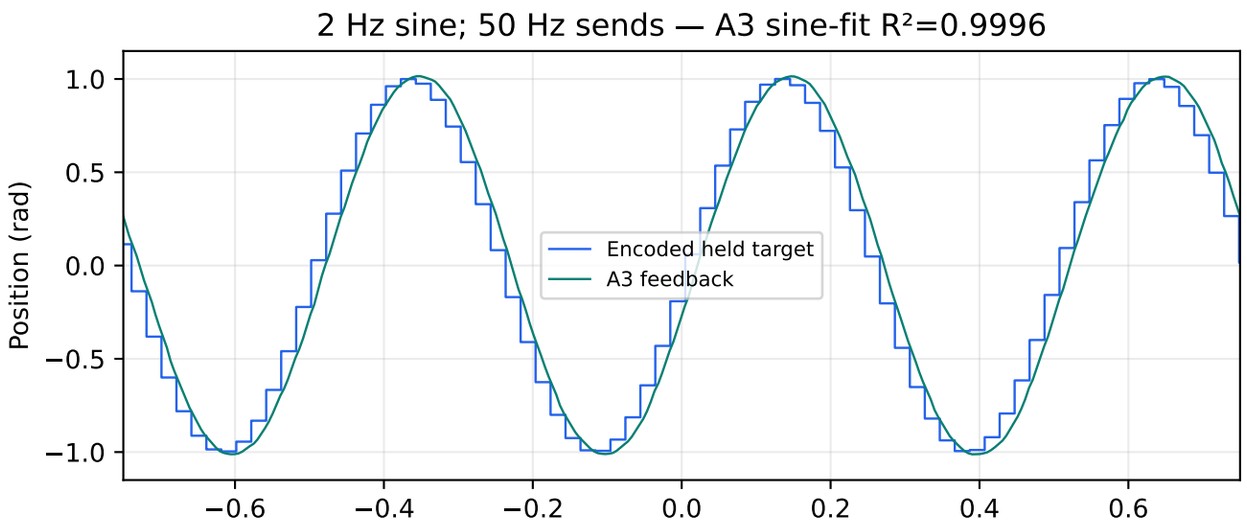

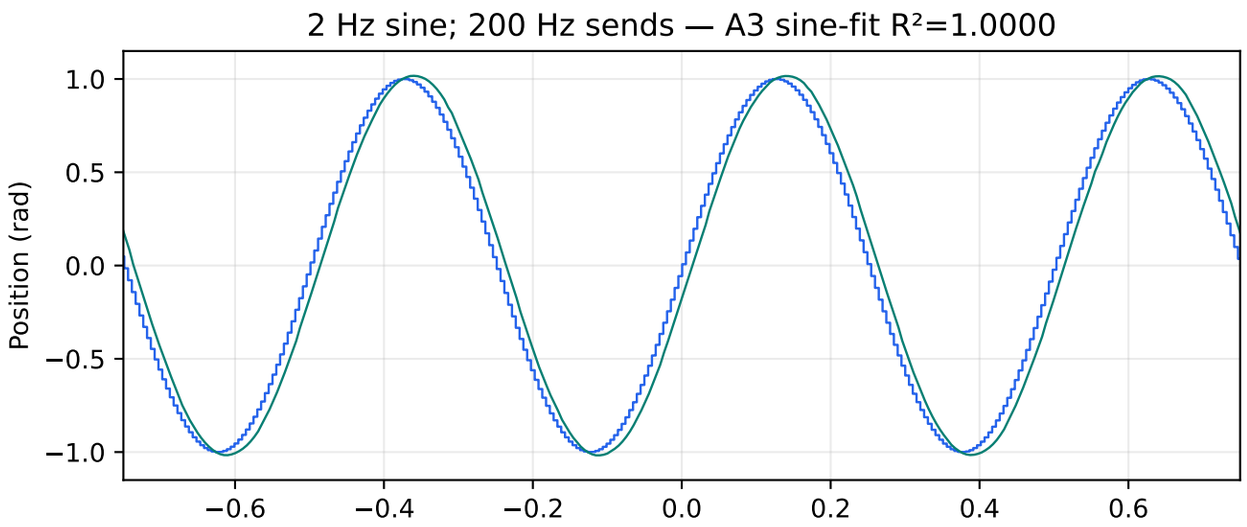

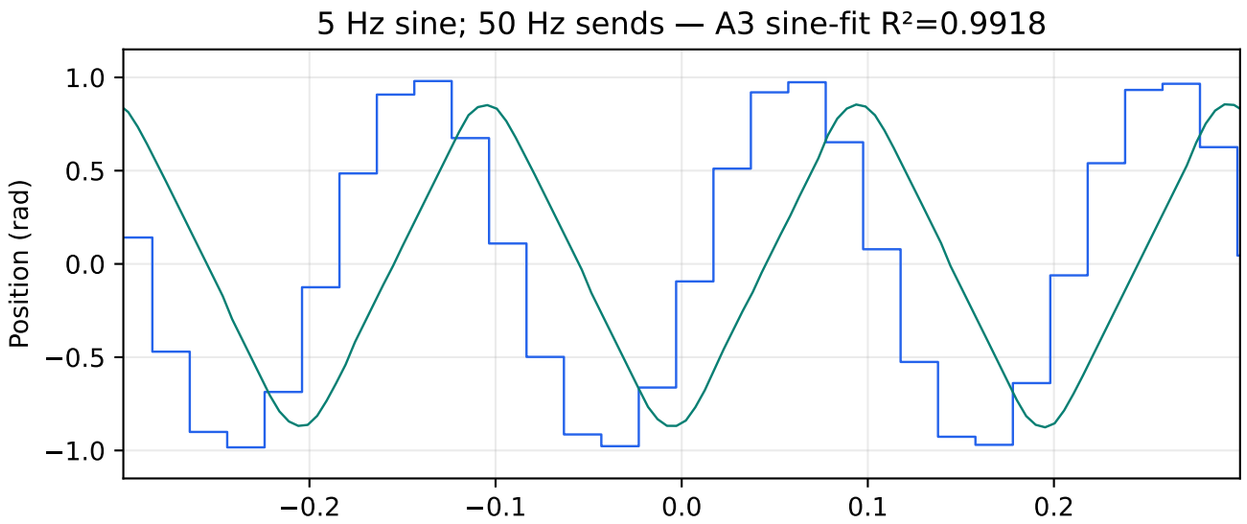

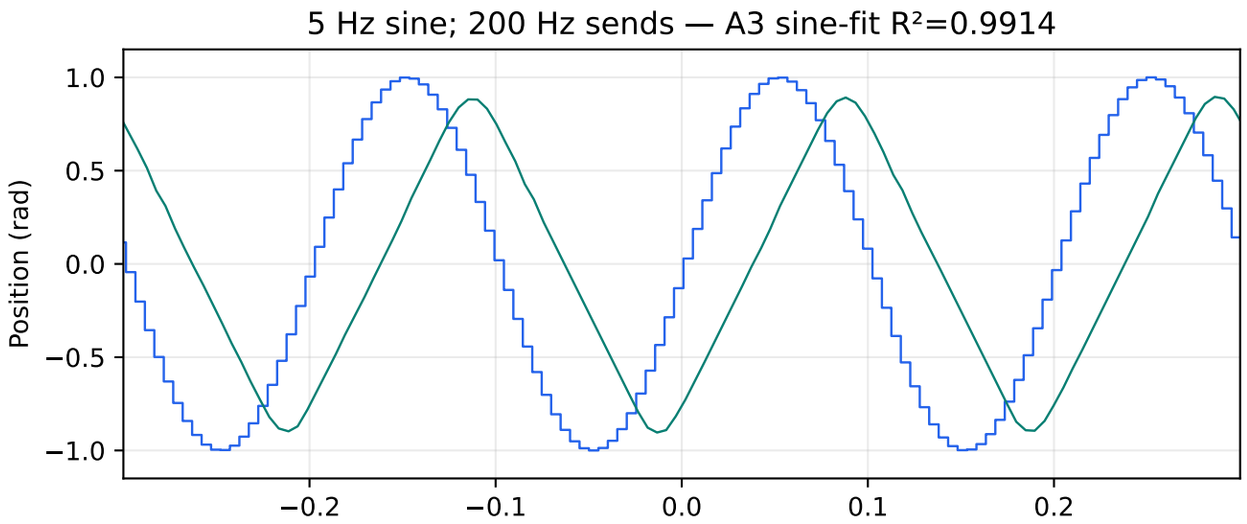

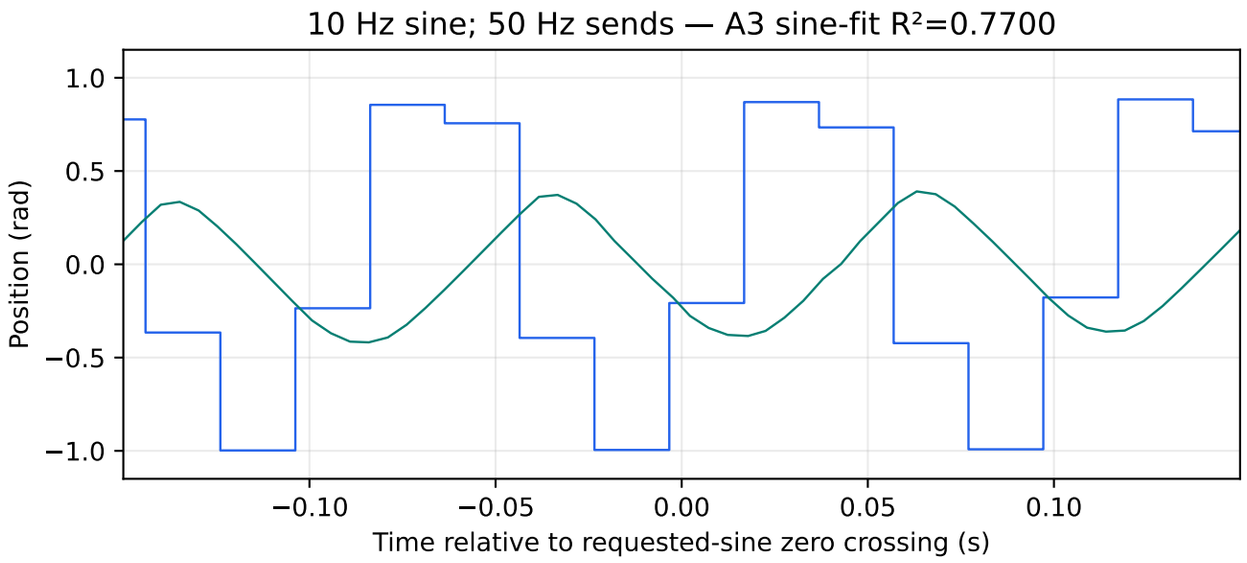

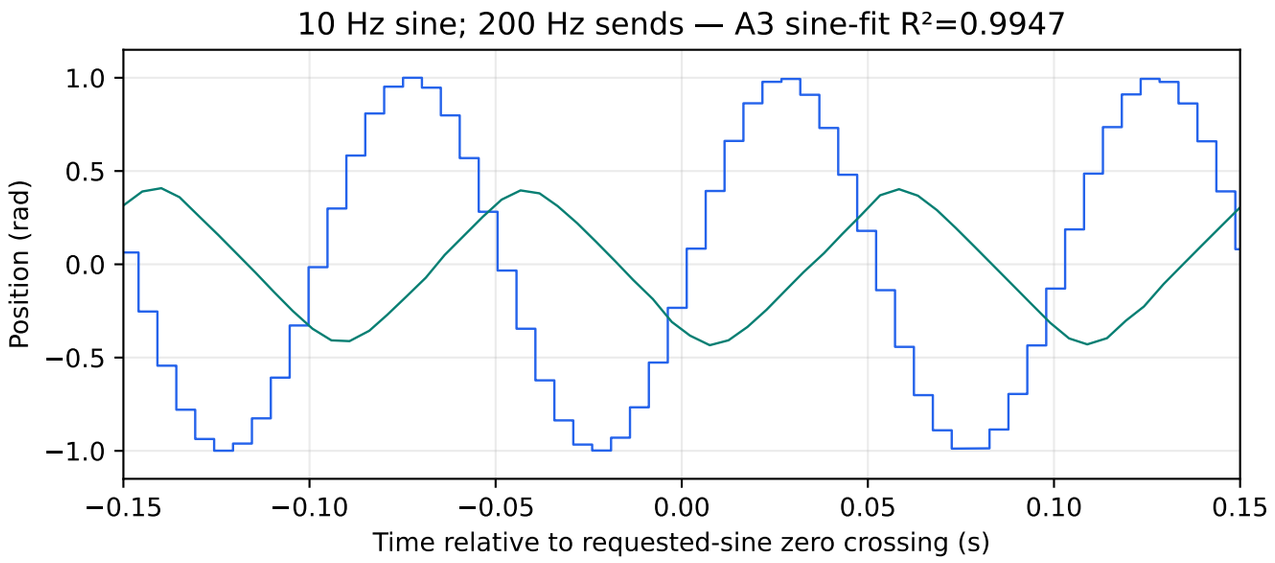

Independent recordings aligned only by requested sine phase; feedback is never shifted relative to its command. Raw samples retained, no smoothing.