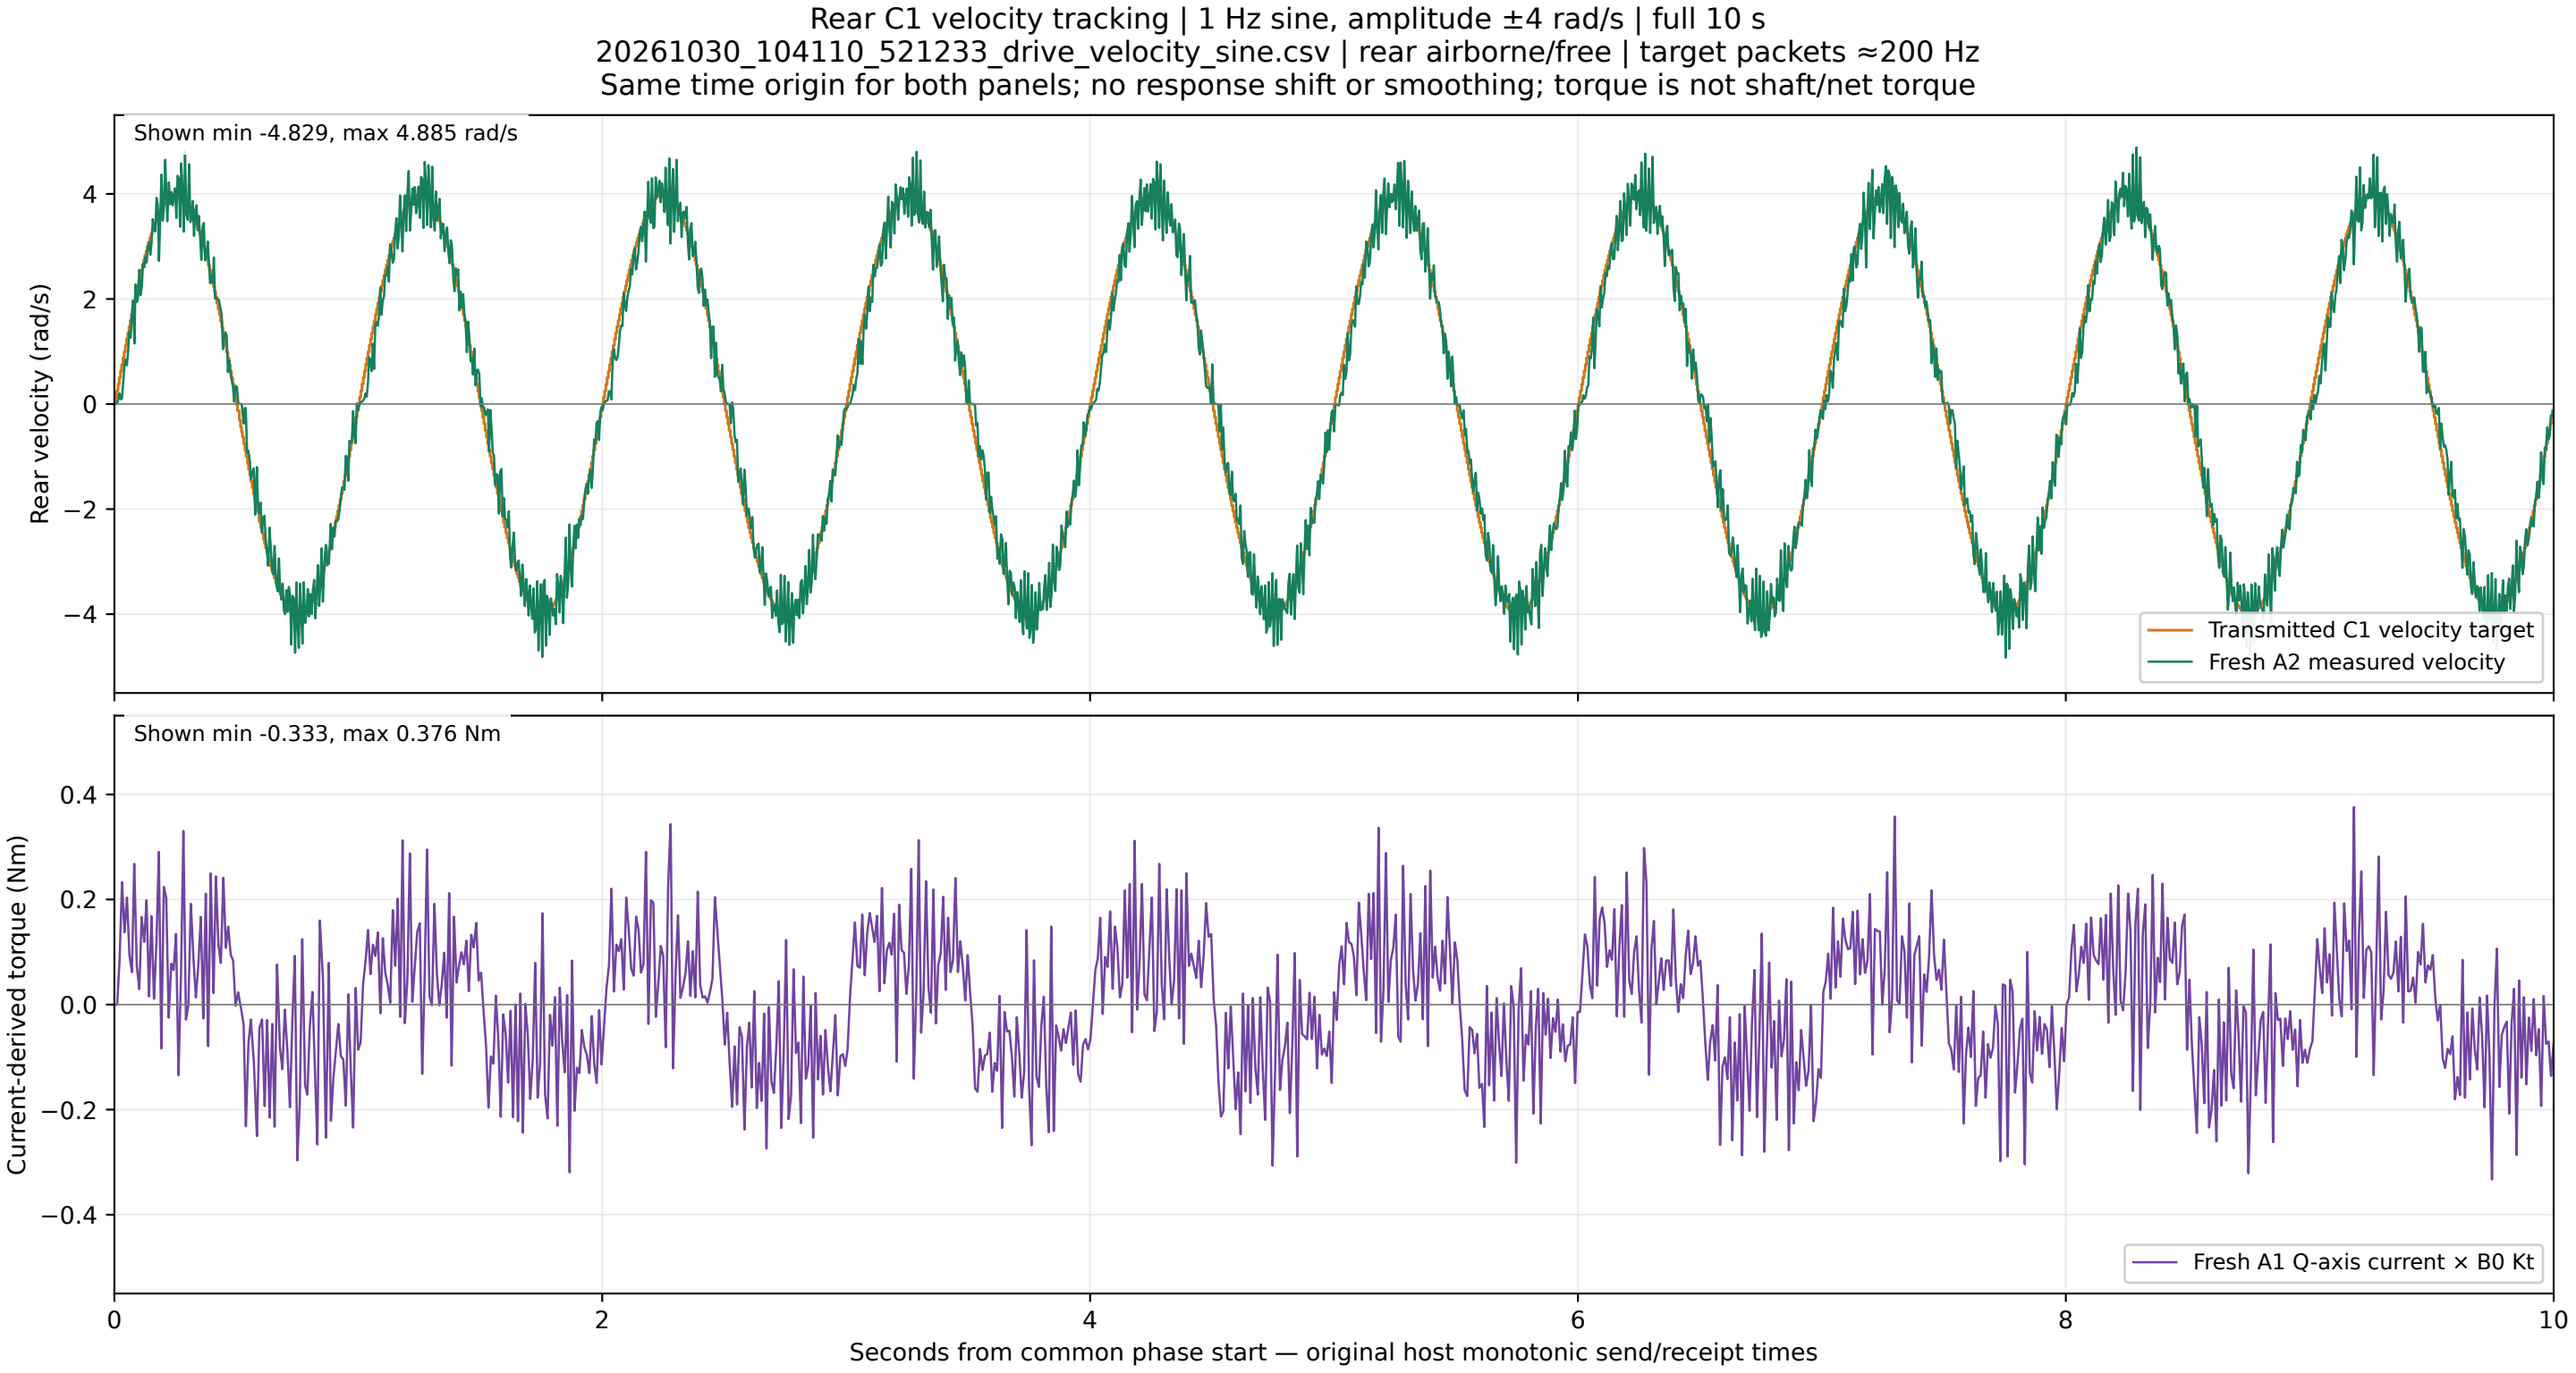
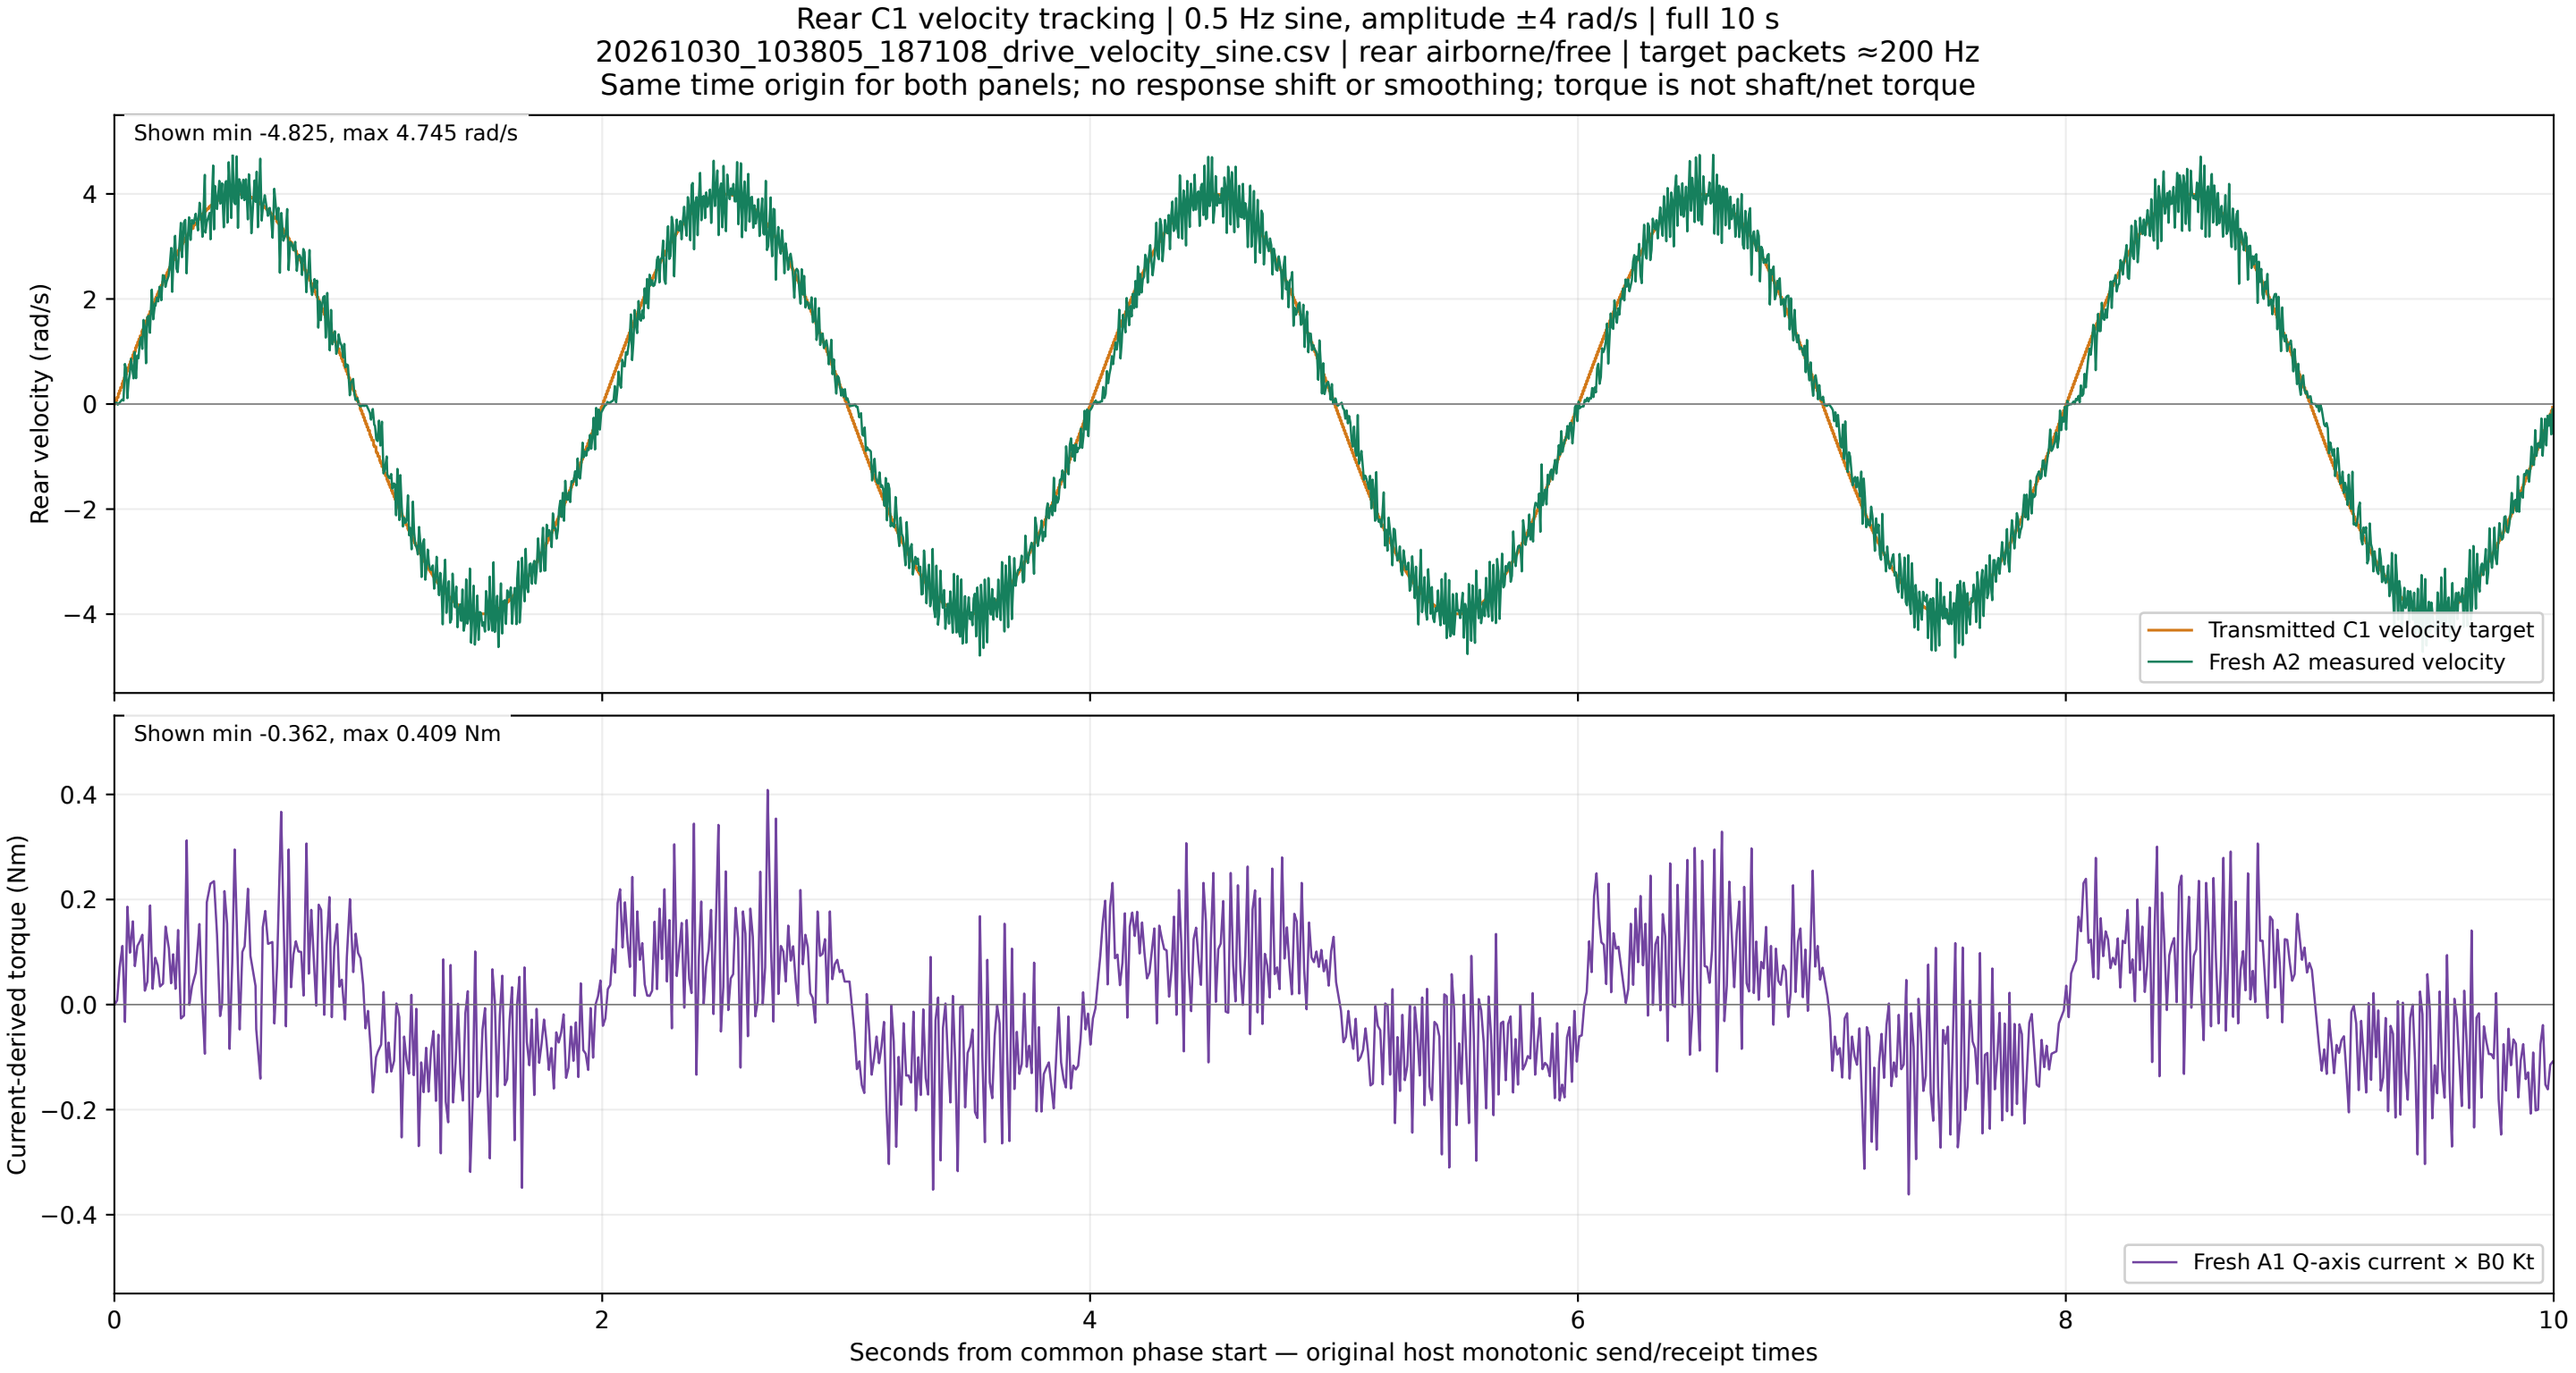
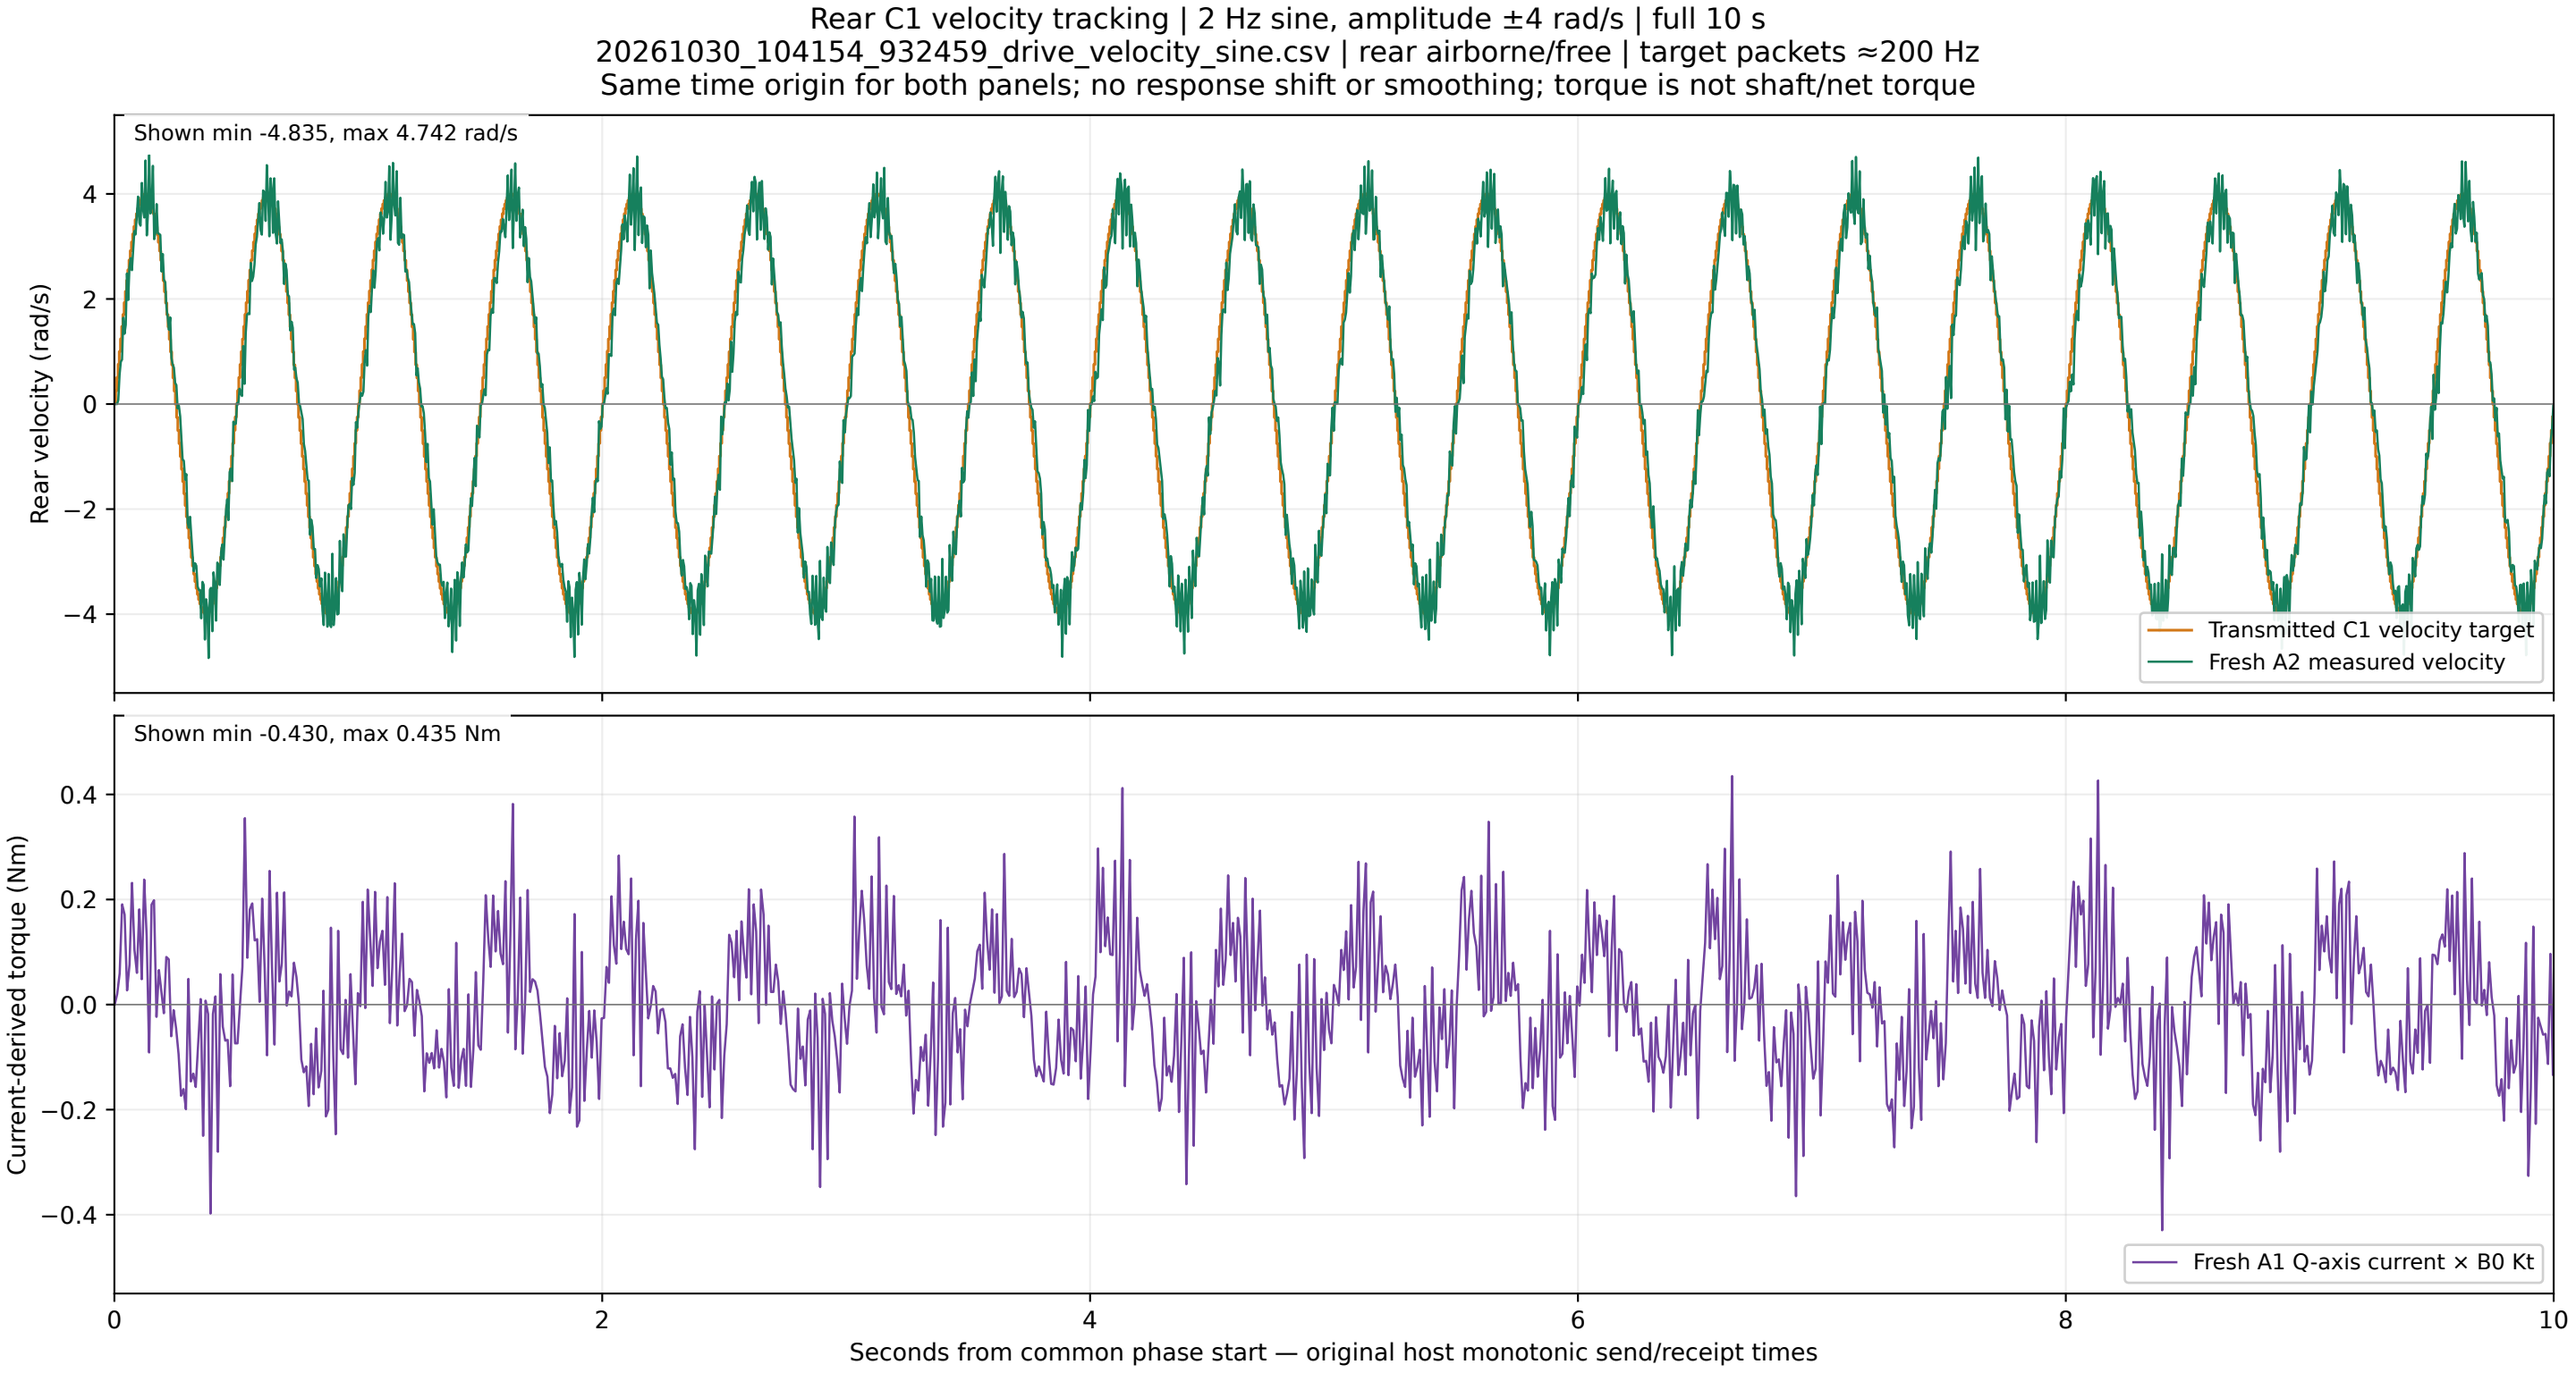
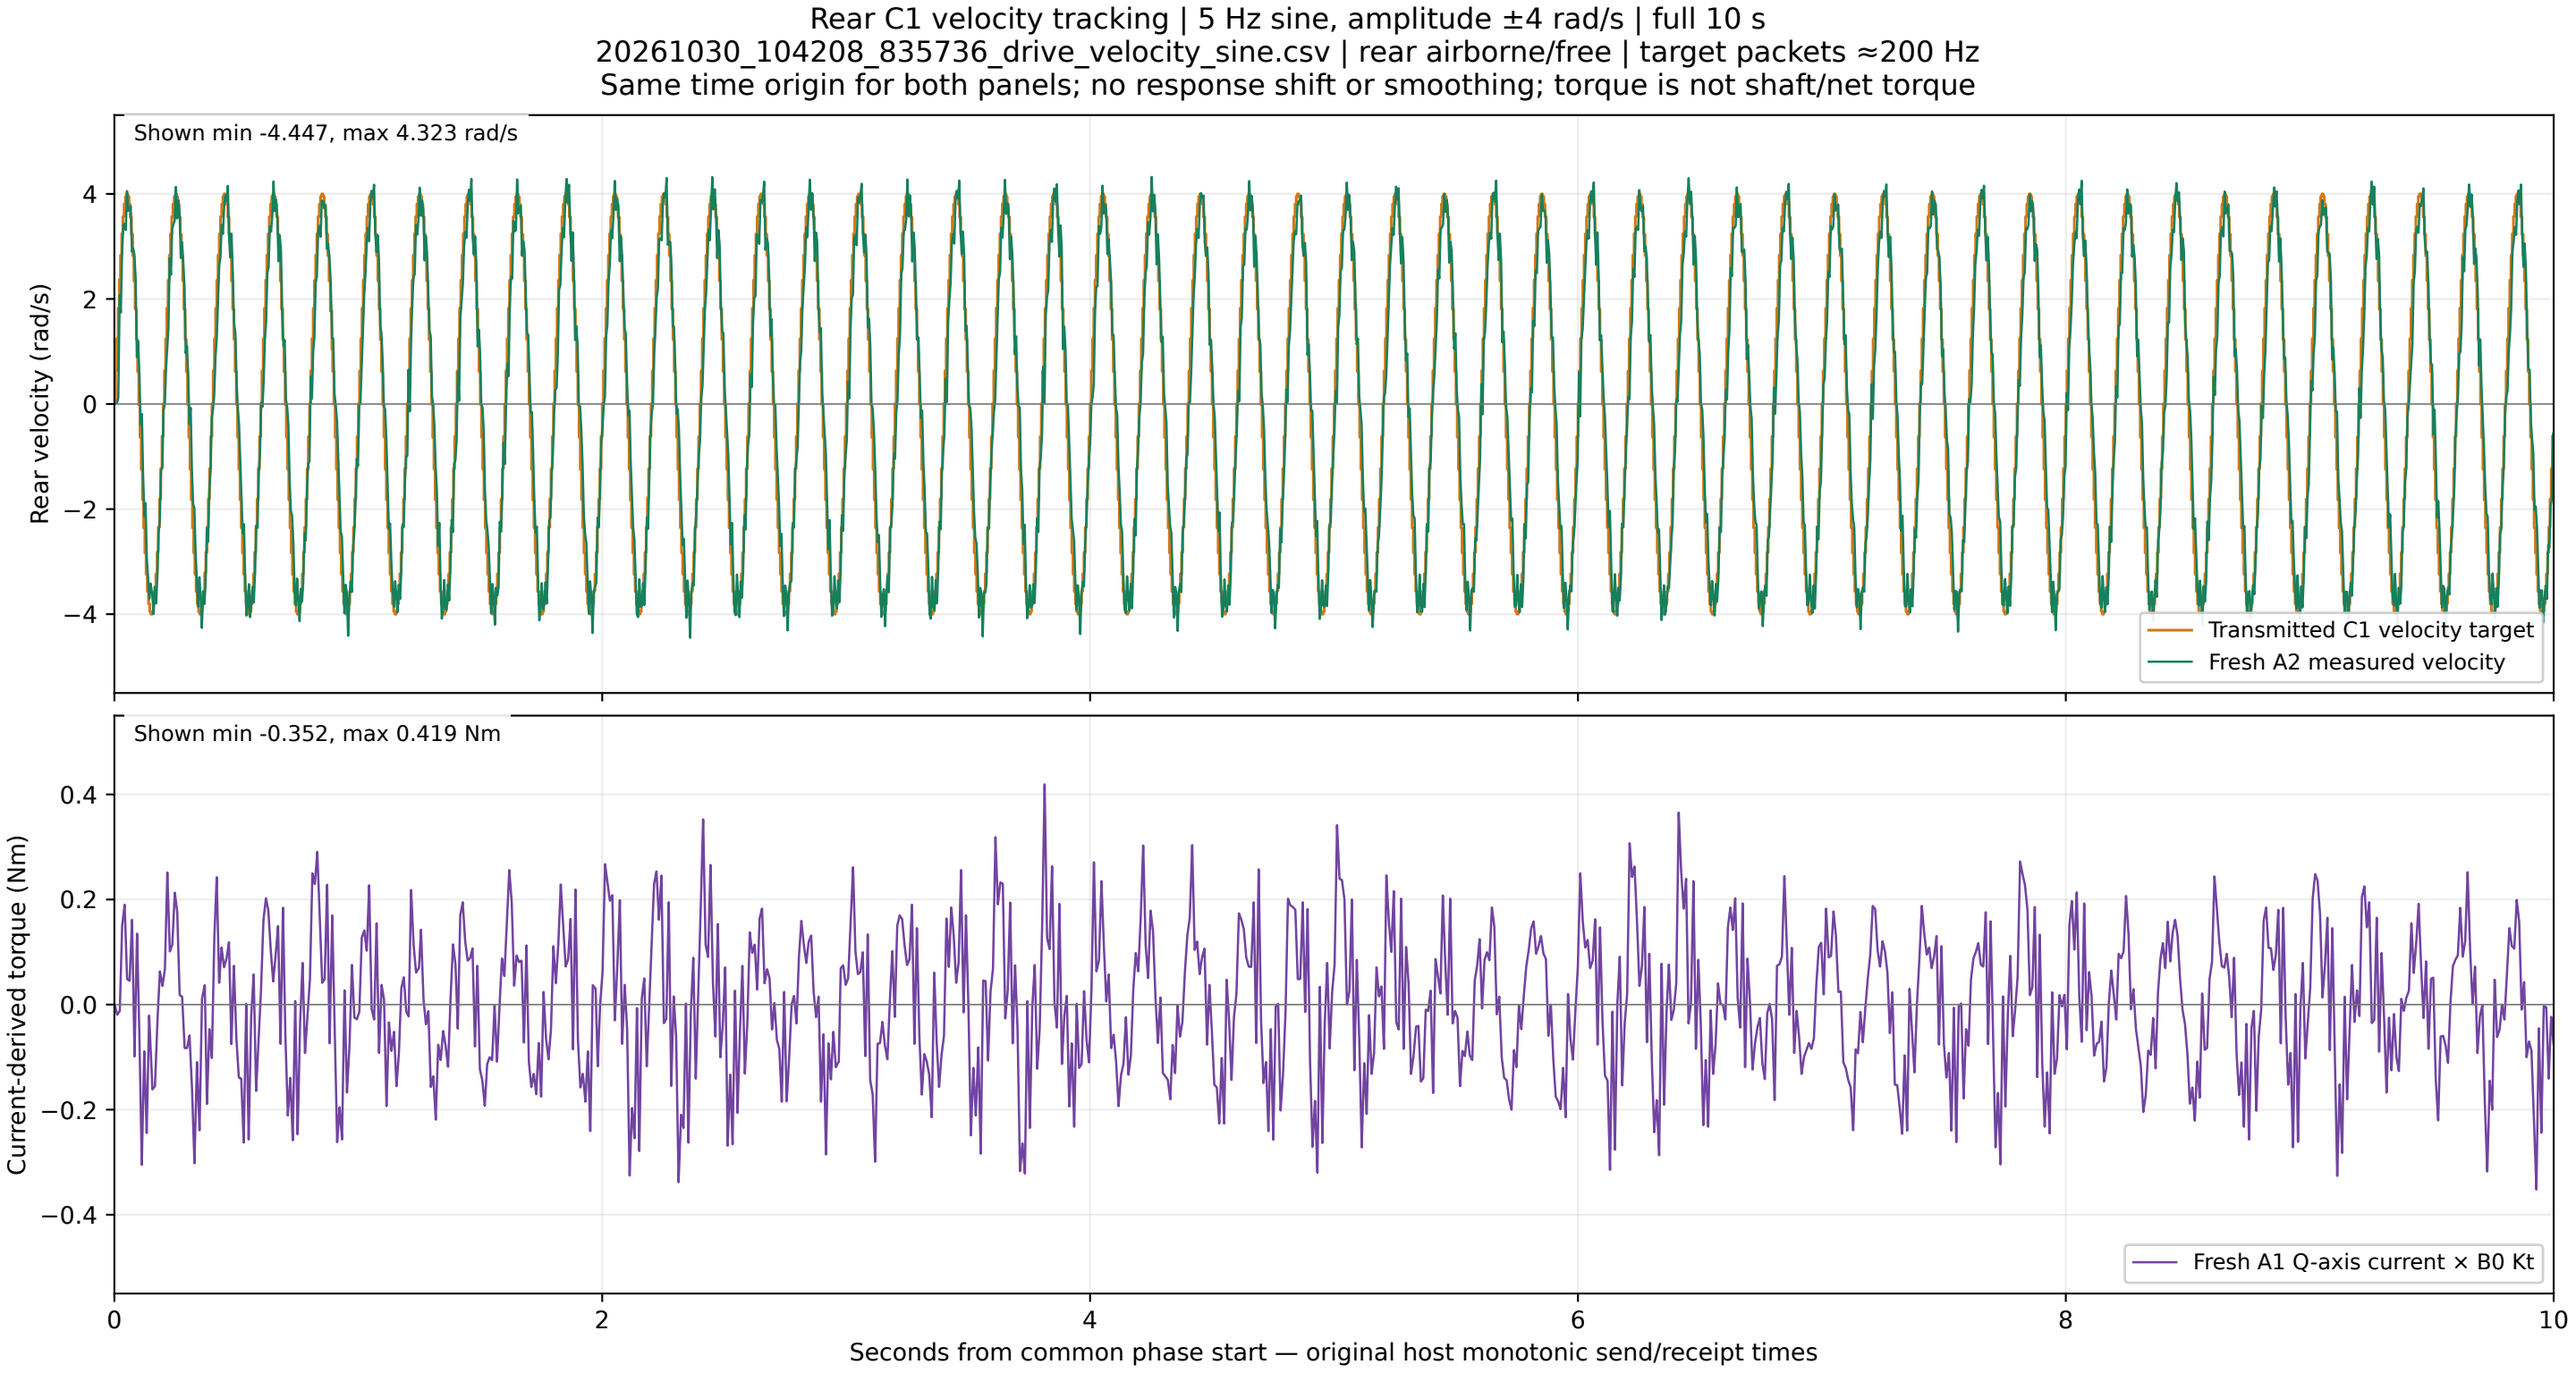
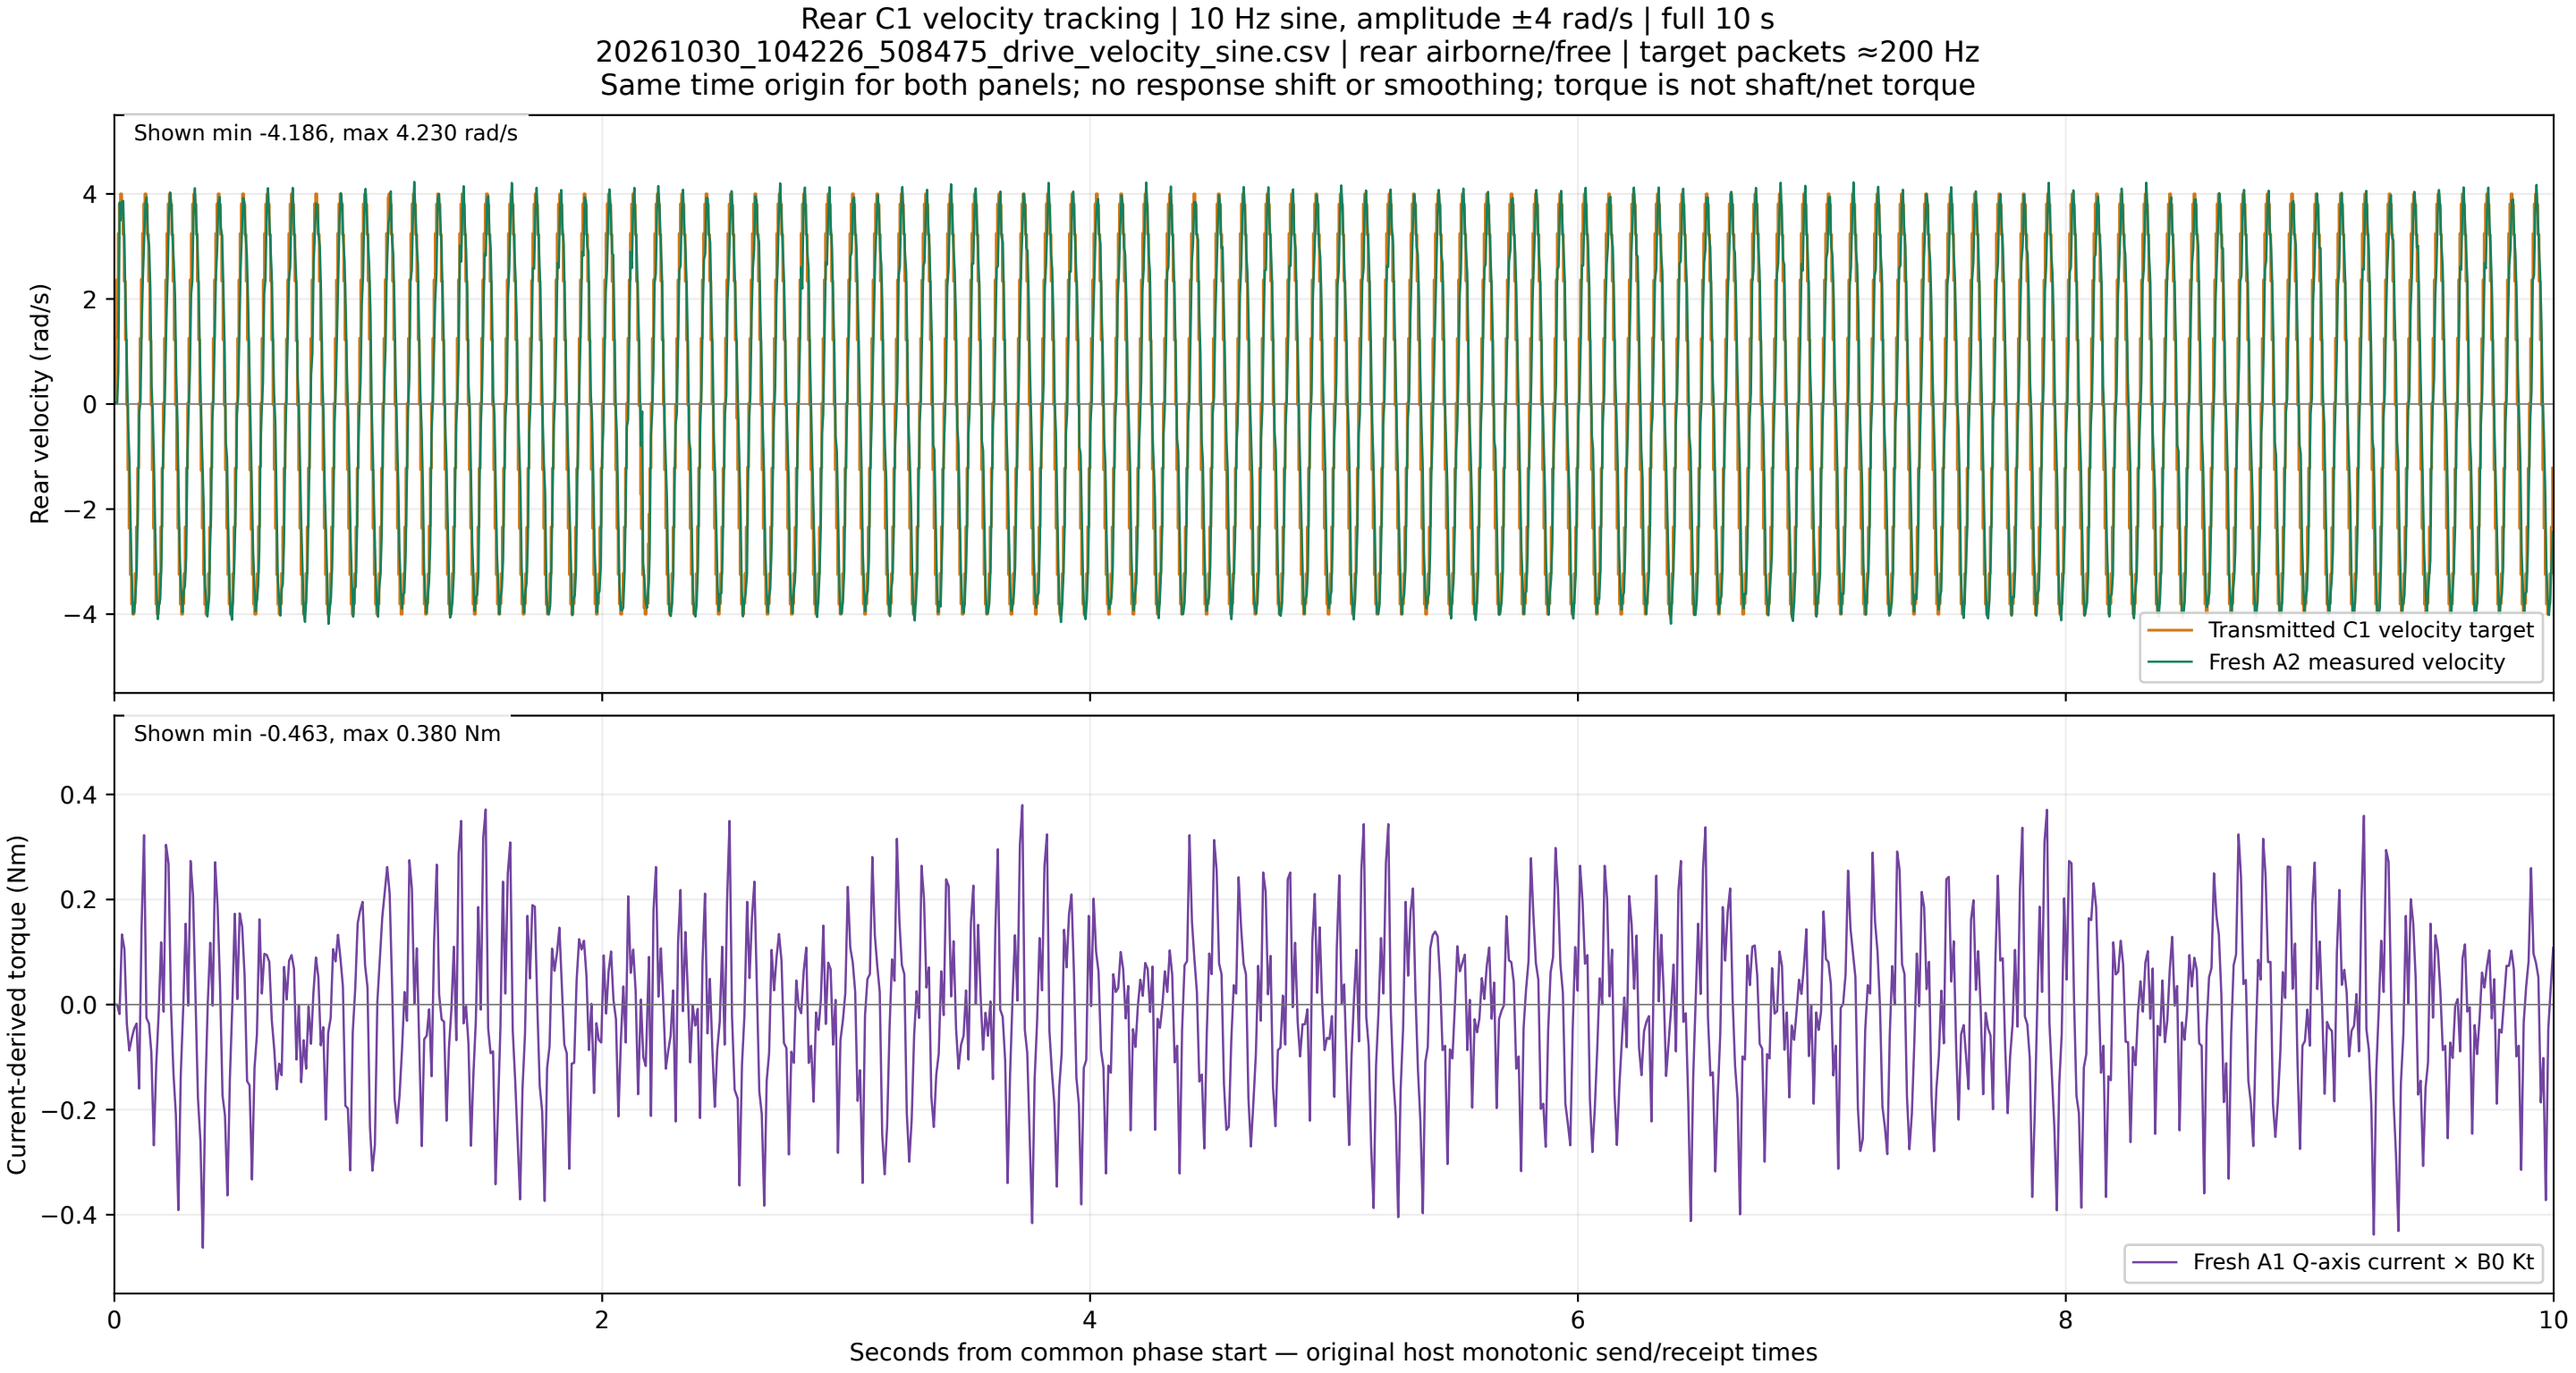

Rear C1 velocity tracking | 1 Hz sine, amplitude ±4 rad/s | full 10 s
20261030_104110_521233_drive_velocity_sine.csv | rear airborne/free | target packets ≈200 Hz
Same time origin for both panels; no response shift or smoothing; torque is not shaft/net torque
Shown min -4.829, max 4.885 rad/s
Rear velocity (rad/s)
Transmitted C1 velocity target
Fresh A2 measured velocity
Shown min -0.333, max 0.376 Nm
Current-derived torque (Nm)
Fresh A1 Q-axis current × B0 Kt
Seconds from common phase start — original host monotonic send/receipt times


Rear C1 velocity tracking | 0.5 Hz sine, amplitude ±4 rad/s | full 10 s
20261030_103805_187108_drive_velocity_sine.csv | rear airborne/free | target packets ≈200 Hz
Same time origin for both panels; no response shift or smoothing; torque is not shaft/net torque
Shown min -4.825, max 4.745 rad/s
Rear velocity (rad/s)
Transmitted C1 velocity target
Fresh A2 measured velocity
Shown min -0.362, max 0.409 Nm
Current-derived torque (Nm)
Fresh A1 Q-axis current × B0 Kt
Seconds from common phase start — original host monotonic send/receipt times


Rear C1 velocity tracking | 2 Hz sine, amplitude ±4 rad/s | full 10 s
20261030_104154_932459_drive_velocity_sine.csv | rear airborne/free | target packets ≈200 Hz
Same time origin for both panels; no response shift or smoothing; torque is not shaft/net torque
Shown min -4.835, max 4.742 rad/s
Rear velocity (rad/s)
Transmitted C1 velocity target
Fresh A2 measured velocity
Shown min -0.430, max 0.435 Nm
Current-derived torque (Nm)
Fresh A1 Q-axis current × B0 Kt
Seconds from common phase start — original host monotonic send/receipt times


Rear C1 velocity tracking | 5 Hz sine, amplitude ±4 rad/s | full 10 s
20261030_104208_835736_drive_velocity_sine.csv | rear airborne/free | target packets ≈200 Hz
Same time origin for both panels; no response shift or smoothing; torque is not shaft/net torque
Shown min -4.447, max 4.323 rad/s
Rear velocity (rad/s)
Transmitted C1 velocity target
Fresh A2 measured velocity
Shown min -0.352, max 0.419 Nm
Current-derived torque (Nm)
Fresh A1 Q-axis current × B0 Kt
Seconds from common phase start — original host monotonic send/receipt times


Rear C1 velocity tracking | 10 Hz sine, amplitude ±4 rad/s | full 10 s
20261030_104226_508475_drive_velocity_sine.csv | rear airborne/free | target packets ≈200 Hz
Same time origin for both panels; no response shift or smoothing; torque is not shaft/net torque
Shown min -4.186, max 4.230 rad/s
Rear velocity (rad/s)
Transmitted C1 velocity target
Fresh A2 measured velocity
Shown min -0.463, max 0.380 Nm
Current-derived torque (Nm)
Fresh A1 Q-axis current × B0 Kt
Seconds from common phase start — original host monotonic send/receipt times