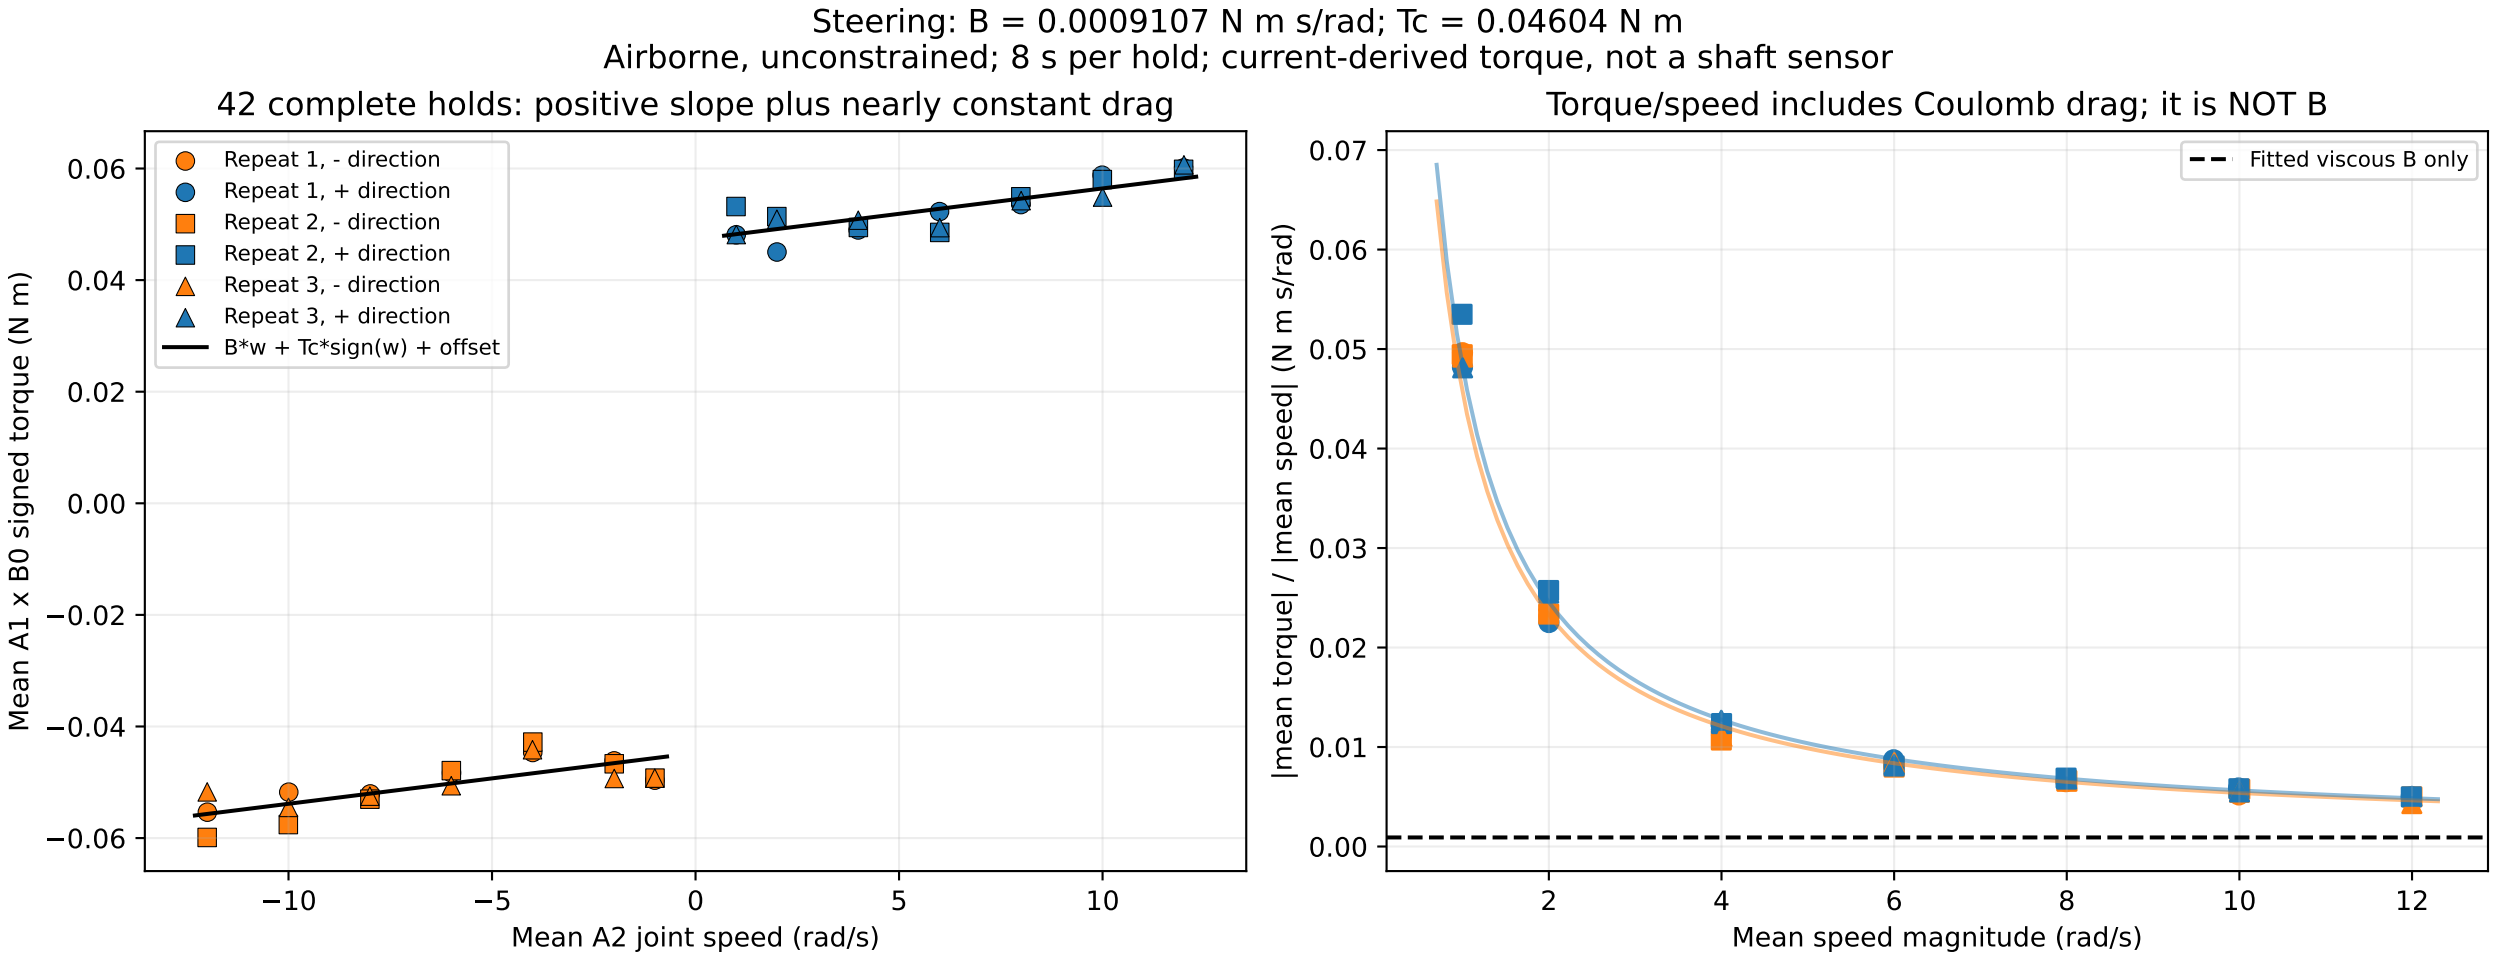
Steering: B = 0.0009107 N m s/rad; Tc = 0.04604 N m
Airborne, unconstrained; 8 s per hold; current-derived torque, not a shaft sensor
42 complete holds: positive slope plus nearly constant drag
Repeat 1, - direction
Repeat 1, + direction
Repeat 2, - direction
Repeat 2, + direction
Repeat 3, - direction
Repeat 3, + direction
B*w + Tc*sign(w) + offset
Mean A1 x B0 signed torque (N m)
Mean A2 joint speed (rad/s)
Torque/speed includes Coulomb drag; it is NOT B
Fitted viscous B only
|mean torque| / |mean speed| (N m s/rad)
Mean speed magnitude (rad/s)