
Same intended conditions, repeat 3: raw target, response, current-derived torque and encoder travel

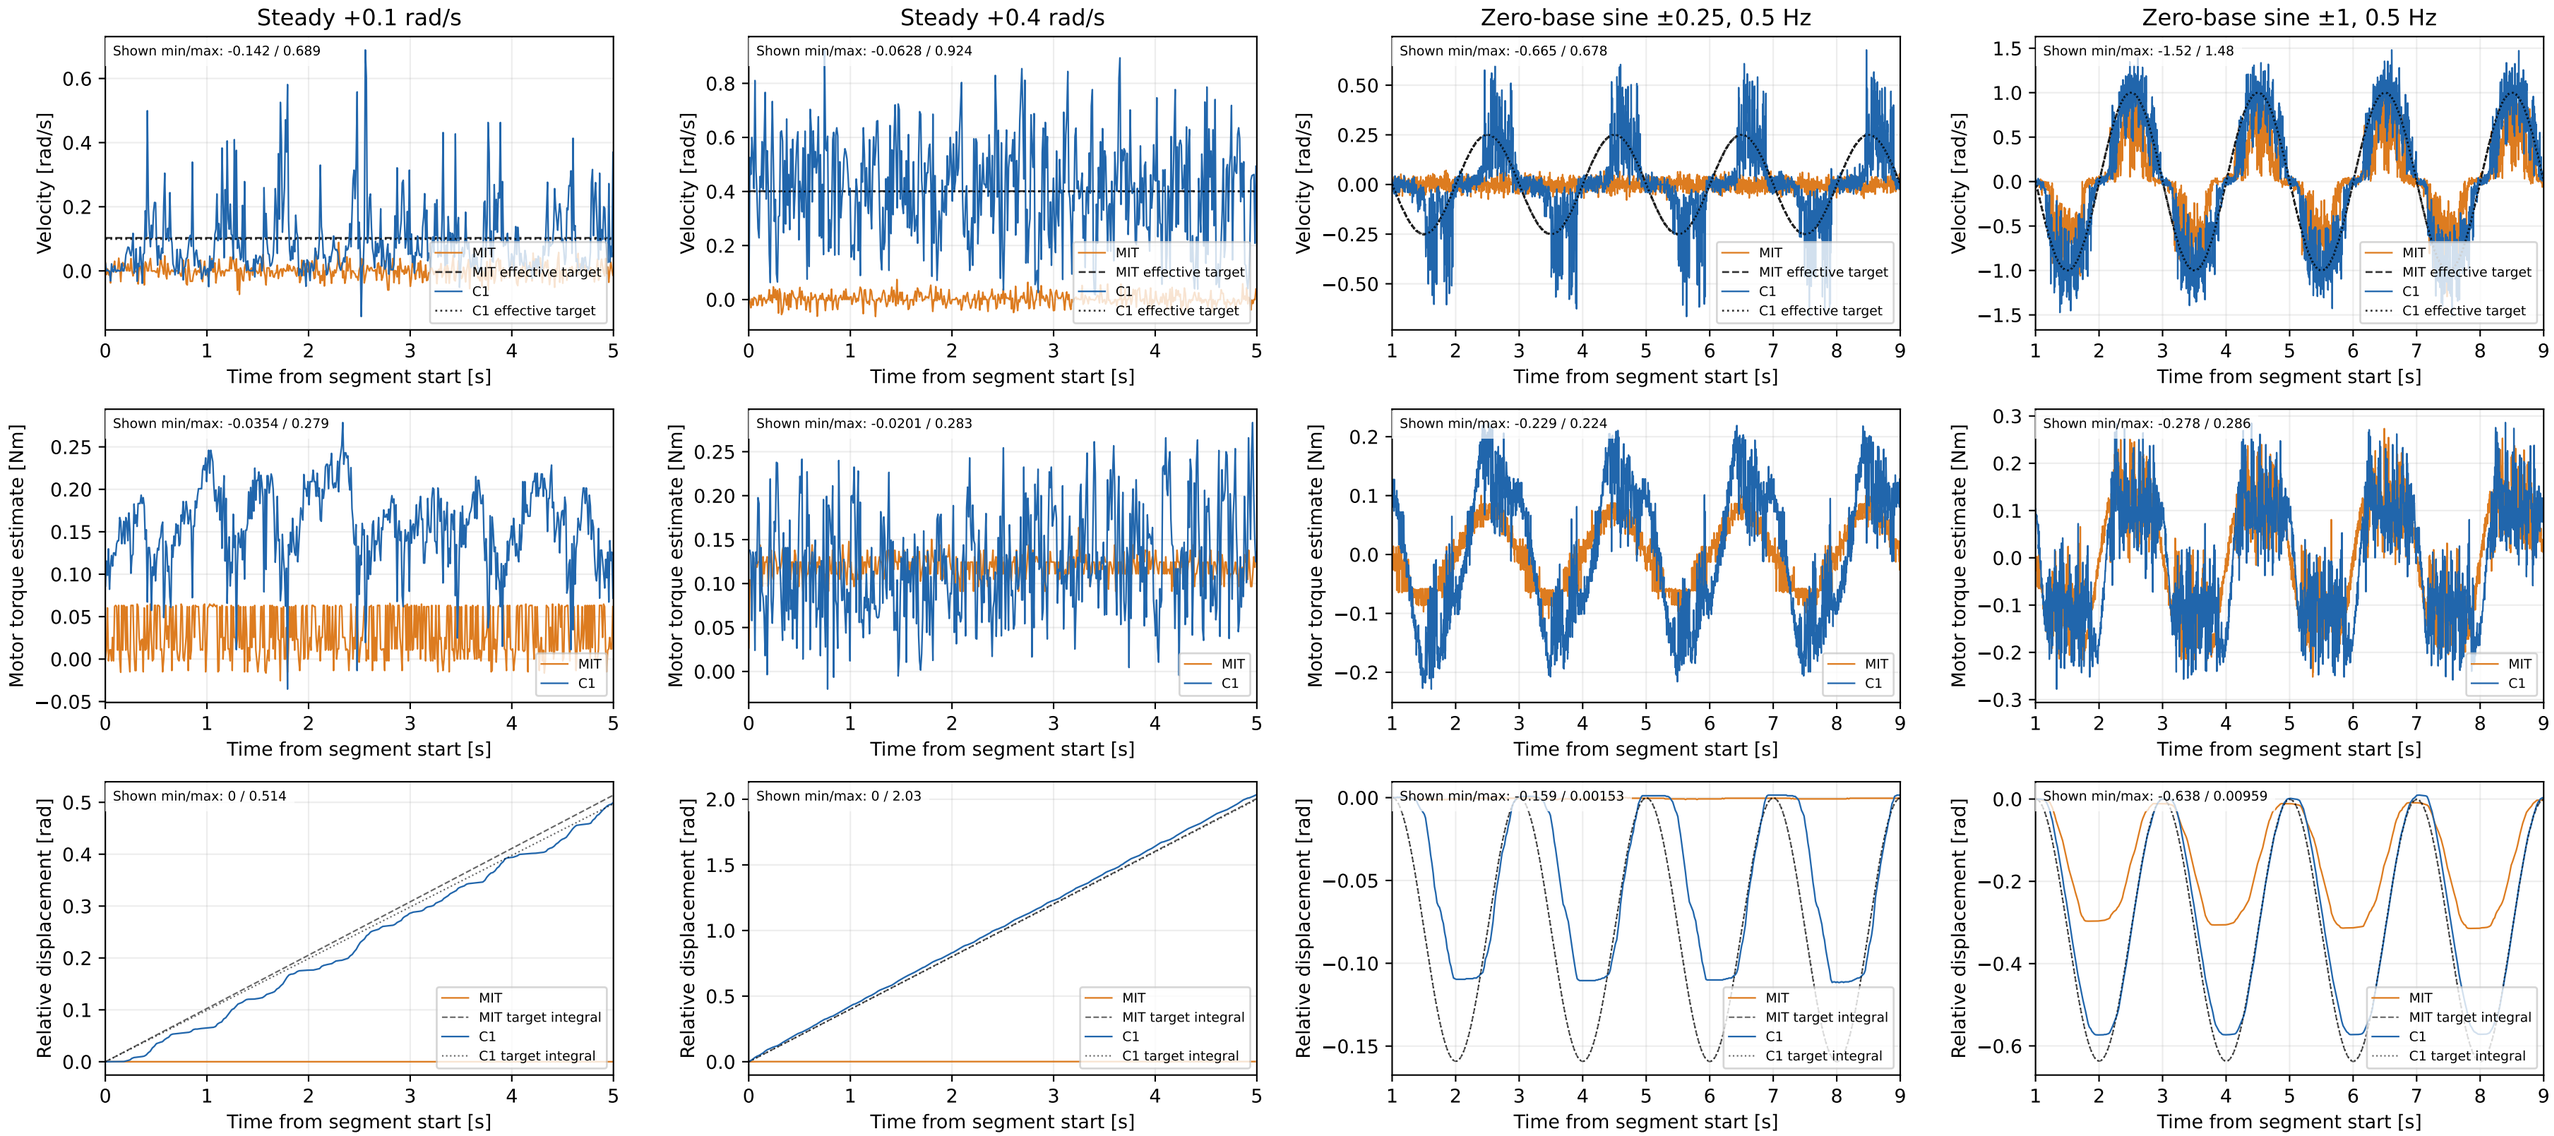

Each position trace subtracts its own first shown A3; reference is a velocity integral, not a position command. Separate runs, no smoothing/time shifting/physical angle matching.