
Policy output, final motor request and measured response

Model 91850 | Corrected rear sign | 2026-10-12 18:06 | Five-second windows

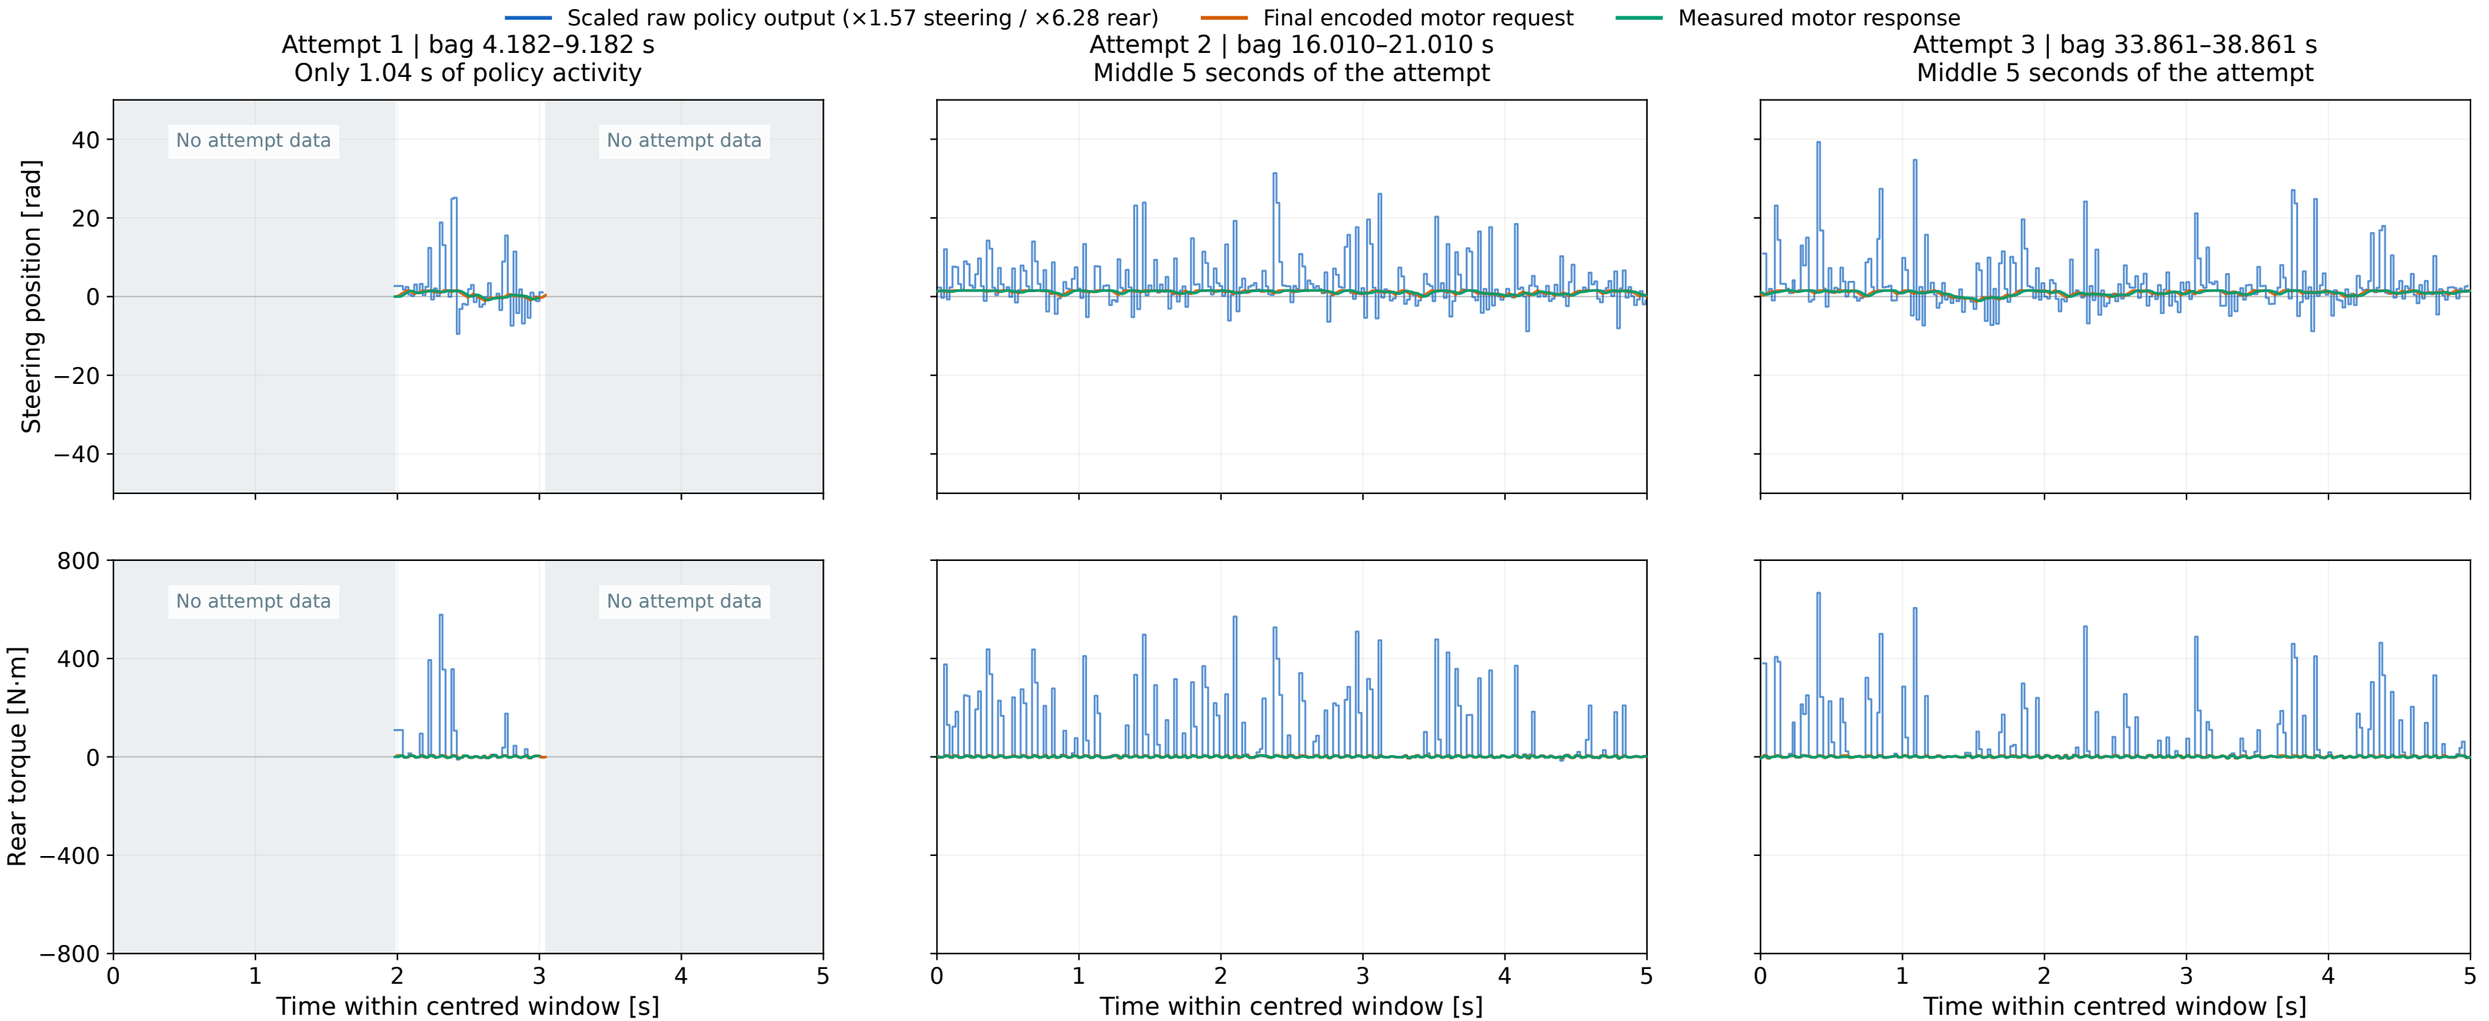

Same linear physical-unit axis for all three curves; full raw range retained. Common y scale across attempts per motor.

Final request: encoded MIT steering position / C0 torque equivalent on successful-send ticks. Measured rear torque: current × B0, not independent shaft torque.

Attempt 1 is shorter than 5 s: available data only; shaded surroundings have no attempt data. Recorded clocks, no lag correction, smoothing or interpolation.

Command limits were ENABLED in this bag. Kickstand contact <1 s after lift was reported; later data are not unsupported balancing.