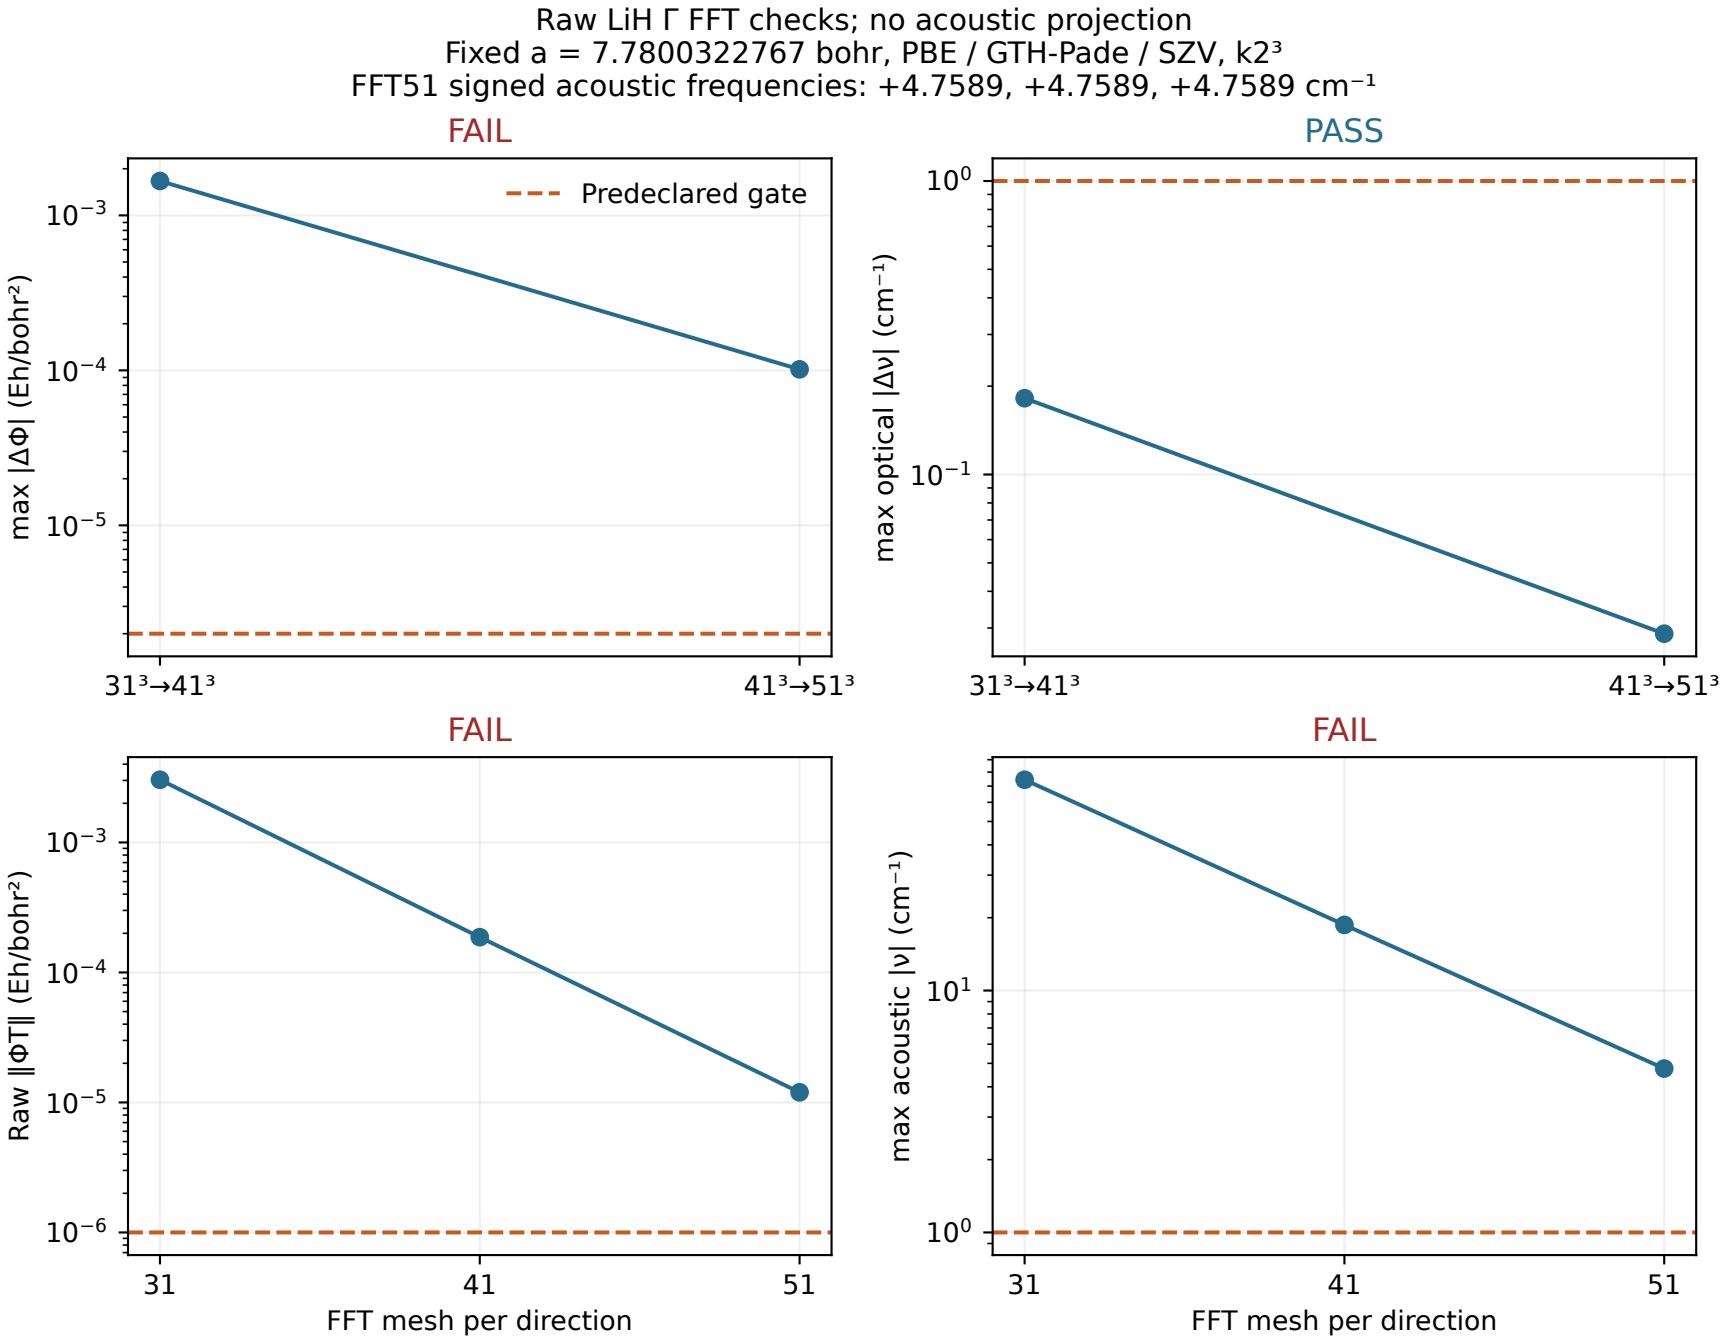
Raw LiH Γ FFT checks; no acoustic projection
Fixed a = 7.7800322767 bohr, PBE / GTH-Pade / SZV, k2³
FFT51 signed acoustic frequencies: +4.7589, +4.7589, +4.7589 cm⁻¹
FAIL
Predeclared gate
max |ΔΦ| (Eh/bohr²)
31³→41³
41³→51³
PASS
max optical |Δν| (cm⁻¹)
FAIL
Raw ‖ΦT‖ (Eh/bohr²)
FFT mesh per direction
FAIL
max acoustic |ν| (cm⁻¹)
FFT mesh per direction