

ELI LILLY AND COMPANY
HEALTH AND SAFETY PROCEDURE
North American Logistics Operations

General Safety Instructions for Distribution Warehouses

USD-SOP-Wrhs, Dock, and Admin Safety Instr-001

SUPERSEDES	001-002738, DOHS010
-------------------	---------------------

PURPOSE	To instruct all North American Logistics Operations (NALO) employees (regular, summer and contract) in general safety instructions for distribution warehouses.
----------------	---

AREAS INVOLVED	North American Logistics Operations and support areas
-----------------------	---

APPROVALS	Management, NALO Operations Representative, Health, Safety & Environmental
------------------	---

REFERENCES	USD-SOP-Spill Clean Up-001 USD-SOP-Plainfield ERP-001 USD-SOP-Enfield and Fresno ERP-001 USD-SOP-Rptg Injuries Illnesses Incidents-001 USD-SOP-PIT Safety-001 USD-SOP-PPE Assignments-001 USD-SOP-HSE Mgmt System-001 DOHS004_OJT, Strapping OJT HS20003, Back Safety HS14031, Hazard Communication
-------------------	--

REASONS FOR REVISION	All revisions are marked with an (*): To add #7 to the Dock Safety section. • Rationale: TR40926640.
-----------------------------	---

TABLE OF CONTENTS

Topic	Page
Introduction	2
General Safety	3
Personal Conduct	4
General Emergency Response Information	4
Material Handling	5
Ergonomics and Back Safety	7
Hazard Communication Globally Harmonized System (GHS) & Labels	8
Personal Protective Equipment	8
Fire Safety	8
Dock Safety	9
Safety Permits and Tags	9
Housekeeping	9
Pedestrians	10
Lone Operators	11
Visitors	11
Non-Routine Tasks	11
Appendix A, "Lockout" tag, "Do Not Use" tag (examples)	12
Appendix B, Examples for Lifting Cases	13

INTRODUCTION

All levels of management and supervision within NALO are committed to the creation of an injury-free work environment. Employees' safety knowledge, attitudes, and behaviors are critical for the success of this objective.

Some subjects in this procedure are covered in more detail in related safety training courses that are assigned to Learning Plans. It is the responsibility of all employees to know and follow the instructions contained in safety training courses.

**GENERAL
SAFETY**

All NALO employees are responsible to work in a safe manner such that they protect their own personal safety as well as the safety of co-workers and the physical assets of Eli Lilly and Company. You are responsible and accountable to follow the established safety "NALO Organizational Structure and Responsibilities" in accordance with Health and Safety procedure USD-SOP-HSE Mgmt System-001. Additionally:

1. Do not perform unsafe acts; do not take risks in order to meet other priorities.
 2. Flagrant or continuous disregard for safety instructions will lead to disciplinary actions.
 3. Report all injuries/illnesses suspected of being work-related to supervision and the Lilly designated Health Care Provider immediately. Also, report near miss incidents to supervision immediately in accordance with USD-SOP-Rptg Injuries Illnesses Incidents-001.
 4. Notify your supervision if you have a medical condition that could be aggravated by your work environment (e.g. a sore back that was caused by activity at home or another job.)
 5. Report unsafe conditions or situations to supervision immediately. Report ideas for safety improvements to an area safety committee representative.
 6. Report final product breakage or spills to supervision immediately. Broken or spilled materials will be cleaned up by following USD-SOP-Spill Clean Up-001.
 7. Report other spills of any type to supervision immediately. Refer to USD-SOP-Plainfield ERP-001 and USD-SOP-Enfield and Fresno ERP-001.
-

**PERSONAL
CONDUCT**

1. Ask your immediate supervisor about any operation or procedure that you do not fully understand.
2. Walk, do not run. Use handrails in stairwells and the three-point contact rule.
3. Do not climb on pallet racks, shelves, flow racks, powered equipment, or office chairs in order to reach something. Use approved, supplied step stools or safety ladders.
4. Horseplay is not allowed.
5. Do not throw objects.
6. Follow food and drink guidelines for your area.
7. Help familiarize new employees with hazards and safety practices.
8. Do not proceed through any automatic door (overhead, sliding or swinging) until the door is completely open and motionless.
9. Never leave an automatic door (especially overhead doors) in a partially open position. Raise or open automatic doors to the completely open position.
10. To prevent a slip/trip hazard, do not step or walk on a pallet or pallet ring at any time.
11. Cell phones, paperwork/documents, and personal electronic devices are not to be read or used while walking in the warehouse. Cell phone use is only permitted in designated barricaded areas within the warehouse.
12. Do not wear headphones or other portable devices in your ears while walking or working in the warehouse.

**GENERAL
EMERGENCY
RESPONSE
INFORMATION**

It is the responsibility of each employee to follow the emergency response plans for the area in which they work. It is also each employee's responsibility to know the appropriate emergency phone number (911 for PDC and EDC) for their location. Responsibilities also include knowing the location of:

- Fire/evacuation rally points
- Tornado/severe weather shelters
- Shelter-In-Place rally points
- Fire alarms
- Exits from the workplace
- Fire extinguishers
- Safety showers/eyewash stations

Inform supervision or co-workers when leaving the work area in order to help obtain headcount at Rally Points, if needed.

Avoid contact with blood or other body fluids if another employee is injured. Only trained personnel should clean up blood or body fluids.

**MATERIAL
HANDLING**

1. Use only utility knives and cutting tools that are issued by NALO.
2. Special hook knives are supplied to cut straps and shrink-wrap.
3. Only tweezers are to be used to remove tape from a jammed tape machine. Scissors are also located at tape machines but are only to be used to cut tape. Perform regular cleaning of tape machine brushes to help avoid tape machine jams.
4. Learn and follow strapping guidelines in accordance with Health and Safety Training Course DOHS004_OJT.
5. Maintain clear aisle ways. Do not store materials in designated aisle ways blocking industrial truck travel. Properly mark aisles designating where vehicles travel.
6. Use only pallets that are in good condition. Inspect all pallets to ensure that stringers and solid slats are in place.
7. Store pallets in designated locations only and store them flat, not on end or side.
8. Empty wooden pallets stored in the rack cannot exceed 14 pallets high. For empty wooden pallets staged on the floor where direct contact from a sprinkler head can be made, the pallets can be stacked 18 pallets high.
Note: Maximum height may vary by Distribution Center but will not exceed above requirements.
9. Do not stack multiple empty pallets on a pallet pal. Prior to placing a new pallet onto a pallet pal (product, coolers, etc.) remove any empty pallets first. When removing material from a pallet that is placed on a pallet pal, do so by removing 1 full layer at a time to allow the pallet pal to work as designed.
10. Do not stack more than one pallet of coolers/product on a pallet pal given the incremental risk presented by the stack height.
11. Plastic pallet stacking height: If the plastic pallets are FM approved (has FM diamond on the pallet), they can be stacked on the floor or stored in the rack 6 feet high. If they are not FM approved, they can be stacked on the floor or stored in the rack 4 feet high.
Note: If either one is stored in rack that has the built-in sprinkler, they can be stacked 6 feet high. All plastic pallets that are stacked in the racks or on the floor must be banded or shrink wrapped. For Plainfield, plastic pallets are to be staged in PLA5 for return to vendor.
12. At no time must an operator manually handle more than one pallet at a time. It is preferred that powered industrial trucks (PITs) be used to move/stack pallets instead of manually handling pallets.
13. Adhere to the following guidelines if manual stacking of pallets must be done:
 - By one (1) person, stacks should not exceed seven (7)
 - By two (2) people, stacks should not exceed ten (10)
14. Do not drop pallets since this could cause damage and weakness.
15. It is a requirement that you use leather palm gloves or cut resistant gloves to handle pallets, sharp or rough objects, and when pulling used strapping from pallet loads.

Continued on next page

**MATERIAL
HANDLING,
CONTINUED**

16. Be alert for all PITs. Watch for warning lights, listen for horns, and use safety mirrors to move about the warehouse.
 17. Do not operate switches, start/stop buttons and control buttons, or powered equipment such as dock leveler plates, doors, conveyors, and elevators unless trained on the equipment operation and everyone and everything is clear.
 18. Only trained employees are allowed to operate PITs. Do not use any material handling equipment (power or manual driven) until trained on specific instructions regarding its safe use.
 19. The safe operation of PITs is primarily the responsibility of the individual operator. Refer to USD-SOP-PIT Safety-001.
 20. Use caution when removing or applying rubber bands to pallets. At times, using 2 people to apply or remove rubber bands should be considered.
 21. Ensure no material or equipment is staged or temporarily staged in designated pedestrian walkways. This allows for adequate pedestrian movement and unobstructed access to emergency exits.
 22. Headphones, personal speakers, or personal electronic devices are not to be worn or used while operating a PIT.
 23. Be aware of and avoid creating a trip hazard while removing strapping and stretch wrapping from pallets.
-

**ERGONOMICS
AND BACK
SAFETY**

1. At no time must an operator manually handle more than one pallet at a time. Use proper lifting techniques and body mechanics when performing all manual material handling. Do not attempt to lift, push or pull loads that are too heavy, ask for help. Refer to safety training HS20003.
 2. Bend knees, lift with legs and keep the load close to the body when manually lifting.
 3. Keep shoulders straight over hips and move feet to turn during manual material handling. Avoid twisting any part of the body while lifting or setting material down.
 4. Do not reach over an obstacle to lift a load. Move whatever is in the way or go around it.
 5. Stretching exercises are beneficial for minimizing muscle soreness/strains if done before, throughout and after the work shift. It is expected that morning exercises are performed before the work shift. It is recommended to also perform exercises throughout and after the work shift.
 6. Participate in local Ergonomic program activities, keeping in mind the concept that all injuries are preventable. Refer to the Introduction of this procedure.
 7. Use good body mechanics and avoid awkward ergonomic positions such as overuse of hands (pinch grip). Lift cases with two hands vs. one hand to eliminate the pinch grip that will lead to excessive force and strain to the forearms. Boxes should be cupped underneath with both hands to eliminate the pinch grip. See Attachment B for examples.
 8. Large coolers or coolers/packages weighing more than 28 pounds require a 2-person lift.
-

**HAZARD
COMMUNI-
CATION
GLOBALLY
HARMONIZED
SYSTEM (GHS)
& LABELS**

1. Safety Data Sheets (SDS) are available for materials that are inventoried by NALO. Refer to safety training HS14031.
2. Ask supervision for any specific SDS to review. SDS can also be found on LillyNow.
3. Ask supervision for guidance on storage requirements and cautions associated with drugs, chemicals or compounds.
4. Label formats may vary but they will contain basic information such as the name of the material, appropriate flammability or corrosive properties, etc.
5. Do not remove labels from chemicals, compounds, raw materials, or company product.

**PERSONAL
PROTECTIVE
EQUIPMENT
(PPE)**

1. Know the proper use of personal protective equipment assigned for tasks performed. Refer to USD-SOP-PPE Assignments-001.
2. Ask supervision questions related to personal protective equipment.
3. Understand the required use of safety shoes for an area.
4. Know where to obtain personal protective equipment.
5. Inspect all personal protective equipment, including fall protection equipment, prior to every use.

FIRE SAFETY

1. Know the location of fire alarms, fire/emergency exits, and fire extinguishers in the work area.
 2. Be observant of potential fire hazards in the warehouse, such as loose wiring, worn or cut extension cords, missing fire extinguishers, open electrical panels, etc.
 3. Report fire hazards to supervision immediately.
 4. Intervene if you observe an outside truck driver, non-Lilly vendor or contractor smoking on Lilly property.
-

**DOCK
SAFETY**

1. Be alert of various types of traffic on docks. Congestion is a hazard of dock areas.
2. Avoid standing or walking through dock areas unnecessarily in order to help minimize congestion and the possibility of injury.
3. Remind and ensure drivers shut off their trucks and set brakes when they leave the cabs.
4. Use ladders and steps to move between trucks and docks. Never jump off of loading docks.
5. Do not operate dock levelers and dock locks without proper training. Refer to USD-SOP-PIT Safety-001.
6. PIT operation in dock areas requires extreme care. Refer to USD-SOP-PIT Safety-001.
7. *For PDC only: Use caution near outbound dock doors 8-9 during active container loading and unloading operations. Container swing radius may exceed expected limits. Observe floor markers designating the container swing zone in this area.

**SAFETY
PERMITS AND
TAGS**

1. Attach "Do Not Use" tags to PITs that are taken out of service for repairs. Talk to supervision to obtain tags. Refer to USD-SOP-PIT Safety-001.
2. Do not attempt to start any equipment that has a Lockout lock or tag attached to it.
3. Be aware of any Hot Work Permits (HWP) in effect or posted in the work area. Be alert for the accumulation of combustible material in the area where a HWP is posted. Never put a PIT battery on charge in the area where a HWP is posted since charging batteries emit flammable gases.

See Appendix A for examples of "Do Not Use" and "Lockout" tags.

**HOUSE-
KEEPING**

1. Maintain a clean and neat work area. Clean up trash and objects on the floor that may cause slips, trips and falls.
 2. Store brooms, dust mops, and other cleaning supplies, in cabinets or other designated locations.
 3. Remove and dispose of excess label backing material. Do not allow excessive waste paper to accumulate anywhere.
 4. Use extreme care when working with trash compactors. Know the proper operation and safe use of compactors.
 5. Maintain a clear view while traveling through the warehouse with trash containers. Get help if needed.
-

PEDESTRIANS

Pedestrians and PIT operators have a shared responsibility regarding pedestrian safety in the warehouse.

PIT operators should:

Anticipate the sudden appearance of pedestrians into the travel path.

Use the PIT horn to alert pedestrians at intersections, doorways, aisleways, when backing and when overtaking pedestrians.

Where possible, drive in the middle of aisles.

After talking with a pedestrian, do not begin to move your PIT until the pedestrian steps away, clear of the PIT.

Pedestrians should:

Read posted signs before entering the warehouse and follow posted instructions during warehouse travel.

Use designated pedestrian walkways whenever they are designated. If walkways are not specifically designated, use main aisles as the primary travel path.

Be aware of and stay out of designated "No Pedestrian" areas.

Stay out of narrow, wire-guided/swing reach aisles when a PIT is in that aisle. If it is necessary for pedestrians to be in these aisles, the ends of the aisle must be roped off or barricaded.

Slow down, look, listen and use safety mirrors, and safety signals (PDC only) when approaching intersections, blind corners, and where doors open into PIT travel paths.

Move conversations out of aisles to avoid injuries and blocking travel paths.

Keep away from moving, turning, and backing PITs. Be aware of the swing of trucks so you are not pinned.

Be aware of trucks stacking or depositing loads in rack locations. Watch for falling objects from either side of a rack.

Never walk up to a PIT operator without first making eye contact and ensuring that direct communication is established.

Never stand or walk under the forks or raised load of a PIT.

Never stand or ride on the forks of a truck.

Never catch a ride on a PIT.

Cross through racking at designated locations only. Do not walk through "A" level locations.

Follow the 2-foot rule (keep a 2-foot space between the pedestrian and the PIT) when approaching and communicating with PIT operators to prevent feet from being crushed by PIT movement.

LONE OPERATORS

For warehouse operations and maintenance, during off hours, employees at all distribution locations whose work assignment requires him/her to be out of hearing and sight of any other employee should follow the "lone operator" steps below:

- Call Security and inform them that you are working alone
 - Tell Security your name and department and expected duration of the work
 - Tell Security exactly where you are located
 - If using a PIT, have site security go into the warehouse with you to serve as a safety escort, and PDC monitor cameras regardless of site location
 - If not using a PIT, site security can monitor activities from security office.
-

VISITORS

1. Unescorted visitors are not allowed in the warehouse. Lilly employees are responsible for the safety and instructions of escorted visitors.
 2. Warn all visitors concerning PIT traffic and pedestrian rules.
 3. Inform long-term visitors/contractors about emergency response procedures, Rally Points, Tornado shelters, emergency telephone numbers, etc., to ensure that visitors know how to respond to emergencies.
-

NON-ROUTINE TASKS

Non-routine work is jobs or tasks that are performed irregularly or are being performed for the very first time. Because these jobs and tasks are not performed regularly, understanding all of the hazards associated with the job or task can be difficult.


1. Supervisors should meet with their employees prior to assigning and starting non-routine tasks.
 2. The following jobs or tasks are possible examples of non-routine work:
 - Performed infrequently
 - Routine task performed with greater frequency
 - Outside of normal duties
 - Does not have a documented procedure
 - Has never been performed before
 - Routine tasks that carry high level of risk of injury
 3. Before doing unplanned/non-routine work, think about the following questions:
 - What injuries could occur?
 - What could be the severities of the injuries?
 - What cause/conditions/events would lead to the injuries?
 4. Supervisors use the Safe Work Permit (SWP) for Non-Routine Tasks located in Gensuite.
-

Appendix A
"Lockout" tag, "Do Not Use" tag
(Examples)



Appendix B
Examples for Lifting Cases

Correct

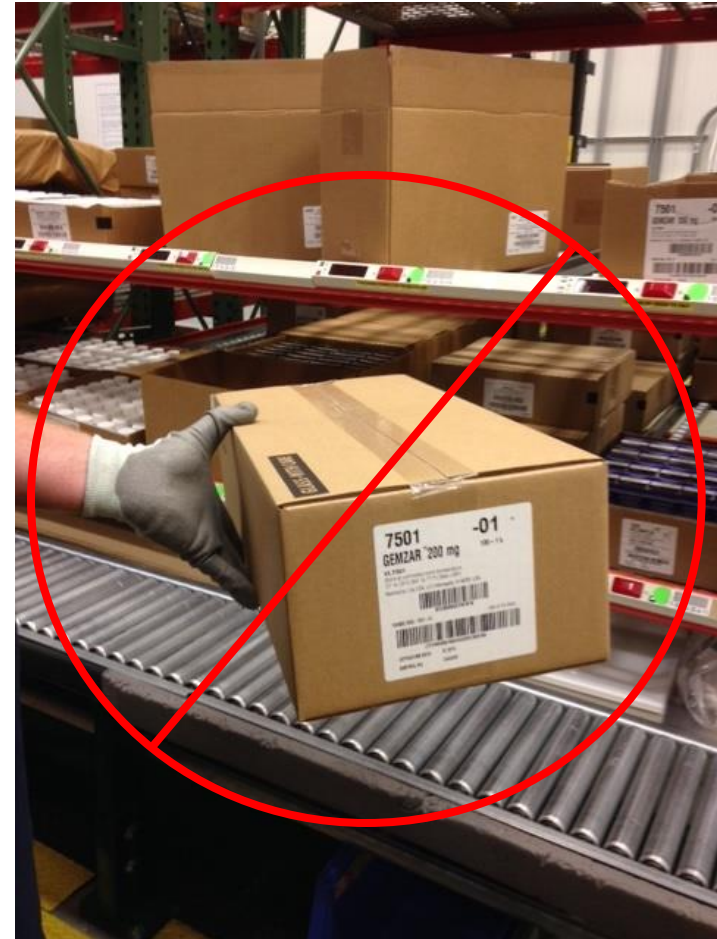

Incorrect (pinch grip)

Document Approval Signatures

Approved Date: 16 Apr 2026

Approval Verdict: Approve	Brandon Bowler (L004253@lilly.com) Approver 15-Apr-2026 18:40:27 GMT+0000
Approval Verdict: Approve	Melissa Wienke (L113275@lilly.com) Approver 16-Apr-2026 18:10:05 GMT+0000
Reviewer / Approver Additional Details	N/A