




Leiterplatten-Layout Vorschlag für SMT
PCB-Layout Proposal for SMT

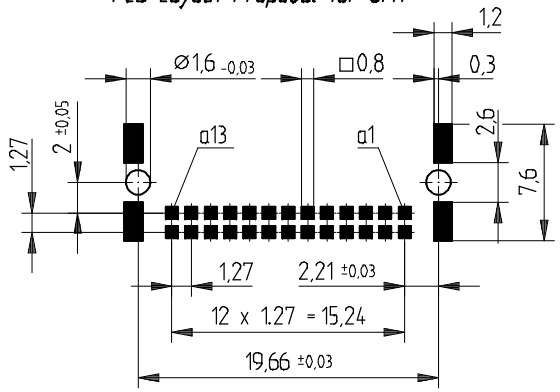

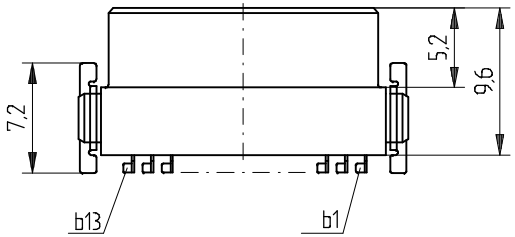



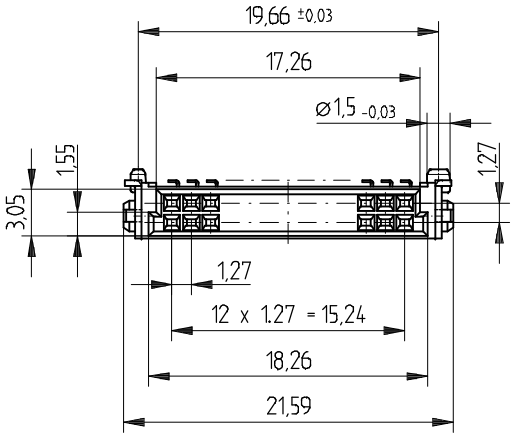




Anforderungsstufe 1
Performance Level 1

Kontaktbereich vergoldet
Mating Area gold plating


Anschlussbereich verzinnt 4-6 µm
Terminal Area 4-6 µm tin plating

Koplanarität der Anschlüsse ≦ 0.1mm
Coplanarity Area of Termination ≦ 0.1 mm

Verpackt in Gurtverpackung - *Tape on Reel Packaging*
Verpackungseinheit: 560 Stück - *Packaging unit: 560 pcs*

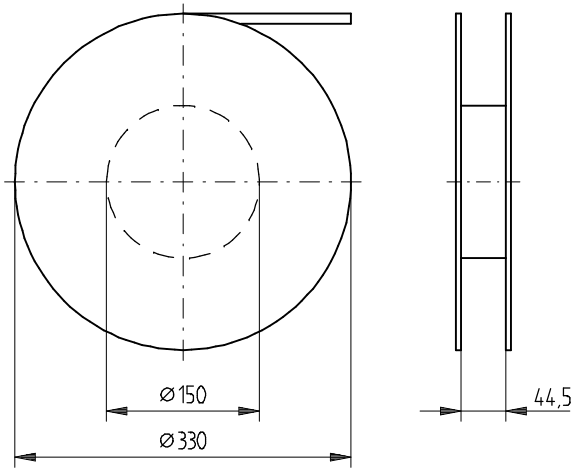

Abspulrichtung - *Reel off Direction*

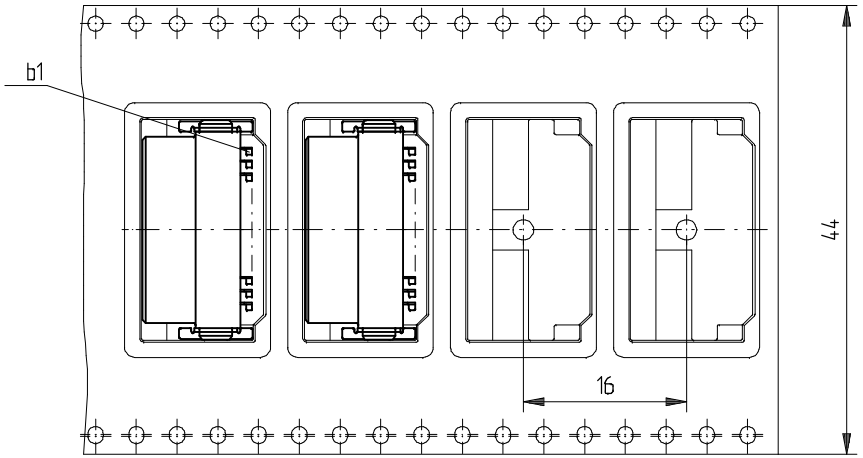

BA7-03 - Standard Bauhöhe
type7-03 - Standard Assembly Height

Consider protection memo from DIN 34

Information:

Tolerances

All Dimensions in mm

Scale 3:1

XXXXX Angaben zu entsprechender Ident-Nr. siehe Fertigungsunterlagen
For further information about I.D. number see manufacturing document.

All rights reserved.
Only for information.
To insure that this is the latest version of this drawing, please contact one of the ERNI companies before using.

Subject to modification without prior notice.
Drawing will not be updated.

Designation
Federl. SMC-Q 26-SMD-BA7-03
Female SMC-Q 26-SMD-type7-03

ERNI www.ERNI.com

154741 1

Index | Date | V:00039948.SZN | SMCQ