
PVL Series Pilot Indicator



Applications / Markets


Audio / Visual


Security Devices


Industrial Controls


Kiosks


Electrical Housewares


Medical Equipment

RoHS

Specifications

Contact Arrangement: Lamp indicator
Operating/Storage Temperature: -40°C to 85°C
Lamp Life: 40,000 Hours Nominal
Ingress Protection: IP67
Panel Thickness: 1-6mm or 1-10mm, (depending on mounting diameter)
Maximum Thread Torque: 5-14Nm
Recommended Mounting Nut Torque: 0.1-0.6Nm

Features & Benefits

- **Pilot indicator light**
- **Multiple panel cutout sizes -- 6mm to 25mm dia.**
- **Multiple illumination voltage options**
- **Multiple LED color options**
- **Wire leads (150mm long) optional**
- **IP67 rated**

Part Number Configurator

Series	Panel Cutout	Lens	Terminal	Body Finish	Lens Color	Illumination Voltage
PVL	**06** - 6mm Dia. **08** - 8mm Dia. **10** - 10mm Dia. **12** - 12mm Dia. **14** - 14mm Dia. **16** - 16mm Dia. **19** - 19mm Dia. **22** - 22mm Dia. **25** - 25mm Dia.	**F** - Flat **D** - Domed	**L** - Solder Lug **W** - Wire Leads 150mm **S** - Screw*	**S** - Stainless Steel **1** - Black Anodized **N** - Nickel Plated**	**0** - White **1** - Red **2** - Orange **3** - Green **4** - Blue **5** - Yellow **R** - RGB***	**1** - Base Voltage‡ **3** - 6V **4** - 12V **5** - 24V **6** - 110V **7** - 220V


NOTES:
‡Base voltage on LEDs:
1.8V @ 20mA for Red, Yellow and Orange
2.8V @ 20mA for Blue, Green and White

*Screw only available with 16mm, 19mm, 22mm, 25mm
**Nickel plated not available with 22mm, 25mm
***RGB not available with 110V, 220V


Specifications subject to change without notice 11.12.2025

BODY DIMENSIONS


PVL06

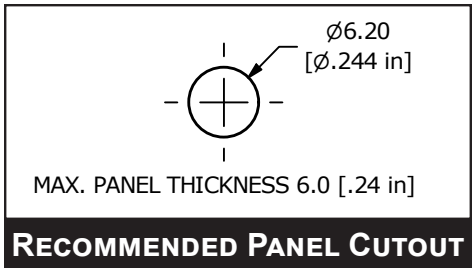



RECOMMENDED PANEL CUTOUT




SCHEMATIC

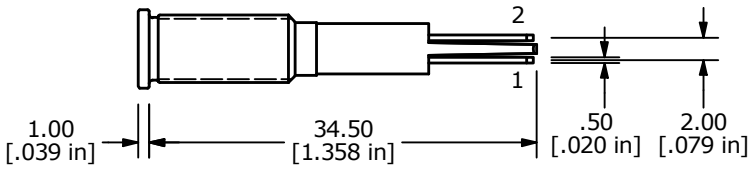

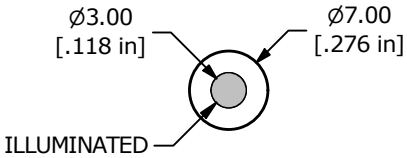


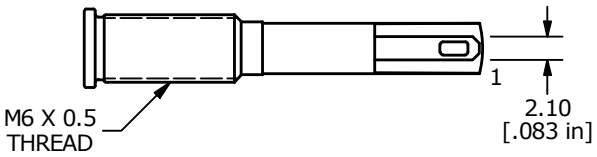


PVL08

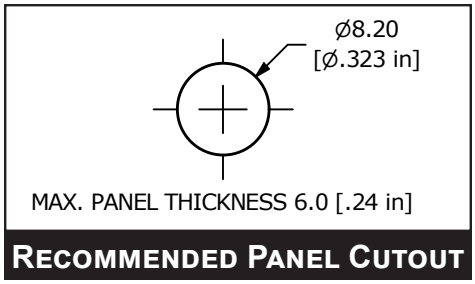



RECOMMENDED PANEL CUTOUT



SCHEMATIC

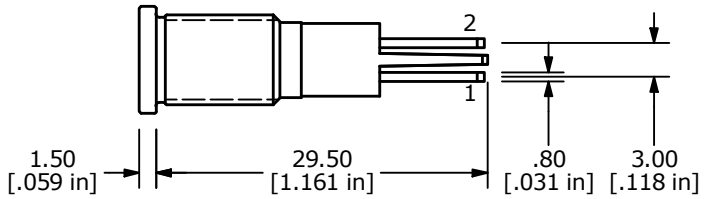


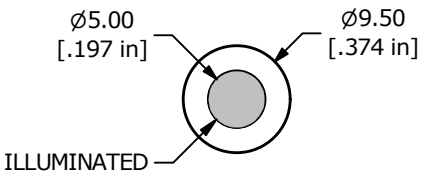

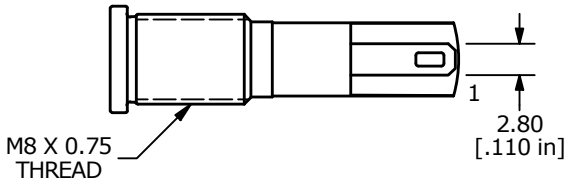


BODY DIMENSIONS


PVL10

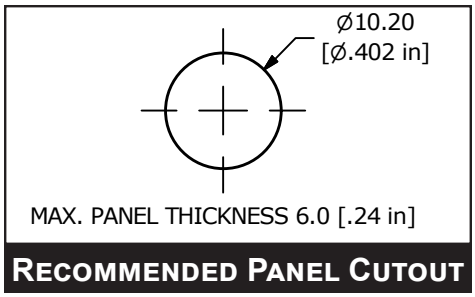



RECOMMENDED PANEL CUTOUT




SCHEMATIC

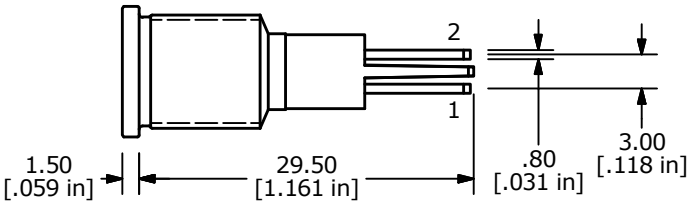

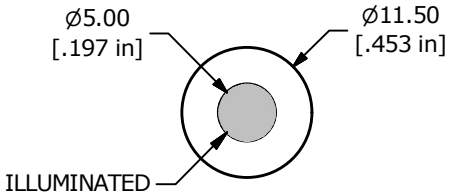


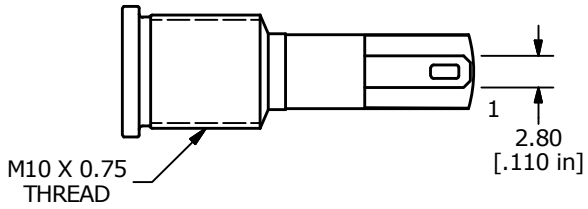


PVL12

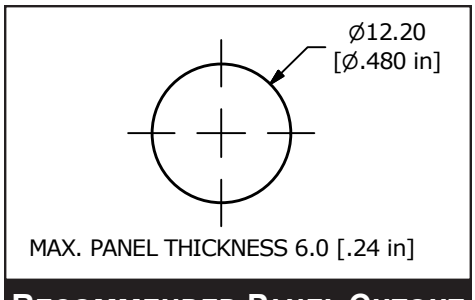



RECOMMENDED PANEL CUTOUT



SCHEMATIC

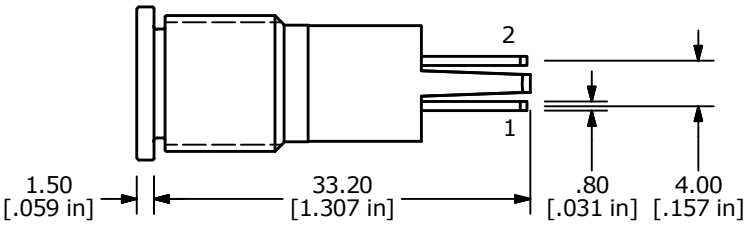


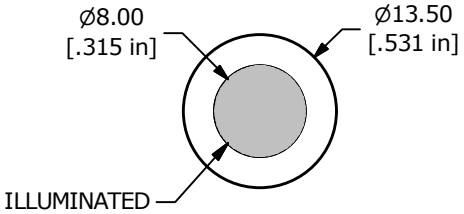

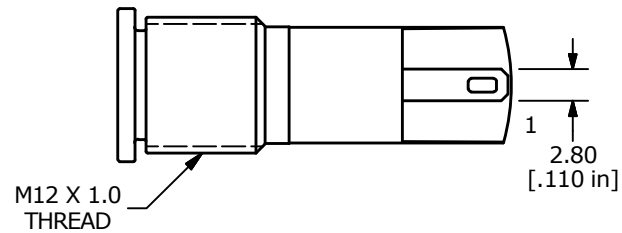


BODY DIMENSIONS


PVL14

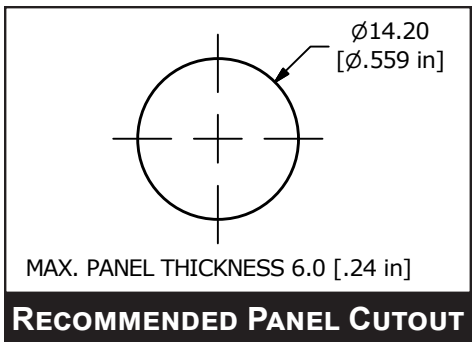



RECOMMENDED PANEL CUTOUT




SCHEMATIC

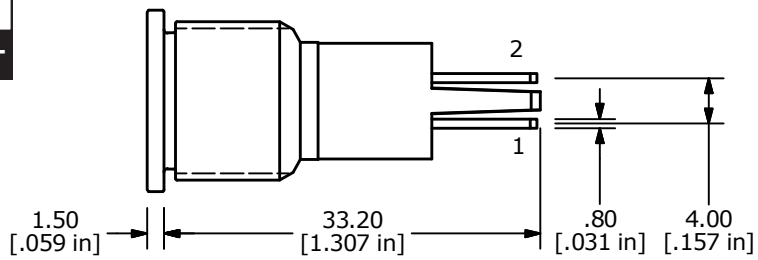

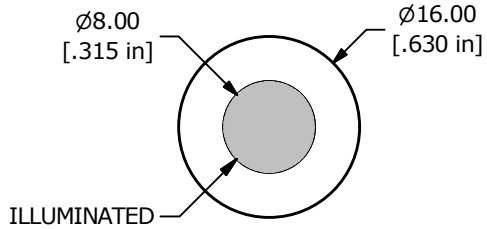


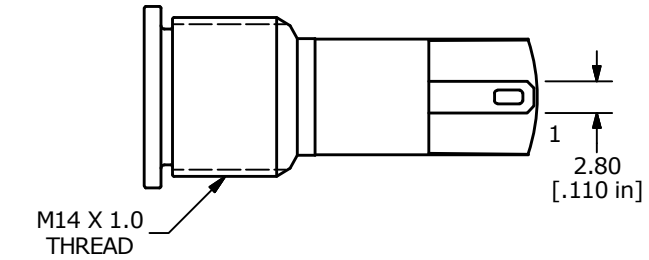


PVL16

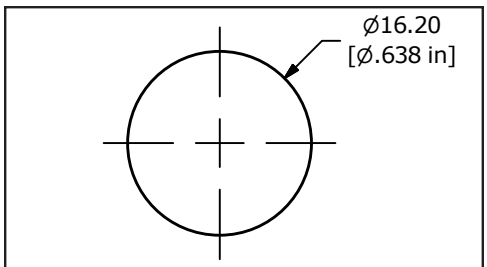



RECOMMENDED PANEL CUTOUT



SCHEMATIC

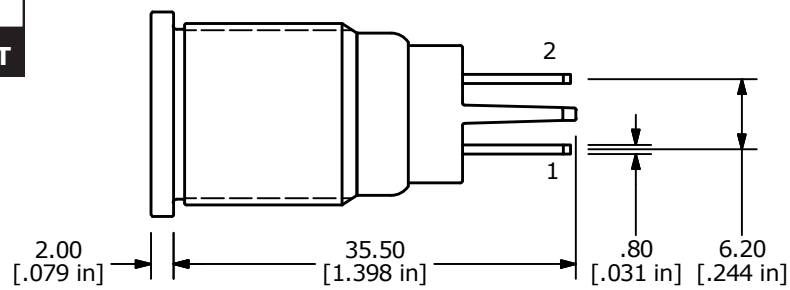


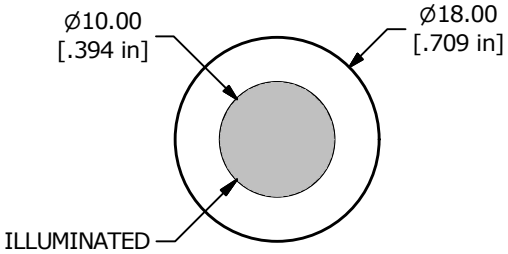

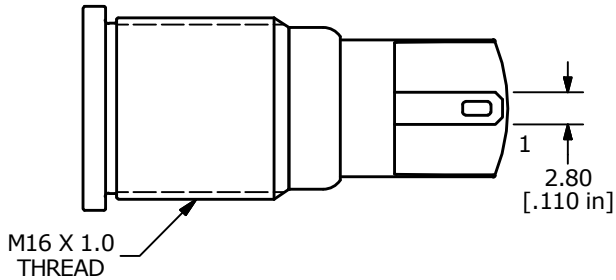


BODY DIMENSIONS


PVL19

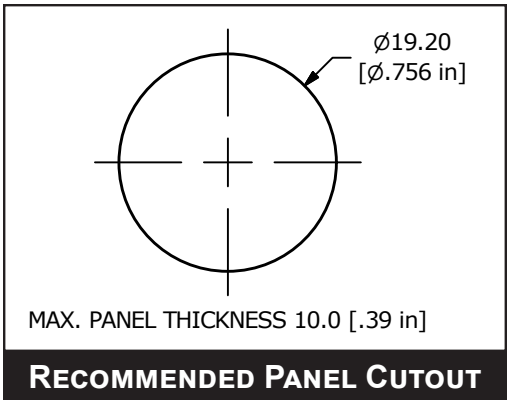



RECOMMENDED PANEL CUTOUT



SCHEMATIC

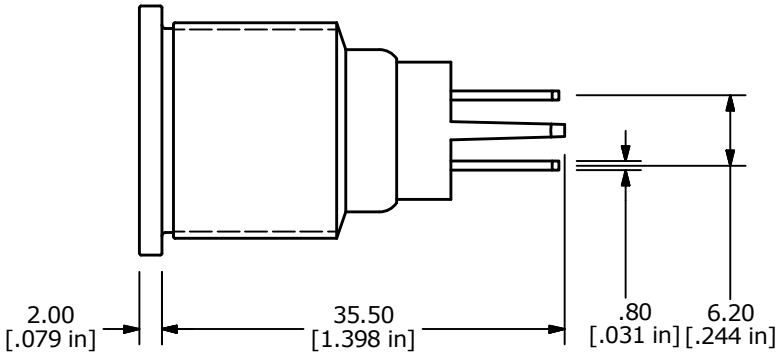

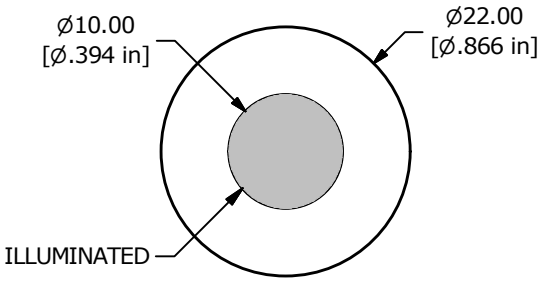


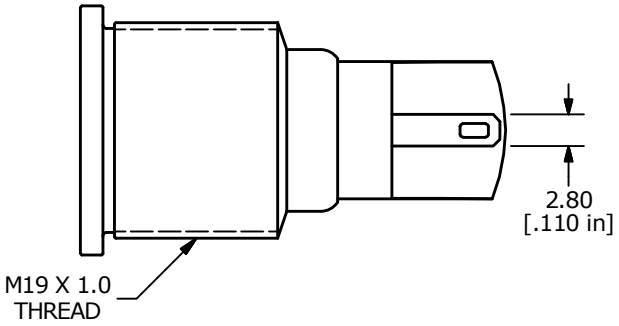


WIRE LEAD OPTIONS

PVL06


ADAPTER	WIRE	LENGTH
SW1-1	WIRE, 24 AWG AWM UL1061, BLACK	150.0 [5.9 in]
SW1-2	WIRE, 24 AWG AWM UL1061, BLACK	150.0 [5.9 in]

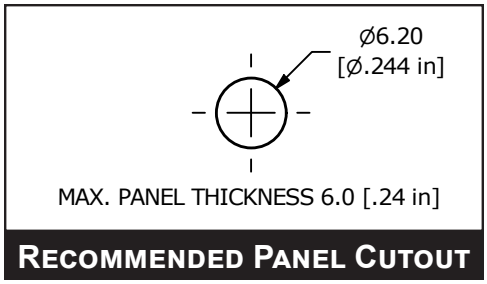


RECOMMENDED PANEL CUTOUT




SCHEMATIC

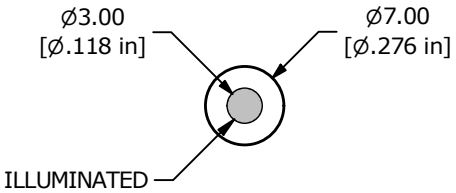

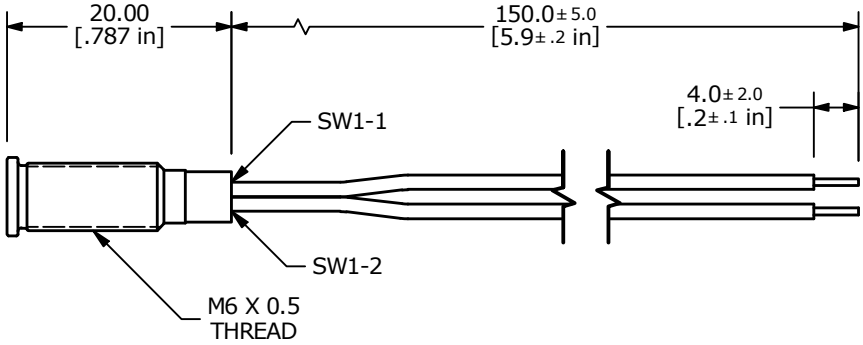


PVL08


ADAPTER	WIRE	LENGTH
SW1-1	WIRE, 24 AWG AWM UL1007, BLACK	150.0 [5.9 in]
SW1-2	WIRE, 24 AWG AWM UL1007, BLACK	150.0 [5.9 in]

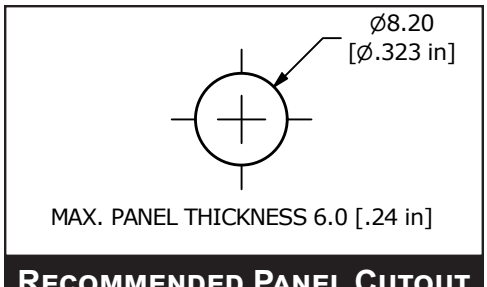


RECOMMENDED PANEL CUTOUT



SCHEMATIC

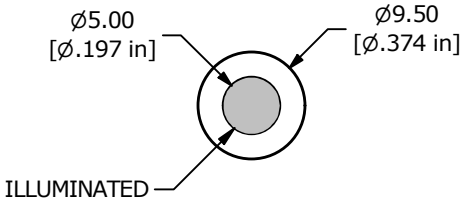


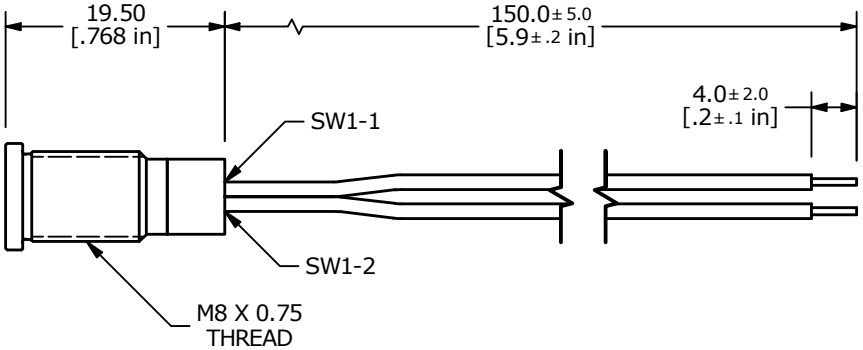


WIRE LEAD OPTIONS

PVL10


ADAPTER	WIRE	LENGTH
SW1-1	WIRE, 24 AWG AWM UL1007, BLACK	150.0 [5.9 in]
SW1-2	WIRE, 24 AWG AWM UL1007, BLACK	150.0 [5.9 in]

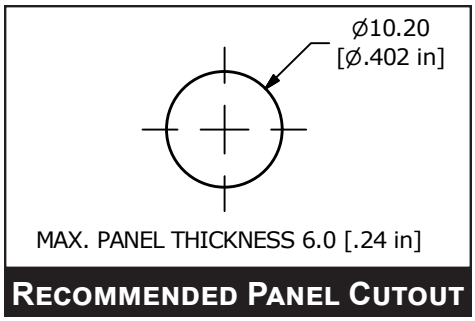


RECOMMENDED PANEL CUTOUT




SCHEMATIC

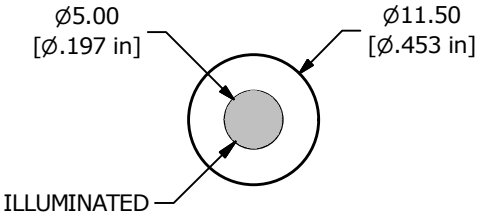

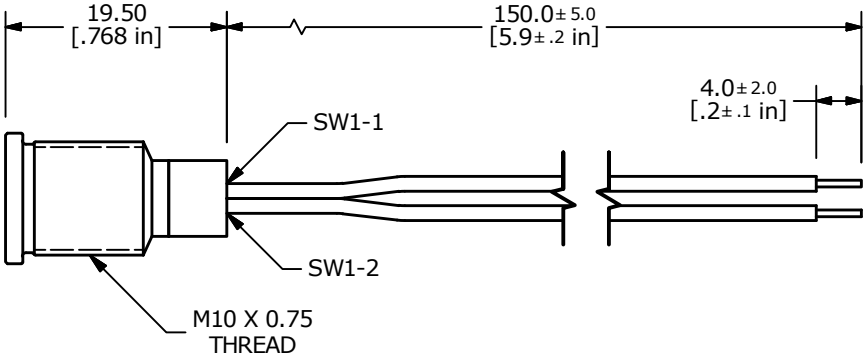


PVL12


ADAPTER	WIRE	LENGTH
SW1-1	WIRE, 24 AWG AWM UL1007, BLACK	150.0 [5.9 in]
SW1-2	WIRE, 24 AWG AWM UL1007, BLACK	150.0 [5.9 in]

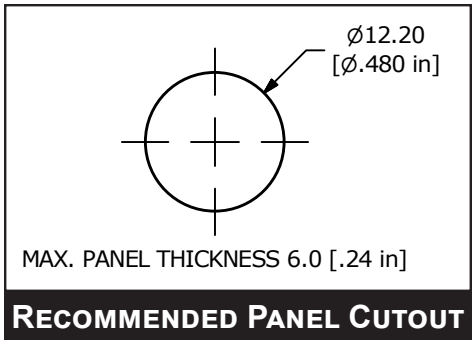


RECOMMENDED PANEL CUTOUT



SCHEMATIC

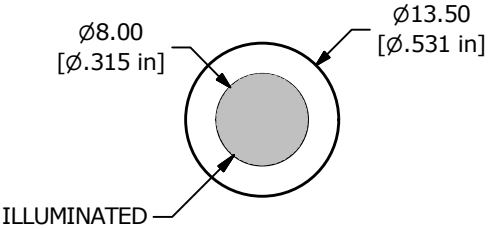


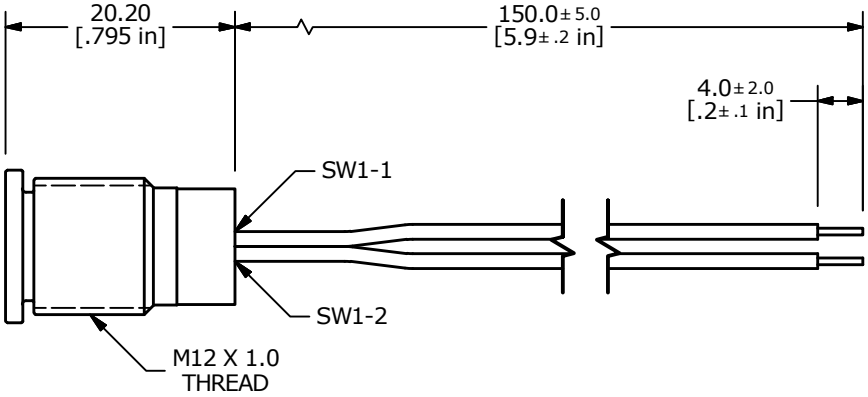


WIRE LEAD OPTIONS

PVL14


ADAPTER	WIRE	LENGTH
SW1-1	WIRE, 24 AWG AWM UL1007, BLACK	150.0 [5.9 in]
SW1-2	WIRE, 24 AWG AWM UL1007, BLACK	150.0 [5.9 in]

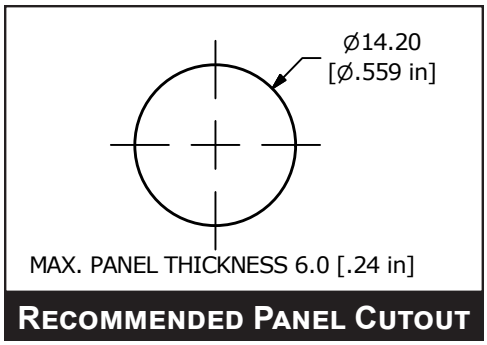

RECOMMENDED PANEL CUTOUT




SCHEMATIC

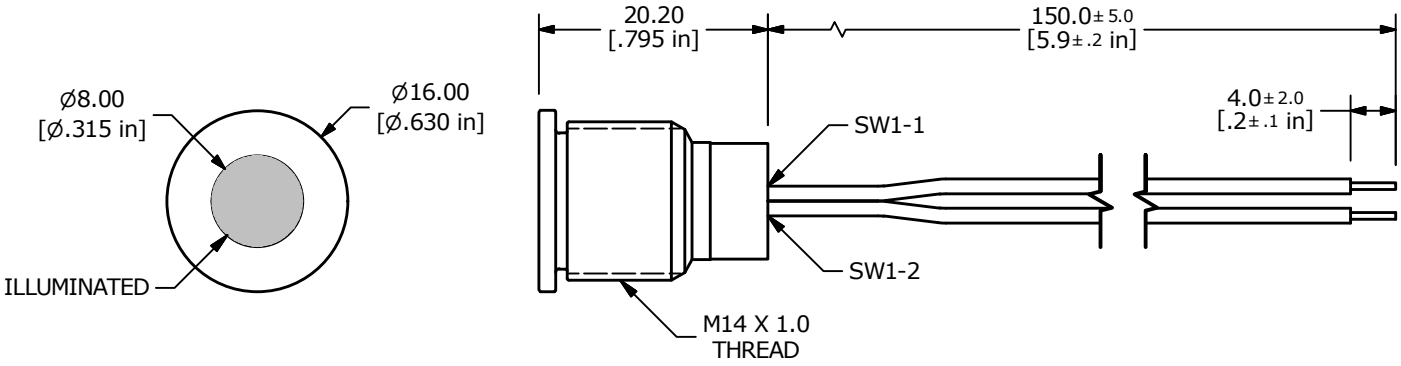


PVL16


ADAPTER	WIRE	LENGTH
SW1-1	WIRE, 24 AWG AWM UL1007, BLACK	150.0 [5.9 in]
SW1-2	WIRE, 24 AWG AWM UL1007, BLACK	150.0 [5.9 in]

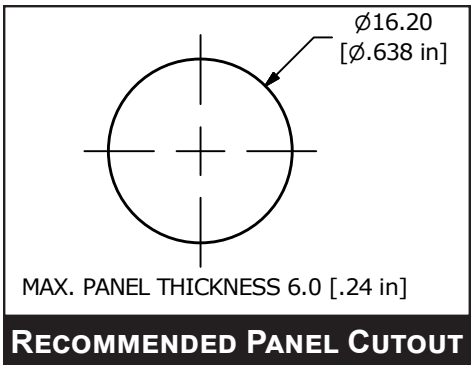

RECOMMENDED PANEL CUTOUT




SCHEMATIC

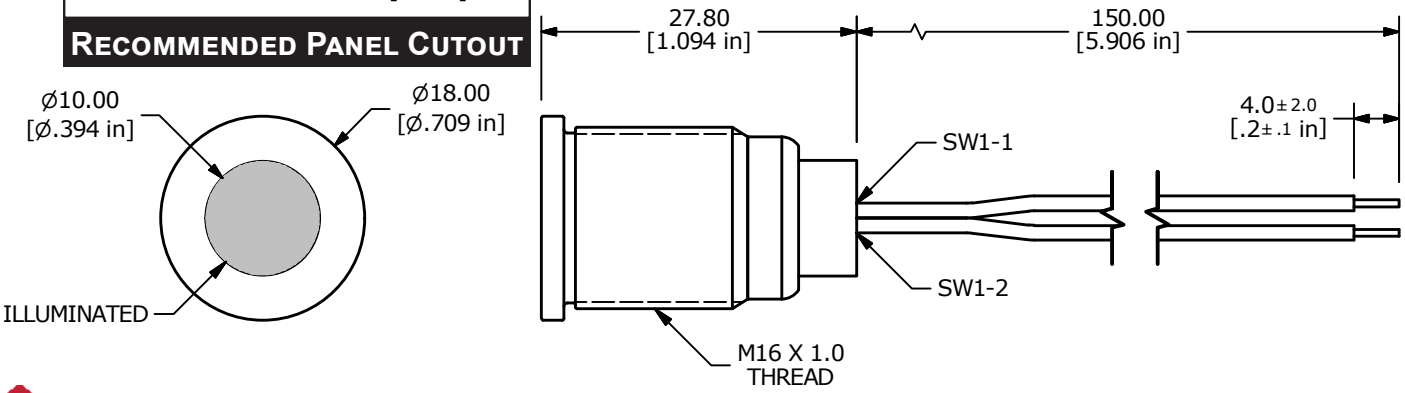


WIRE LEAD OPTIONS

PVL19

ADAPTER	WIRE	LENGTH
SW1-1	WIRE, 24 AWG AWM UL1007, BLACK	150.0 [5.9 in]
SW1-2	WIRE, 24 AWG AWM UL1007, BLACK	150.0 [5.9 in]

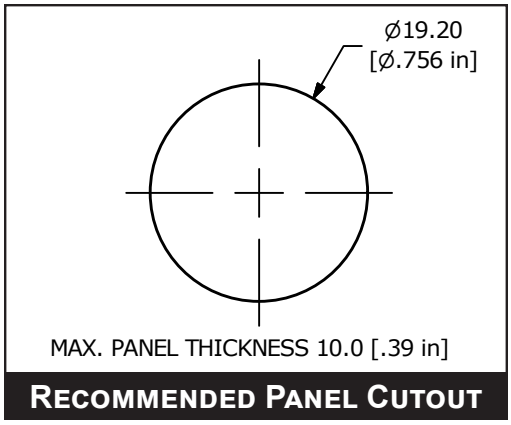

RECOMMENDED PANEL CUTOUT



SCHEMATIC

