

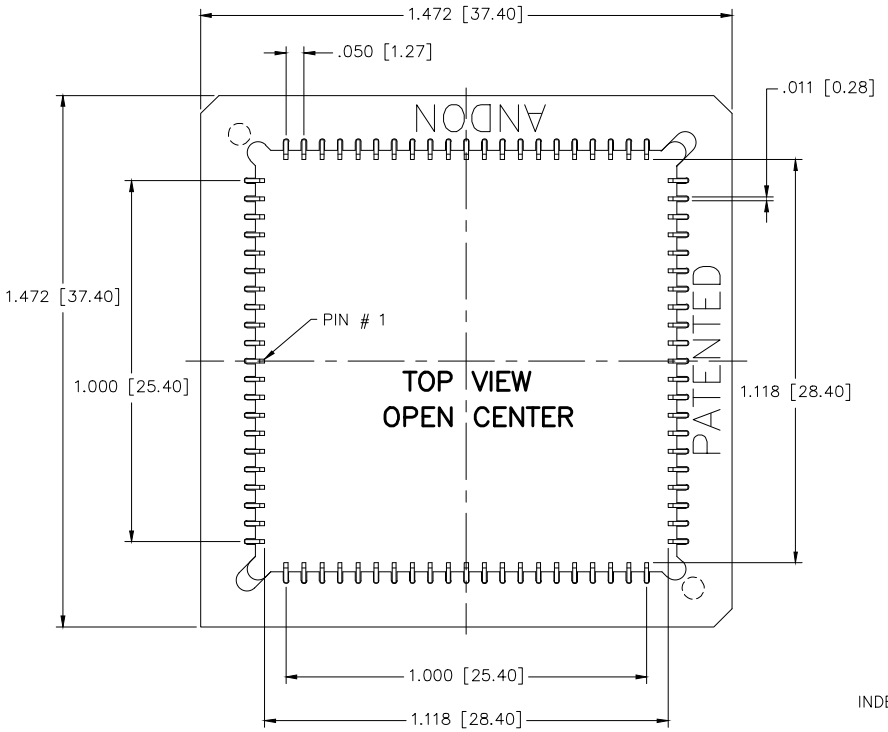


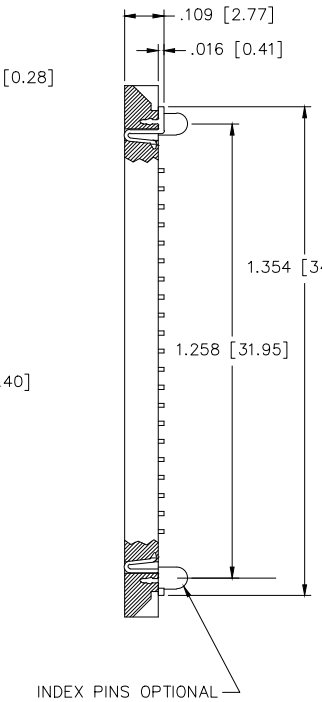

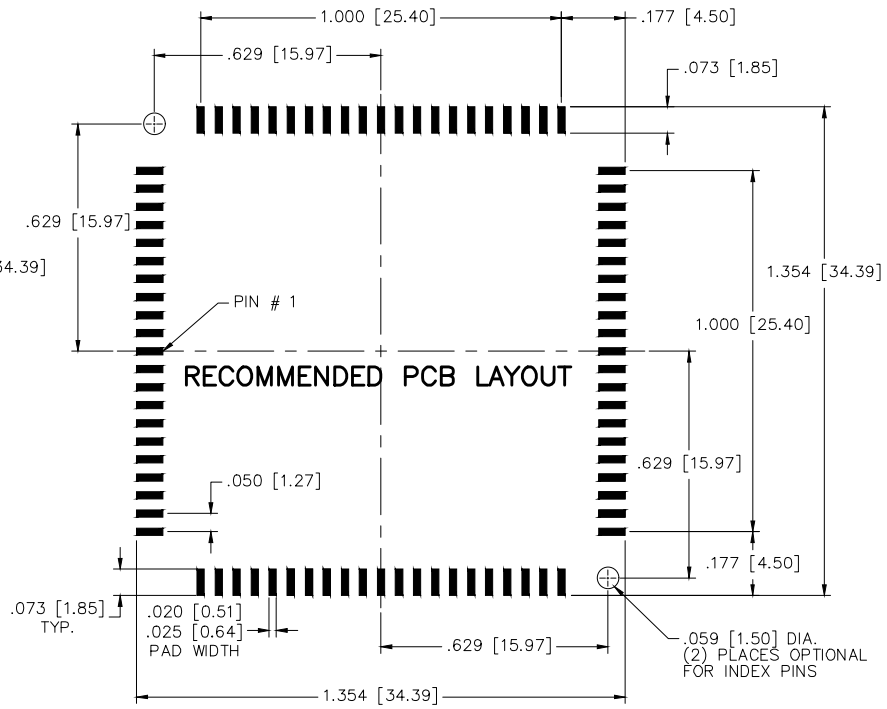

TECHNICAL SPECIFICATIONS

ELECTRICAL DATA

CONTACT RESISTANCE ..... 30 MILLIOHMS
CURRENT RATING ..... 1.0 AMP
INSULATION RESISTANCE ... 1000 MEGAOHMS
DIELECTRIC VOLTAGE..... 500 VAC

MATERIAL DATA


INSULATOR .... BLACK PLASTIC, HI-TEMP GLASS FILLED, UL94V-0
CONTACT ..... BERYLLIUM COPPER
PLATING ..... GOLD 10μ INCHES MIN.

620-84-SM-G10-S14-1

INSULATOR MATERIAL

WITHOUT INDEX PINS = 0
WITH INDEX PINS = 1

PATENTED



US PAT# 5,588,847

RoHS COMPLIANT

"ANDON PROPRIETARY INFORMATION"

THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO ANDON ELECTRONICS CORPORATION. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING IS EXPRESSLY PROHIBITED AS ANDON ELECTRONICS MAY OTHERWISE AGREE IN WRITING.

AEC ANDON ELECTRONICS CORP.
4 COURT DRIVE LINCOLN, RI. 02865, USA

TITLE: .050 PITCH, 84 PIN LCC SOCKET			
TOLERANCE EXCEPT AS NOTED	DRAWN BY: GB	SCALE: NONE	
ANGLE ....± 2°	CHK'D BY: GB/MA	DATE: 09/13/24	
FRACTION ±.010	APP'D BY: MA	FILE:	
.XXX.....±.005	UNITS: INCHES		

REV.	DESCRIPTION	DATE	REV. BY	APP. BY	B	DWG. NO. 620-84-SM-G10-S14-1	REV. 0