


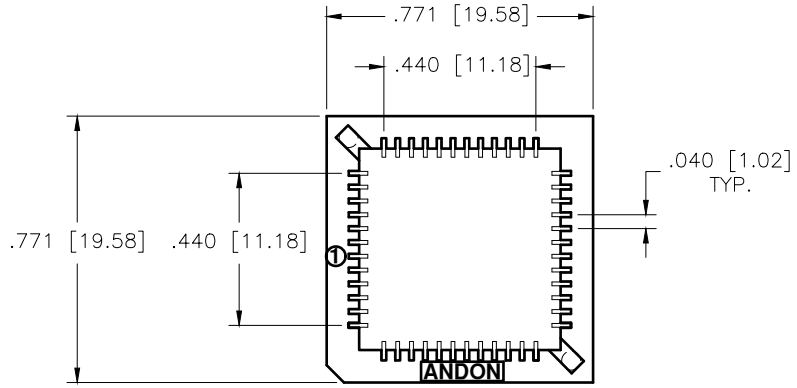


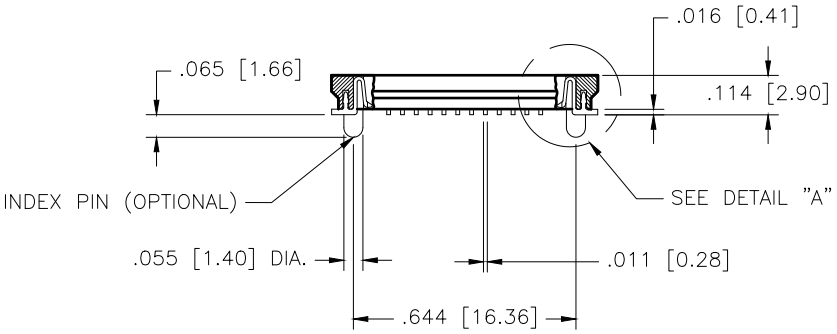

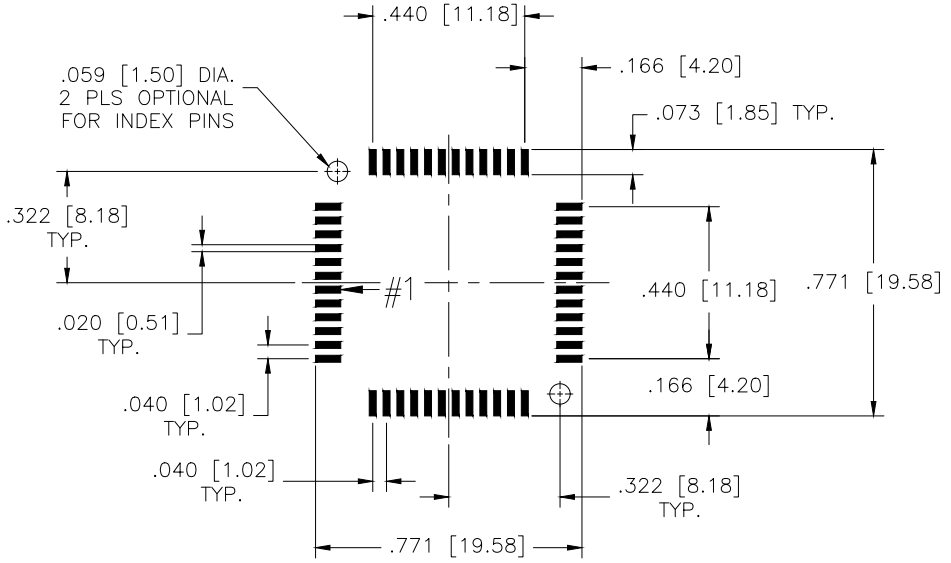


PCB LAYOUT

FOR INSTALLATION, PUSH DEVICE DOWN WITH THUMB UNTIL IT IS FLUSH WITH THE PCB

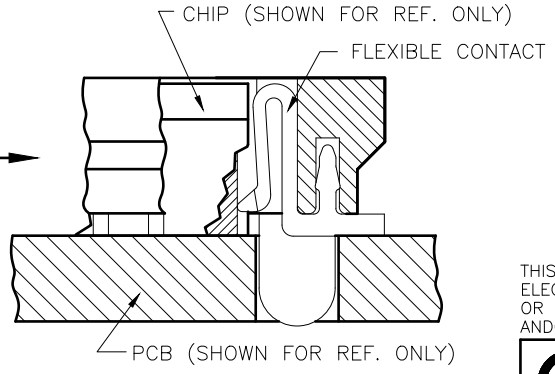

DETAIL "A"



* US Pat #5,588,847

PART NO.	DESCRIPTION
680-48-SM-G10-R14-0	WITHOUT INDEX PINS
680-48-SM-G10-R14-1	WITH INDEX PINS

TECHNICAL SPECIFICATIONS

ELECTRICAL DATA

CONTACT RESISTANCE ..... 30 MILLIOHMS
CURRENT RATING ..... 1.0 AMP
INSULATION RESISTANCE ... 1000 MEGAOHMS
DIELECTRIC VOLTAGE..... 500 VAC

MATERIAL DATA

INSULATOR .... HIGH TEMP UL 94V-0
CONTACT ..... BERYLLIUM COPPER
PLATING ..... G10 GOLD OVER NICKEL

THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO ANDON ELECTRONICS CORPORATION. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING IS EXPRESSLY PROHIBITED AS ANDON ELECTRONICS MAY OTHERWISE AGREE IN WRITING.

AEC ANDON ELECTRONICS CORP.
4 COURT DRIVE LINCOLN, RI. 02865, USA

TITLE: 2.85MM, .040 PITCH, 48 PIN LCC SOCKET

TOLERANCE EXCEPT AS NOTED	DRAWN BY: S. KIRCORIAN	SCALE: NONE
ANGLE .... ±1/2°	CHK'D BY:	DATE: 3-27-03
FRACTION ±.010	APP'D BY:	FILE: P6800001
.XX..... ±.010		
.XXX..... ±.005	UNITS: INCHES [MILLIMETERS]	

REV.	DESCRIPTION	DATE	REV. BY	APP. BY

A | DWG. NO. 680-48-SM-G10-R14-X | REV. 0