

Nama : Thofikh Bisyrn T


NIM : L200170017

Kelas : A

C. Kegiatan Praktikum Kegiatan Topologi 1

1.


1. Menggunakan PACKET TRACER buat topologi berikut ini dengan menggunakan switch Catalyst 2950.

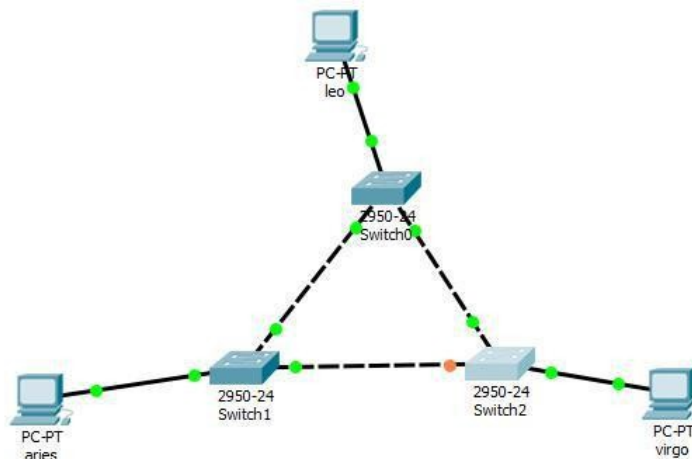

- Tugas 1 A : Tulis langkah pembuatan topologi. Langkah – langkah :
 - a. Pada menu bar yang terdapat pada packet cisco tracer pilih Devices
 - b. Drag and Drop PC sejumlah 3 buah
 - c. Pada menu bar yang terdapat pada packet cisco tracer pilih Network Devices lalu pilih Switches
 - d. Drag and Drop Switch 950-24
 - e. Susun PC dan Switch lalu hubungkan dengan kabel seperti pada modul
 - f. Klik 2x pada PC lalu beri nama sesuai nama yang ada pada modul
- 2. Beri nama masing-masing switch dengan SW1,SW2, dan SW3
 - Tugas 2A : tulis langkah pemberian nama switch mulai dari *mode user*.
Langkah-langkah :
 - a. Klik 2x pada switch lalu ganti nama menjadi SW1,SW2 dan SW3
- 3. Konfigurasi masing-masing PC dengan alamat IP:
 - Leo = 172.21.1.1/24
 - Aries = 172.21.1.2/4

- Virgo = 172.21.1.3/24
4. Pada mode user atau mode privileged, lihat status STP pada masing-masing switch. Langkah pengoperasian
- Tekan enter
 - Masuk mode privileged (optional)

- Ketik show spanning-tree
- Tugas 4A : Pada kondisi default, capture masing-masing tampilan status STP switch (SW1,SW2,dan SW3).

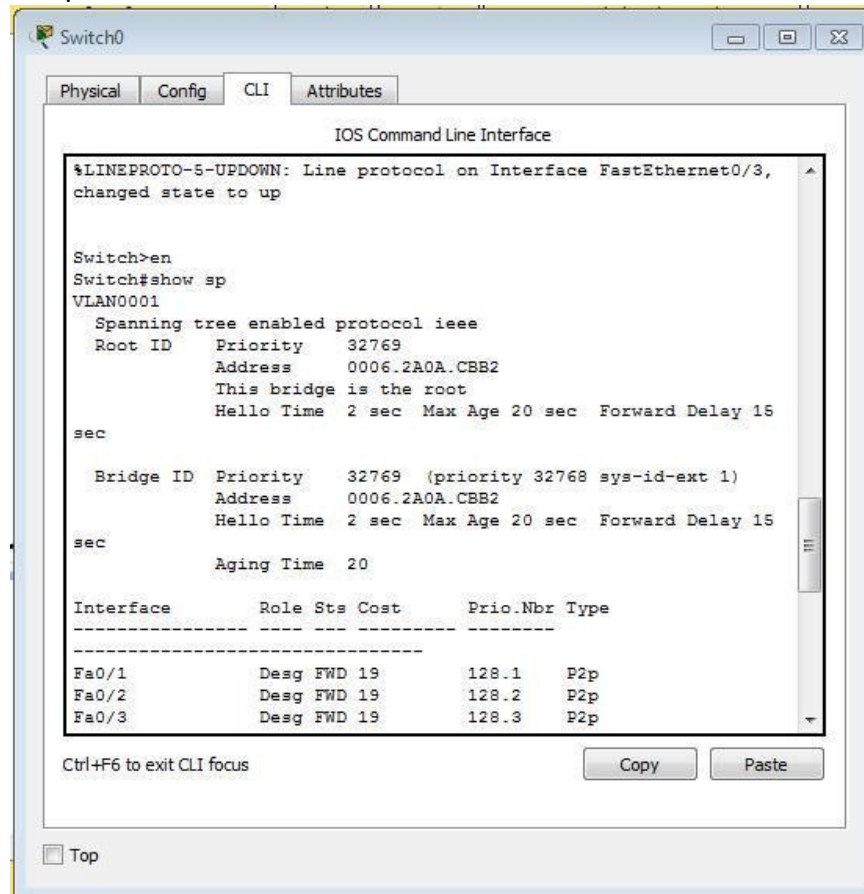

Switch1

Physical Config CLI Attributes

IOS Command Line Interface

```

Switch>en
Switch#show sp
VLAN0001
  Spanning tree enabled protocol ieee
  Root ID    Priority    32769
            Address     0006.2A0A.CBB2
            Cost        19
            Port        1(FastEthernet0/1)
            Hello Time  2 sec  Max Age 20 sec  Forward Delay 15
sec
            Bridge ID   Priority    32769 (priority 32768 sys-id-ext 1)
            Address     000D.BD63.A046
            Hello Time  2 sec  Max Age 20 sec  Forward Delay 15
sec
            Aging Time  20

Interface      Role Sts Cost      Prio.Nbr Type
-----
Fa0/1          Root FWD 19        128.1    P2p
Fa0/2          Desg FWD 19        128.2    P2p
Fa0/3          Desg FWD 19        128.3    P2p

Switch#

```

Ctrl+F6 to exit CLI focus

Copy Paste

Top

Switch2

Physical Config CLI Attributes

IOS Command Line Interface

```

Switch>en
Switch#show sp
VLAN0001
  Spanning tree enabled protocol ieee
  Root ID    Priority    32769
            Address     0006.2A0A.CBB2
            Cost        19
            Port        1(FastEthernet0/1)
            Hello Time  2 sec  Max Age 20 sec  Forward Delay 15
sec
            Bridge ID   Priority    32769 (priority 32768 sys-id-ext 1)
            Address     00E0.F977.373B
            Hello Time  2 sec  Max Age 20 sec  Forward Delay 15
sec
            Aging Time  20

Interface      Role Sts Cost      Prio.Nbr Type
-----
Fa0/1          Root FWD 19        128.1    P2p
Fa0/2          Altn BLK 19        128.2    P2p
Fa0/3          Desg FWD 19        128.3    P2p

Switch#

```

Ctrl+F6 to exit CLI focus

Copy Paste

Top

- Tugas 4B : Untuk tiap-tiap switch, isikan tabel berikut :

SW0

No	Variabel	Nilai
1	Root ID	32769,0006.2A0A.CBB2
2	Priority	32769
3	MAC Adress	0006.2A0A.CBB2
4	Bridge ID	32769,0006.2A0A.CBB2
5	Cost (0/1;0/2;0/3)	19 FWD;19 FWD;19 FWD
6	Hello Time	2 sec
7	Max Age	20 sec
8	Forward Delay	15

SW

1

No	Variabel	Nilai
1	Root ID	32769,0006.2A0A.CBB2
2	Priority	32769
3	MAC Adress	0006.2A0A.CBB2
4	Bridge ID	32769,000D.BD63.A046
5	Cost (0/1;0/2;0/3)	19 FWD;19 FWD;19 FWD
6	Hello Time	2 sec
7	Max Age	20 sec
8	Forward Delay	15

SW

2

No	Variabel	Nilai
1	Root ID	32769,0006.2A0A.CBB2
2	Priority	32769
3	MAC Adress	0006.2A0A.CBB2
4	Bridge ID	32769,00E0.F977.373B
5	Cost (0/1;0/2;0/3)	19 FWD;19 BLK;19 FWD
6	Hello Time	2 sec
7	Max Age	20 sec
8	Forward Delay	15

- 4C : pada kondisi default tersebut, switch dan port mana saja yang :

- Menjadi root bridge : SW0
- Menjadi designated bridge : SW0
- Menjadi root port : SW1 dan SW2
- Menjadi designated port : SW1 dan SW2

- Tugas 4D: pada kondisi default tersebut, dan port mana saja yang:

- Berada pada keadaan forwarding : SW0 dan SW1
- Berada pada keadaan blocking : SW2

5. Dari PC Leo lakukan ping ke PC Virgo.

```
leo
Physical Config Desktop Programming Attributes

Command Prompt

FastEthernet0 Connection: (default port)

Link-local IPv6 Address..... FE80::2D0:58FF:FEAD:C9BA
IP Address..... 172.21.1.1
Subnet Mask..... 255.255.255.0
Default Gateway..... 0.0.0.0

Bluetooth Connection:

Link-local IPv6 Address..... ::
IP Address..... 0.0.0.0
Subnet Mask..... 0.0.0.0
Default Gateway..... 0.0.0.0

C:\>ping 172.21.1.3

Pinging 172.21.1.3 with 32 bytes of data:


Reply from 172.21.1.3: bytes=32 time=14ms TTL=128
Reply from 172.21.1.3: bytes=32 time<1ms TTL=128
Reply from 172.21.1.3: bytes=32 time<1ms TTL=128
Reply from 172.21.1.3: bytes=32 time<1ms TTL=128

Ping statistics for 172.21.1.3:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 14ms, Average = 3ms
```


- Tugas 5A: Tulis langkah untuk melakukan perintah ping.
 - a. Klik 2x pada PC leo
 - b. Klik desktop
 - c. Pilih command prompt
 - d. Lalu ping ke alamat IP virgo dengan cara ketik ping 172.21.1.3
- 6. Simpan konfigurasi jaringan dengan nama lab2.nwc
 - Tugas 6A : Tulis langkah untuk menyimpan konfigurasi jaringan.
 - a. Masuk switch lalu pilih menu CLI
 - b. Lalu ketikkan copy running-config startup-config

Kegiatan 2. Topologi 2

1. Menggunakan Packet Tracer ubah topologi menjadi seperti topologi berikut ini:

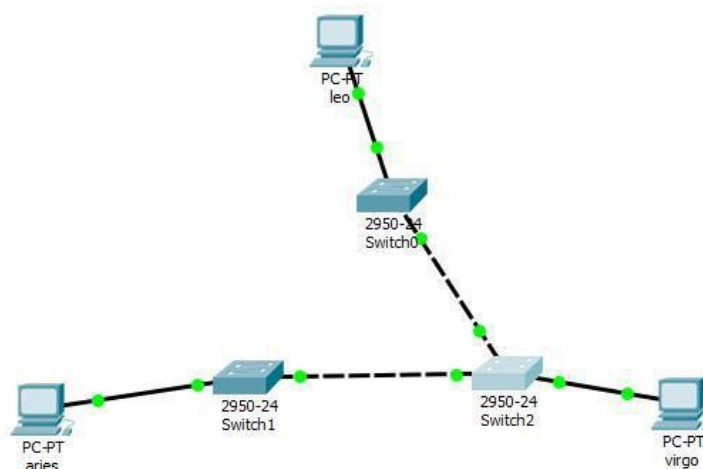

2. Simpan topologi dan buka topologi tersebut pada lingkungan Packet Tracer. Kemudian load file konfigurasi lab2.ncw
3. Lakukan langkah lab.4 dan lab.5
 - Tugas 9A : kerjakan tugas seperti pada tugas langkah lab.4
4. Pada mode user atau mode privileged, lihat status STP pada masing-masing switch. Langkah pengoperasian
 - Tekan enter
 - Masuk mode privileged (optional)
 - Ketik show spanning-tree
- Tugas 4A : Pada kondisi default, capture masing-masing tampilan status STP switch (SW1,SW2,dan SW3).

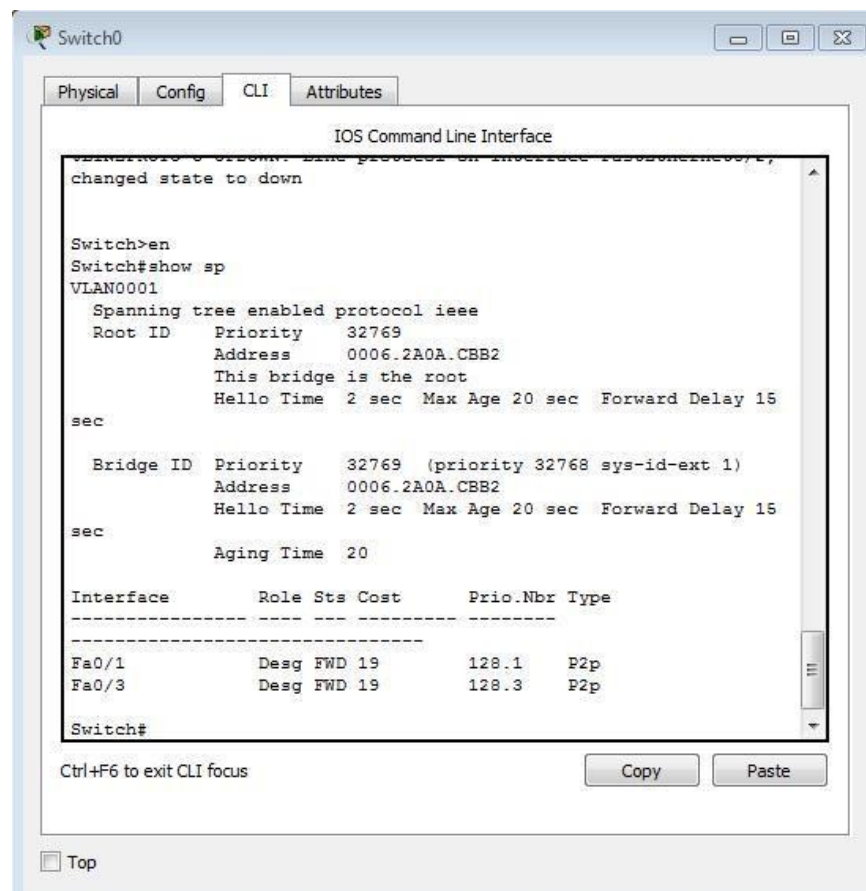

Switch1

Physical Config CLI Attributes

IOS Command Line Interface

```

Switch>en
Switch#show sp
VLAN0001
  Spanning tree enabled protocol ieee
    Root ID    Priority    32769
              Address     0006.2A0A.CBB2
              Cost        38
              Port        2(FastEthernet0/2)
              Hello Time  2 sec  Max Age 20 sec  Forward Delay 15
sec
    Bridge ID  Priority    32769 (priority 32768 sys-id-ext 1)
              Address     000D.BD63.A046
              Hello Time  2 sec  Max Age 20 sec  Forward Delay 15
sec
              Aging Time  20

Interface      Role Sts Cost      Prio.Nbr Type
-----
Fa0/2          Root FWD 19        128.2    P2p
Fa0/3          Desg FWD 19        128.3    P2p
Switch#

```

Ctrl+F6 to exit CLI focus

Copy Paste

Top

Switch2

Physical Config CLI Attributes

IOS Command Line Interface

```

Switch>en
Switch#show sp
VLAN0001
  Spanning tree enabled protocol ieee
    Root ID    Priority    32769
              Address     0006.2A0A.CBB2
              Cost        19
              Port        1(FastEthernet0/1)
              Hello Time  2 sec  Max Age 20 sec  Forward Delay 15
sec
    Bridge ID  Priority    32769 (priority 32768 sys-id-ext 1)
              Address     00E0.F977.373B
              Hello Time  2 sec  Max Age 20 sec  Forward Delay 15
sec
              Aging Time  20

Interface      Role Sts Cost      Prio.Nbr Type
-----
Fa0/1          Root FWD 19        128.1    P2p
Fa0/2          Desg FWD 19        128.2    P2p
Fa0/3          Desg FWD 19        128.3    P2p
Switch#

```

Ctrl+F6 to exit CLI focus

Copy Paste

Top

SW0

No	Variabel	Nilai
----	----------	-------

1	Root ID	32769,0006.2A0A.CBB2
2	Priority	32769
3	MAC Adress	0006.2A0A.CBB2
4	Bridge ID	32769,0006.2A0A.CBB2
5	Cost (0/1;0/3)	19 FWD;19 FWD
6	Hello Time	2 sec
7	Max Age	20 sec
8	Forward Delay	15

SW

1

No	Variabel	Nilai
1	Root ID	32769,0006.2A0A.CBB2
2	Priority	32769
3	MAC Adress	0006.2A0A.CBB2
4	Bridge ID	32769,000D.BD63.A046
5	Cost (0/2;0/3)	19 FWD;19 FWD
6	Hello Time	2 sec
7	Max Age	20 sec
8	Forward Delay	15

SW

2

No	Variabel	Nilai
1	Root ID	32769,0006.2A0A.CBB2
2	Priority	32769
3	MAC Adress	0006.2A0A.CBB2
4	Bridge ID	32769,00E0.F977.373B
5	Cost (0/1;0/2;0/3)	19 FWD;19 FWD;19 FWD
6	Hello Time	2 sec
7	Max Age	20 sec
8	Forward Delay	15

- 4C : pada kondisi default tersebut, switch dan port mana saja yang :

- Menjadi root bridge : SW0
- Menjadi designated bridge : SW0
- Menjadi root port : SW1 dan SW2
- Menjadi designated port : SW1 dan SW2

- Tugas 4D: pada kondisi default tersebut, dan port mana saja yang:

- Berada pada keadaan forwarding : SW0,SW1 dan SW2
- Berada pada keadaan blocking : tidak ada

5. Dari PC Leo lakukan ping ke PC Virgo.

```
leo
Physical  Config  Desktop  Programming  Attributes

Command Prompt

FastEthernet0 Connection: (default port)

Link-local IPv6 Address.....: FE80::2D0:58FF:FEAD:C9BA
IP Address.....: 172.21.1.1
Subnet Mask.....: 255.255.255.0
Default Gateway.....: 0.0.0.0

Bluetooth Connection:

Link-local IPv6 Address.....: ::
IP Address.....: 0.0.0.0
Subnet Mask.....: 0.0.0.0
Default Gateway.....: 0.0.0.0

C:\>ping 172.21.1.3

Pinging 172.21.1.3 with 32 bytes of data:

Reply from 172.21.1.3: bytes=32 time=14ms TTL=128
Reply from 172.21.1.3: bytes=32 time<1ms TTL=128
Reply from 172.21.1.3: bytes=32 time<1ms TTL=128
Reply from 172.21.1.3: bytes=32 time<1ms TTL=128

Ping statistics for 172.21.1.3:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 14ms, Average = 3ms
```

- Tugas 5A: Tulis langkah untuk melakukan perintah ping.
- Langkah-langkah :
- e. Klik 2x pada PC leo
 - f. Klik desktop
 - g. Pilih command prompt
 - h. Lalu ping ke alamat IP virgo dengan cara ketik ping 172.21.1.3