


Nama : Rima Dwi Novika



NIM : L200170044



Kelas : B



Modul : 4


Kegiatan 1

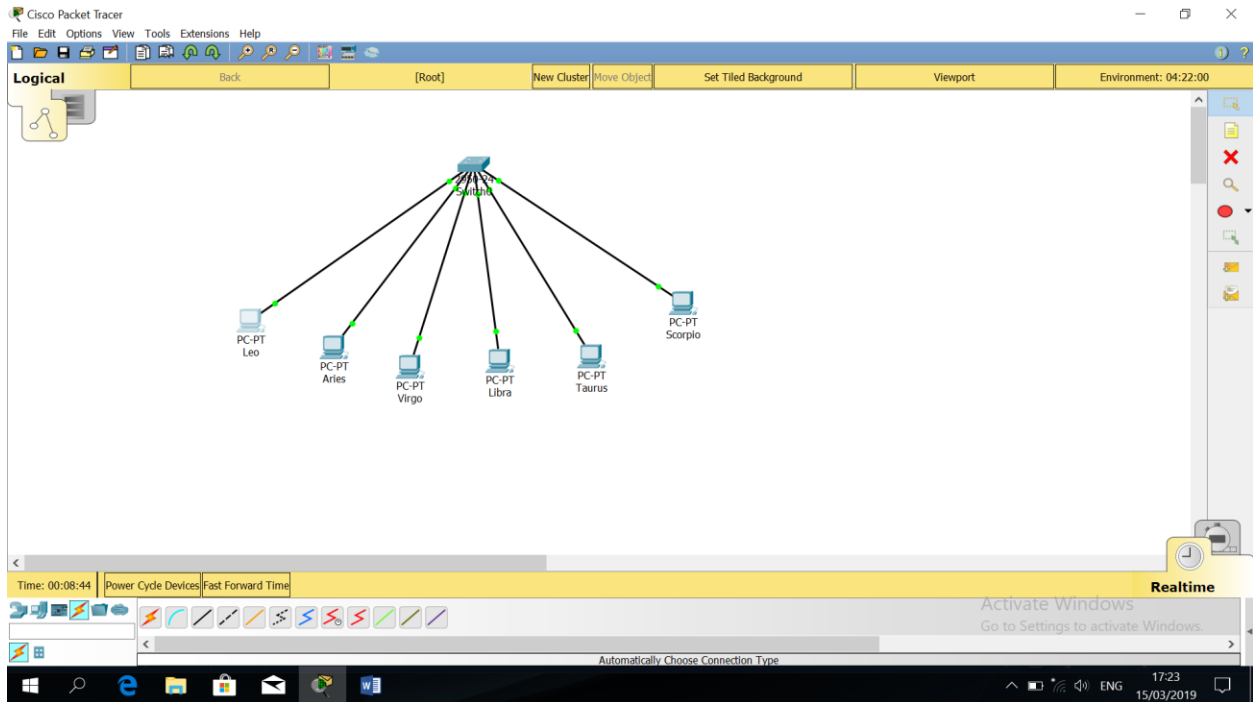

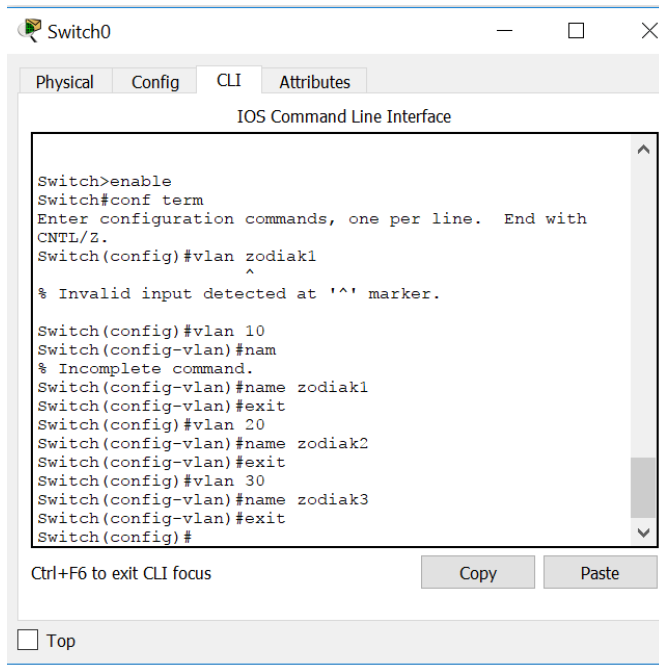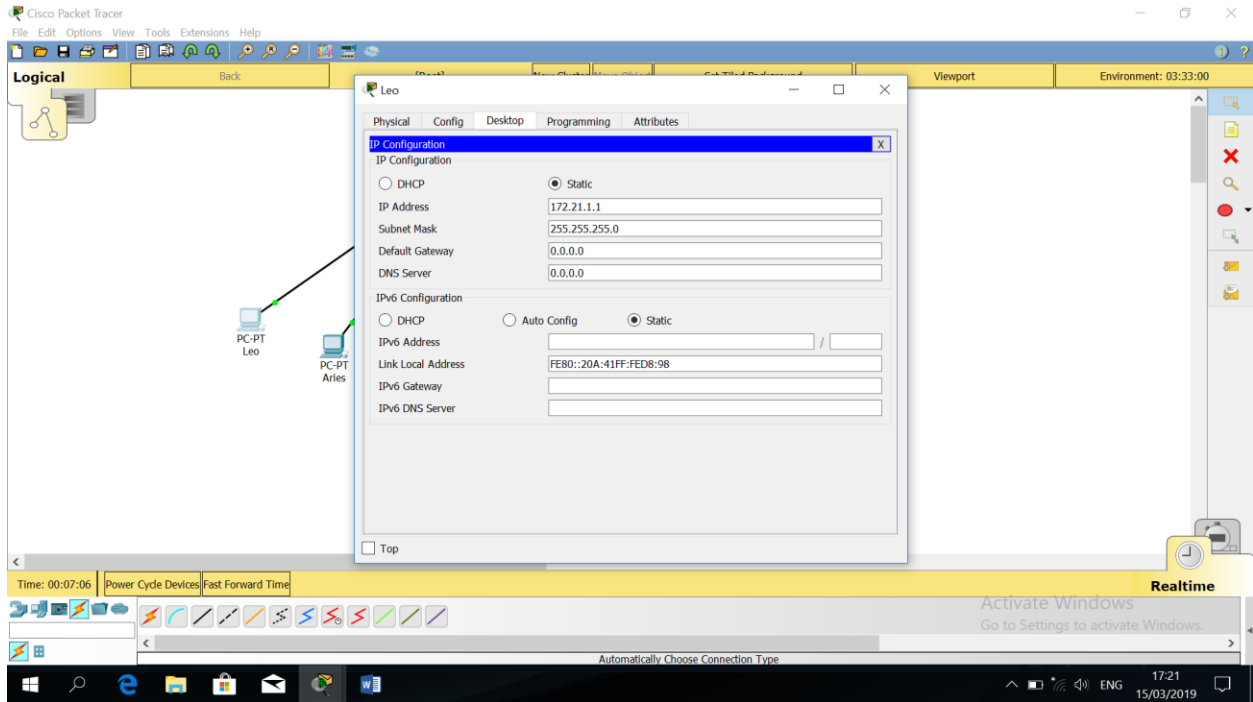

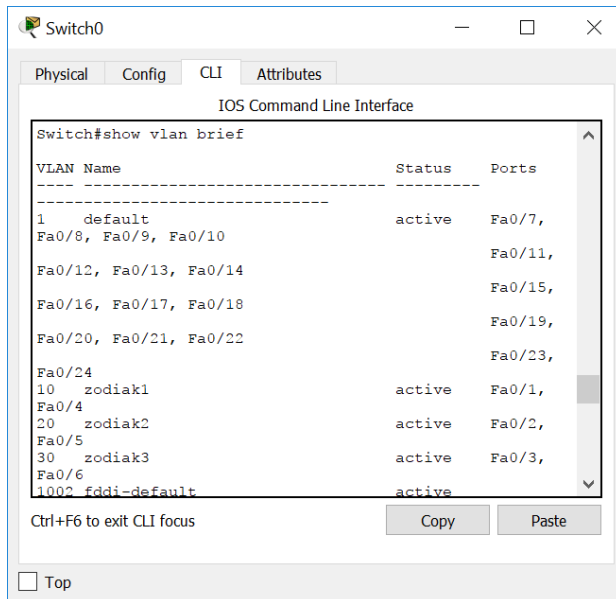
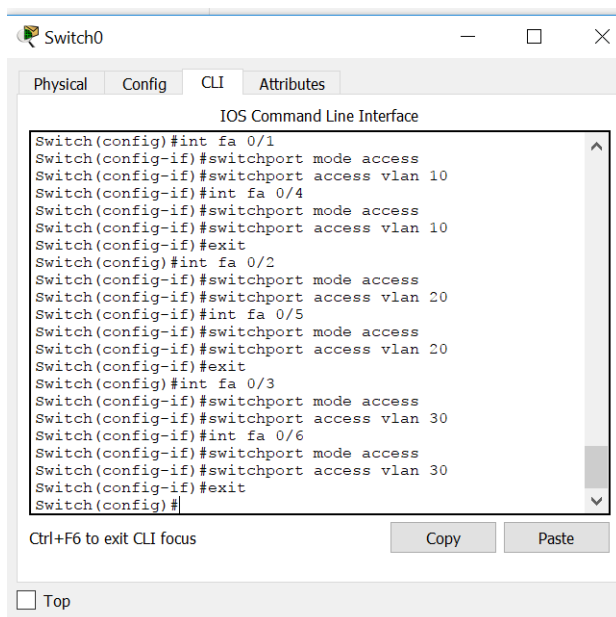


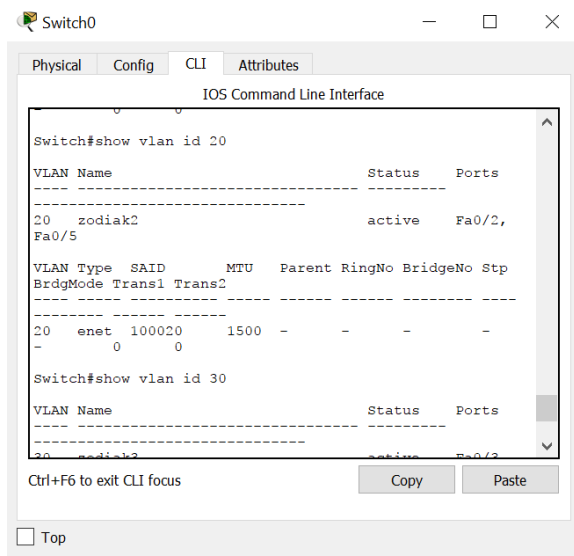
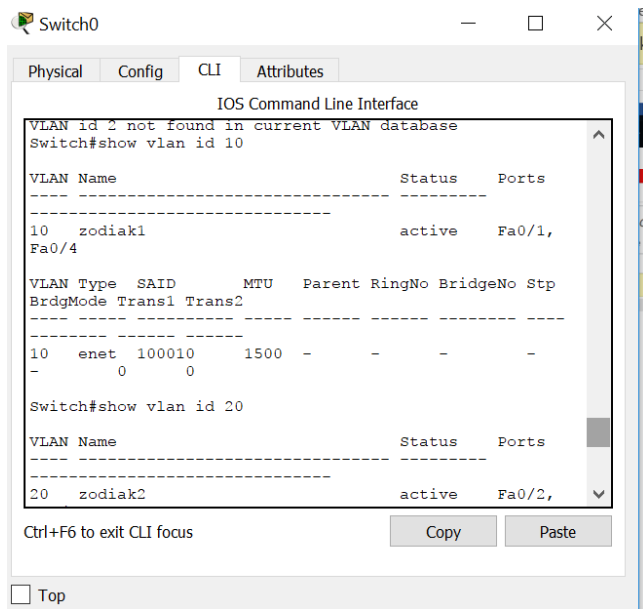


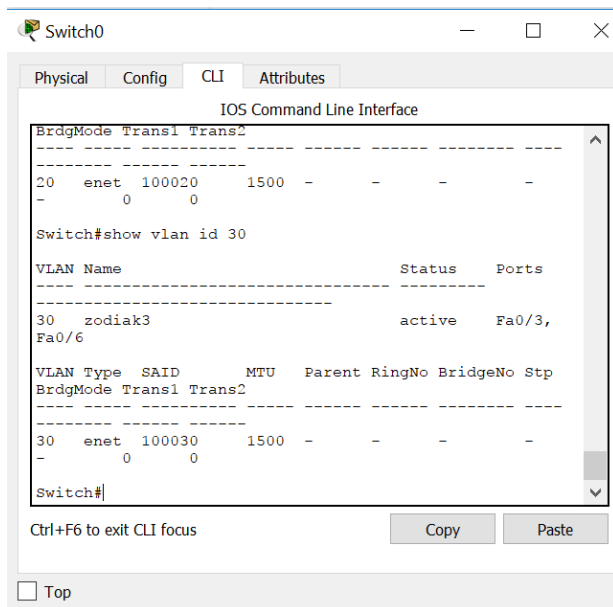

No	Variabel	Nilai		
1	Nomor VLAN	10	20	30
2	Nama VLAN	Zodiak1	Zodiak2	Zodiak3
3	Port	Fa 0/1, Fa 0/4	Fa 0/2, Fa 0/5	Fa 0/3, Fa 0/6
4	Status	Active	Active	Active

Kegiatan 2

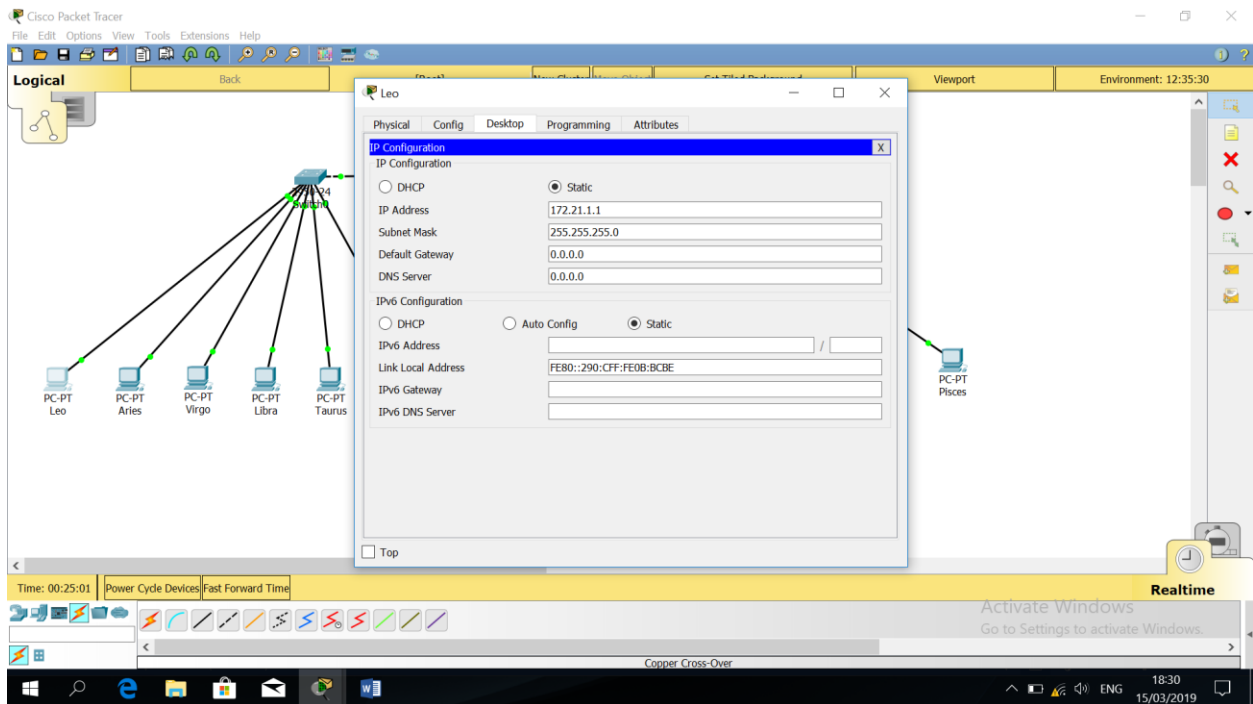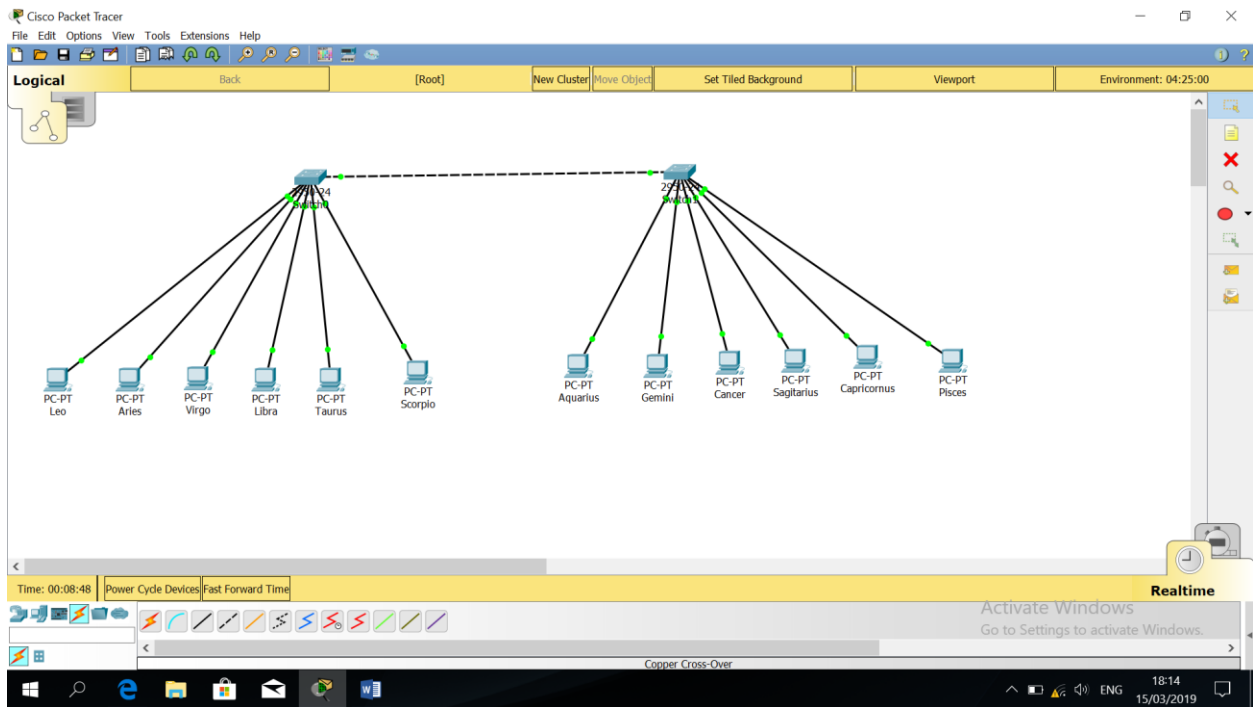

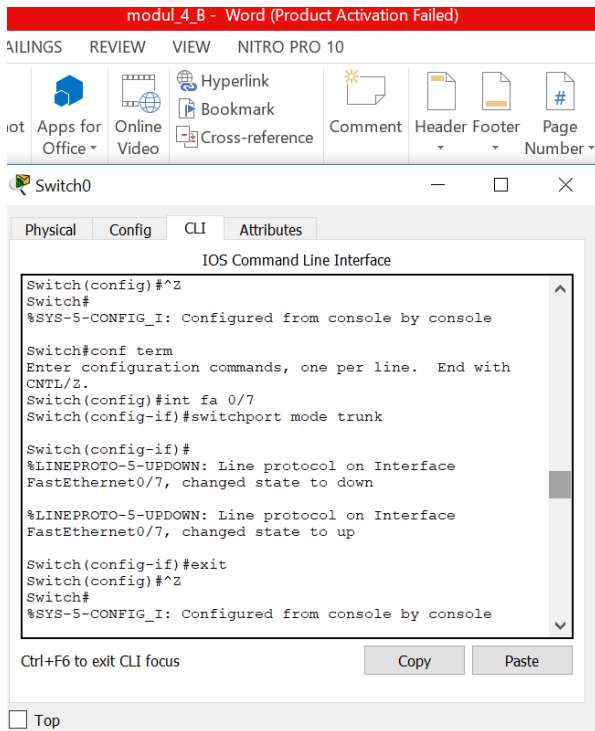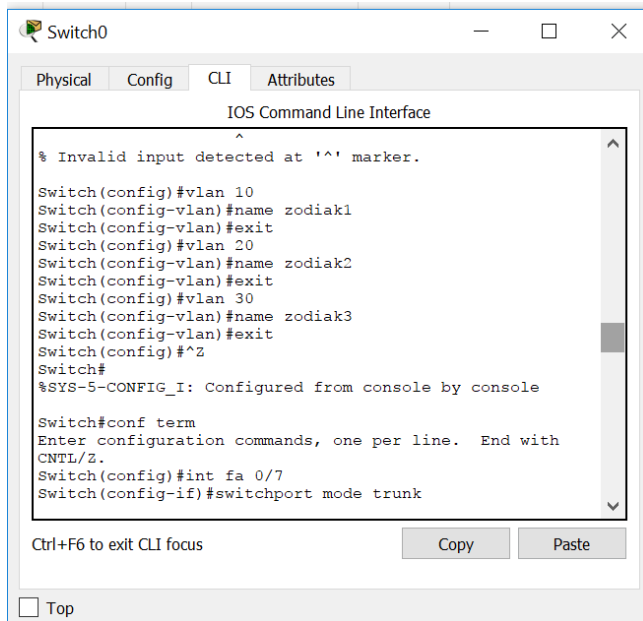

modul_4_B - Word (Product Activation Failed)

TAILINGSREVIEWVIEWNITRO PRO 10

hot

Apps for Office

Online Video

HyperlinkBookmarkCross-reference

Comment

Header Footer

Page Number

Switch0

PhysicalConfigCLIAttributes

IOS Command Line Interface

Switch0-3-Config-1: Configured from Console by Console

Switch#show int fa 0/7 switchport
Name: Fa0/7
Switchport: Enabled
Administrative Mode: trunk
Operational Mode: trunk
Administrative Trunking Encapsulation: dot1q
Operational Trunking Encapsulation: dot1q
Negotiation of Trunking: On
Access Mode VLAN: 1 (default)
Trunking Native Mode VLAN: 1 (default)
Voice VLAN: none
Administrative private-vlan host-association: none
Administrative private-vlan mapping: none
Administrative private-vlan trunk native VLAN: none
Administrative private-vlan trunk encapsulation: dot1q
Administrative private-vlan trunk normal VLANs: none
Administrative private-vlan trunk private VLANs: none
Operational private-vlan: none
Trunking VLANs Enabled: All
Pruning VLANs Enabled: 2-1001
Capture Mode Disabled

Ctrl+F6 to exit CLI focus

CopyPaste

☐ Top

Switch0

PhysicalConfigCLIAttributes

IOS Command Line Interface



Switch#show int fa 0/7 trunk
^
% Invalid input detected at '^' marker.
Switch#show vlan

VLAN Name	Status	Ports
1 default	active	Fa0/1, Fa0/2, Fa0/3, Fa0/4, Fa0/6, Fa0/8, Fa0/9, Fa0/11, Fa0/12, Fa0/13, Fa0/15, Fa0/16, Fa0/17, Fa0/19, Fa0/20, Fa0/21, Fa0/23, Fa0/24

Ctrl+F6 to exit CLI focus

CopyPaste

☐ Top

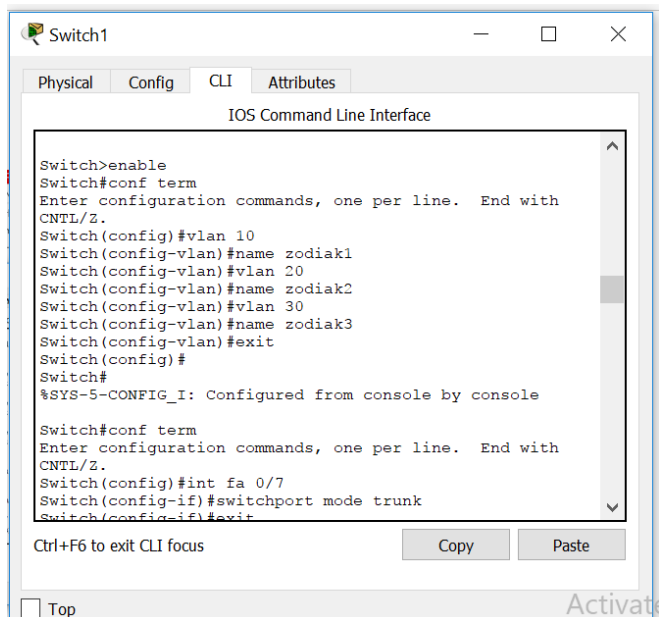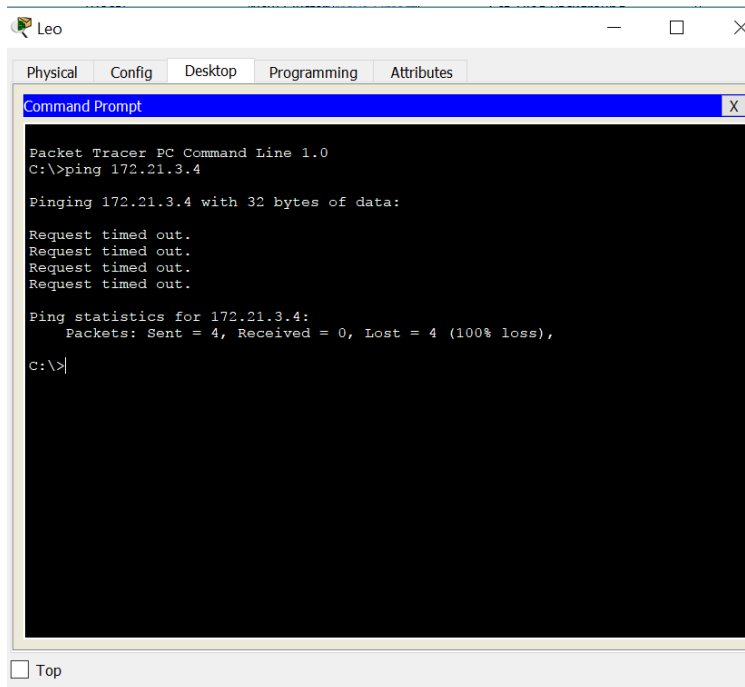

Product Activation Failed

O PRO 10

AaBbCcDc

AaBbCc

AaBbCcC

AaB

AaBbCcC

AaBbCcD

No Spac...

Heading 1

Heading 2

Title

Subtitle

Subtitle Em.

Styles

8

9

10

11

12

13

14

15

16

17

18

Copper Cross-Over

1846

15/03/2019

Product Activation Failed

Switch1

Physical

Config

CLI

Attributes

IOS Command Line Interface

Switch-S-CONFIG-1: Configured from console by console

Switch#show vlan

VLAN	Name	Status	Ports
1	default	active	Fa0/1, Fa0/2, Fa0/3, Fa0/4 Fa0/6, Fa0/8, Fa0/9 Fa0/11, Fa0/12, Fa0/13 Fa0/15, Fa0/16, Fa0/17 Fa0/19, Fa0/20, Fa0/21 Fa0/23, Fa0/24
10	zodiak1	active	
20	zodiak2	active	
30	zodiak3	active	


Ctrl+F6 to exit CLI focus



Copy



Paste

Top

Activat

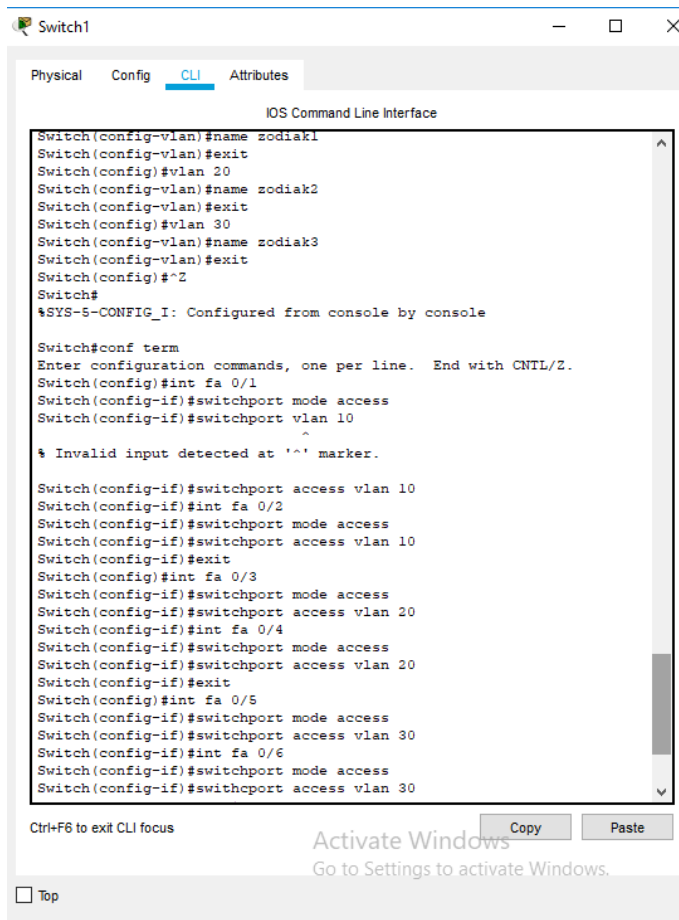

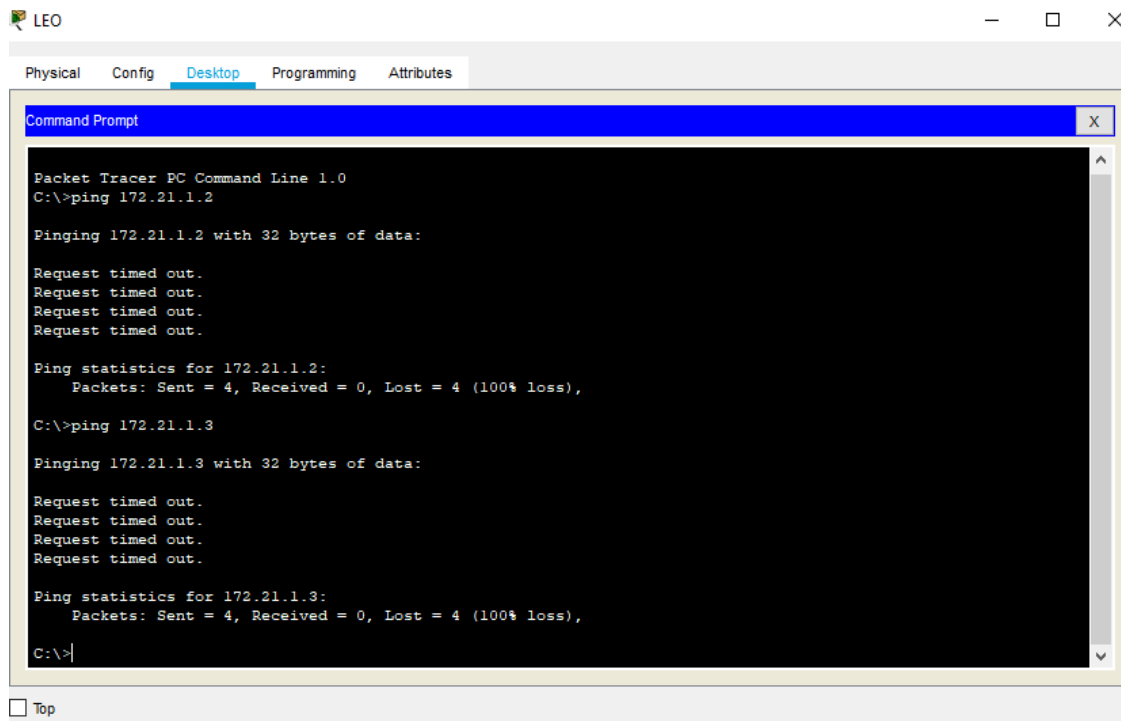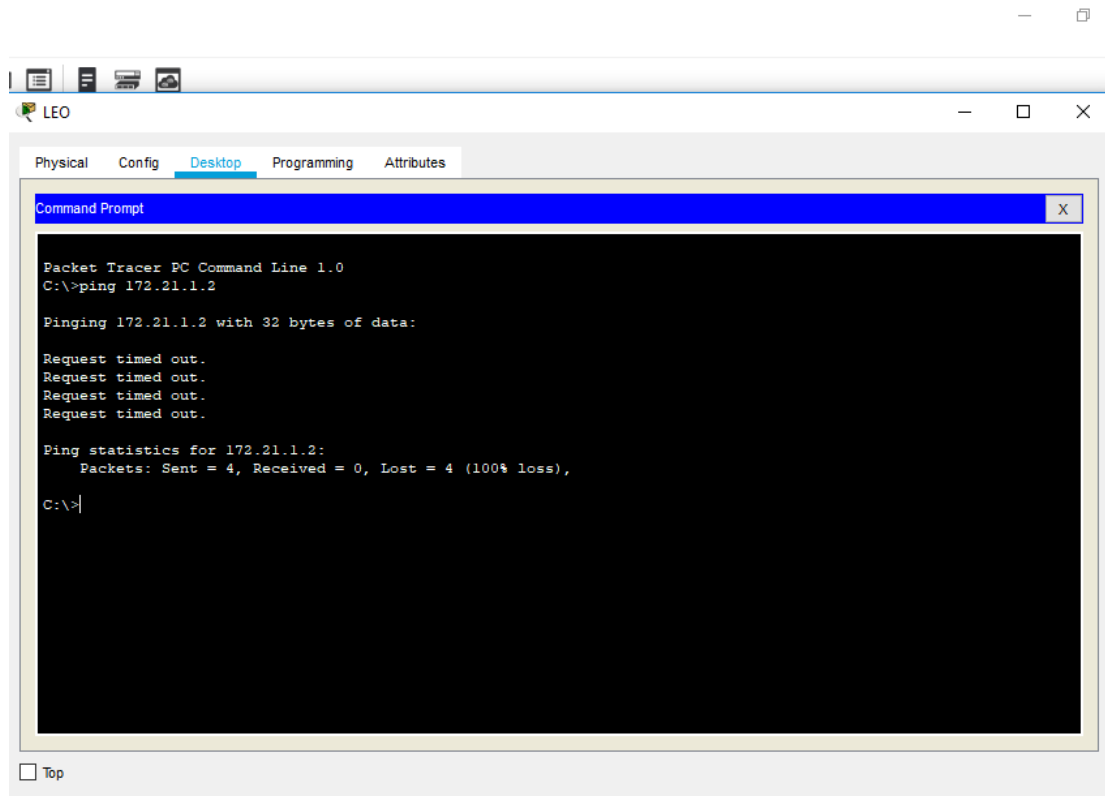

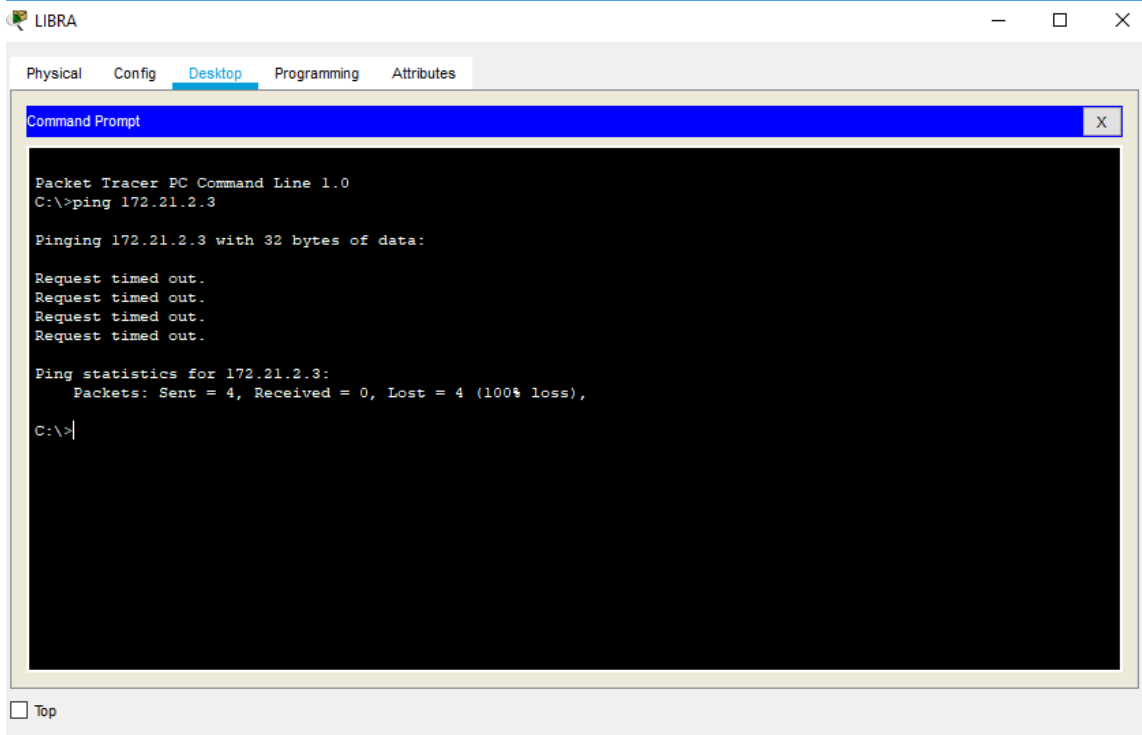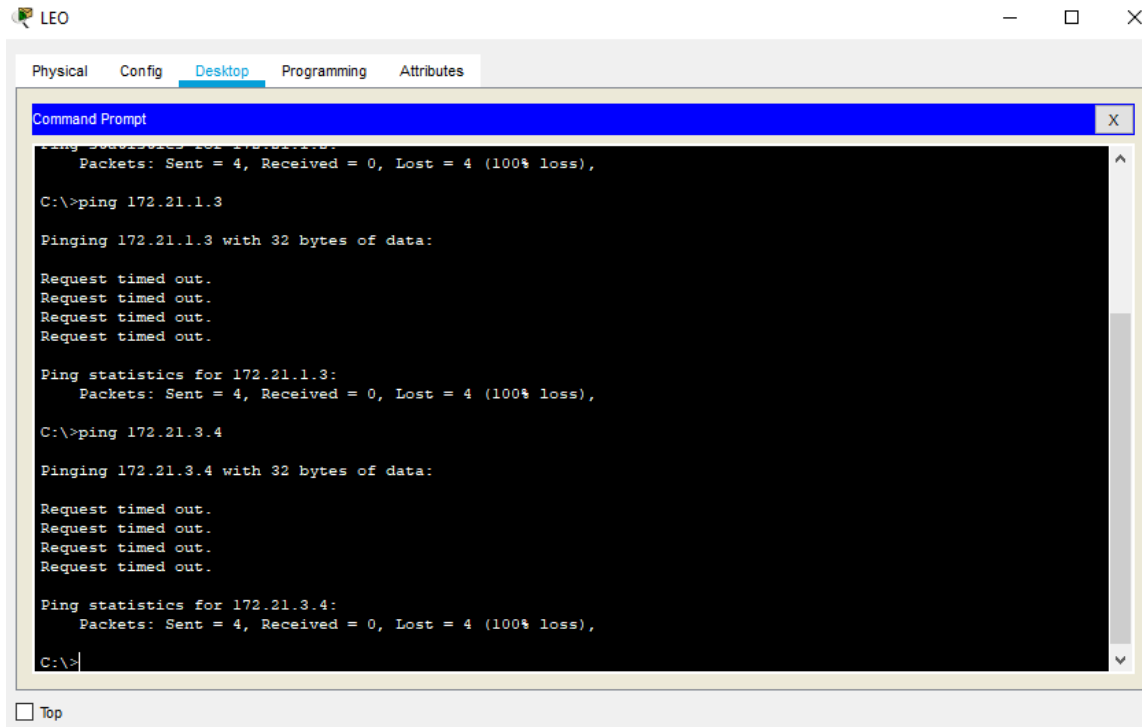

Physical Config **Desktop** Programming Attributes

Command Prompt

X

```
Packet Tracer PC Command Line 1.0
C:\>ping 172.21.2.3

Pinging 172.21.2.3 with 32 bytes of data:

Request timed out.
Request timed out.
Request timed out.
Request timed out.

Ping statistics for 172.21.2.3:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),

C:\>ping 172.21.1.1

Pinging 172.21.1.1 with 32 bytes of data:

Request timed out.
Request timed out.
Request timed out.
Request timed out.

Ping statistics for 172.21.1.1:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),

C:\>|
```

☐ Top