



Nama : Fael Fais Afrizal

NIM : I200170076

Kelas : B

Modul : 4

Kegiatan 1

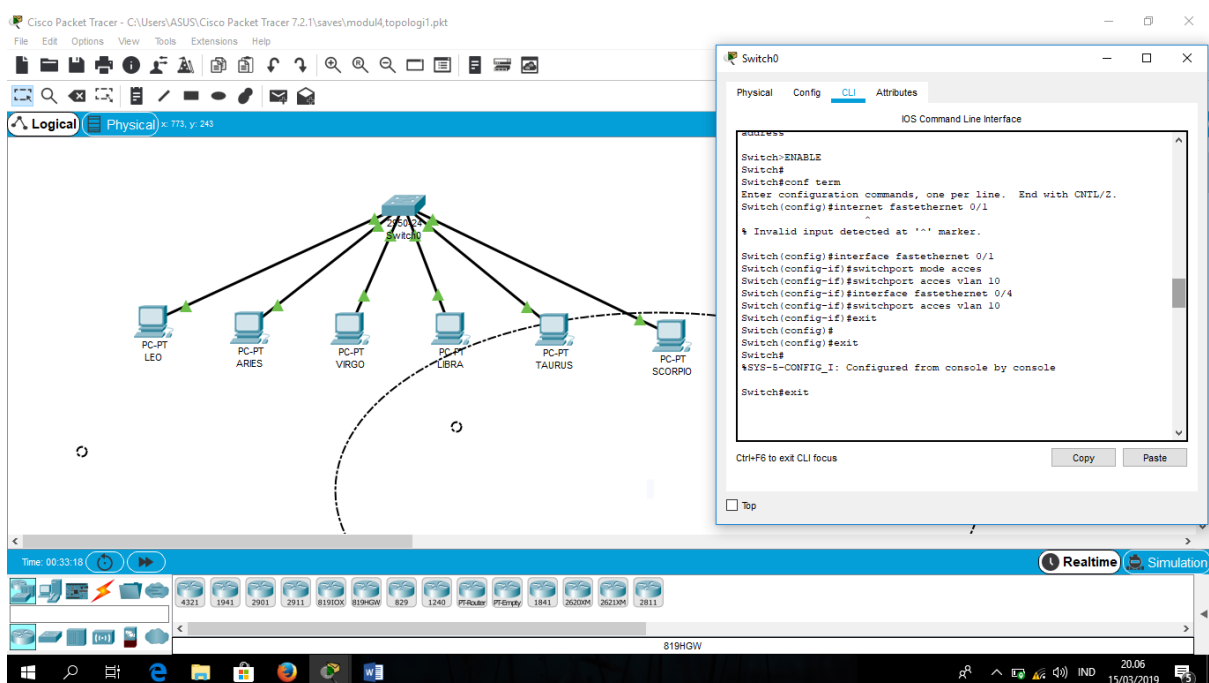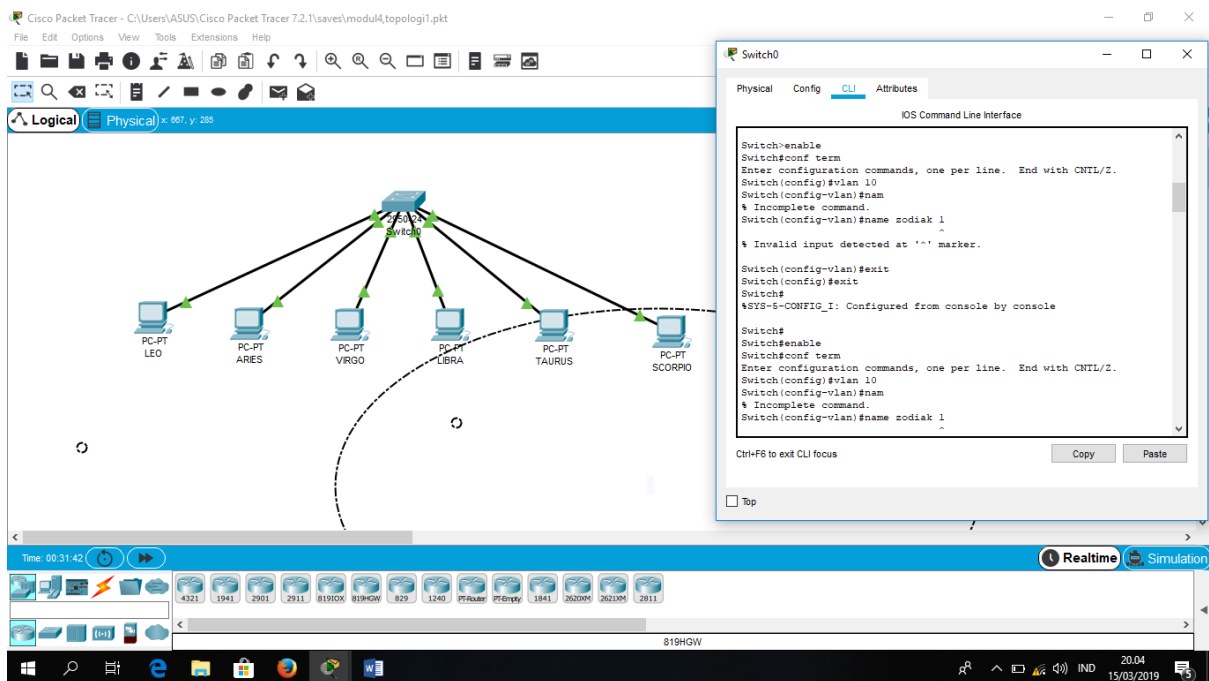

Cisco Packet Tracer - C:\Users\ASUS\Cisco Packet Tracer 7.2.1\saves\modul4\topologi1.pkt

File Edit Options View Tools Extensions Help

Logical Physical x: 780, y: 335

Switch0

Physical Config CLI Attributes

IOS Command Line Interface

```
Switch>enable
Switch#~2
Switch#show vlan brief
```

VLAN Name	Status	Ports
1 default	active	Fa0/7, Fa0/8, Fa0/9, Fa0/10, Fa0/13, Fa0/14, Fa0/15, Fa0/16, Fa0/17, Fa0/18, Fa0/19, Fa0/20, Fa0/21, Fa0/22
10 sodiak1	active	Fa0/23, Fa0/24
20 sodiak2	active	Fa0/1, Fa0/4
30 sodiak3	active	Fa0/2, Fa0/5
1002 fddi-default	active	Fa0/3, Fa0/6
1003 token-ring-default	active	
1004 fddiner-default	active	
1005 token-ring-default	active	

Ctrl+F6 to exit CLI focus

Copy Paste

Top

Time: 00:34:35



Realtime Simulation

4321 1941 2901 2911 8191OK 8191GW 829 1240 PFRoad PTEntry 1941 2620M 2621M 2811

CGR1240

Windows taskbar: 20.07 15/03/2019

Kegiatan 2

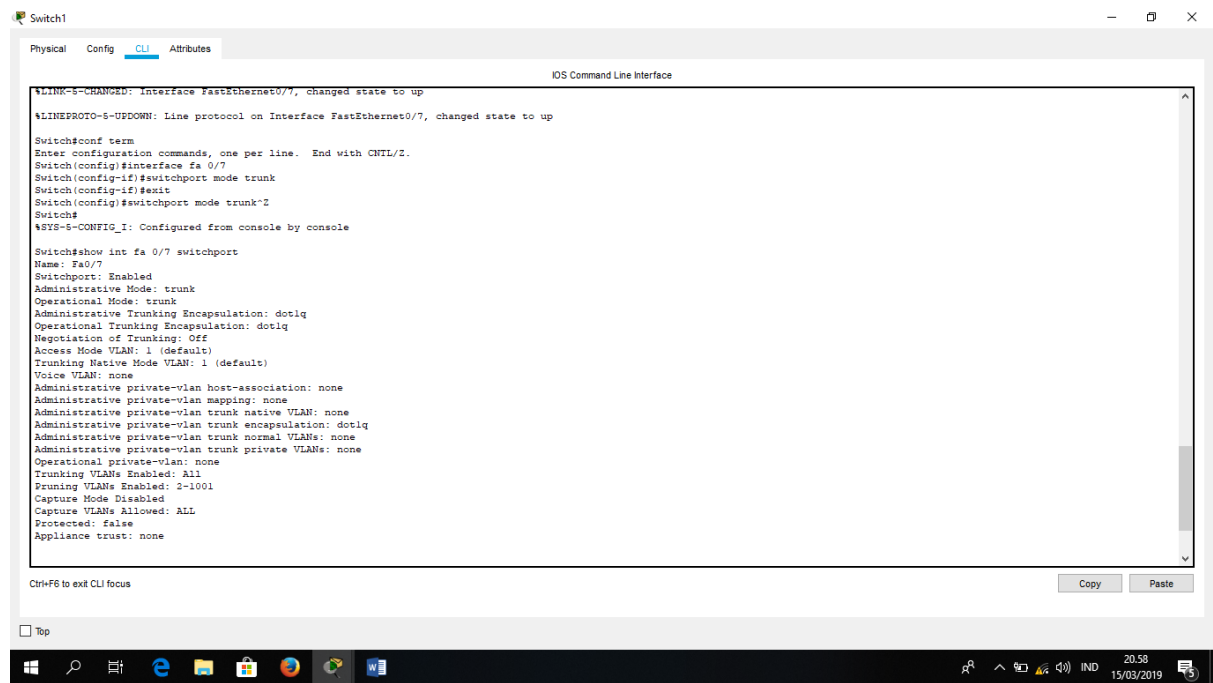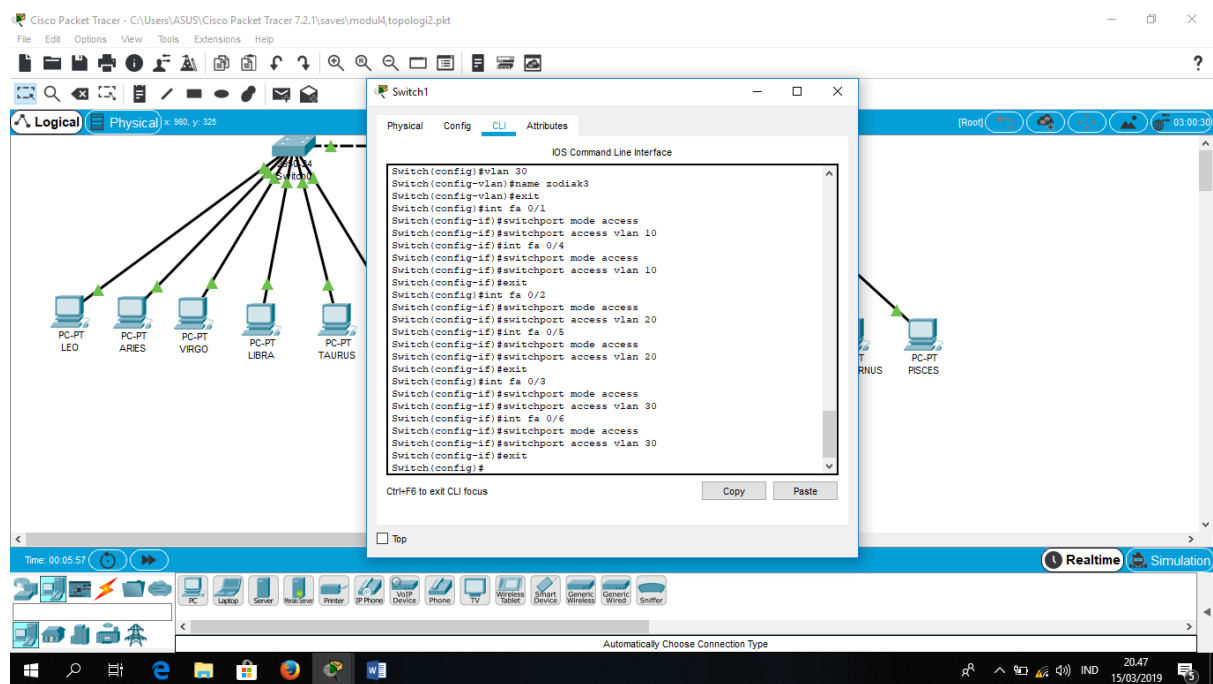

Switch0

Switch1

Physical Config CLI Attributes

IOS Command Line Interface

Switch#show vlan

VLAN	Name	Status	Ports
1	default	active	Fa0/1, Fa0/2, Fa0/3, Fa0/4, Fa0/5, Fa0/6, Fa0/8, Fa0/9, Fa0/10, Fa0/11, Fa0/12, Fa0/13, Fa0/14, Fa0/15, Fa0/16, Fa0/17, Fa0/18, Fa0/19, Fa0/20, Fa0/21, Fa0/22, Fa0/23, Fa0/24
1002	fddi-default	active	
1003	token-ring-default	active	
1004	fddinet-default	active	
1005	trnet-default	active	


VLAN	Type	SAID	MTU	Parent	RingNo	BridgeNo	Stp	BrdgMode
Trans1	Trans2							

Ctrl+F6 to exit CLI focus

Copy Paste

☐ Top

Switch#

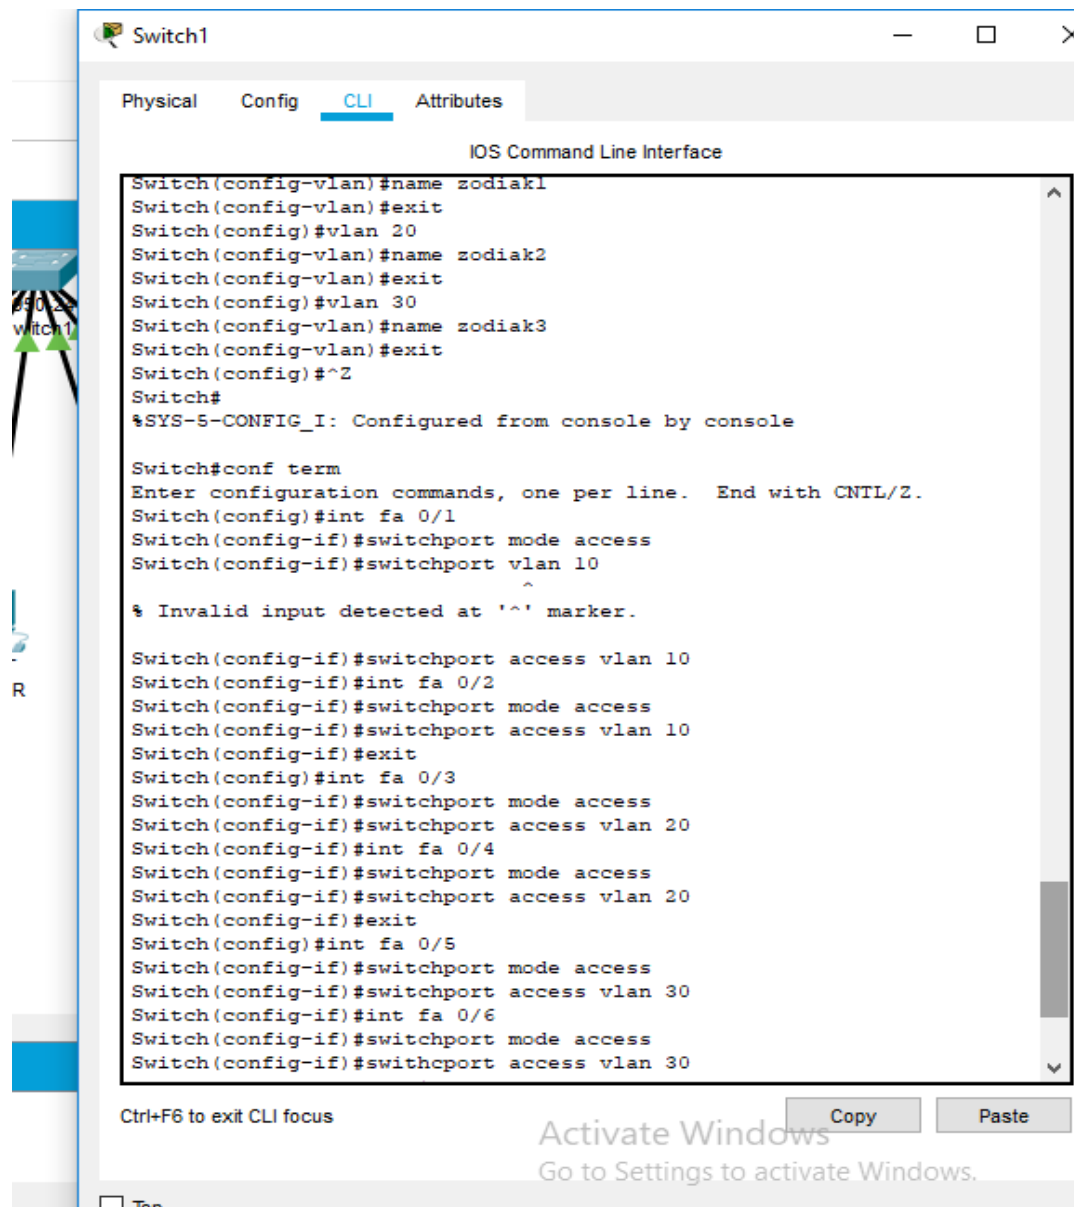

Proses Ping

