


Nama: Rahmat Wijaya

NIM: L200170093


Kelas: C

Modul: 02



Kegiatan 1

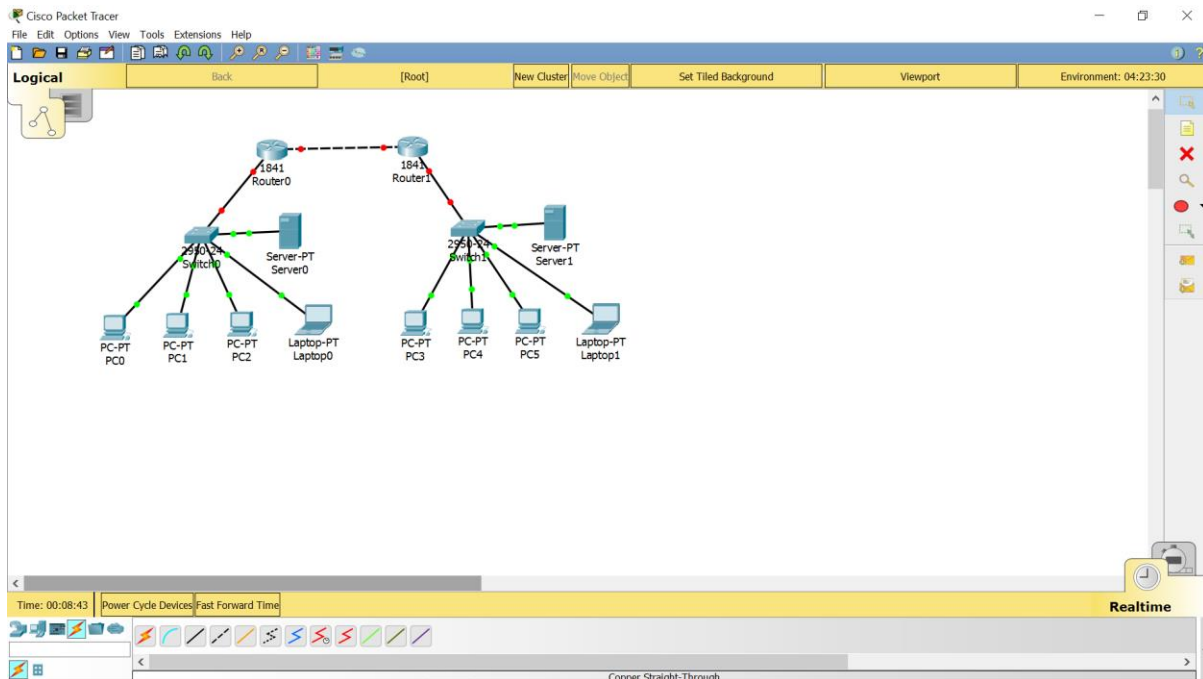

Kegiatan 2

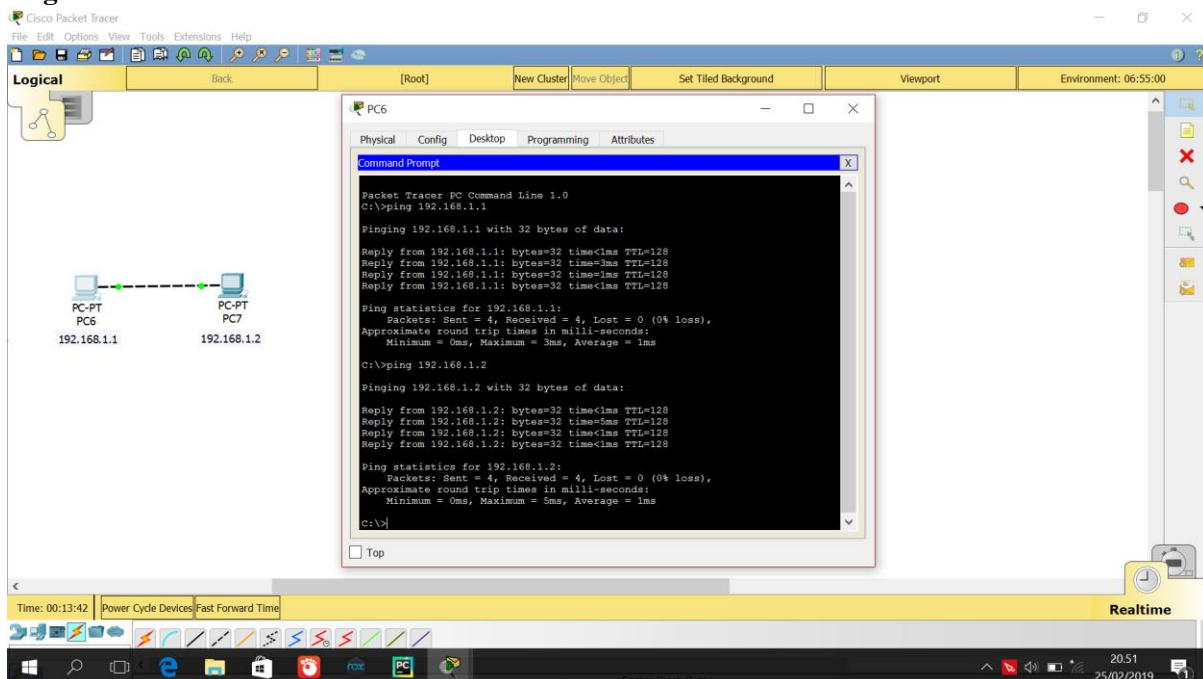

Kegiatan 3

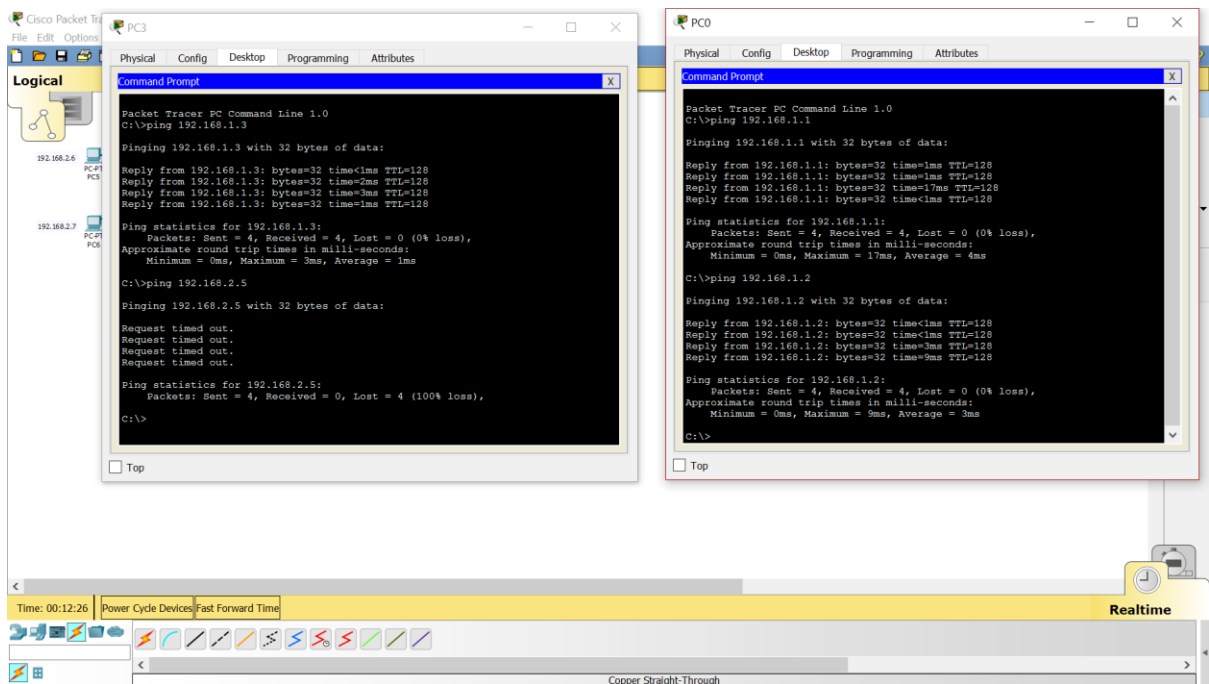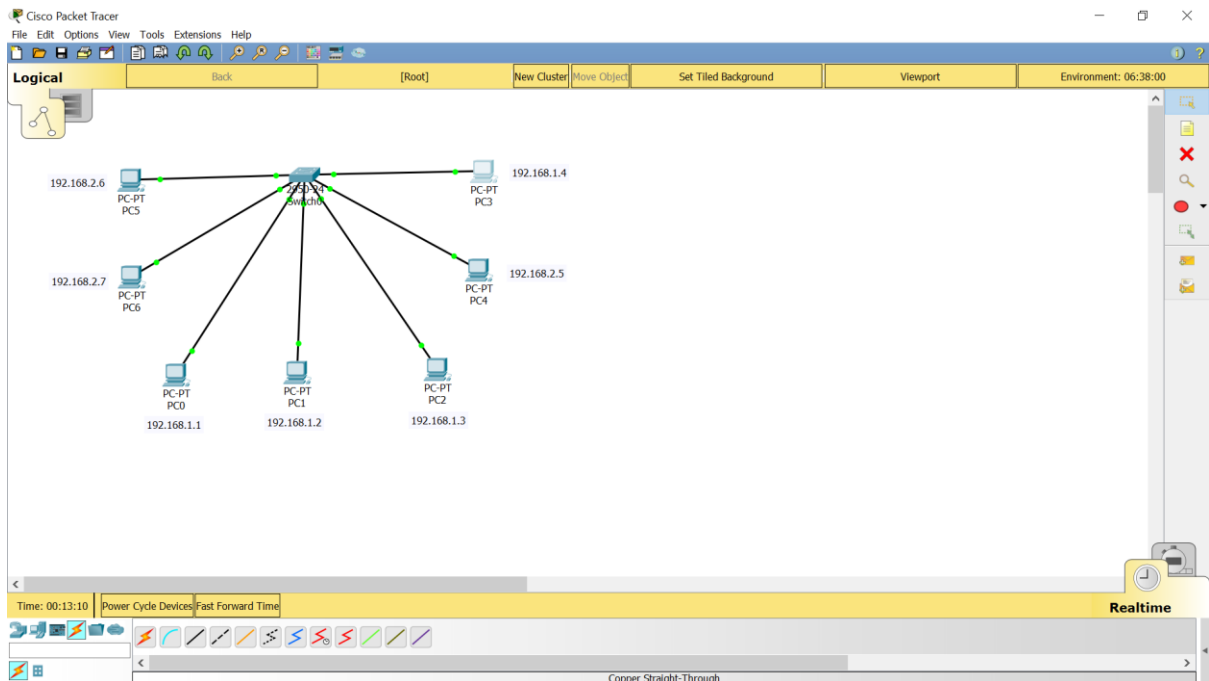

Kegiatan 4

The screenshot displays the Cisco Packet Tracer interface. The main workspace shows a logical network topology with three devices: PC-PT PC8 (IP 192.168.123.1), AccessPoint-PT Access Point0, and PC-PT PC9 (IP 192.168.123.2). A command prompt window is open for PC8, showing the results of a ping command to 192.168.123.1 and 192.168.123.2. The ping results show successful connectivity with 0% loss.

Command Prompt Output:

```
Packet Tracer PC Command Line 1.0
C:\>
ping 192.168.123.1

Pinging 192.168.123.1 with 32 bytes of data:
Reply from 192.168.123.1: bytes=32 time=3ms TTL=128
Reply from 192.168.123.1: bytes=32 time=1ms TTL=128
Reply from 192.168.123.1: bytes=32 time=3ms TTL=128
Reply from 192.168.123.1: bytes=32 time=4ms TTL=128

Ping statistics for 192.168.123.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 1ms, Maximum = 4ms, Average = 2ms

C:\>ping 192.168.123.2

Pinging 192.168.123.2 with 32 bytes of data:
Reply from 192.168.123.2: bytes=32 time=27ms TTL=128
Reply from 192.168.123.2: bytes=32 time=10ms TTL=128
Reply from 192.168.123.2: bytes=32 time=18ms TTL=128
Reply from 192.168.123.2: bytes=32 time=7ms TTL=128

Ping statistics for 192.168.123.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 7ms, Maximum = 27ms, Average = 15ms

C:\>
```