Nama : SRI HAJIATI

Nim : L200170103

Kelas : C

Kegiatan 1

Untuk langkah no 1,2,3

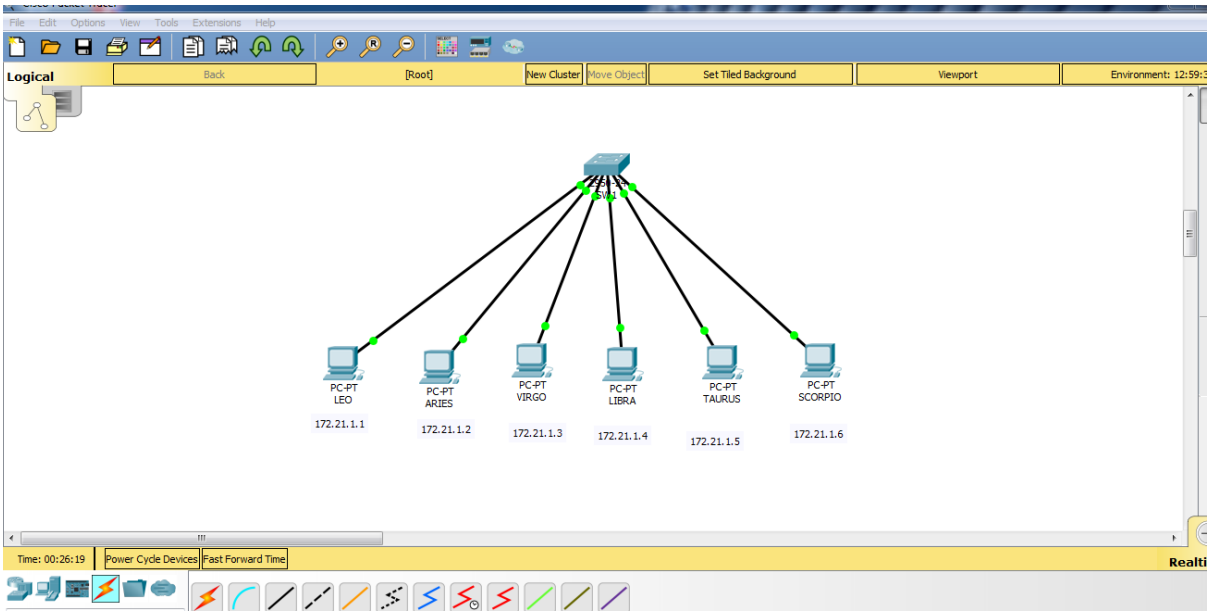

Langkah No 4.

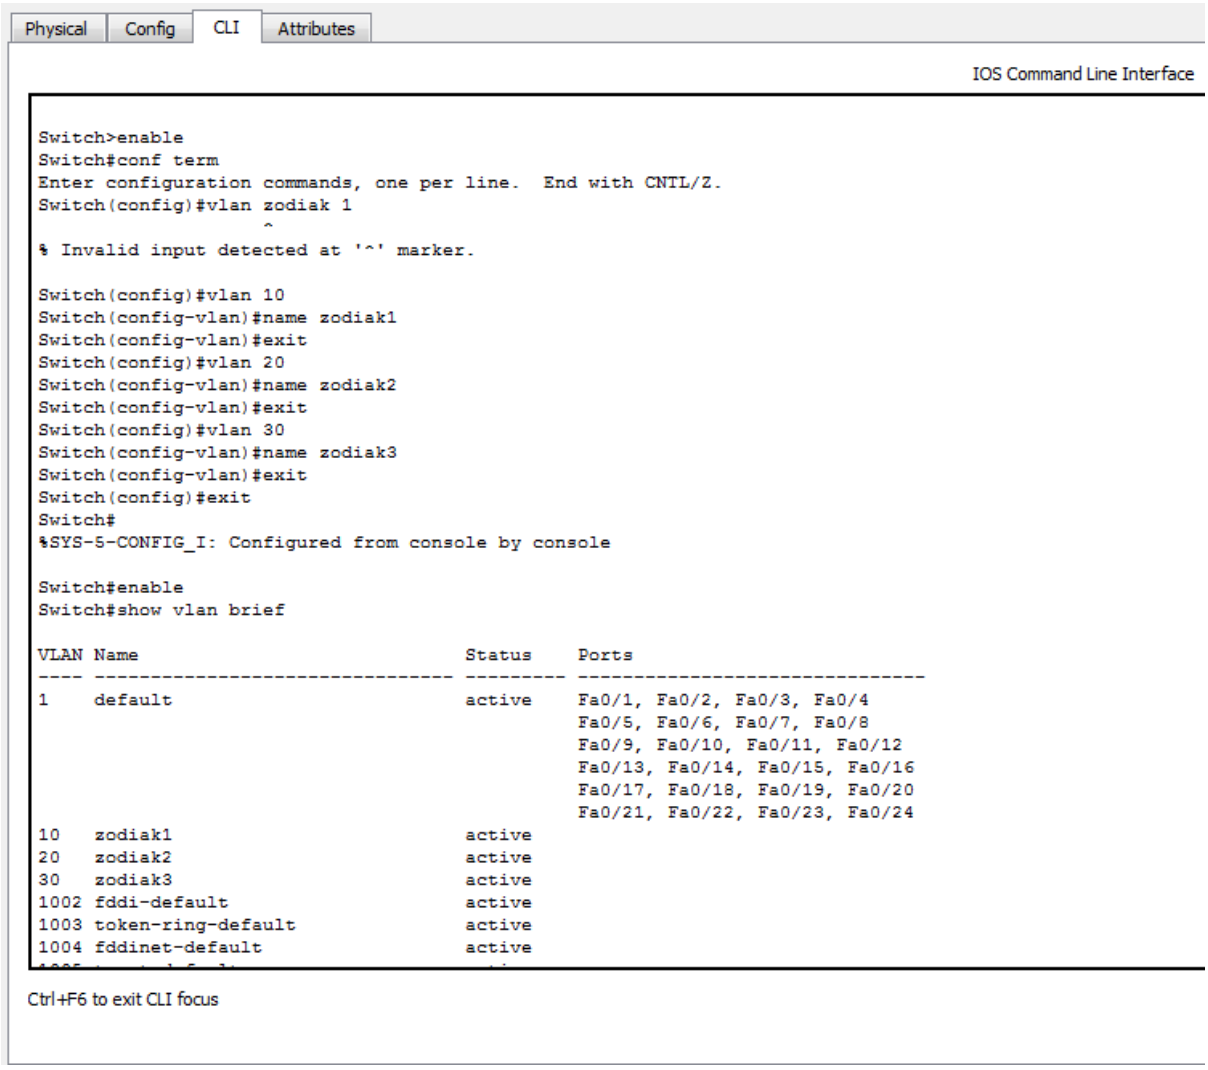
Physical
Config
CLI
Attributes
IOS Command Line Interface
Switch>enable
Switch#conf term
Enter configuration commands, one per line. End with CNTL/Z.
Switch(config)#vlan zodiak 1
^
% Invalid input detected at '^' marker.
Switch(config)#vlan 10
Switch(config-vlan)#name zodiak1
Switch(config-vlan)#exit
Switch(config)#vlan 20
Switch(config-vlan)#name zodiak2
Switch(config-vlan)#exit
Switch(config)#vlan 30
Switch(config-vlan)#name zodiak3
Switch(config-vlan)#exit
Switch(config)#exit
Switch#
%SYS-5-CONFIG_I: Configured from console by console
Switch#enable
Switch#show vlan brief
VLAN Name Status Ports
1 default active Fa0/1, Fa0/2, Fa0/3, Fa0/4
Fa0/5, Fa0/6, Fa0/7, Fa0/8
Fa0/9, Fa0/10, Fa0/11, Fa0/12
Fa0/13, Fa0/14, Fa0/15, Fa0/16
Fa0/17, Fa0/18, Fa0/19, Fa0/20
Fa0/21, Fa0/22, Fa0/23, Fa0/24
10 zodiak1 active
20 zodiak2 active
30 zodiak3 active
1002 fddi-default active
1003 token-ring-default active
1004 fddinet-default active
Ctrl+F6 to exit CLI focus

Langkah No 5.

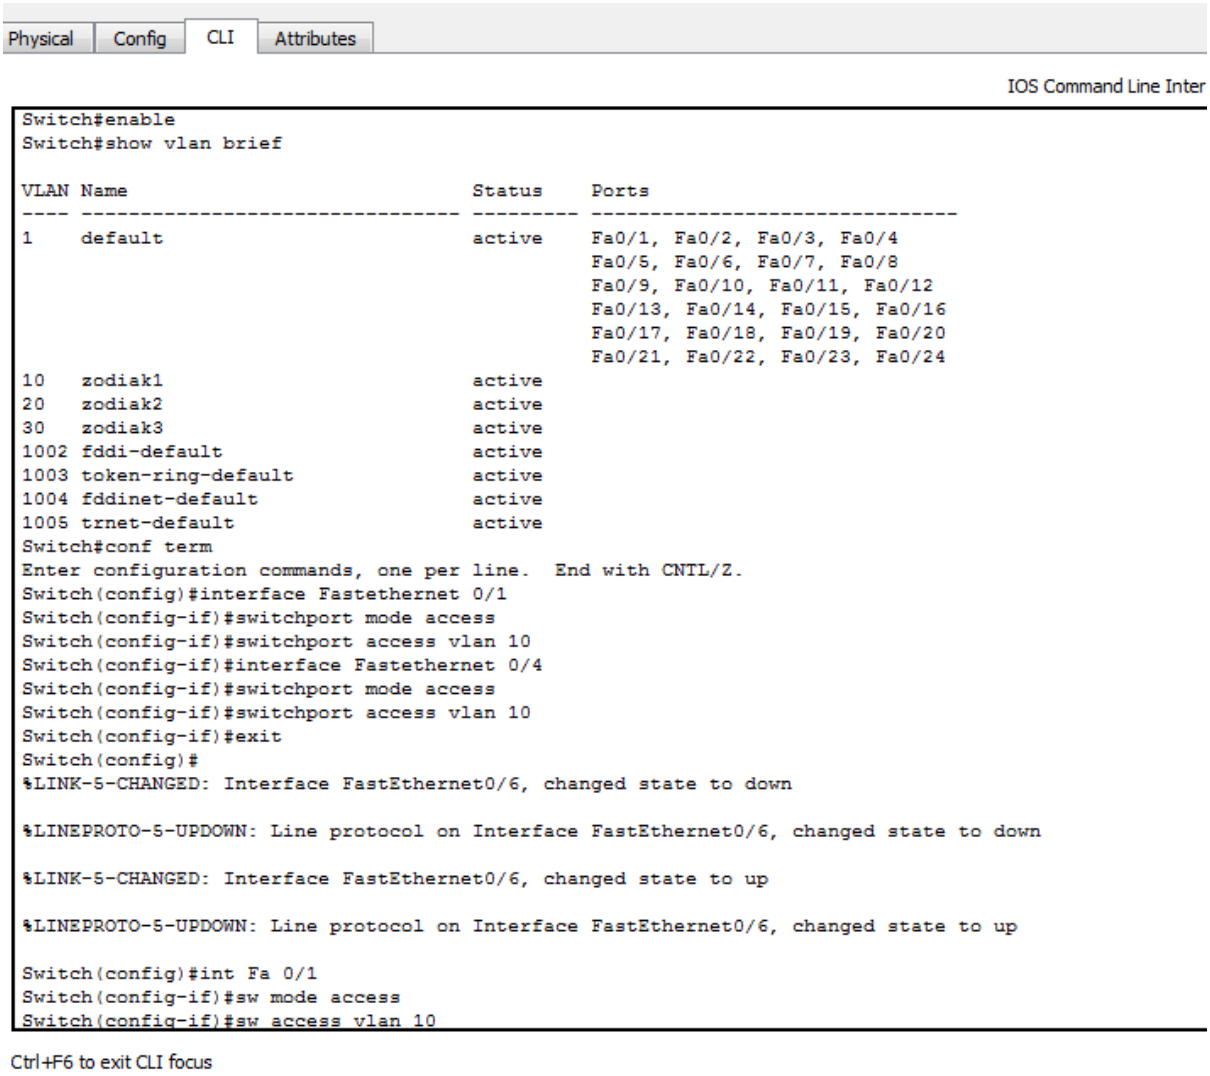
Physical
Config
CLI
Attributes
IOS Command Line Inter
Switch#enable
Switch#show vlan brief
VLAN Name Status Ports
---- -------------------------------- --------- -------------------------------
1 default active Fa0/1, Fa0/2, Fa0/3, Fa0/4
Fa0/5, Fa0/6, Fa0/7, Fa0/8
Fa0/9, Fa0/10, Fa0/11, Fa0/12
Fa0/13, Fa0/14, Fa0/15, Fa0/16
Fa0/17, Fa0/18, Fa0/19, Fa0/20
Fa0/21, Fa0/22, Fa0/23, Fa0/24
10 zodiak1 active
20 zodiak2 active
30 zodiak3 active
1002 fddi-default active
1003 token-ring-default active
1004 fddinet-default active
1005 trnet-default active
Switch#conf term
Enter configuration commands, one per line. End with CNTL/Z.
Switch(config)#interface Fastethernet 0/1
Switch(config-if)#switchport mode access
Switch(config-if)#switchport access vlan 10
Switch(config-if)#interface Fastethernet 0/4
Switch(config-if)#switchport mode access
Switch(config-if)#switchport access vlan 10
Switch(config-if)#exit
Switch(config)#
%LINK-5-CHANGED: Interface FastEthernet0/6, changed state to down
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/6, changed state to down
%LINK-5-CHANGED: Interface FastEthernet0/6, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/6, changed state to up
Switch(config)#int Fa 0/1
Switch(config-if)#sw mode access
Switch(config-if)#sw access vlan 10
Ctrl+F6 to exit CLI focus


Physical
Config
CLI
Attributes
IOS Command Line Interface
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/6, changed state to up
Switch(config)#int Fa 0/1
Switch(config-if)#sw mode access
Switch(config-if)#sw access vlan 10
Switch(config-if)#int Fa 0/4
Switch(config-if)#sw mode access
Switch(config-if)#sw access vlan 10
Switch(config-if)#exit
Switch(config)#int Fa 0/2
Switch(config-if)#sw mode access
Switch(config-if)#sw access vlan 20
Switch(config-if)#int Fa 0/5
Switch(config-if)#sw mode access
Switch(config-if)#sw access vlan 20
Switch(config-if)#exit
Switch(config)#int Fa 0/3
Switch(config-if)#sw mode access vlan 30'
^
% Invalid input detected at '^' marker.
Switch(config-if)#sw mode access vlan 30
^
% Invalid input detected at '^' marker.
Switch(config-if)#sw mode access
Switch(config-if)#sw access vlan 30
Switch(config-if)#int Fa 0/6
Switch(config-if)#sw mode access
Switch(config-if)#sw access vlan 30
Switch(config-if)#exit
Switch(config)#exit
Switch#
%SYS-5-CONFIG_I: Configured from console by console
Switch#show id 10
^
% Invalid input detected at '^' marker.
Ctrl+F6 to exit CLI focus

Langkah No 6.

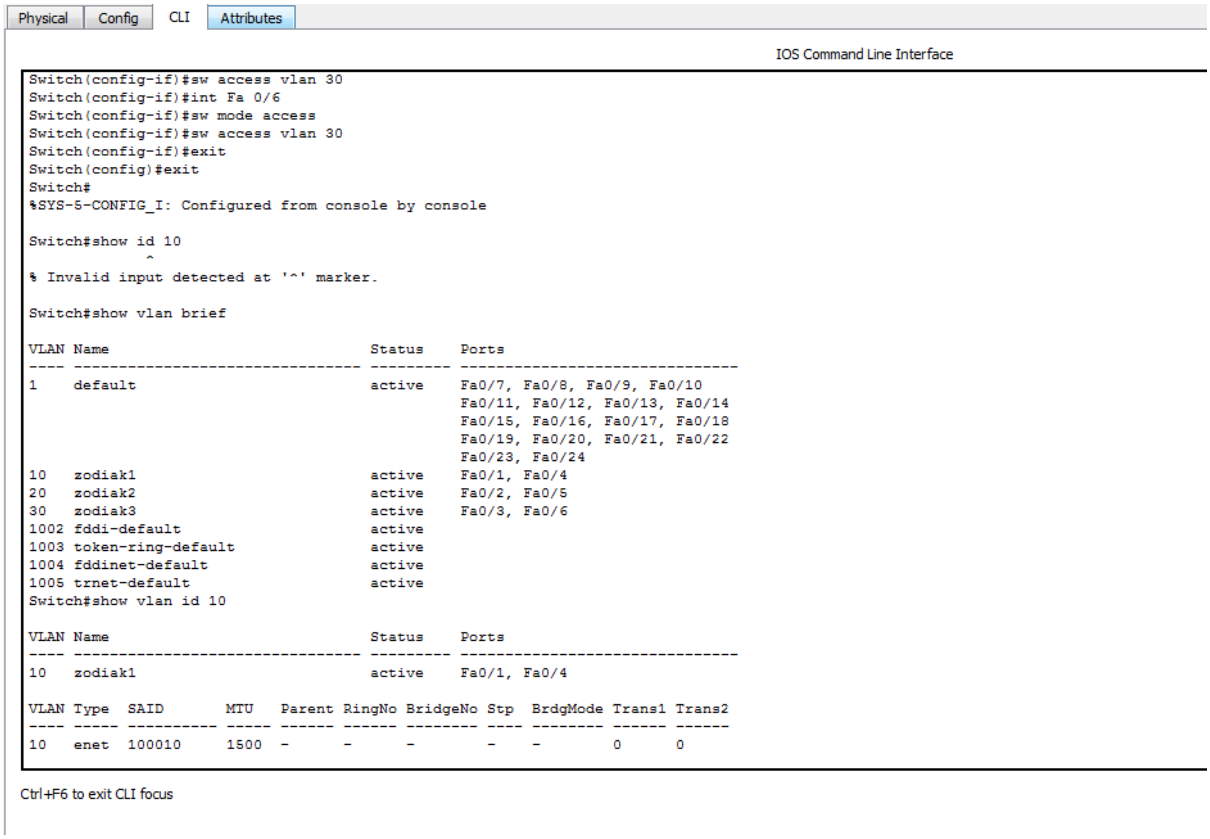
Physical
Config
CLI
Attributes
IOS Command Line Interface
Switch(config-if)#sw access vlan 30
Switch(config-if)#int Fa 0/6
Switch(config-if)#sw mode access
Switch(config-if)#sw access vlan 30
Switch(config-if)#exit
Switch(config)#exit
Switch#
%SYS-5-CONFIG_I: Configured from console by console
Switch#show id 10
% Invalid input detected at '^' marker.
Switch#show vlan brief
VLAN Name Status Ports
1 default active Fa0/7, Fa0/8, Fa0/9, Fa0/10
Fa0/11, Fa0/12, Fa0/13, Fa0/14
Fa0/15, Fa0/16, Fa0/17, Fa0/18
Fa0/19, Fa0/20, Fa0/21, Fa0/22
Fa0/23, Fa0/24
10 zodiak1 active Fa0/1, Fa0/4
20 zodiak2 active Fa0/2, Fa0/5
30 zodiak3 active Fa0/3, Fa0/6
1002 fddi-default active
1003 token-ring-default active
1004 fddinet-default active
1005 trnet-default active
Switch#show vlan id 10
VLAN Name Status Ports
10 zodiak1 active Fa0/1, Fa0/4
VLAN Type SAID MTU Parent RingNo BridgeNo Stp BrdgMode Trans1 Trans2
10 enet 100010 1500 - - - - - 0 0
Ctrl+F6 to exit CLI focus

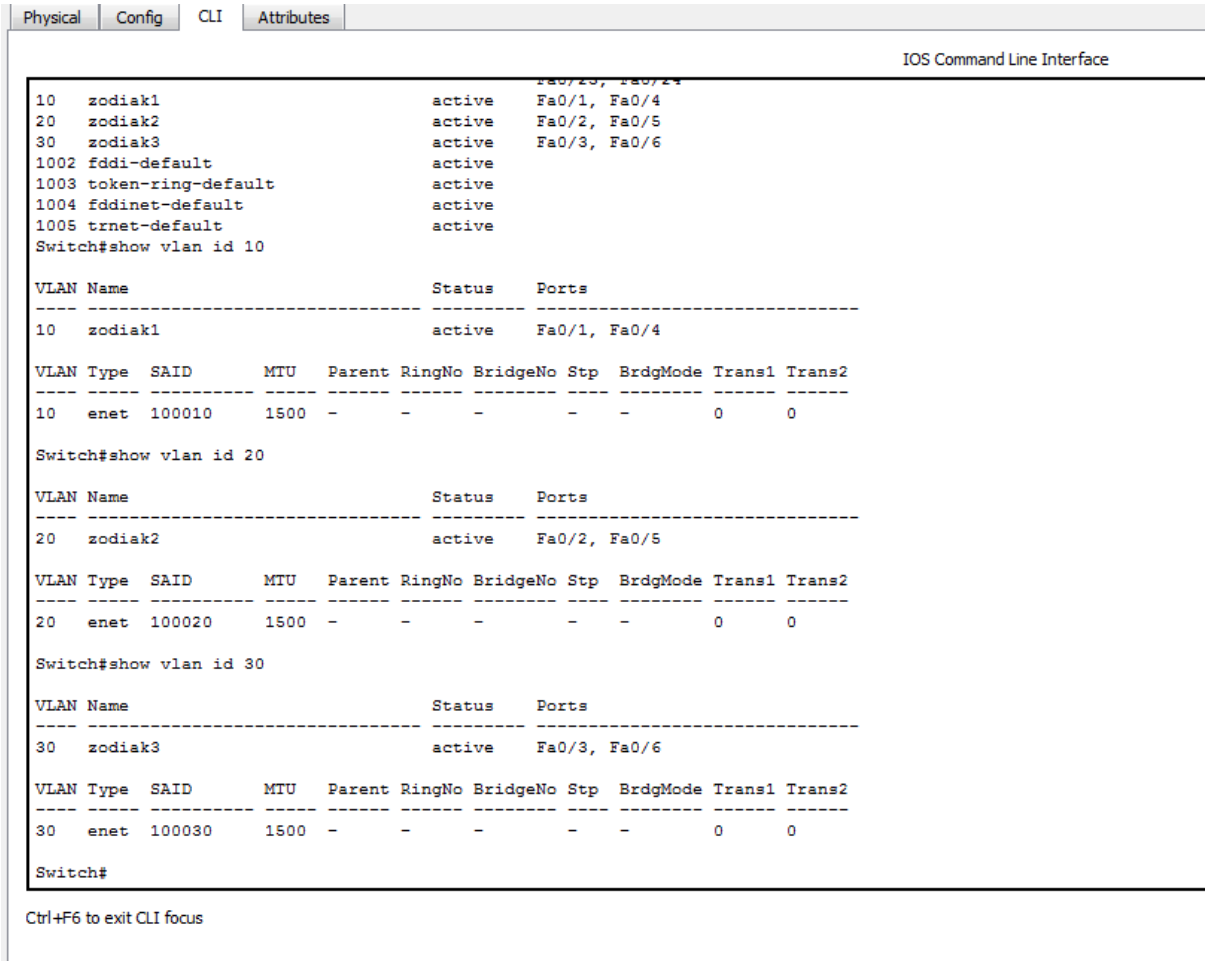

Tugas 6A :

No	Variabel	Nilai		
1.	Nomor Vlan	10	20	30
2.	Nama Vlan	zodiak1	zodiak2	zodiak3
3.	Port	Fa 0/1, Fa 0/4	Fa 0/2, Fa 0/5	Fa 0/3, Fa 0/6
4.	Status	Active	Active	Active

Tugas 6B :

Penjelasan dari table diatas :

- Nomor Vlan 10 nama Vlan zodiak1, memiliki port Fa 0/2(leo) dan Fa 0/4 (Libra). Yang sudah di konfigurasikan sesuai dengan yang ada di modul yang statusnya bersifat active. Yang setiap PC sudah mempunya Ip nya masing masing
- Nomor Vlan 20 nama Vlan zodiak1, memiliki port Fa 0/2(Aries) dan Fa 0/5 (Taurus). Yang sudah di konfigurasikan sesuai dengan yang ada di modul yang statusnya bersifat active. Yang setiap PC sudah mempunya Ip nya masing masing

- Nomor Vlan 30 nama Vlan zodiak1, memiliki port Fa 0/3(virgo) dan Fa 0/6 (Scorpio). Yang sudah di konfigurasikan sesuai dengan yang ada di modul yang statusnya bersifat active. Yang setiap PC sudah mempunya Ip nya masing masing

Kegiatan 2

Untuk langkah nomor 1,2,3,4

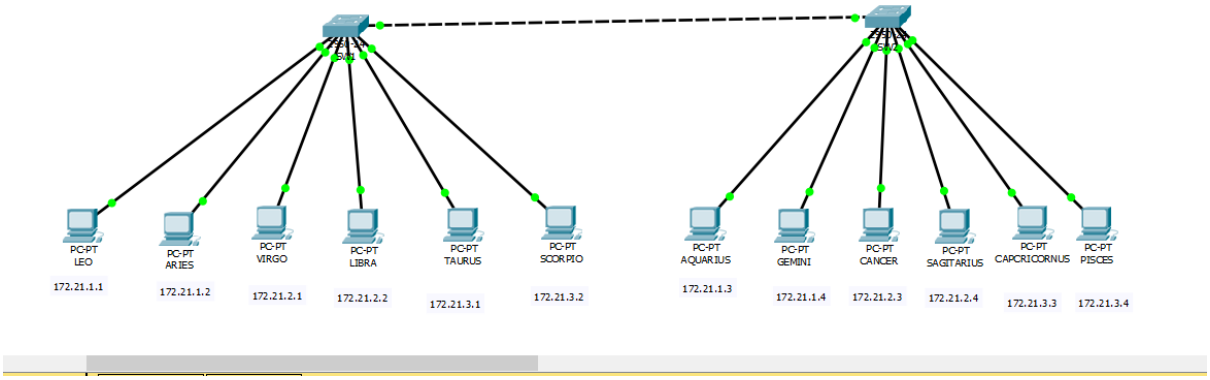

5. untuk SW1 Sudah di sertakan pada SS an kegiatan pertama

Untuk SW2 :

Physical | Config | CLI | Attributes

IOS Command Line Interface

```
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/7, changed state to up


Switch>enable
Switch#conf term
Enter configuration commands, one per line.  End with CNTL/Z.
Switch(config)#vlan 10
Switch(config-vlan)#name zodiak1
Switch(config-vlan)#exit
Switch(config)#vlan 20
Switch(config-vlan)#name zodiak2
Switch(config-vlan)#exit
Switch(config)#vlan 30
Switch(config-vlan)#name zodiak3
Switch(config-vlan)#exit
Switch(config)#exit
Switch#
%SYS-5-CONFIG_I: Configured from console by console

Switch#conf term
Enter configuration commands, one per line.  End with CNTL/Z.
Switch(config)#inter Fa 0/1
Switch(config-if)#switchport mode acces
Switch(config-if)#switchport access vlan 10
Switch(config-if)#inter Fa 0/2
Switch(config-if)#switchport mode access
Switch(config-if)#switchport access vlan 10
Switch(config-if)#exit
Switch(config)#int Fa 0/3
Switch(config-if)#sw mode access
Switch(config-if)#sw access vlan 20
Switch(config-if)#inter Fa 0/4
Switch(config-if)#sw mode access
Switch(config-if)#sw access vlan 20
Switch(config-if)#exit
Switch(config)#inter Fa 0/5
Switch(config-if)#sw mode access
Switch(config-if)#sw access vlan 30
```

Ctrl+F6 to exit CLI focus

Untuk langkah Nomor 6 dan 7

IOS Command Line Interface

```
Switch>enable
Switch#conf term
Enter configuration commands, one per line.  End with CNTL/Z.
Switch(config)#interface fa 0/7
Switch(config-if)#switchport mode trunk

Switch(config-if)#
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/7, changed state to down

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/7, changed state to up

Switch(config-if)#exit
Switch(config)#exit
Switch#
%SYS-5-CONFIG_I: Configured from console by console

Switch#show interface trunk
Port        Mode         Encapsulation  Status        Native vlan
Fa0/7       on           802.1q         trunking      1

Port        Vlans allowed on trunk
Fa0/7       1-1005

Port        Vlans allowed and active in management domain
Fa0/7       1,10,20,30

Port        Vlans in spanning tree forwarding state and not pruned
Fa0/7       1,10,20,30

Switch#show vlan

VLAN Name                             Status    Ports
---- -------------------------------- --------- -------------------------------
1    default                          active    Fa0/8, Fa0/9, Fa0/10, Fa0/11
                                                Fa0/12, Fa0/13, Fa0/14, Fa0/15
                                                Fa0/16, Fa0/17, Fa0/18, Fa0/19
                                                Fa0/20, Fa0/21, Fa0/22, Fa0/23
                                                Fa0/24
10   zodiak1                          active    Fa0/1, Fa0/4
```

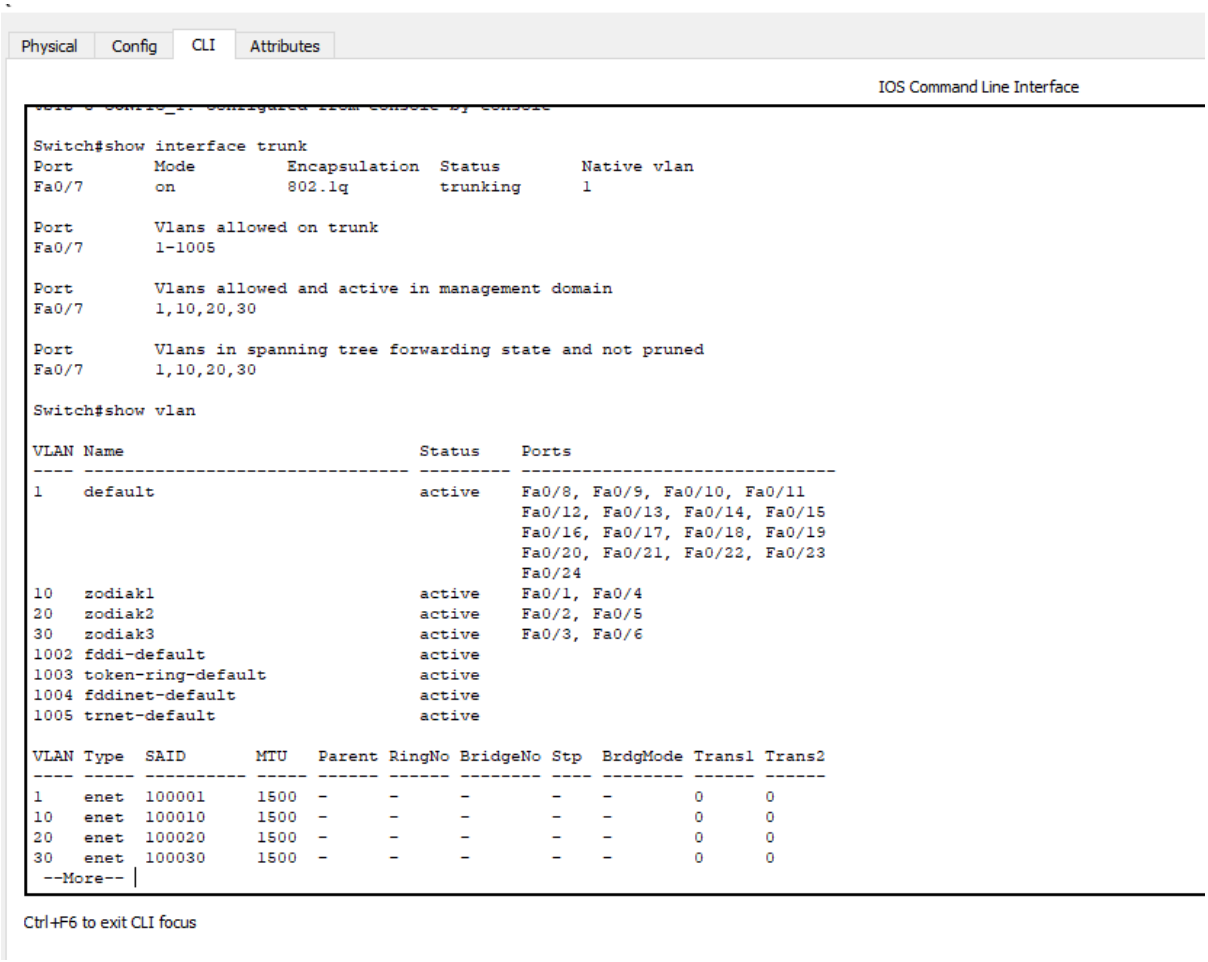

7A: Penjelasan

Hasil yang diperoleh pada mode privileged pada switch 1 yaitu pada vlans allowed on trunk mempunyai nilai 1-1005 pada port fa 0/7 yang artinya menggunakan jaringan skala kecil dan menengah. Vlan allowed and active in management domain (config untuk manajemen switch) memiliki nilai 1,10,20,30. vlans spanning tree forwarding state and not pruned mempunyai nilai 1,10,20,30.

Mempunyai status trunking mode on, encapusilation 802.1q (protokol umum yang didukung oleh banyak vektor)

8. ping PC leo dan PC pisces

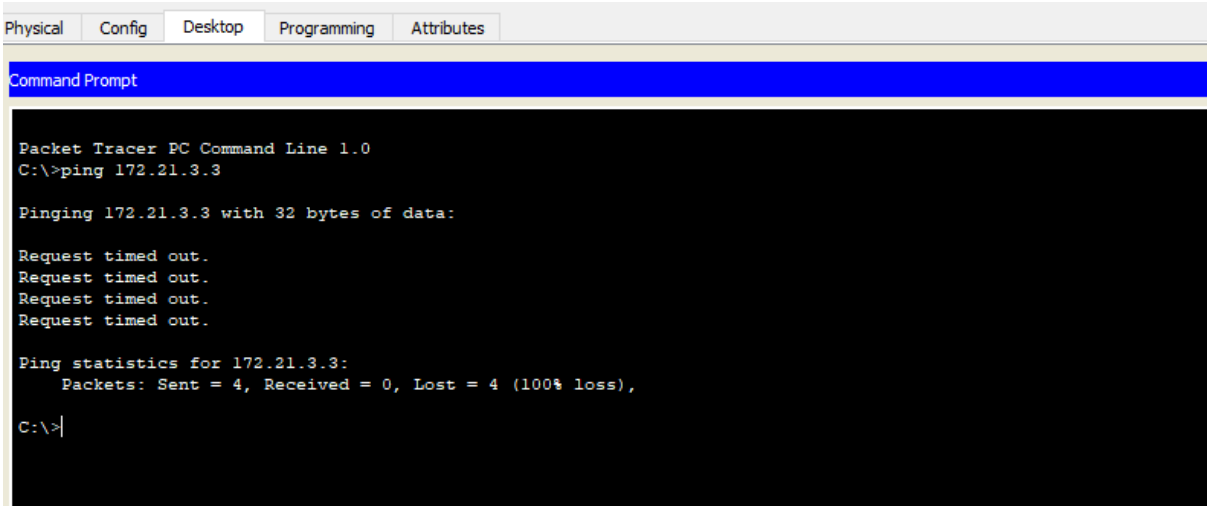

Penjelasan :

Hasil ping dari pc leo ke pc pisces bukanlah reply, tetapi request timed out (RTO), karena permintaan koneksi yang lama dan subnet address nya sudah berbeda.

9.

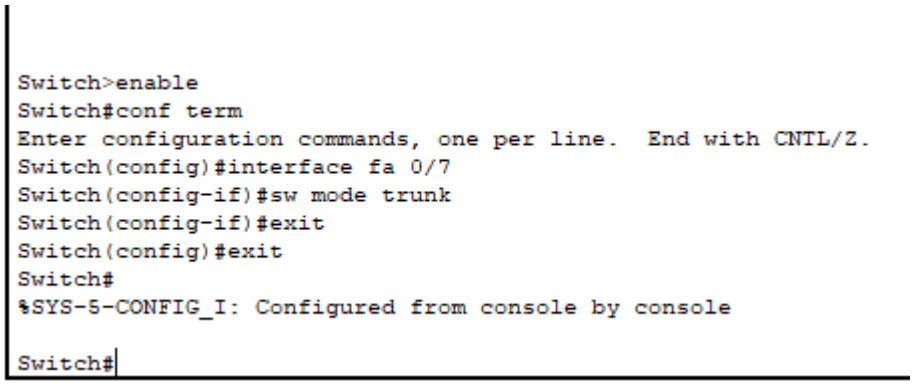

10. pada Mode privileged

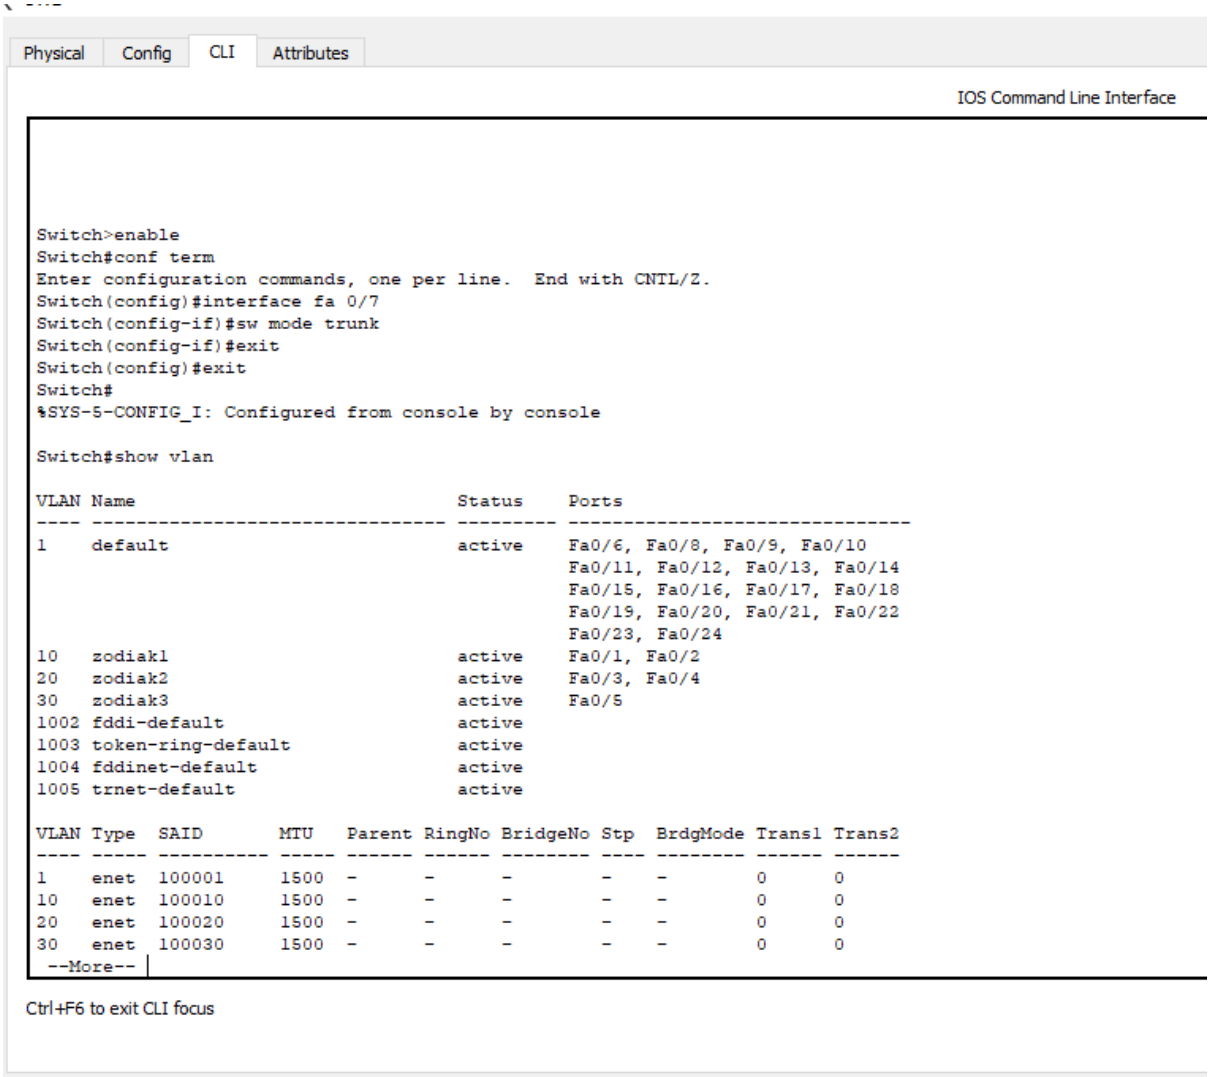

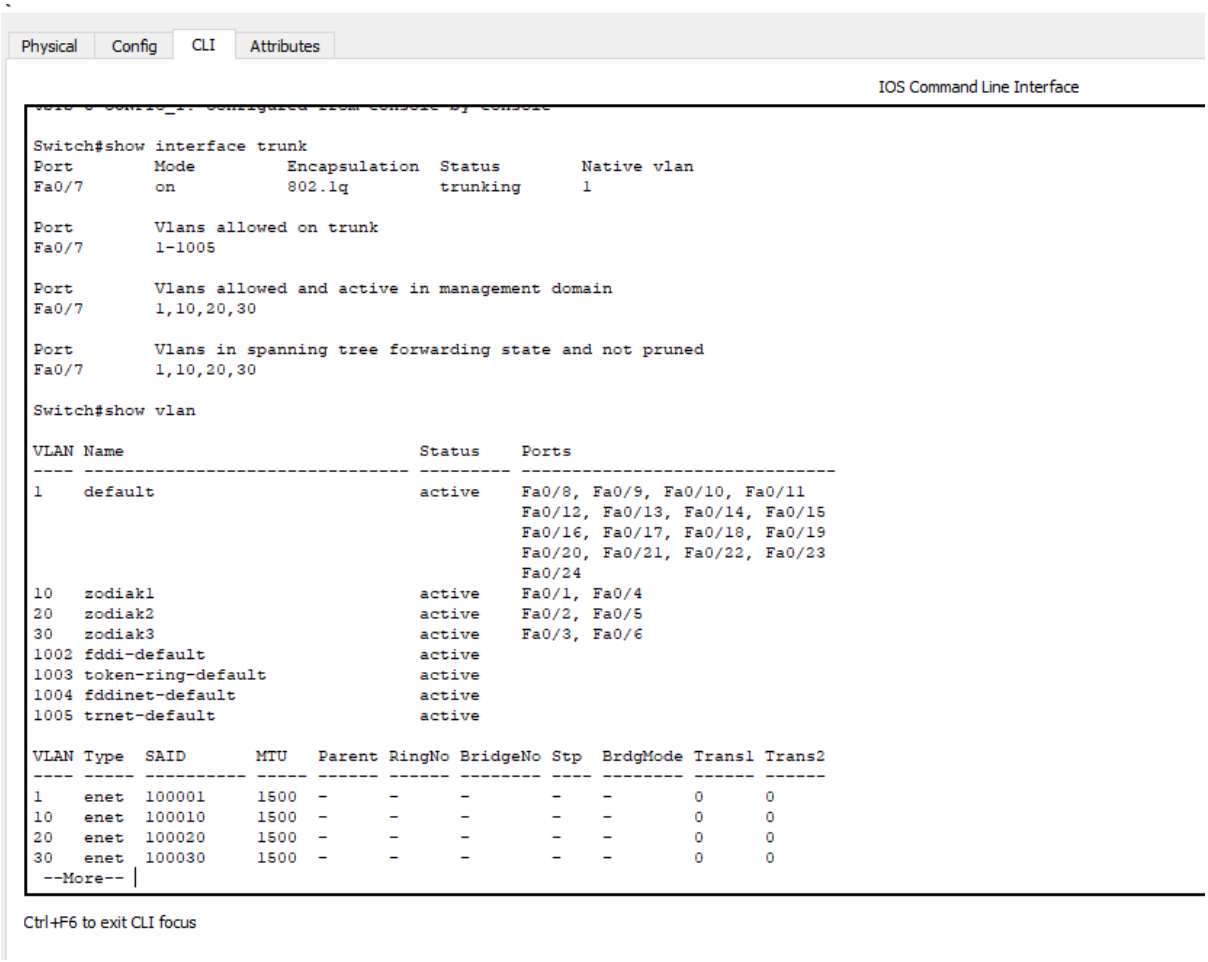

Penjelasan 10A :

Hasil yang diperoleh pada mode privileged pada switch 1 yaitu pada vlans allowed on trunk mempunyai nilai 1-1005 pada port fa 0/7 yang artinya menggunakan jaringan skala kecil dan menengah. Vlan allowed and active in management domain (config untuk manajemen switch) memiliki nilai 1,10,20,30. vlans spanning tree forwarding state and not pruned mempunyai nilai 1,10,20,30.

Mempunyai status trunking mode on, encapusilation 802.1q (protokol umum yang didukung oleh banyak vektor)

11.

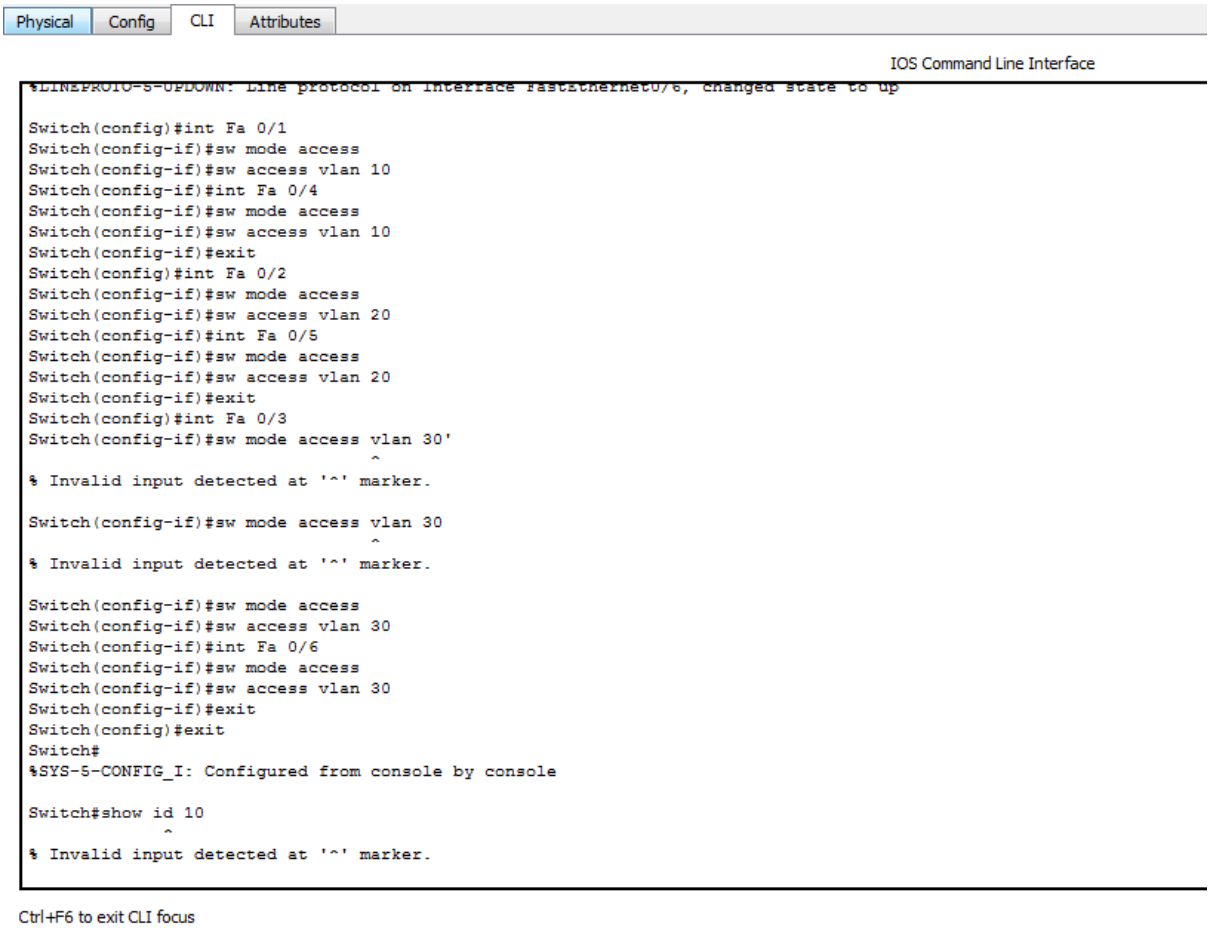

12.

a) Ping PC leo ke PC aries

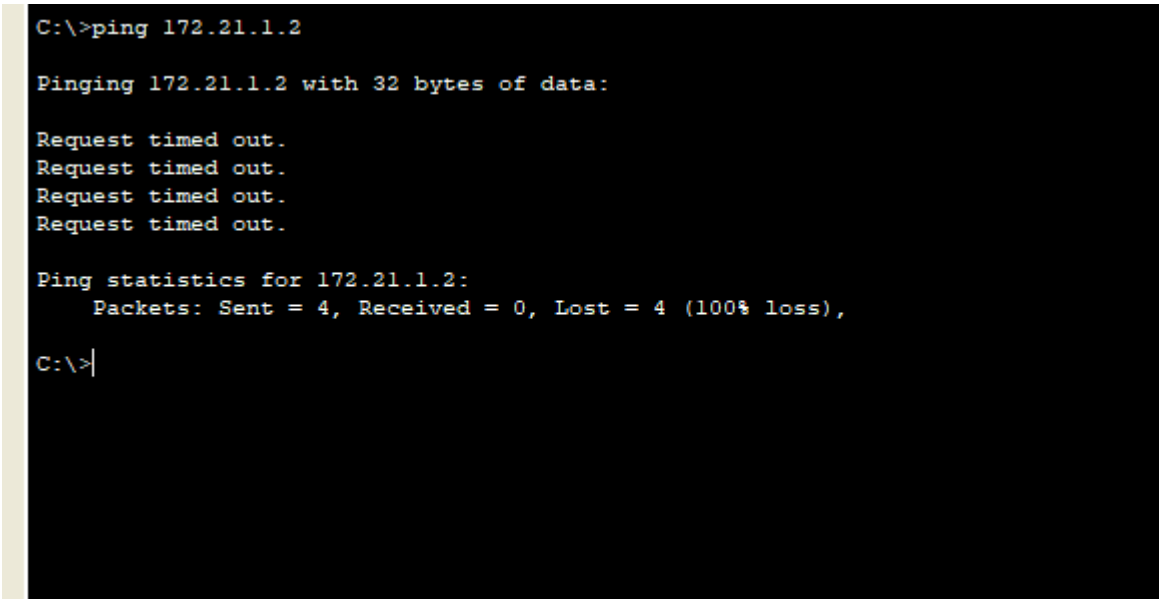

b) Ping PC leo ke PC aquarius

```
C:\>ping 172.21.1.3

Pinging 172.21.1.3 with 32 bytes of data:

Reply from 172.21.1.3: bytes=32 time<1ms TTL=128
Reply from 172.21.1.3: bytes=32 time<1ms TTL=128
Reply from 172.21.1.3: bytes=32 time<1ms TTL=128
Reply from 172.21.1.3: bytes=32 time<1ms TTL=128

Ping statistics for 172.21.1.3:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>
```

c) Ping PC leo ke PC pisces

```
C:\>ping 172.21.3.4

Pinging 172.21.3.4 with 32 bytes of data:

Request timed out.
Request timed out.
Request timed out.
Request timed out.

Ping statistics for 172.21.3.4:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),

C:\>
```

d) Ping PC libra ke PC cancer

```
Packet Tracer PC Command Line 1.0
C:\>ping 172.21.2.3

Pinging 172.21.2.3 with 32 bytes of data:

Request timed out.
Request timed out.
Request timed out.
Request timed out.

Ping statistics for 172.21.2.3:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),

C:\>
```

e) Ping PC libra ke PC leo

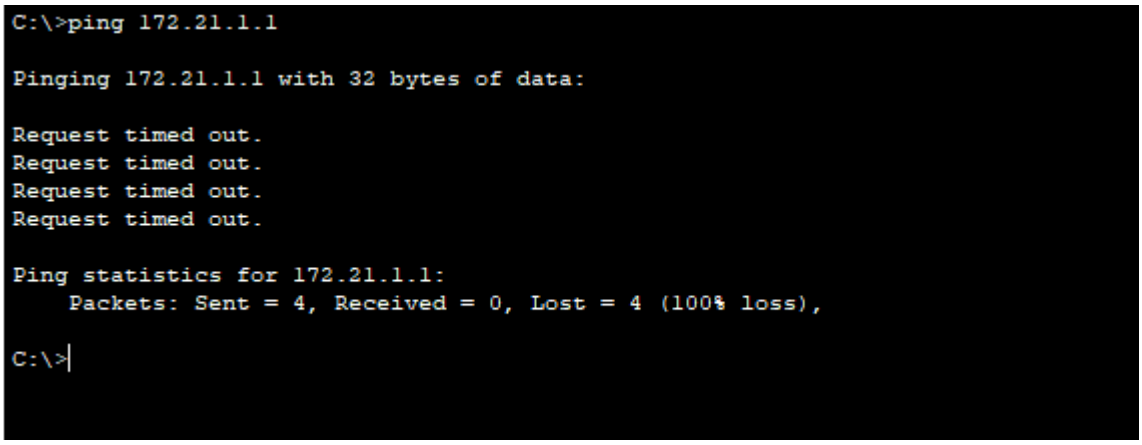

12A:

Penjelasan :

Hasil ping PC leo ke PC pisces adalah request time out permintaan koneksi yang lama dan karena subnet address nya sudah berbeda.