
NAMA: AGATHA FEBIANANDA P


NIM : L200170127


KELAS : C

MODUL: 8

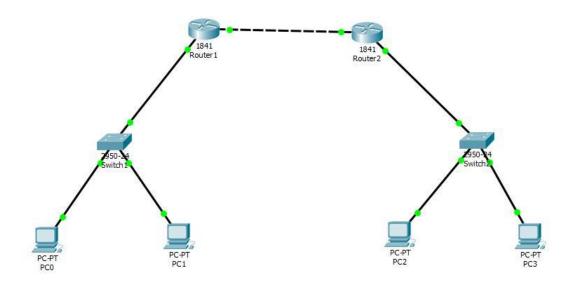



## 1. Router

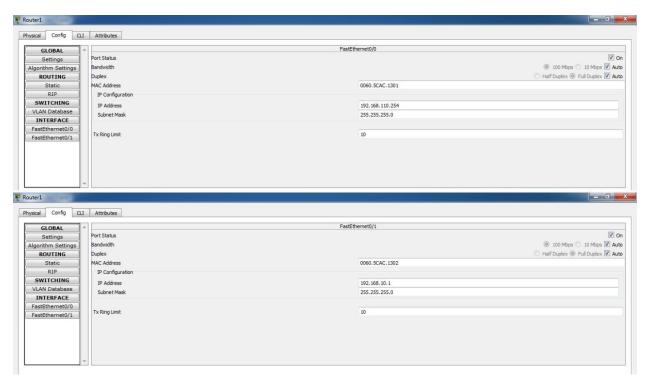

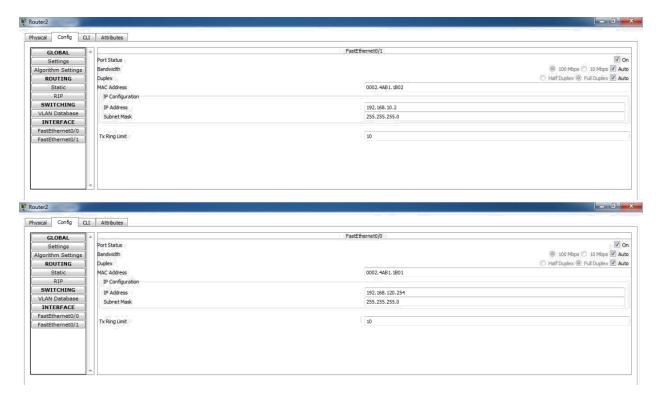



2. Memberi alamat ip pada setiap switch

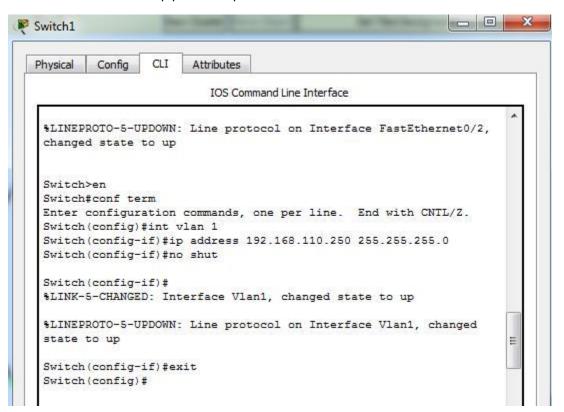


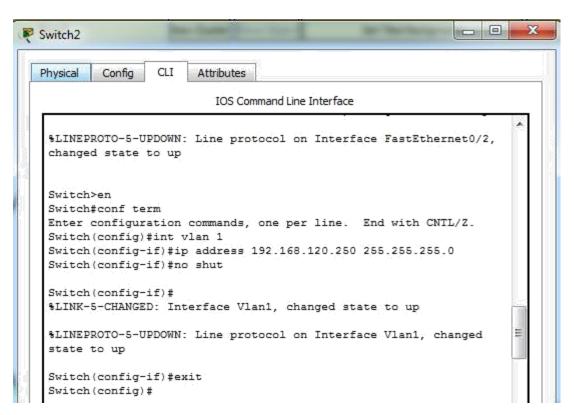


3. Memberikan alamat ip, sebnet mask, dan default gateway pada setiap pc

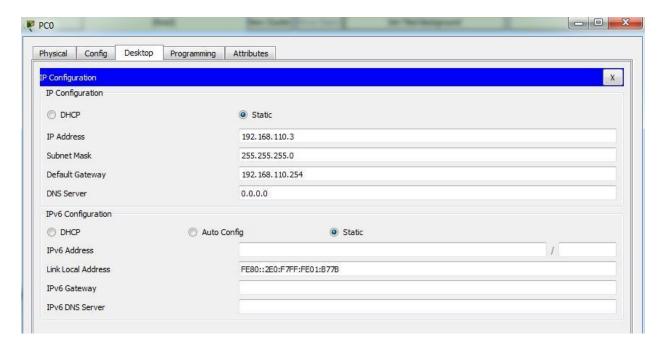


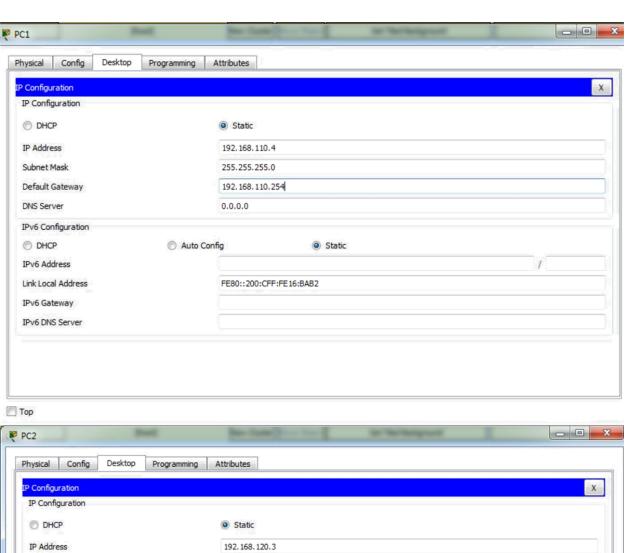

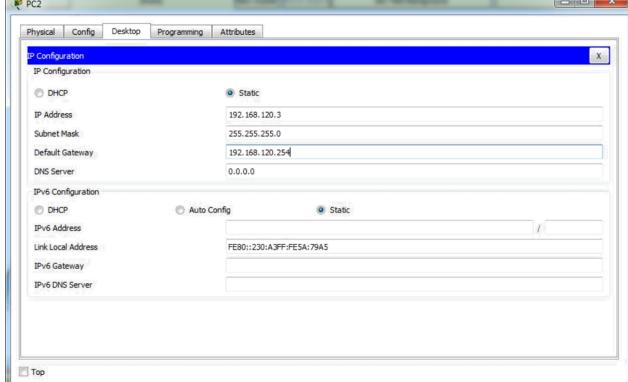

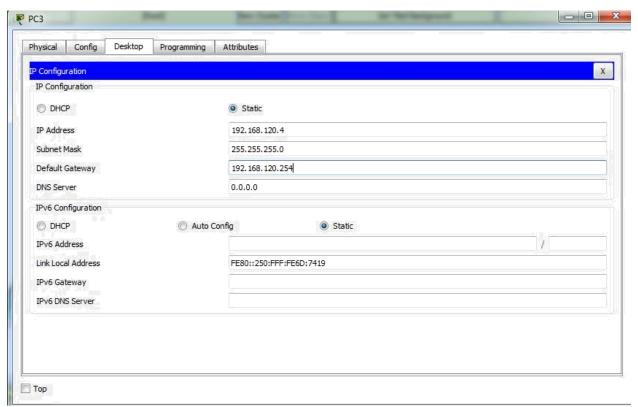

4. Pembuatan routing dengan protocol rip pada kedua jaringan

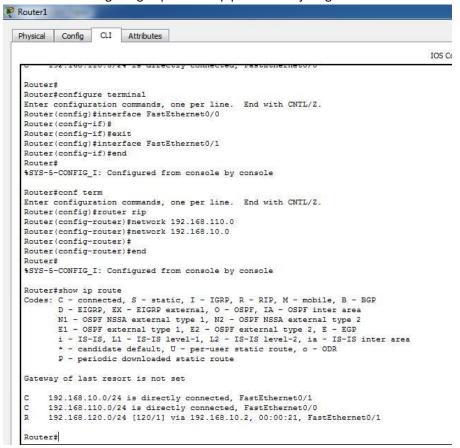


```
M Houter2
   Physical Config CLI Attributes
                                                                                                                                    105 Command L
      *SYS-5-CONFIG_I: Configured from console by console
     Enter configuration commands, one per line. End with CMTL/E. Bouter(config)@neswork 192.168.120.0
      * Invalid input detected at '" marker.
      Router (config) #couter rip
      Router (confly-router) fretwork 192,168,120.0
      Router(config-router) thetwork 192.169.10.0
      Router(config-router)2-2
      • Invalid input detected at '-' marker.
      Router (config-router) fend
      *SYS-5-COMFIG_I: Configured from console by console
      Router#show ip couter
      * Invalid input detected at '-' marker.
      Souterfahow ip coute
     Codes: C - connected, S - static, I - IGDS, H - BIS, M - mobile, B - SGP
D - EIGDS, EX - EIGDS external, O - GSSS, IA - GSSS inter area
M1 - GSSS MSSA manacras; Mype 1, M2 - GSSS MSSA metacras; Mype 2
E1 - GSSS external type 1, E2 - GSSS external type 2, E - SGS
i - IS-IS, Li - IS-IS lavel-1, Li - IS-IS lavel-2, ia - IS-IS inter area
" - candidate default, U - per-uses static route, O - GGB
               P - periodic downloaded static soute
      Cateury of last remort is not set
             192.169.10.0/24 is directly connected, FastEthernet0/1
             192.168.110.0/24 [120/1] via 192.168.10.1, 00:00:01, FastEthernet0/1 192.168.120.0/24 is directly connected, FastEthernet0/0
     Routers
```

#### 6. Ping dari pc 1 ke pc 4

```
_ D X
PC0
   Physical Config Desktop Programming Attributes
    Command Prompt
                                                                                                                                           Х
    Pinging 192.168.120.4 with 32 bytes of data:
    Request timed out.
    Reply from 192.168.120.4: bytes=32 time=1ms TTL=126
    Reply from 192.168.120.4: bytes=32 time=1ms TTL=126
    Reply from 192.168.120.4: bytes=32 time<1ms TTL=126
    Ping statistics for 192.168.120.4:
Packets: Sent = 4, Received = 3, Lost = 1 (25% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 1ms, Average = 0ms
    C:\>ping 192.168.120.4
    Pinging 192.168.120.4 with 32 bytes of data:
    Reply from 192.168.120.4: bytes=32 time=1ms TTL=126
    Reply from 192.168.120.4: bytes=32 time<1ms TTL=126 Reply from 192.168.120.4: bytes=32 time=1ms TTL=126
    Reply from 192.168.120.4: bytes=32 time=1ms TTL=126
     Ping statistics for 192.168.120.4:
         Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
     Approximate round trip times in milli-seconds:
         Minimum = 0ms, Maximum = 1ms, Average = 0ms
```

# 7. Menentukan access list pada router 1

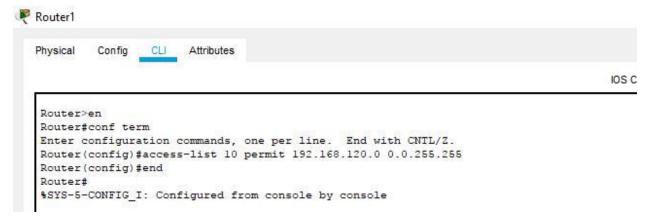

#### 8. Menerapkan access list ke interface router 1

```
Router#conf term
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#int fa 0/0
Router(config-if)#ip access-group 10 out
Router(config-if)#^Z


% Invalid input detected at '^' marker.

Router(config-if)#end
Router#
%SYS-5-CONFIG_I: Configured from console by console
```

### 9. Lihat konfig access list router 1

```
Router#sh access-lists
Standard IP access list 10
10 permit 192.168.0.0 0.0.255.255
```

### 10. Show running config

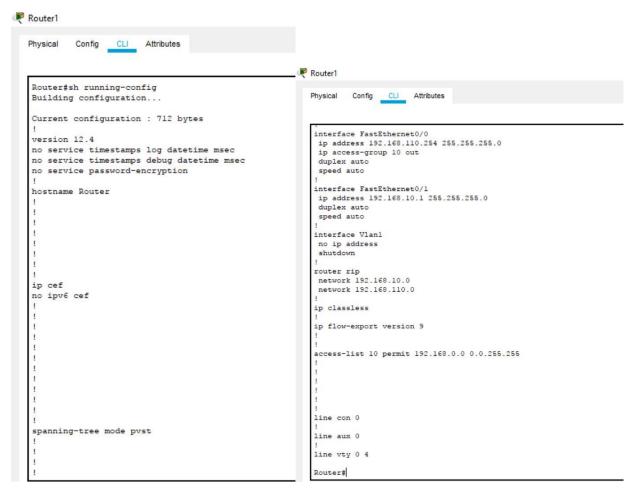

11. Melakukan ping dua arah antara PC 3 dan PC 1

```
Physical Config Desktop Programming Attributes

Command Prompt

Pinging 192.168.110.3 with 32 bytes of data:

Request timed out.

Reply from 192.168.110.3: bytes=32 time=10ms TTL=126

Reply from 192.168.110.3: bytes=32 time=14ms TTL=126

Reply from 192.168.110.3: bytes=32 time=14ms TTL=126

Ping statistics for 192.168.110.3:

Packets: Sent = 4, Received = 3, Lost = 1 (25% loss),
Approximate round trip times in milli-seconds:

Minimum = 10ms, Maximum = 14ms, Average = 12ms
```


12. Berikan akses hanya pada satu host (PC 4).

```
Router>en
Router#conf term
Enter configuration commands, one per line. End with CNTL/Z.
Router(config) #access-list 20 permit 192.168.120.4 0.0.0.0
Router(config) #end
Router#
%SYS-5-CONFIG_I: Configured from console by console
Router#conf term
Enter configuration commands, one per line. End with CNTL/Z.
Router(config) #fa 0/0
% Invalid input detected at '^' marker.
Router(config) #int fa 0/0
Router(config-if) #ip access-group 20 out
Router(config-if) #end
Router#
%SYS-5-CONFIG_I: Configured from console by console
```

13. Meneerapkan access list 20 tersebut pada interface Ethernet pada Router.

```
Router#sh access-lists
Standard IP access list 10
10 permit 192.168.0.0 0.0.255.255 (8 match(es))
Standard IP access list 20
10 permit host 192.168.120.4
Router#
```

14. Melakukan ping dari pc 3 ke pc 1 dan 2

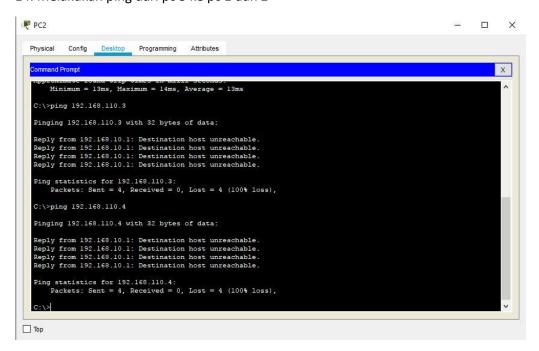

#### 15. Melakukan ping dari pc 4 ke pc 1 dan 2

```
PC3
                                                                                                                                                                                                                           X
   Physical Config Desktop Programming
                                                                               Attributes
     Command Prompt
                                                                                                                                                                                                                                     Х
    Pinging 192.168.110.3 with 32 bytes of data:
   Reply from 192.168.110.3: bytes=32 time=1ms TTL=126
Reply from 192.168.110.3: bytes=32 time=14ms TTL=126
Reply from 192.168.110.3: bytes=32 time=13ms TTL=126
Reply from 192.168.110.3: bytes=32 time=14ms TTL=126
    Ping statistics for 192.168.110.3:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = lms, Maximum = 14ms, Average = 10ms
    C:\>ping 192.168.110.4
    Pinging 192.168.110.4 with 32 bytes of data:
   Reply from 192.168.110.4: bytes=32 time<1ms TTL=126
Reply from 192.168.110.4: bytes=32 time=14ms TTL=126
Reply from 192.168.110.4: bytes=32 time=12ms TTL=126
Reply from 192.168.110.4: bytes=32 time=14ms TTL=126
    Ping statistics for 192.168.110.4:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 14ms, Average = 10ms
□ Тор
```

#### **KEGIATAN 2**

1. Konfigurasi extended access-list

```
Router>en
Router#conf term
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#access-list 100 permit tcp 192.168.120.0 0.0.0.255 192.168.110.3 0.0.0.0 eq telnet
Router(config)#end
Router#
%SYS-5-CONFIG_I: Configured from console by console
```

2. Menerapkan access list tersebut ke interface router

```
Router#conf term
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#int fa 0/1
Router(config-if)#ip access-group 100 in
Router(config-if)#end
Router#
%SYS-5-CONFIG_I: Configured from console by console
```