


Nama : Rifqi Wirawan
NIM : L200170141
Kelas : C
Modul : Ke-7

Kegiatan Praktikum Modul 7

1. Membuat topologi seperti gambar dibawah ini. Beri nama masing-masing router dengan Eagle(router 1), Puma(router 2) dan Tiger(router 3) serta beri nama masing-masing PC dengan Leo(PC 1), Aries(PC 2) dan Virgo(PC 3).

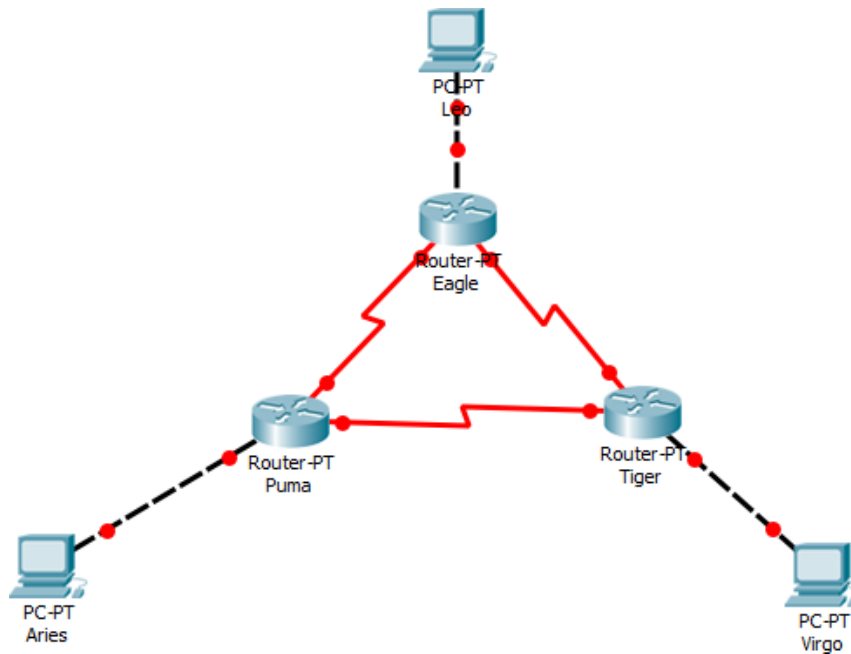

2. Konfigurasi masing-masing interface pada tiap Router dengan alamat IP berikut ini:
 - Eagle (ethernet 0) = 172.21.10.10/24

```
Router>en
Router#conf term
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#int fa0/0
Router(config-if)#ip add 172.21.10.10 255.255.255.0
Router(config-if)#no shutdown

Router(config-if)#
%LINK-5-CHANGED: Interface FastEthernet0/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0,
changed state to up
```

- Eagle (serial 0) = 172.21.1.1/24 dan Eagle (serial 1) = 172.21.2.1/24

```
Router(config-if)#int se2/0
Router(config-if)#clock rate 2000000
Router(config-if)#ip add 172.21.1.1 255.255.255.0
Router(config-if)#no shutdown

%LINK-5-CHANGED: Interface Serial2/0, changed state to down
Router(config-if)#int se3/0
Router(config-if)#clock rate 2000000
Router(config-if)#ip add 172.21.2.1 255.255.255.0
Router(config-if)#no shutdown

%LINK-5-CHANGED: Interface Serial3/0, changed state to down
Router(config-if)#
%LINK-5-CHANGED: Interface Serial2/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface Serial2/0,
changed state to up

%LINK-5-CHANGED: Interface Serial3/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface Serial3/0,
changed state to up
```

- Puma (ethernet 0) = 172.21.20.20/24

```
Router>en
Router#conf term
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#int fa0/0
Router(config-if)#ip add 172.21.20.20 255.255.255.0
Router(config-if)#no shutdown

Router(config-if)#
%LINK-5-CHANGED: Interface FastEthernet0/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0,
changed state to up
```

- Puma (serial 0) = 172.21.1.2/24 dan Puma (serial 1) = 172.21.3.2/24

```
Router(config-if)#int se2/0
Router(config-if)#ip add 172.21.1.2 255.255.255.0
Router(config-if)#no shutdown

Router(config-if)#
%LINK-5-CHANGED: Interface Serial2/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface Serial2/0,
changed state to up

Router(config-if)#int se3/0
Router(config-if)#clock rate 2000000
Router(config-if)#ip add 172.21.3.2 255.255.255.0
Router(config-if)#no shutdown

%LINK-5-CHANGED: Interface Serial3/0, changed state to down
Router(config-if)#
%LINK-5-CHANGED: Interface Serial3/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface Serial3/0,
changed state to up
```

- Tiger (ethernet 0) = 172.21.30.30/24

```
Router>en
Router#conf term
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#int fa0/0
Router(config-if)#ip add 172.21.30.30 255.255.255.0
Router(config-if)#no shutdown

Router(config-if)#
%LINK-5-CHANGED: Interface FastEthernet0/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0,
changed state to up
```

- Tiger (serial 0) = 172.21.2.3/24 dan Tiger (serial 1) = 172.21.3.3/24

```
Router(config-if)#int se2/0
Router(config-if)#ip add 172.21.2.3 255.255.255.0
Router(config-if)#no shutdown

Router(config-if)#
%LINK-5-CHANGED: Interface Serial2/0, changed state to up

Router(config-if)#
%LINEPROTO-5-UPDOWN: Line protocol on Interface Serial2/0,
changed state to up


Router(config-if)#int se3/0
Router(config-if)#ip add 172.21.3.3 255.255.255.0
Router(config-if)#no shutdown

Router(config-if)#
%LINK-5-CHANGED: Interface Serial3/0, changed state to up


Router(config-if)#
%LINEPROTO-5-UPDOWN: Line protocol on Interface Serial3/0,
changed state to up
```

3. Konfigurasi masing-masing PC dengan alamat IP berikut ini:


- Leo (PC 1) = 172.21.10.1/24 dan default gateway (ipconfig/dg) 172.21.10.10

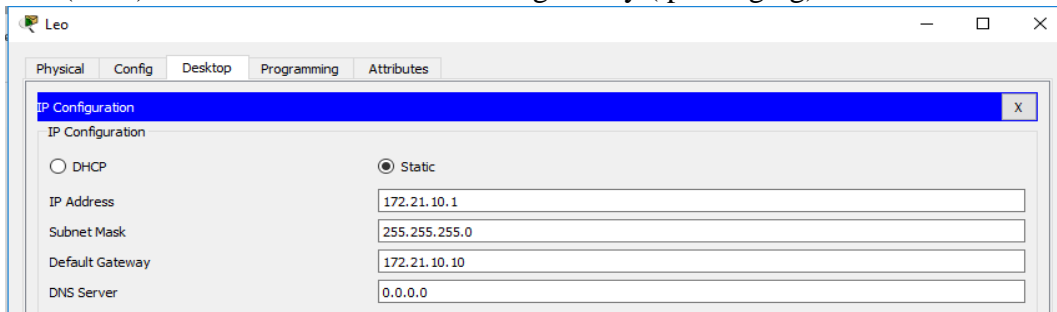

- Aries (PC 2) = 172.21.20.2/24 dan default gateway (ipconfig/dg) 172.21.20.20

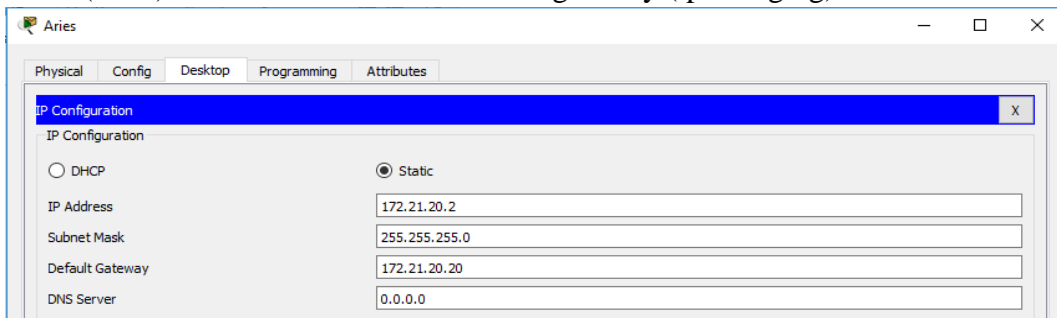


- Virgo (PC 3) = 172.21.30.3/24 dan default gateway (ipconfig/dg) 172.21.30.30

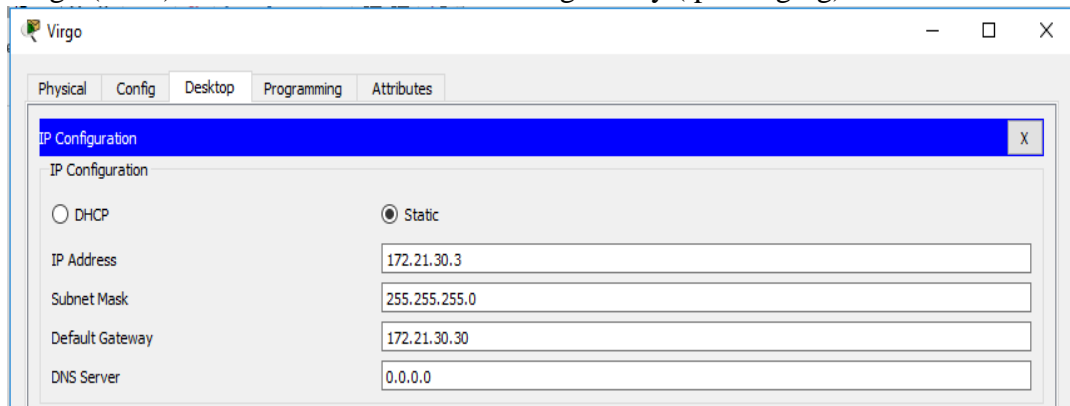


4. Langkah pengujian untuk memastikan kesesuaian konfigurasi.


- Lakukan ping dari PC leo ke router eagle (172.21.1.1)

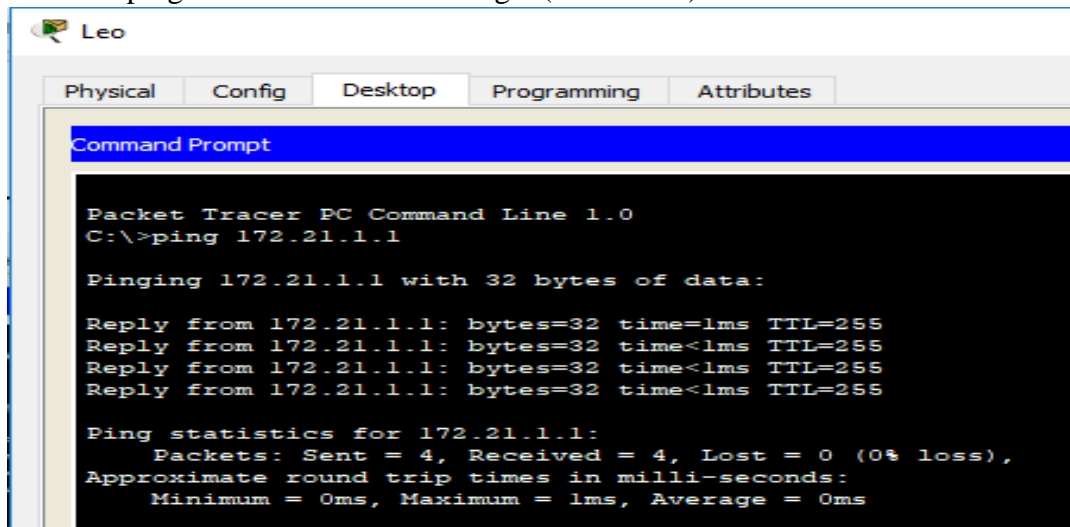

- Lakukan ping dari PC aries ke router puma (172.21.1.2)

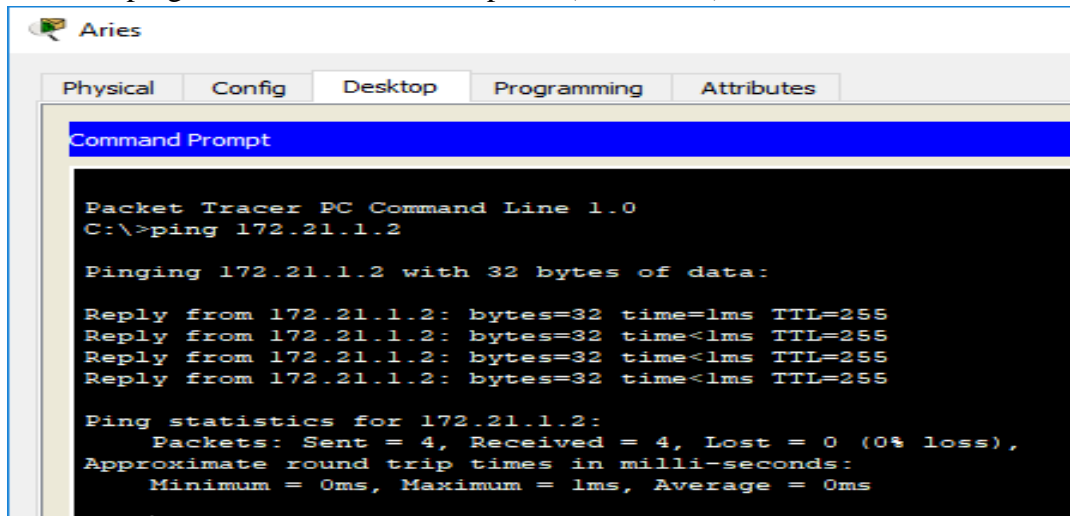

- Lakukan ping dari PC virgo ke router tiger (172.21.3.3)

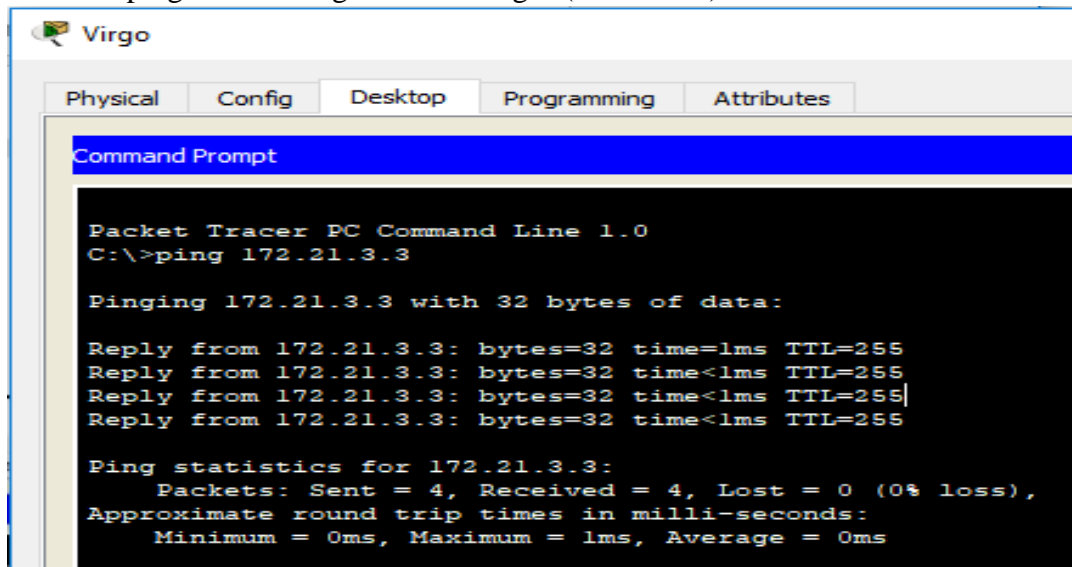

```

Virgo
Physical Config Desktop Programming Attributes
Command Prompt

Packet Tracer PC Command Line 1.0
C:\>ping 172.21.3.3

Pinging 172.21.3.3 with 32 bytes of data:

Reply from 172.21.3.3: bytes=32 time=1ms TTL=255
Reply from 172.21.3.3: bytes=32 time<1ms TTL=255
Reply from 172.21.3.3: bytes=32 time<1ms TTL=255
Reply from 172.21.3.3: bytes=32 time<1ms TTL=255

Ping statistics for 172.21.3.3:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 1ms, Average = 0ms

```

- Lakukan ping dari router eagle ke router puma (172.21.1.2)

```

Router>en
Router#ping 172.21.1.2

Type escape sequence to abort.
Sending 5, 100-byte ICMP Echos to 172.21.1.2, timeout is 2
seconds:
!!!!
Success rate is 100 percent (5/5), round-trip min/avg/max = 1/1/3
ms

```

- Lakukan ping dari router eagle ke router tiger (172.21.2.3)

```

Router#ping 172.21.2.3

Type escape sequence to abort.
Sending 5, 100-byte ICMP Echos to 172.21.2.3, timeout is 2
seconds:
!!!!
Success rate is 100 percent (5/5), round-trip min/avg/max = 1/1/4
ms

```

- Lakukan ping dari router puma ke router tiger (172.21.3.3)

```

Router>en
Router#ping 172.21.3.3

Type escape sequence to abort.
Sending 5, 100-byte ICMP Echos to 172.21.3.3, timeout is 2
seconds:
!!!!
Success rate is 100 percent (5/5), round-trip min/avg/max = 1/1/4
ms

```

5. Simpan konfigurasi seluruh device yang telah dilakukan



6. Pada mode user atau mode privileged, lihat route pada masing-masing router

- Eagle

```
Router>en
Router#show ip route
Codes: C - connected, S - static, I - IGRP, R - RIP, M - mobile,
B - BGP
        D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter
area
        N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external
type 2
        E1 - OSPF external type 1, E2 - OSPF external type 2, E -
EGP
        i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia -
IS-IS inter area
        * - candidate default, U - per-user static route, o - ODR
        P - periodic downloaded static route

Gateway of last resort is not set

    172.21.0.0/24 is subnetted, 3 subnets
C       172.21.1.0 is directly connected, Serial2/0
C       172.21.2.0 is directly connected, Serial3/0
C       172.21.10.0 is directly connected, FastEthernet0/0
```

- Puma

```
Router>en
Router#show ip route
Codes: C - connected, S - static, I - IGRP, R - RIP, M - mobile,
B - BGP
        D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter
area
        N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external
type 2
        E1 - OSPF external type 1, E2 - OSPF external type 2, E -
EGP
        i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia -
IS-IS inter area
        * - candidate default, U - per-user static route, o - ODR
        P - periodic downloaded static route

Gateway of last resort is not set

    172.21.0.0/24 is subnetted, 3 subnets
C       172.21.1.0 is directly connected, Serial2/0
C       172.21.3.0 is directly connected, Serial3/0
C       172.21.20.0 is directly connected, FastEthernet0/0
```

- Tiger

```
Router>en
Router#show ip route
Codes: C - connected, S - static, I - IGRP, R - RIP, M - mobile,
B - BGP
        D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter
area
        N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external
type 2
        E1 - OSPF external type 1, E2 - OSPF external type 2, E -
EGP
        i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia -
IS-IS inter area
        * - candidate default, U - per-user static route, o - ODR
        P - periodic downloaded static route

Gateway of last resort is not set

    172.21.0.0/24 is subnetted, 3 subnets
C       172.21.2.0 is directly connected, Serial2/0
C       172.21.3.0 is directly connected, Serial3/0
C       172.21.30.0 is directly connected, FastEthernet0/0
```

7. Dari router eagle lakukan ping ke alamat interface e0 router puma (172.21.20.20)

```
Router#ping 172.21.20.20

Type escape sequence to abort.
Sending 5, 100-byte ICMP Echos to 172.21.20.20, timeout is 2
seconds:
.....
Success rate is 0 percent (0/5)
```

8. Dari PC leo lakukan trace ke PC aries

```
Packet Tracer PC Command Line 1.0
C:\>tracert 172.21.20.2

Tracing route to 172.21.20.2 over a maximum of 30 hops:

  1  1 ms      0 ms      0 ms      172.21.10.10
  2  0 ms      *          0 ms      172.21.10.10
  3  *          0 ms      *          Request timed out.
  4  0 ms      *          0 ms      172.21.10.10
  5  *          0 ms      *          Request timed out.
  6  0 ms      *          0 ms      172.21.10.10
  7  *          0 ms      *          Request timed out.
  8  0 ms      *          0 ms      172.21.10.10
  9  *          3 ms      *          Request timed out.
 10  0 ms      *          0 ms      172.21.10.10
 11  *          0 ms      *          Request timed out.
 12  1 ms      *          0 ms      172.21.10.10
 13  *          0 ms      *          Request timed out.
 14  0 ms      *          1 ms      172.21.10.10
 15  *          0 ms      *          Request timed out.
 16  0 ms      *          0 ms      172.21.10.10
 17  *          0 ms      *          Request timed out.
 18  0 ms      *          1 ms      172.21.10.10
 19  *          0 ms      *          Request timed out.
 20  0 ms      *          0 ms      172.21.10.10
 21  *          0 ms      *          Request timed out.
 22  0 ms      *          0 ms      172.21.10.10
 23  *          0 ms      *          Request timed out.
 24  0 ms      *          0 ms      172.21.10.10
 25  *          0 ms      *          Request timed out.
 26  0 ms      *          3 ms      172.21.10.10
 27  *          0 ms      *          Request timed out.
 28  0 ms      *          0 ms      172.21.10.10
 29  *          0 ms      *          Request timed out.
 30  0 ms      *          0 ms      172.21.10.10

Trace complete.
```

9. Dari PC leo lakukan trace ke alamat interface s0 router eagle (172.21.1.1)

```
C:\>tracert 172.21.1.1

Tracing route to 172.21.1.1 over a maximum of 30 hops:

  1  1 ms      0 ms      0 ms      172.21.1.1

Trace complete.
```


10. Pada mode user atau mode privileged, tambahkan route table pada masing-masing rote untuk setiap alamat jaringan yang tidak terhubung secara langsung dengan interface router

- Eagle

```
Router#conf term
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#ip route 172.21.20.20 255.255.255.0 172.21.1.2
%Inconsistent address and mask
Router(config)#ip route 172.21.20.0 255.255.255.0 172.21.1.2
Router(config)#ip route 172.21.30.0 255.255.255.0 172.21.2.3
Router(config)#ex
Router#
%SYS-5-CONFIG_I: Configured from console by console

Router#show ip route
Codes: C - connected, S - static, I - IGRP, R - RIP, M - mobile,
B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter
area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external
type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2, E -
EGP
       i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia -
IS-IS inter area
       * - candidate default, U - per-user static route, o - ODR
       P - periodic downloaded static route

Gateway of last resort is not set

      172.21.0.0/24 is subnetted, 5 subnets
C       172.21.1.0 is directly connected, Serial2/0
C       172.21.2.0 is directly connected, Serial3/0
C       172.21.10.0 is directly connected, FastEthernet0/0
S       172.21.20.0 [1/0] via 172.21.1.2
S       172.21.30.0 [1/0] via 172.21.2.3
```

- Puma

```
Router>en
Router#conf term
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#ip route 172.21.10.0 255.255.255.0 172.21.1.1
Router(config)#ip route 172.21.30.0 255.255.255.0 172.21.3.3
Router(config)#ex
Router#
%SYS-5-CONFIG_I: Configured from console by console

Router#show ip route
Codes: C - connected, S - static, I - IGRP, R - RIP, M - mobile,
B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter
area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external
type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2, E -
EGP
       i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia -
IS-IS inter area
       * - candidate default, U - per-user static route, o - ODR
       P - periodic downloaded static route

Gateway of last resort is not set

      172.21.0.0/24 is subnetted, 5 subnets
C       172.21.1.0 is directly connected, Serial2/0
C       172.21.3.0 is directly connected, Serial3/0
S       172.21.10.0 [1/0] via 172.21.1.1
C       172.21.20.0 is directly connected, FastEthernet0/0
S       172.21.30.0 [1/0] via 172.21.3.3
```

- Tiger

```
Router>en
Router#conf term
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#ip route 172.21.10.0 255.255.255.0 172.21.2.1
Router(config)#ip route 172.21.20.0 255.255.255.0 172.21.3.2
Router(config)#ex
Router#
%SYS-5-CONFIG_I: Configured from console by console

Router#show ip route
Codes: C - connected, S - static, I - IGRP, R - RIP, M - mobile,
B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter
area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external
type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2, E -
EGP
       i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia -
IS-IS inter area
       * - candidate default, U - per-user static route, o - ODR
       P - periodic downloaded static route

Gateway of last resort is not set

      172.21.0.0/24 is subnetted, 5 subnets
C       172.21.2.0 is directly connected, Serial2/0
C       172.21.3.0 is directly connected, Serial3/0
S       172.21.10.0 [1/0] via 172.21.2.1
S       172.21.20.0 [1/0] via 172.21.3.2
C       172.21.30.0 is directly connected, FastEthernet0/0
```

11. Dari PC leo lakukan ping ke PC aries, dan lakukan pula trace dari PC leo ke aries

```
C:\>ping 172.21.20.2

Pinging 172.21.20.2 with 32 bytes of data:

Reply from 172.21.20.2: bytes=32 time=4ms TTL=126
Reply from 172.21.20.2: bytes=32 time=3ms TTL=126
Reply from 172.21.20.2: bytes=32 time=1ms TTL=126
Reply from 172.21.20.2: bytes=32 time=14ms TTL=126

Ping statistics for 172.21.20.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 1ms, Maximum = 14ms, Average = 5ms

C:\>tracert 172.21.20.2

Tracing route to 172.21.20.2 over a maximum of 30 hops:

  0  1 ms    0 ms    5 ms    172.21.10.10
  1  5 ms    1 ms    0 ms    172.21.1.2
  2  4 ms    1 ms    0 ms    172.21.20.2

Trace complete.
```

1. Dari Packet Tracker, buka (load) topologi NetMap Kegiatan 1.

-
- The diagram illustrates a network topology with three routers: Router-PT Eagle, Router-PT Puma, and Router-PT Tiger. These routers are interconnected in a triangular mesh. PC-PT Leo is connected to Router-PT Eagle, PC-PT Aries to Router-PT Puma, and PC-PT Virgo to Router-PT Tiger. Red lines highlight the path for traffic originating from PC-PT Leo and destined for PC-PT Aries, showing the route from Leo to Eagle, then to Puma, and finally to Aries.

- ```
Router>en
Router#conf term
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#router rip
Router(config-router)#network 172.21.0.0
```

- ```
Router#show running-config
Building configuration...

Current configuration : 795 bytes
!
version 12.2
no service timestamps log datetime msec
no service timestamps debug datetime msec
no service password-encryption
!
hostname Router
!
!
!
!
!
!
!
ip cef
no ipv6 cef
!
!
!
!
!
!
router rip
network 172.21.0.0
!
ip classless
!
ip flow-export version 9
!
!
```

- ```
Router#debug ip rip
RIP protocol debugging is on
Router#
Router#RIP: sending v1 update to 255.255.255.255 via
FastEthernet0/0 (172.21.10.10)
RIP: build update entries
 network 172.21.1.0 metric 1
 network 172.21.2.0 metric 1
RIP: sending v1 update to 255.255.255.255 via Serial2/0
(172.21.1.1)
RIP: build update entries
 network 172.21.2.0 metric 1
 network 172.21.10.0 metric 1
RIP: sending v1 update to 255.255.255.255 via Serial3/0
(172.21.2.1)
RIP: build update entries
 network 172.21.1.0 metric 1
 network 172.21.10.0 metric 1
RIP: sending v1 update to 255.255.255.255 via FastEthernet0/0
(172.21.10.10)
RIP: build update entries
 network 172.21.1.0 metric 1
 network 172.21.2.0 metric 1
```

- Konfigurasi routing RIP Puma

```
Router>en
Router#conf term
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#router rip
Router(config-router)#network 172.21.0.0
Router(config-router)#ex
Router(config)#ex
Router#show running-config
Building configuration...

Current configuration : 775 bytes
!
version 12.2
no service timestamps log datetime msec
no service timestamps debug datetime msec
no service password-encryption
!
hostname Router
!
!
!
!
!
!
interface FastEthernet0/0
ip address 172.21.20.20 255.255.255.0
duplex auto
speed auto
!
interface FastEthernet1/0
no ip address
duplex auto
speed auto
shutdown
!
interface Serial12/0
ip address 172.21.1.2 255.255.255.0
!
interface Serial13/0
ip address 172.21.3.2 255.255.255.0
clock rate 2000000
!
interface FastEthernet4/0
no ip address
shutdown
!
ip cef
no ipv6 cef
!
!
!
!
!
!
interface FastEthernet5/0
no ip address
shutdown
!
router rip
network 172.21.0.0
!
ip classless
!
ip flow-export version 9
!
end
```

- Update router RIP Puma

```
Router#debug ip rip
RIP protocol debugging is on
Router#RIP: received v1 update from 172.21.1.1 on Serial2/0
 172.21.2.0 in 1 hops
 172.21.10.0 in 1 hops
RIP: sending v1 update to 255.255.255.255 via FastEthernet0/0
(172.21.20.20)
RIP: build update entries
 network 172.21.1.0 metric 1
 network 172.21.2.0 metric 2
 network 172.21.3.0 metric 1
 network 172.21.10.0 metric 2
RIP: sending v1 update to 255.255.255.255 via Serial2/0
(172.21.1.2)
RIP: build update entries
 network 172.21.3.0 metric 1
 network 172.21.20.0 metric 1
RIP: sending v1 update to 255.255.255.255 via Serial3/0
(172.21.3.2)
RIP: build update entries
 network 172.21.1.0 metric 1
 network 172.21.2.0 metric 2
 network 172.21.10.0 metric 2
 network 172.21.20.0 metric 1
```

- Konfigurasi routing RIP Tiger

```
Router>en
Router#conf term
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#router rip
Router(config-router)#network 172.21.0.0
Router(config-router)#ex
Router(config)#ex
```

|                                                                                                                                                                                                                                                                                                         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                                        |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------|
| <pre>Router#show running-config Building configuration...  Current configuration : 755 bytes ! version 12.2 no service timestamps log datetime msec no service timestamps debug datetime msec no service password-encryption ! hostname Router ! ! ! ! ! ! ip cef no ipv6 cef ! ! ! ! ! ! ! ! ! !</pre> | <pre>interface FastEthernet0/0  ip address 172.21.30.30 255.255.255.0  duplex auto  speed auto ! interface FastEthernet1/0  no ip address  duplex auto  speed auto  shutdown ! interface Serial2/0  ip address 172.21.2.3 255.255.255.0 ! interface Serial3/0  ip address 172.21.3.3 255.255.255.0 ! interface FastEthernet4/0  no ip address  shutdown ! interface FastEthernet5/0  no ip address  shutdown ! router rip  network 172.21.0.0 ! ip classless ! ip flow-export version 9 ! !</pre> | <pre>! ! line con 0 ! line aux 0 ! line vty 0 4  login ! ! ! end</pre> |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------|

- Update router RIP Tiger

```
Router#debug ip rip
RIP protocol debugging is on
Router#RIP: received v1 update from 172.21.3.2 on Serial3/0
 172.21.1.0 in 1 hops
 172.21.10.0 in 2 hops
 172.21.20.0 in 1 hops
RIP: sending v1 update to 255.255.255.255 via FastEthernet0/0
(172.21.30.30)
RIP: build update entries
 network 172.21.1.0 metric 2
 network 172.21.2.0 metric 1
 network 172.21.3.0 metric 1
 network 172.21.10.0 metric 2
 network 172.21.20.0 metric 2
RIP: sending v1 update to 255.255.255.255 via Serial2/0
(172.21.2.3)
RIP: build update entries
 network 172.21.3.0 metric 1
 network 172.21.20.0 metric 2
 network 172.21.30.0 metric 1
RIP: sending v1 update to 255.255.255.255 via Serial3/0
(172.21.3.3)
RIP: build update entries
 network 172.21.2.0 metric 1
 network 172.21.10.0 metric 2
 network 172.21.30.0 metric 1

Router#no debug ip RIP: received v1 update from 172.21.2.1 on
Serial2/0
 172.21.1.0 in 1 hops
 172.21.10.0 in 1 hops
 172.21.20.0 in 2 hops
```

% Incomplete command.

6. Dari PC leo lakukan trace ke PC aries

```
Packet Tracer PC Command Line 1.0
C:\>tracert 172.21.20.2

Tracing route to 172.21.20.2 over a maximum of 30 hops:

 1 10 ms 0 ms 0 ms 172.21.10.10
 2 1 ms 0 ms 1 ms 172.21.1.2
 3 * 0 ms 0 ms 172.21.20.2


Trace complete.
```

7. Buat hubungan antara router eagle dan puma terputus dan perhatikan proses update routing RIP yang terjadi.

```
Router>en
Router#conf term
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#int se2/0
Router(config-if)#shutdown

Router(config-if)#
%LINK-5-CHANGED: Interface Serial2/0, changed state to
administratively down

%LINEPROTO-5-UPDOWN: Line protocol on Interface Serial2/0,
changed state to down
```

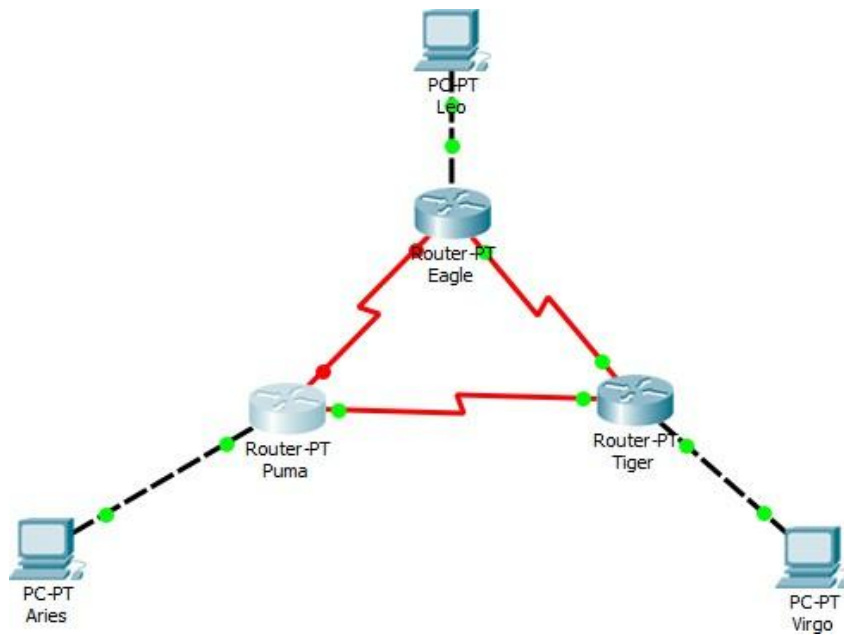

8. Dari PC leo lakukan trace ke PC aries


```
C:\>tracert 172.21.20.2
|
Tracing route to 172.21.20.2 over a maximum of 30 hops:

 1 0 ms 0 ms 0 ms 172.21.10.10
 2 1 ms 1 ms 4 ms 172.21.2.3
 3 10 ms 1 ms 6 ms 172.21.3.2
 4 11 ms 14 ms 13 ms 172.21.20.2

Trace complete.
```

### Kegiatan 3. EIGRP (*Interior Gateway Routing Protocol*)

1. Dari Packet Tracker, buka (load) topologi NetMap Kegiatan 1

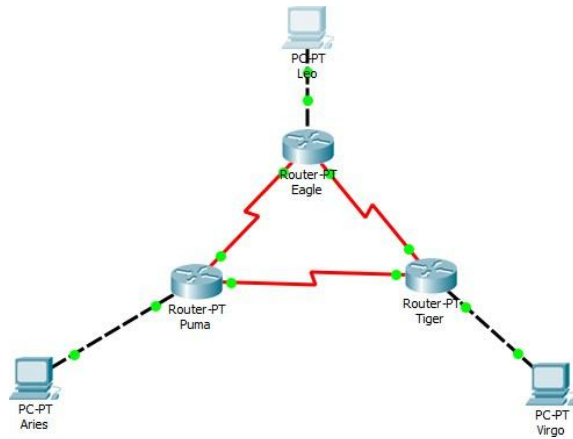

2. Pada mode configuration, konfigurasi routing RIP pada router eagle

```
Router>en
Router#conf term
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#router eigrp 100
Router(config-router)#network 172.21.0.0
Router(config-router)#
```

3. Lihat konfigurasi routing EIGRP yang telah dibuat dengan perintah “show running-config” pada mode user. Perhatikan pada bagian “router RIP”

```
Router#show running-config
Building configuration...

Current configuration : 815 bytes
!
version 12.2
no service timestamps log datetime msec
no service timestamps debug datetime msec
no service password-encryption
!
hostname Router
!
!
!
!
!
ip cef
no ipv6 cef
!
!
!
!
!
!
interface FastEthernet1/0
 no ip address
 duplex auto
 speed auto
 shutdown
!
interface Serial2/0
 ip address 172.21.1.1 255.255.255.0
 clock rate 2000000
!
interface Serial3/0
 ip address 172.21.2.1 255.255.255.0
 clock rate 2000000
!
interface FastEthernet4/0
 no ip address
 shutdown
!
interface FastEthernet5/0
 no ip address
 shutdown
!
router eigrp 100
 network 172.21.0.0
 auto-summary
!
ip classless
!
ip flow-export version 9
!
!
!
```

```
line con 0
!
line aux 0
!
line vty 0 4
login
!
!
end
```



4. Lihat proses transaksi routing EIGRP pada router eagle dengan perintah “debug eigrp packets”

```
Router#debug eigrp packet
EIGRP Packets debugging is on
 (UPDATE, REQUEST, QUERY, REPLY, HELLO, ACK)
Router#
EIGRP: Sending HELLO on Serial3/0
 AS 100, Flags 0x0, Seq 1/0 idbQ 0/0 iidbQ un/rely 0/0

EIGRP: Sending HELLO on Serial2/0
 AS 100, Flags 0x0, Seq 1/0 idbQ 0/0 iidbQ un/rely 0/0

EIGRP: Sending HELLO on FastEthernet0/0
 AS 100, Flags 0x0, Seq 1/0 idbQ 0/0 iidbQ un/rely 0/0
```

5. Lakukan konfigurasi routing EIGRP pada router puma dan tiger

- Konfigurasi routing EIGRP Puma

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <pre>Router&gt;en Router#conf term Enter configuration commands, one per line.  End with CNTL/Z. Router(config)#router eigrp 100 Router(config-router)#network 172.21.0.0 Router(config-router)# %DUAL-5-NBRCHANGE: IP-EIGRP 100: Neighbor 172.21.1.1 (Serial2/0) is up: new adjacency  Router#show running-config Building configuration...  Current configuration : 795 bytes ! version 12.2 no service timestamps log datetime msec no service timestamps debug datetime msec no service password-encryption ! hostname Router ! ! ! ! ! ! ! ! ! ! ip cef no ipv6 cef ! ! ! ! ! ! ! ! ! !</pre> | <pre>interface FastEthernet0/0 ip address 172.21.20.20 255.255.255.0 duplex auto speed auto ! interface FastEthernet1/0 no ip address duplex auto speed auto shutdown ! interface Serial2/0 ip address 172.21.1.2 255.255.255.0 ! interface Serial3/0 ip address 172.21.3.2 255.255.255.0 clock rate 2000000 ! interface FastEthernet4/0 no ip address shutdown ! interface FastEthernet5/0 no ip address shutdown ! router eigrp 100 network 172.21.0.0 auto-summary ! ip classless ! ! ip flow-export version 9 ! end</pre> |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

- Update pada routing EIGRP Puma

```
Router#debug eigrp packets
EIGRP Packets debugging is on
 (UPDATE, REQUEST, QUERY, REPLY, HELLO, ACK)
Router#
EIGRP: Sending HELLO on FastEthernet0/0
 AS 100, Flags 0x0, Seq 6/0 idbQ 0/0 iidbQ un/rely 0/0

EIGRP: Sending HELLO on Serial3/0
 AS 100, Flags 0x0, Seq 6/0 idbQ 0/0 iidbQ un/rely 0/0

EIGRP: Sending HELLO on Serial2/0
 AS 100, Flags 0x0, Seq 6/0 idbQ 0/0 iidbQ un/rely 0/0

EIGRP: Received HELLO on Serial2/0 nbr 172.21.1.1
 AS 100, Flags 0x0, Seq 6/0 idbQ 0/0
```

```
Router#show running-config
Building configuration...

Current configuration : 775 bytes
!
version 12.2
no service timestamps log datetime msec
no service timestamps debug datetime msec
no service password-encryption
!
hostname Router
!
!
!
!
!
!
ip cef
no ipv6 cef
!
!
!
!
!
!
interface FastEthernet0/0
ip address 172.21.30.30 255.255.255.0
duplex auto
speed auto
!
interface FastEthernet1/0
no ip address
duplex auto
speed auto
shutdown
!
interface Serial2/0
ip address 172.21.2.3 255.255.255.0
!
interface Serial3/0
ip address 172.21.3.3 255.255.255.0
!
interface FastEthernet4/0
no ip address
shutdown
!
interface FastEthernet5/0
no ip address
shutdown
!
router eigrp 100
network 172.21.0.0
auto-summary
!
ip classless
!
ip flow-export version 9
!
end
```

- Update pada routing EIGRP Tiger

```
Router#debug eigrp packets
EIGRP Packets debugging is on
(UPDATE, REQUEST, QUERY, REPLY, HELLO, ACK)
Router#
EIGRP: Received HELLO on Serial2/0 nbr 172.21.2.1
AS 100, Flags 0x0, Seq 11/0 idbQ 0/0

EIGRP: Sending HELLO on Serial3/0
AS 100, Flags 0x0, Seq 11/0 idbQ 0/0 iidbQ un/rely 0/0

EIGRP: Sending HELLO on FastEthernet0/0
AS 100, Flags 0x0, Seq 11/0 idbQ 0/0 iidbQ un/rely 0/0

EIGRP: Sending HELLO on Serial2/0
AS 100, Flags 0x0, Seq 11/0 idbQ 0/0 iidbQ un/rely 0/0

EIGRP: Received HELLO on Serial3/0 nbr 172.21.3.2
AS 100, Flags 0x0, Seq 9/0 idbQ 0/0
```

6. Dari PC leo lakukan trace ke PC aries

```
Packet Tracer PC Command Line 1.0
C:\>tracert 172.21.20.2

Tracing route to 172.21.20.2 over a maximum of 30 hops:

 1 25 ms 0 ms 0 ms 172.21.10.10
 2 1 ms 4 ms 0 ms 172.21.1.2
 3 * 0 ms 3 ms 172.21.20.2

Trace complete.
```

7. Buat hubungan antara router eagle dan puma terputus dan perhatikan proses update routing RIP yang terjadi

```
Router#conf term
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#int se2/0
Router(config-if)#shutdown

Router(config-if)#
%LINK-5-CHANGED: Interface Serial2/0, changed state to
administratively down

%LINEPROTO-5-UPDOWN: Line protocol on Interface Serial2/0,
changed state to down

%DUAL-5-NBRCHANGE: IP-EIGRP 100: Neighbor 172.21.1.1 (Serial2/0)
is down: interface down

Router#debug eigrp packets
EIGRP Packets debugging is on
(UPDATE, REQUEST, QUERY, REPLY, HELLO, ACK)
Router#
EIGRP: Received HELLO on Serial3/0 nbr 172.21.3.3
AS 100, Flags 0x0, Seq 16/0 idbQ 0/0

EIGRP: Sending HELLO on FastEthernet0/0
AS 100, Flags 0x0, Seq 16/0 idbQ 0/0 iidbQ un/rely 0/0

EIGRP: Sending HELLO on Serial3/0
AS 100, Flags 0x0, Seq 16/0 idbQ 0/0 iidbQ un/rely 0/0
```

8. Dari PC leo lakukan trace ke PC aries

```
C:\>tracert 172.21.20.2

Tracing route to 172.21.20.2 over a maximum of 30 hops:

 1 0 ms 0 ms 0 ms 172.21.10.10
 2 0 ms 1 ms 1 ms 172.21.2.3
 3 2 ms 5 ms 0 ms 172.21.3.2
 4 13 ms 1 ms 11 ms 172.21.20.2

Trace complete.
```