

YOGA TRI PRIHATIN


L200170150

D


MODUL 4 : VIRTUAL LAN DAN TRUNKING

KEGIATAN 1 : TOPOLOGI 1

Buatlah rancangan berupa switch dan 5 PC :

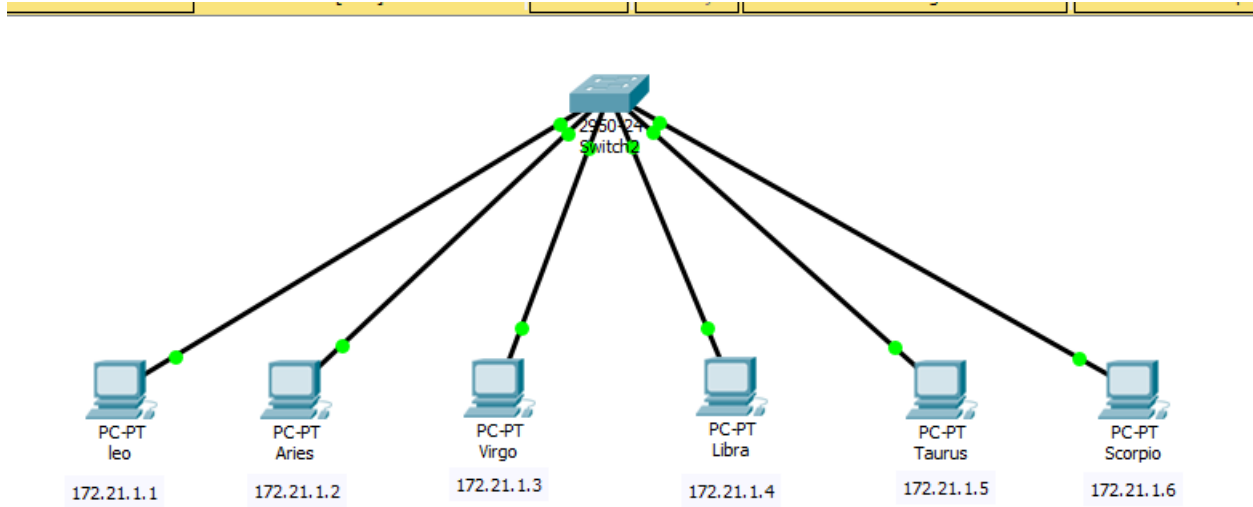

Konfigurasi masing-masing PC dengan ganti nama dan alamat IP :

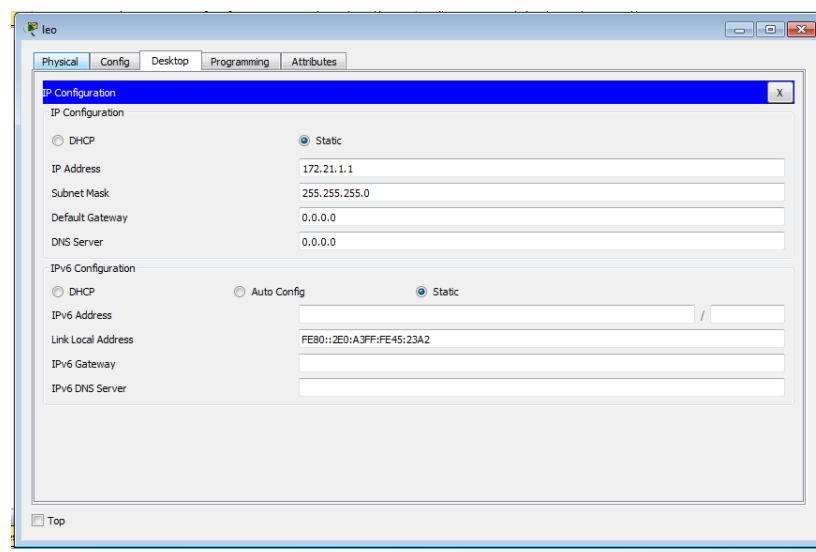

- Leo = 172.21.1.1/24
- Aries = 172.21.1.2/24
- Virgo = 172.21.1.3/24
- Libra = 172.21.1.4/24
- Taurus = 172.21.1.5/24
- Scorpio = 172.21.1.6/24

Buatlah 3 VLAN dengan nama zodiak1, zodiak2, dan zodiak3. Dengan masing-masing VLAN :

```
Switch>enable
Switch#config term
Enter configuration commands, one per line. End with CNTL/Z.
Switch(config)#vlan 10
Switch(config-vlan)#name zodiak1
Switch(config-vlan)#exit
Switch(config)#vlan 20
Switch(config-vlan)#name zodiak2
Switch(config-vlan)#exit
Switch(config)#vlan 30
Switch(config-vlan)#name zodiak3
Switch(config-vlan)#exit
```

- zodiak1 = Leo dan Libra
- zodiak2 = Aries dan Taurus
- zodiak3 = Virgo dan Scorpio

Langkah pengoperasinya menggunakan CLI :

```
Switch>enable
Switch#config term
Enter configuration commands, one per line. End with CNTL/Z.
Switch(config)#vlan 10
Switch(config-vlan)#name zodiak1
Switch(config-vlan)#exit
Switch(config)#vlan 20
Switch(config-vlan)#name zodiak2
Switch(config-vlan)#exit
Switch(config)#vlan 30
Switch(config-vlan)#name zodiak3
Switch(config-vlan)#exit
Switch(config)#int fa 0/1
Switch(config-if)#sw mode access
Switch(config-if)#sw access vlan 10
Switch(config-if)#int fa 0/4
Switch(config-if)#sw mode access
Switch(config-if)#sw access vlan 10
Switch(config-if)#int fa 0/2
Switch(config-if)#sw mode access
Switch(config-if)#sw access vlan 20
Switch(config-if)#int fa 0/5
Switch(config-if)#sw mode access
Switch(config-if)#sw access vlan 20
Switch(config-if)#int fa 0/3
Switch(config-if)#
%LINK-5-CHANGED: Interface FastEthernet0/3, changed state to down
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/3, changed state to down
%LINK-5-CHANGED: Interface FastEthernet0/3, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/3, changed state to up
Switch(config-if)#sw mode access
Switch(config-if)#sw access vlan 30
Switch(config-if)#int fa 0/6
Switch(config-if)#sw mode access
Switch(config-if)#sw access vlan 30
```

```
Switch(config-if)#sw mode access
Switch(config-if)#sw access vlan 20
Switch(config-if)#int fa 0/5
Switch(config-if)#sw mode access
Switch(config-if)#sw access vlan 20
Switch(config-if)#int fa 0/3
Switch(config-if)#
%LINK-5-CHANGED: Interface FastEthernet0/3, changed state to down

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/3, changed state to down

%LINK-5-CHANGED: Interface FastEthernet0/3, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/3, changed state to up

Switch(config-if)#sw mode access
Switch(config-if)#sw access vlan 30
Switch(config-if)#int fa 0/6
Switch(config-if)#sw mode access
Switch(config-if)#sw access vlan 30
Switch(config-if)#end
Switch#
%SYS-5-CONFIG_I: Configured from console by console


Switch#show vlan brief
```

VLAN	Name	Status	Ports
1	default	active	Fa0/7, Fa0/8, Fa0/9, Fa0/10 Fa0/11, Fa0/12, Fa0/13, Fa0/14 Fa0/15, Fa0/16, Fa0/17, Fa0/18 Fa0/19, Fa0/20, Fa0/21, Fa0/22 Fa0/23, Fa0/24
10	zodiak1	active	Fa0/1, Fa0/4
20	zodiak2	active	Fa0/2, Fa0/5
30	zodiak3	active	Fa0/3, Fa0/6
1002	fdi-default	active	
1003	token-ring-default	active	
1004	fdiinet-default	active	
1005	trnet-default	active	


```
Switch#
```

## KEGIATAN 2 : TOPOLOGI 2

Buat lah rancangan dengan menggunakan 2 switch dan 12 PC yang saling berhubungan satu sama lain.

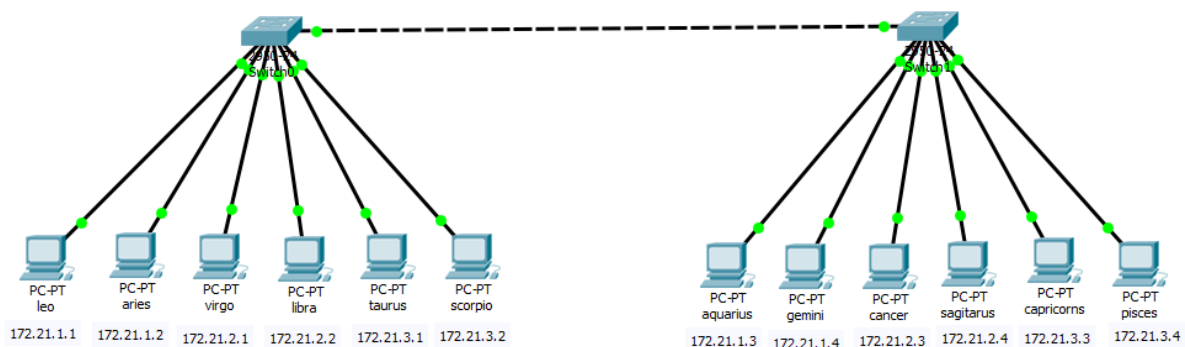

Konfigurasi alamat IP address dan nama pada masing-masing PC :

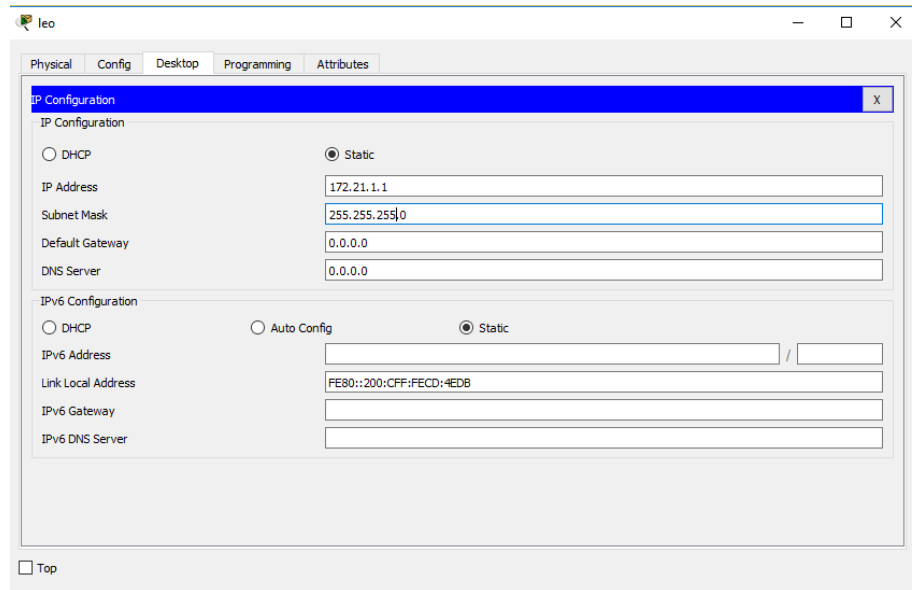

- leo = 172.21.1.1/24
- aries = 172.21.1.2/24
- virgo = 172.21.2.1/24
- libra = 172.21.2.2/24
- taurus = 172.21.3.1/24
- scorpio = 172.21.3.2/24
- aquarius = 172.21.1.3/24
- gemini = 172.21.1.4/24
- cancer = 172.21.2.3/24
- sagitarius = 172.21.2.4/24
- capricornus = 172.21.3.3/24
- pisces = 172.21.3.4/24

Lakukan konfigurasi VLAN dan Trunk

- a. Pada segmen switch 1
  - zodiak1 = leo dan libra
  - zodiak2 = aries dan Taurus
  - zodiak3 = virgo dan scorpio

langkah pengoperasian dan berserta hasilnya berada dibawah:

```

Switch#show int fa 0/1 switchport
Name: Fa0/1
Switchport: Enabled
Administrative Mode: trunk
Operational Mode: trunk
Administrative Trunking Encapsulation: dot1q
Operational Trunking Encapsulation: dot1q
Negotiation of Trunking: On
Access Mode VLAN: 1 (default)
Trunking Native Mode VLAN: 1 (default)
Voice VLAN: none
Administrative private-vlan host-association: none
Administrative private-vlan mapping: none
Administrative private-vlan trunk native VLAN: none
Administrative private-vlan trunk encapsulation: dot1q
Administrative private-vlan trunk normal VLANs: none
Administrative private-vlan trunk private VLANs: none
Operational private-vlan: none
Trunking VLANs Enabled: All
Pruning VLANs Enabled: 2-1001
Capture Mode Disabled
Capture VLANs Allowed: ALL
Protected: false
--More-- |

```

```

Switch#
%SYS-5-CONFIG_I: Configured from console by console

```

```

Switch#show vlan brief

```

VLAN Name	Status	Ports
1 default	active	Fa0/1, Fa0/8,
Fa0/9, Fa0/10		Fa0/11, Fa0/12,
Fa0/13, Fa0/14		Fa0/15, Fa0/16,
Fa0/17, Fa0/18		Fa0/19, Fa0/20,
Fa0/21, Fa0/22		Fa0/23, Fa0/24
10 zodiak1	active	Fa0/2, Fa0/5
20 zodiak2	active	Fa0/3, Fa0/6
30 zodiak3	active	Fa0/4, Fa0/7
1002 fddi-default	active	
1003 token-ring-default	active	
1004 fddinet-default	active	
1005 trnet-default	active	

---

```

Switch#

```

```

Switch#show int trunk
Port      Mode      Encapsulation  Status      Native vlan
Fa0/1     on        802.1q         trunking    1

Port      Vlans allowed on trunk
Fa0/1     1-1005

Port      Vlans allowed and active in management domain
Fa0/1     1,10,20,30

Port      Vlans in spanning tree forwarding state and not
pruned
Fa0/1     1,10,20,30

Switch#

```

---

- b. Pada segmen switch 2
- Zodiak1 = aquarius dan Gemini
  - Zodiak2 = cancer dan sagitarius
  - Zodiac3 = Capricorn dan pisces

Berikut langkah operasinya berserta hasilnya : :

```

Switch#show int fa 0/1 switchport
Name: Fa0/1
Switchport: Enabled
Administrative Mode: trunk
Operational Mode: trunk
Administrative Trunking Encapsulation: dot1q
Operational Trunking Encapsulation: dot1q
Negotiation of Trunking: On
Access Mode VLAN: 1 (default)
Trunking Native Mode VLAN: 1 (default)
Voice VLAN: none
Administrative private-vlan host-association: none
Administrative private-vlan mapping: none
Administrative private-vlan trunk native VLAN: none
Administrative private-vlan trunk encapsulation: dot1q
Administrative private-vlan trunk normal VLANs: none
Administrative private-vlan trunk private VLANs: none
Operational private-vlan: none
Trunking VLANs Enabled: All
Pruning VLANs Enabled: 2-1001
Capture Mode Disabled
Capture VLANs Allowed: ALL
Protected: false
Appliance trust: none

```

Switch#show vlan

VLAN	Name	Status	Ports
1	default	active	Fa0/8, Fa0/9, Fa0/10, Fa0/11 Fa0/12, Fa0/13, Fa0/14, Fa0/15 Fa0/16, Fa0/17, Fa0/18, Fa0/19 Fa0/20, Fa0/21, Fa0/22, Fa0/23 Fa0/24
10	zodiak1	active	Fa0/2, Fa0/3
20	zodiak2	active	Fa0/4, Fa0/5
30	zodiak3	active	Fa0/6, Fa0/7
1002	fddi-default	active	
1003	token-ring-default	active	
1004	fddinet-default	active	
1005	trnet-default	active	

VLAN	Type	SAID	MTU	Parent	RingNo	BridgeNo	Stp	BrdgMode	Trans1	Trans2
1	enet	100001	1500	-	-	-	-	-	0	0
10	enet	100010	1500	-	-	-	-	-	0	0
20	enet	100020	1500	-	-	-	-	-	0	0
30	enet	100030	1500	-	-	-	-	-	0	0
1002	fddi	101002	1500	-	-	-	-	-	0	0
1003	tr	101003	1500	-	-	-	-	-	0	0
1004	fdnet	101004	1500	-	-	-	ieee	-	0	0
1005	trnet	101005	1500	-	-	-	ibm	-	0	0

VLAN	Type	SAID	MTU	Parent	RingNo	BridgeNo	Stp	BrdgMode	Trans1	Trans2
------	------	------	-----	--------	--------	----------	-----	----------	--------	--------

Remote SPAN VLANs

Primary	Secondary	Type	Ports
Switch#			

Switch#show int trunk

Port	Mode	Encapsulation	Status	Native vlan
Fa0/1	on	802.1q	trunking	1

Port	Vlans allowed on trunk
Fa0/1	1-1005

Port	Vlans allowed and active in management domain
Fa0/1	1,10,20,30

Port	Vlans in spanning tree forwarding state and not pruned
Fa0/1	1,10,20,30

## UJI COBA KONEKSI

```
C:\>ping 172.21.1.2

Pinging 172.21.1.2 with 32 bytes of data:

Request timed out.
Request timed out.
Request timed out.
Request timed out.

Ping statistics for 172.21.1.2:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),
```

*Test koneksi leo ke aries*

```
C:\>ping 172.21.1.3

Pinging 172.21.1.3 with 32 bytes of data:

Reply from 172.21.1.3: bytes=32 time=1ms TTL=128
Reply from 172.21.1.3: bytes=32 time<1ms TTL=128
Reply from 172.21.1.3: bytes=32 time<1ms TTL=128
Reply from 172.21.1.3: bytes=32 time<1ms TTL=128

Ping statistics for 172.21.1.3:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 1ms, Average = 0ms
```

*Test koneksi leo ke aquarius*

1.

```
Packet Tracer PC Command Line 1.0
C:\>ping 172.21.3.4

Pinging 172.21.3.4 with 32 bytes of data:

Request timed out.
Request timed out.
Request timed out.
Request timed out.

Ping statistics for 172.21.3.4:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),

C:\>|
```

*Test koneksi leo ke pisces*



```
Packet Tracer PC Command Line 1.0
C:\>ping 172.21.2.3

Pinging 172.21.2.3 with 32 bytes of data:

Request timed out.
Request timed out.
Request timed out.
Request timed out.

Ping statistics for 172.21.2.3:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),
```

*Test koneksi libra ke cancer*

```
C:\>ping 172.21.1.1

Pinging 172.21.1.1 with 32 bytes of data:

Request timed out.
Request timed out.
Request timed out.
Request timed out.

Ping statistics for 172.21.1.1:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),
```

*Test koneksi libra ke leo*