

Nama : Annas Fagiat

NIM : L200170163

Kelas : D

### KEGIATAN PRAKTIKUM MODUL 3


### PRAKTIKUM JARINGAN KOMPUTER

#### ( VLAN , TRUNK )

#### A. Praktikum 1 Switch Mode VLAN

1. Merancang topologi jaringan yang akan dibangun dan dikonfigurasi dengan simulasi *cisco packet tracer*.

- Jaringan terbangun dengan user device yang saling terkoneksi dengan Switch

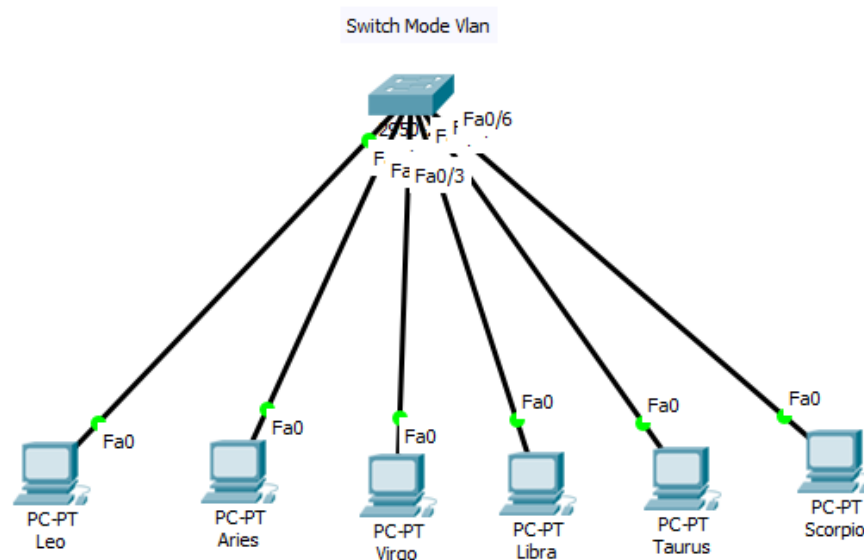

- Jaringan terdiri dari 1 buah switch dan 6 buah host(PC)
2. Konfigurasi IP pada setiap Host (PC)
- Konfigurasi dilakukan dengan detail sebagai berikut :

NO	NAMA PC	IP
1	Leo	= 172.21.1.1/24
2	Aries	= 172.21.1.2/24
3	Virgo	= 172.21.1.3/24
4	Libra	= 172.21.1.4/24
5	Taurus	= 172.21.1.5/24
6	Scorpio	= 172.21.1.6/24

- Konfigurasi IP dari keseluruhan PC pada diatas menggunakan prefik (/) 24 maka dari itu konfigurasi pada setiap PC menggunakan subnet mask 255.255.255.0

3. Melakukan konfigurasi VLAN pada switch

- VLAN pada dasarnya ialah salah satu teknik yang bisa diterapkan di konsep switching dalam jaringan. VLAN banyak digunakan karena banyak menguntungkan dibanding teknik routing.
- Cara kerja dari VLAN adalah semua data yang mengandung informasi pengalamatan akan disimpan dalam sebuah tabel/ database. Switch akan menentukan kemana data akan diforward
- Melakukan konfigurasi sesuai dengan contoh dalam lembar modul praktikum Dengan detail konfigurasi sebagai berikut :

NO	VLAN ID	NAMA VLAN	DAFTAR HOST
1	VLAN 10	ZODIAK1	LEO, LIBRA
2	VLAN 20	ZODIAK2	ARIES, TAURUS
3	VLAN 30	ZODIAK3	VIRGO, SCORPIO

```
Switch#
%SYS-5-CONFIG_I: Configured from console by console

Switch#show vlan brief

VLAN Name                Status    Ports
-----
1    default                active    Fa0/7, Fa0/8,
Fa0/9, Fa0/10              Fa0/11, Fa0/12,
Fa0/13, Fa0/14              Fa0/15, Fa0/16,
Fa0/17, Fa0/18              Fa0/19, Fa0/20,
Fa0/21, Fa0/22              Fa0/23, Fa0/24
10   zodiak1                 active    Fa0/1, Fa0/4
20   zodiak2                 active    Fa0/2, Fa0/5
30   zodiak3                 active    Fa0/3, Fa0/6
1002 fddi-default           active
1003 token-ring-default    active
1004 fddinet-default        active
1005 trnet-default          active
Switch#
```

Gambar setelah dilakukan konfigurasi vlan dan “show vlan brief”

```
Switch#show vlan id 10

VLAN Name                Status    Ports
-----
10   zodiak1                 active    Fa0/1, Fa0/4

VLAN Type  SAID      MTU    Parent RingNo BridgeNo Stp    BrdgMode
Trans1 Trans2
-----
10   enet    100010    1500    -      -      -      -      -
0     0

Switch#
```

Gambar “*show vlan id 10*”

```
Switch#show vlan id 20
```

VLAN Name	Status	Ports
20 zodiak2	active	Fa0/2, Fa0/5

VLAN Type	SAID	MTU	Parent	RingNo	BridgeNo	Stp	BrdgMode
20	enet	100020	1500	-	-	-	-

Gambar “*show vlan id 20*”

```
Switch#show vlan id 30
```

VLAN Name	Status	Ports
30 zodiak3	active	Fa0/3, Fa0/6

VLAN Type	SAID	MTU	Parent	RingNo	BridgeNo	Stp	BrdgMode
30	enet	100030	1500	-	-	-	-


```
Switch#
```

Gambar “*show vlan id 30*”

## B. Praktikum 2 Switch mode VLAN dan Trunk

### 1. Merancang topologi jaringan yang akan dibangun dan dikonfigurasi dengan simulasi *cisco packet tracer*.

- Jaringan terbangun dengan user device yang saling terkoneksi dengan Switch ( 2 )

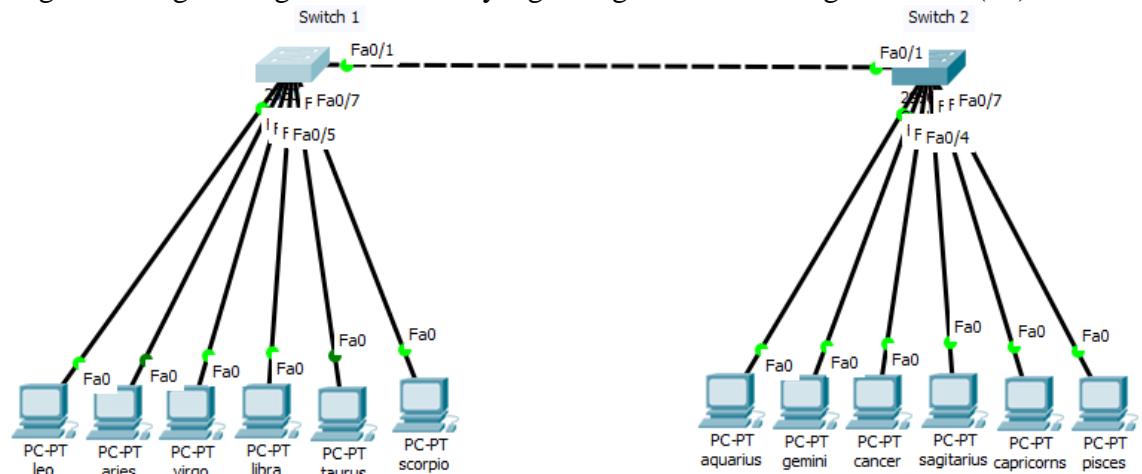

- Jaringan terdiri dari 2 buah switch dan 6 buah host(PC) per segmen switch.

### 2. Konfigurasi IP pada setiap Host (PC)

Konfigurasi dilakukan dengan detail sebagai berikut :

NO	NAMA PC	IP
1	Leo	= 172.21.1.1/24
2	Aries	= 172.21.1.2/24
3	Virgo	= 172.21.2.1/24
4	Libra	= 172.21.2.2/24
5	Taurus	= 172.21.3.1/24
6	Scorpio	= 172.21.3.2/24
7	Aquarius	= 172.21.1.3/24
8	Gemini	= 172.21.1.4/24
9	Cancer	= 172.21.2.3/24
10	Sagittarius	= 172.21.2.4/24
11	Capricorn	= 172.21.3.3/24
12	Pisces	= 172.21.3.4/24

- Konfigurasi IP dari keseluruhan PC pada diatas menggunakan prefik (/) 24 maka dari itu konfigurasi pada setiap PC menggunakan subnet mask 255.255.255.0

### 3. Melakukan konfigurasi VLAN dan Trunk

- Konfigurasi VLAN di switch segmen 1 sama dengan pada kegiatan 1 diatas pada switch tunggal

#### a. Pada segmen switch 1

NO	VLAN ID	NAMA VLAN	DAFTAR HOST
1	VLAN 10	ZODIAK1	LEO, LIBRA
2	VLAN 20	ZODIAK2	ARIES, TAURUS
3	VLAN 30	ZODIAK3	VIRGO, SCORPIO

Hasilnya adalah sebagai berikut :

```
Switch#
%SYS-5-CONFIG_I: Configured from console by console

Switch#show vlan brief

VLAN Name                Status    Ports
-----
1    default                active    Fa0/1, Fa0/8,
Fa0/9, Fa0/10
Fa0/11, Fa0/12,
Fa0/13, Fa0/14
Fa0/15, Fa0/16,
Fa0/17, Fa0/18
Fa0/19, Fa0/20,
Fa0/21, Fa0/22
Fa0/23, Fa0/24
10   zodiak1                 active    Fa0/2, Fa0/5
20   zodiak2                 active    Fa0/3, Fa0/6
30   zodiak3                 active    Fa0/4, Fa0/7
1002 fddi-default          active
1003 token-ring-default    active
1004 fddinet-default        active
1005 trnet-default          active
Switch#
```

Gambar Show Vlan Brief segmen switch 1

- Menambahkan konfigurasi Trunking pada segmen switch 1
- Menentukan port yang akan dilakukan konfigurasi Trunk pada switch
- Melakukan setting konfigurasi sesuai modul praktikum

```
Switch#show int fa 0/1 switchport
Name: Fa0/1
Switchport: Enabled
Administrative Mode: trunk
Operational Mode: trunk
Administrative Trunking Encapsulation: dot1q
Operational Trunking Encapsulation: dot1q
Negotiation of Trunking: On
Access Mode VLAN: 1 (default)
Trunking Native Mode VLAN: 1 (default)
Voice VLAN: none
Administrative private-vlan host-association: none
Administrative private-vlan mapping: none
Administrative private-vlan trunk native VLAN: none
Administrative private-vlan trunk encapsulation: dot1q
Administrative private-vlan trunk normal VLANs: none
Administrative private-vlan trunk private VLANs: none
Operational private-vlan: none
Trunking VLANs Enabled: All
Pruning VLANs Enabled: 2-1001
Capture Mode Disabled
Capture VLANs Allowed: ALL
Protected: false
--More-- |
```

Gambar status trunk pada segmen switch 1

```

Switch#show int trunk
Port      Mode      Encapsulation  Status      Native vlan
Fa0/1     on        802.1q         trunking    1

Port      Vlans allowed on trunk
Fa0/1     1-1005

Port      Vlans allowed and active in management domain
Fa0/1     1,10,20,30

Port      Vlans in spanning tree forwarding state and not pruned
Fa0/1     1,10,20,30

Switch#

```

Gambar detail interfaces trunk switch 1

b. Pada segmen switch 2

NO	VLAN ID	NAMA VLAN	DAFTAR HOST
1	VLAN 10	ZODIAK1	AQUARIUS, GEMINI
2	VLAN 20	ZODIAK2	CANCER, SAGITARIUS
3	VLAN 30	ZODIAK3	CAPRICORN, PISCES

Hasilnya adalah sebagai berikut :

```

Switch#show vlan

VLAN Name                Status    Ports
-----
1    default                active    Fa0/8, Fa0/9, Fa0/10, Fa0/11
                                           Fa0/12, Fa0/13, Fa0/14, Fa0/15
                                           Fa0/16, Fa0/17, Fa0/18, Fa0/19
                                           Fa0/20, Fa0/21, Fa0/22, Fa0/23
                                           Fa0/24
10   zodiak1                 active    Fa0/2, Fa0/3
20   zodiak2                 active    Fa0/4, Fa0/5
30   zodiak3                 active    Fa0/6, Fa0/7
1002 fddi-default           active
1003 token-ring-default    active
1004 fddinet-default        active
1005 trnet-default          active

VLAN Type  SAID      MTU    Parent RingNo BridgeNo  Stp  BrdgMode Trans1 Trans2
-----
1    enet    100001    1500    -      -      -        -   -          0      0
10   enet    100010    1500    -      -      -        -   -          0      0
20   enet    100020    1500    -      -      -        -   -          0      0
30   enet    100030    1500    -      -      -        -   -          0      0
1002 fddi    101002    1500    -      -      -        -   -          0      0
1003 tr     101003    1500    -      -      -        -   -          0      0
1004 fdnet  101004    1500    -      -      -        ieee -          0      0
1005 trnet  101005    1500    -      -      -        ibm  -          0      0

VLAN Type  SAID      MTU    Parent RingNo BridgeNo  Stp  BrdgMode Trans1 Trans2
-----

Remote SPAN VLANs
-----

Primary Secondary Type      Ports
-----
Switch#

```

Gambar Show Vlan Brief segmen switch 1

- Menambahkan konfigurasi Trunking pada segmen switch 2
- Menentukan port yang akan dilakukan konfigurasi Trunk pada switch
- Melakukan setting konfigurasi sesuai seperti switch 1

```
Switch#show int fa 0/1 switchport
Name: Fa0/1
Switchport: Enabled
Administrative Mode: trunk
Operational Mode: trunk
Administrative Trunking Encapsulation: dot1q
Operational Trunking Encapsulation: dot1q
Negotiation of Trunking: On
Access Mode VLAN: 1 (default)
Trunking Native Mode VLAN: 1 (default)
Voice VLAN: none
Administrative private-vlan host-association: none
Administrative private-vlan mapping: none
Administrative private-vlan trunk native VLAN: none
Administrative private-vlan trunk encapsulation: dot1q
Administrative private-vlan trunk normal VLANs: none
Administrative private-vlan trunk private VLANs: none
Operational private-vlan: none
Trunking VLANs Enabled: All
Pruning VLANs Enabled: 2-1001
Capture Mode Disabled
Capture VLANs Allowed: ALL
Protected: false
Appliance trust: none
```

Gambar status trunk pada segmen switch 2

```
Switch#show int trunk
Port      Mode      Encapsulation  Status      Native vlan
Fa0/1     on        802.1q         trunking    1

Port      Vlans allowed on trunk
Fa0/1     1-1005

Port      Vlans allowed and active in management domain
Fa0/1     1,10,20,30

Port      Vlans in spanning tree forwarding state and not
pruned
Fa0/1     1,10,20,30
```

Gambar detail interfaces trunk switch 2

4. Melakukan uji kenoksi dengan “PING”

a. PC LEO ke ARIES

```
C:\>ping 172.21.1.2

Pinging 172.21.1.2 with 32 bytes of data:

Request timed out.
Request timed out.
Request timed out.
Request timed out.

Ping statistics for 172.21.1.2:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),
```

b. PC LEO ke AQUARIUS

```
C:\>ping 172.21.1.3

Pinging 172.21.1.3 with 32 bytes of data:

Reply from 172.21.1.3: bytes=32 time=1ms TTL=128
Reply from 172.21.1.3: bytes=32 time<1ms TTL=128
Reply from 172.21.1.3: bytes=32 time<1ms TTL=128
Reply from 172.21.1.3: bytes=32 time<1ms TTL=128

Ping statistics for 172.21.1.3:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 1ms, Average = 0ms
```

c. PC LEO ke PISCES

```
Packet Tracer PC Command Line 1.0
C:\>ping 172.21.3.4

Pinging 172.21.3.4 with 32 bytes of data:

Request timed out.
Request timed out.
Request timed out.
Request timed out.

Ping statistics for 172.21.3.4:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),

C:\>|
```

d. PC LIBRA ke CANCER

```
Packet Tracer PC Command Line 1.0
C:\>ping 172.21.2.3

Pinging 172.21.2.3 with 32 bytes of data:

Request timed out.
Request timed out.
Request timed out.
Request timed out.

Ping statistics for 172.21.2.3:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),
```



e. PC LIBRA ke LEO

```
C:\>ping 172.21.1.1

Pinging 172.21.1.1 with 32 bytes of data:

Request timed out.
Request timed out.
Request timed out.
Request timed out.

Ping statistics for 172.21.1.1:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),
```

*Thank You!*