Nama : Hastyana Rihardneswara

NIM : L200170172

Kelas : D

1. Topologi

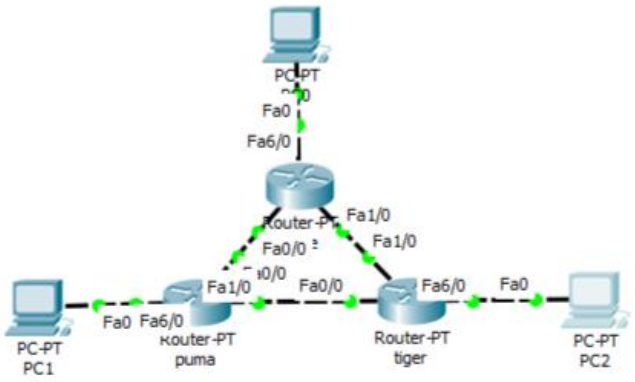

2. Konfigurasi router dengan IP
   a. Eagle

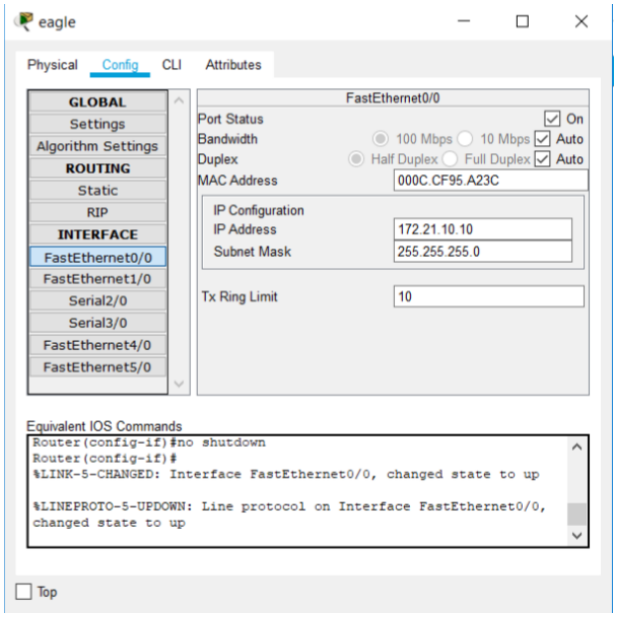

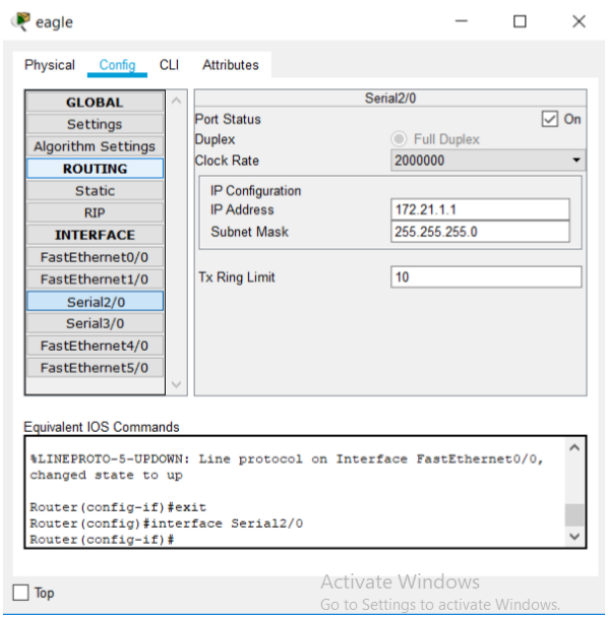

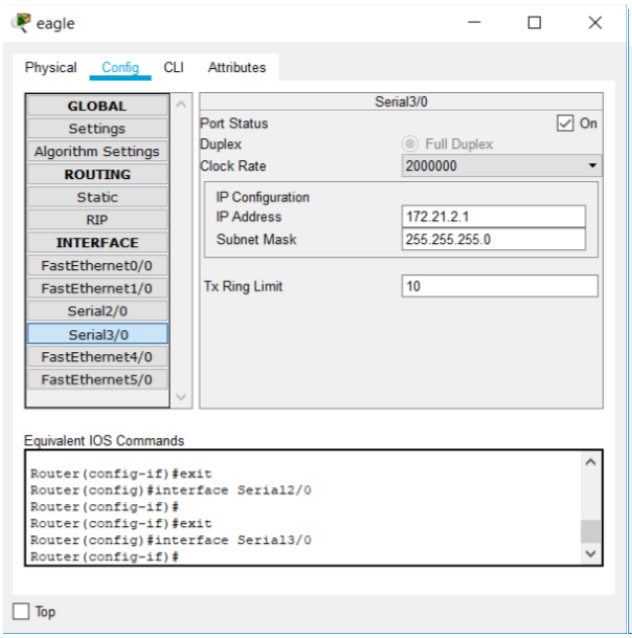
eagle
Physical
Config
CLI
Attributes
GLOBAL
Settings
Algorithm Settings
ROUTING
Static
RIP
INTERFACE
FastEthernet0/0
FastEthernet1/0
Serial2/0
Serial3/0
FastEthernet4/0
FastEthernet5/0
Serial3/0
Port Status
On
Duplex
Full Duplex
Clock Rate
2000000
IP Configuration
IP Address
172.21.2.1
Subnet Mask
255.255.255.0
Tx Ring Limit
10
Equivalent IOS Commands
Router(config-if)#exit
Router(config)#interface Serial2/0
Router(config-if)#
Router(config-if)#exit
Router(config)#interface Serial3/0
Router(config-if)#
Top

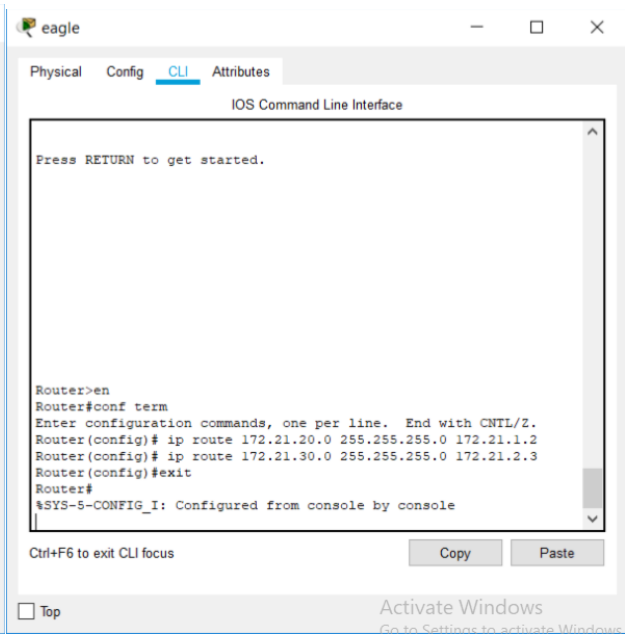
eagle
Physical
Config
CLI
Attributes
IOS Command Line Interface
Press RETURN to get started.
Router>en
Router#conf term
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)# ip route 172.21.20.0 255.255.255.0 172.21.1.2
Router(config)# ip route 172.21.30.0 255.255.255.0 172.21.2.3
Router(config)#exit
Router#
%SYS-5-CONFIG_I: Configured from console by console
Ctrl+F6 to exit CLI focus
Copy
Paste
Top
Activate Windows

b. Puma

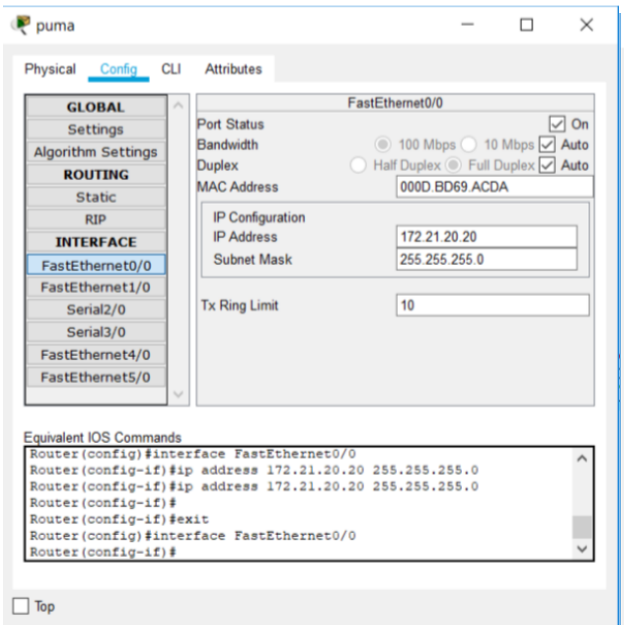
puma
Physical
Config
CLI
Attributes
GLOBAL
Settings
Algorithm Settings
ROUTING
Static
RIP
INTERFACE
FastEthernet0/0
FastEthernet1/0
Serial2/0
Serial3/0
FastEthernet4/0
FastEthernet5/0
FastEthernet0/0
Port Status
On
Bandwidth
100 Mbps
10 Mbps
Auto
Duplex
Half Duplex
Full Duplex
Auto
MAC Address
000D.BD69.ACDA
IP Configuration
IP Address
172.21.20.20
Subnet Mask
255.255.255.0
Tx Ring Limit
10
Equivalent IOS Commands
Router(config)#interface FastEthernet0/0
Router(config-if)#ip address 172.21.20.20 255.255.255.0
Router(config-if)#ip address 172.21.20.20 255.255.255.0
Router(config-if)#
Router(config-if)#exit
Router(config)#interface FastEthernet0/0
Router(config-if)#
Top

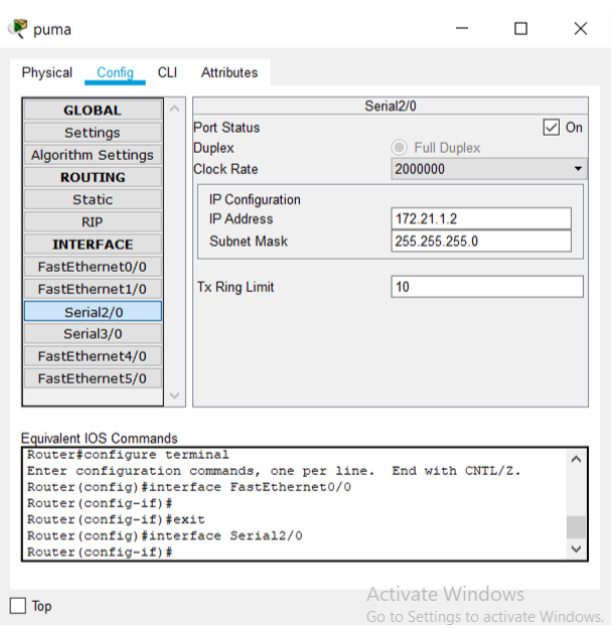
puma
Physical
Config
CLI
Attributes
GLOBAL
Settings
Algorithm Settings
ROUTING
Static
RIP
INTERFACE
FastEthernet0/0
FastEthernet1/0
Serial2/0
Serial3/0
FastEthernet4/0
FastEthernet5/0
Serial2/0
Port Status
On
Duplex
Full Duplex
Clock Rate
2000000
IP Configuration
IP Address
172.21.1.2
Subnet Mask
255.255.255.0
Tx Ring Limit
10
Equivalent IOS Commands
Router#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#interface FastEthernet0/0
Router(config-if)#
Router(config-if)#exit
Router(config)#interface Serial2/0
Router(config-if)#
Top
Activate Windows
Go to Settings to activate Windows.

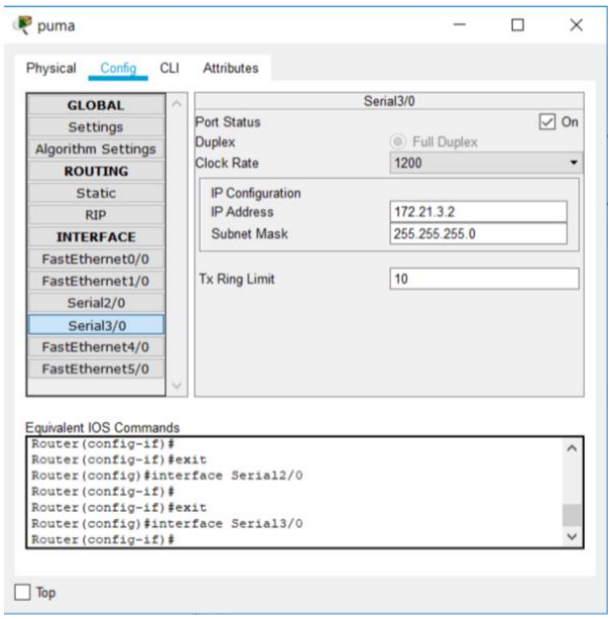
puma
Physical
Config
CLI
Attributes
GLOBAL
Settings
Algorithm Settings
ROUTING
Static
RIP
INTERFACE
FastEthernet0/0
FastEthernet1/0
Serial2/0
Serial3/0
FastEthernet4/0
FastEthernet5/0
Serial3/0
Port Status
On
Duplex
Full Duplex
Clock Rate
1200
IP Configuration
IP Address
172.21.3.2
Subnet Mask
255.255.255.0
Tx Ring Limit
10
Equivalent IOS Commands
Router(config-if)#
Router(config-if)#exit
Router(config)#interface Serial2/0
Router(config-if)#
Router(config-if)#exit
Router(config)#interface Serial3/0
Router(config-if)#
Top

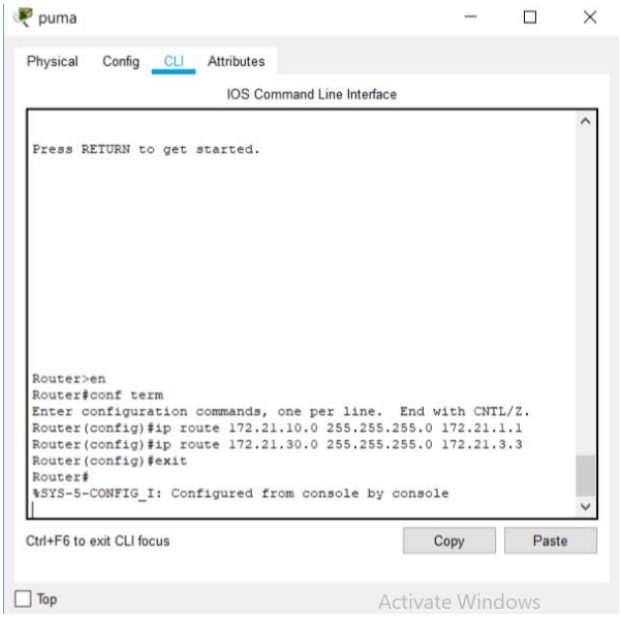
puma
Physical
Config
CLI
Attributes
IOS Command Line Interface
Press RETURN to get started.
Router>en
Router#conf term
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#ip route 172.21.10.0 255.255.255.0 172.21.1.1
Router(config)#ip route 172.21.30.0 255.255.255.0 172.21.3.3
Router(config)#exit
Router#
%SYS-5-CONFIG_I: Configured from console by console
Ctrl+F6 to exit CLI focus
Copy
Paste
Top
Activate Windows

c. Tiger

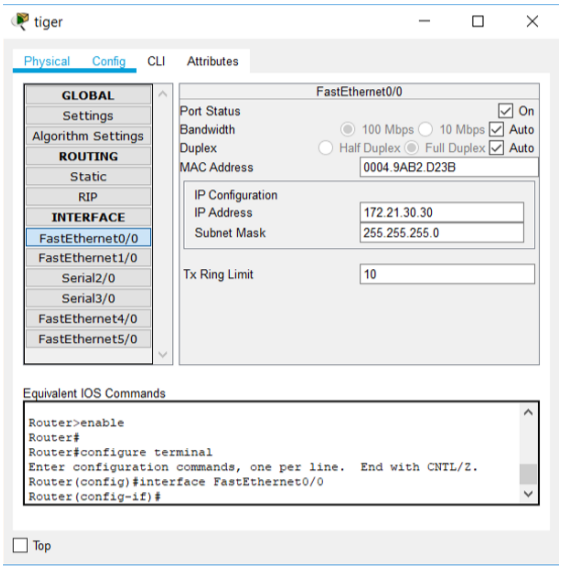
tiger
Physical
Config
CLI
Attributes
GLOBAL
Settings
Algorithm Settings
ROUTING
Static
RIP
INTERFACE
FastEthernet0/0
FastEthernet1/0
Serial2/0
Serial3/0
FastEthernet4/0
FastEthernet5/0
FastEthernet0/0
Port Status
On
Bandwidth
100 Mbps
10 Mbps
Auto
Duplex
Half Duplex
Full Duplex
Auto
MAC Address
0004.9AB2.D23B
IP Configuration
IP Address
172.21.30.30
Subnet Mask
255.255.255.0
Tx Ring Limit
10
Equivalent IOS Commands
Router>enable
Router#
Router#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#interface FastEthernet0/0
Router(config-if)#
Top

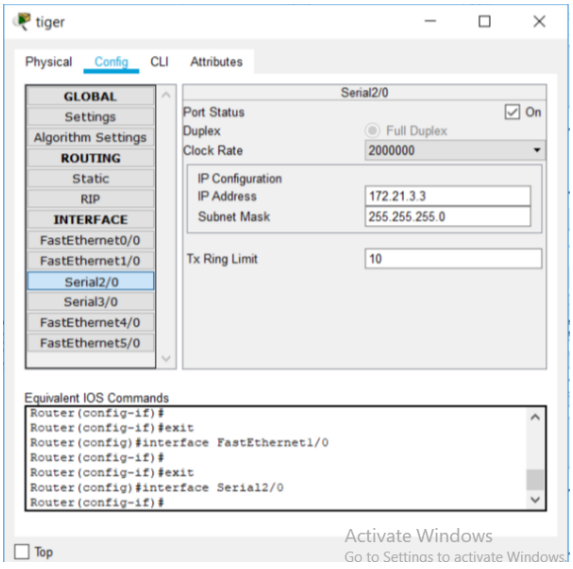
tiger
Physical
Config
CLI
Attributes
GLOBAL
Settings
Algorithm Settings
ROUTING
Static
RIP
INTERFACE
FastEthernet0/0
FastEthernet1/0
Serial2/0
Serial3/0
FastEthernet4/0
FastEthernet5/0
Serial2/0
Port Status
On
Duplex
Full Duplex
Clock Rate
2000000
IP Configuration
IP Address
172.21.3.3
Subnet Mask
255.255.255.0
Tx Ring Limit
10
Equivalent IOS Commands
Router(config-if)#
Router(config-if)#exit
Router(config)#interface FastEthernet1/0
Router(config-if)#
Router(config-if)#exit
Router(config)#interface Serial2/0
Router(config-if)#
Top
Activate Windows
Go to Settings to activate Windows.

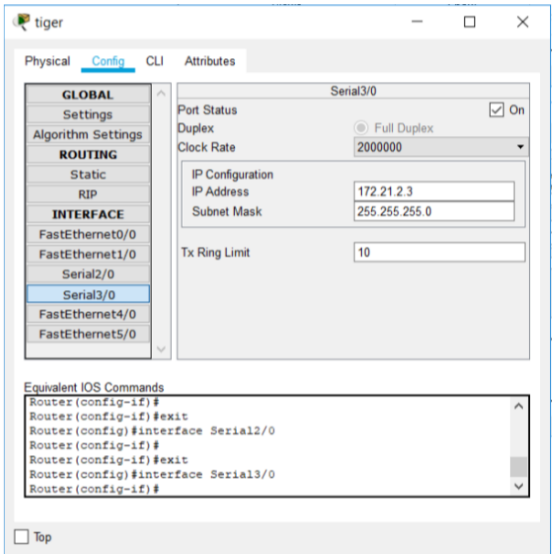

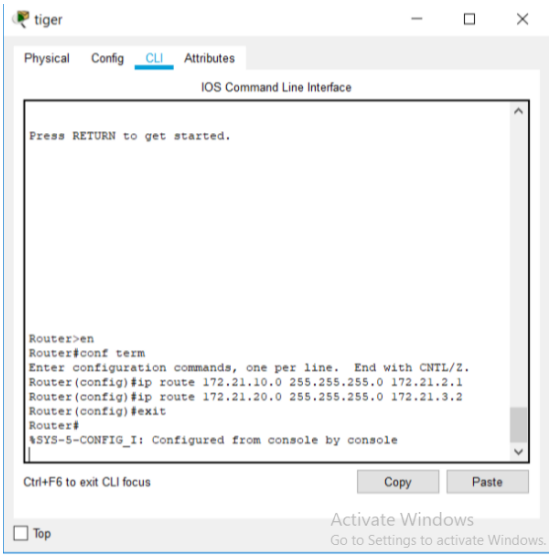

3. Konfigurasi tiap PC

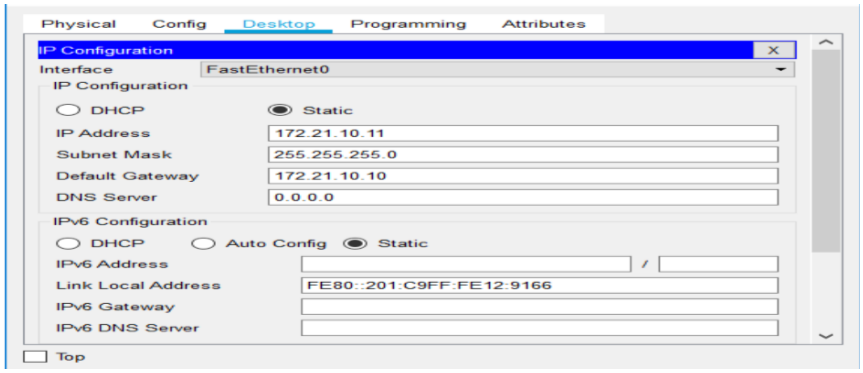

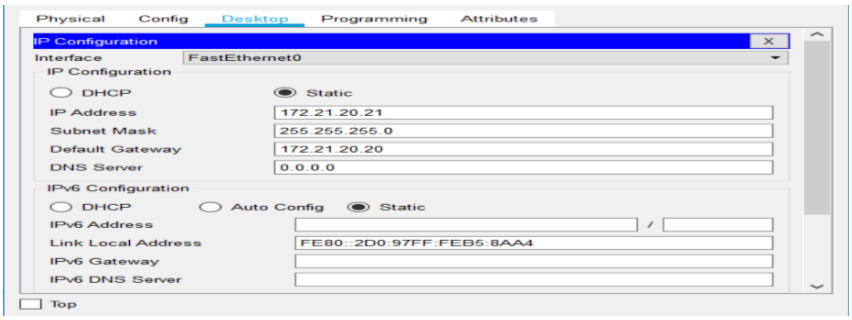

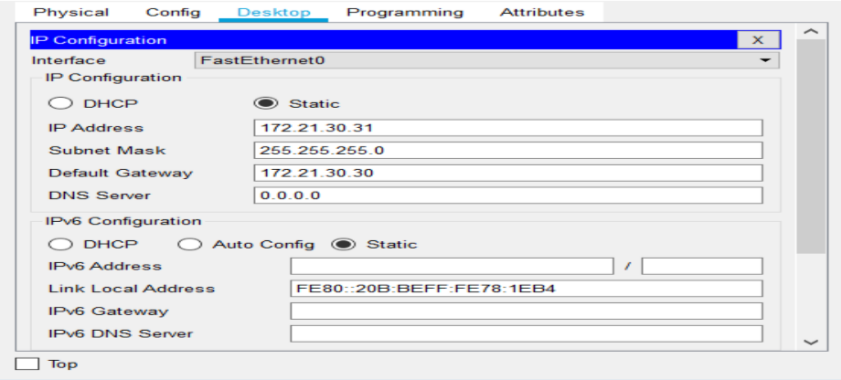
Physical
Config
Desktop
Programming
Attributes
IP Configuration
Interface
FastEthernet0
IP Configuration
DHCP
Static
IP Address
172.21.30.31
Subnet Mask
255.255.255.0
Default Gateway
172.21.30.30
DNS Server
0.0.0.0
IPv6 Configuration
DHCP
Auto Config
Static
IPv6 Address
Link Local Address
FE80::20B:BEFF:FE78:1EB4
IPv6 Gateway
IPv6 DNS Server
Top

4. Pengujian

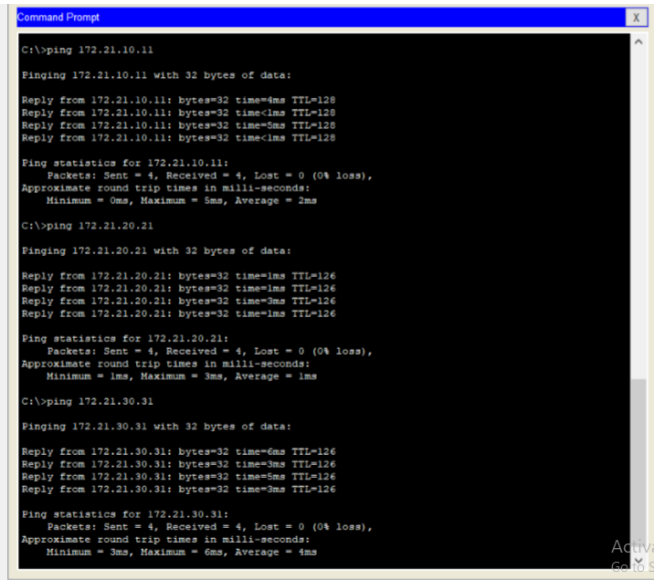
Command Prompt
C:\>ping 172.21.10.11
Pinging 172.21.10.11 with 32 bytes of data:
Reply from 172.21.10.11: bytes=32 time=4ms TTL=128
Reply from 172.21.10.11: bytes=32 time<1ms TTL=128
Reply from 172.21.10.11: bytes=32 time=5ms TTL=128
Reply from 172.21.10.11: bytes=32 time<1ms TTL=128
Ping statistics for 172.21.10.11:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 5ms, Average = 2ms
C:\>ping 172.21.20.21
Pinging 172.21.20.21 with 32 bytes of data:
Reply from 172.21.20.21: bytes=32 time=1ms TTL=126
Reply from 172.21.20.21: bytes=32 time=1ms TTL=126
Reply from 172.21.20.21: bytes=32 time=3ms TTL=126
Reply from 172.21.20.21: bytes=32 time=1ms TTL=126
Ping statistics for 172.21.20.21:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 1ms, Maximum = 3ms, Average = 1ms
C:\>ping 172.21.30.31
Pinging 172.21.30.31 with 32 bytes of data:
Reply from 172.21.30.31: bytes=32 time=6ms TTL=126
Reply from 172.21.30.31: bytes=32 time=3ms TTL=126
Reply from 172.21.30.31: bytes=32 time=5ms TTL=126
Reply from 172.21.30.31: bytes=32 time=3ms TTL=126
Ping statistics for 172.21.30.31:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 3ms, Maximum = 6ms, Average = 4ms