


Nama : Mochammad Itmamul Wafa

Nim : L200170184

Kelas : D

Kegiatan Praktikum Jaringan Komputer modul 9

1. Membuat tapologi dengan 2 pc, 2 switch, 2 router dan 1 server

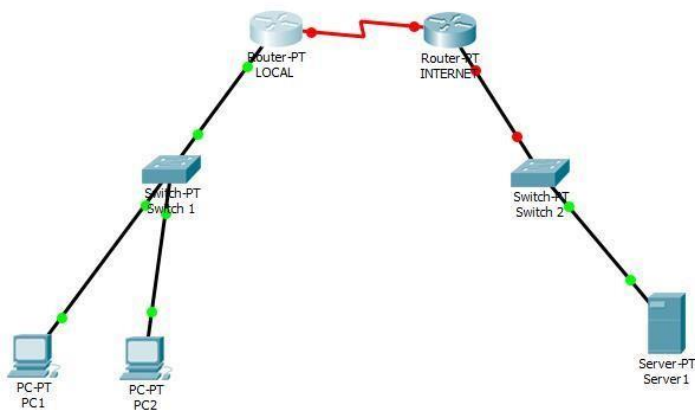

2. Konfigurasi Router Internet


```
Router1
Physical Config CLI Attributes
IOS Command Line Interface
Router>en
Router#conf term
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#hostname Internet
Internet(config)#conf term
%Invalid hex value
Internet(config)#int fa0/0
Internet(config-if)#ip address 10.0.0.1 255.0.0.0
Internet(config-if)#no shut

Internet(config-if)#
%LINK-5-CHANGED: Interface FastEthernet0/0, changed state to up


%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0,
changed state to up


Internet(config-if)#ex
Internet(config)#int se2/0
Internet(config-if)#ip address 20.0.0.2 255.0.0.0
Internet(config-if)#no shut

%LINK-5-CHANGED: Interface Serial12/0, changed state to down
Internet(config-if)#ex
Internet(config)#int se3/0
Internet(config-if)#ex
```

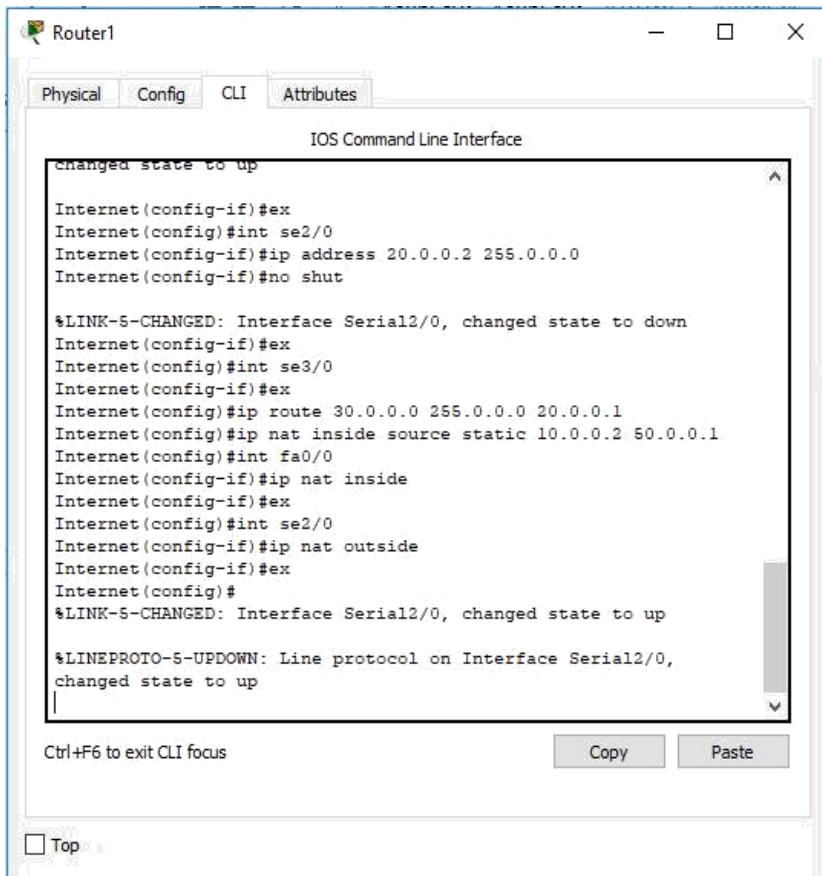


3. Konfigurasi Router Lokal

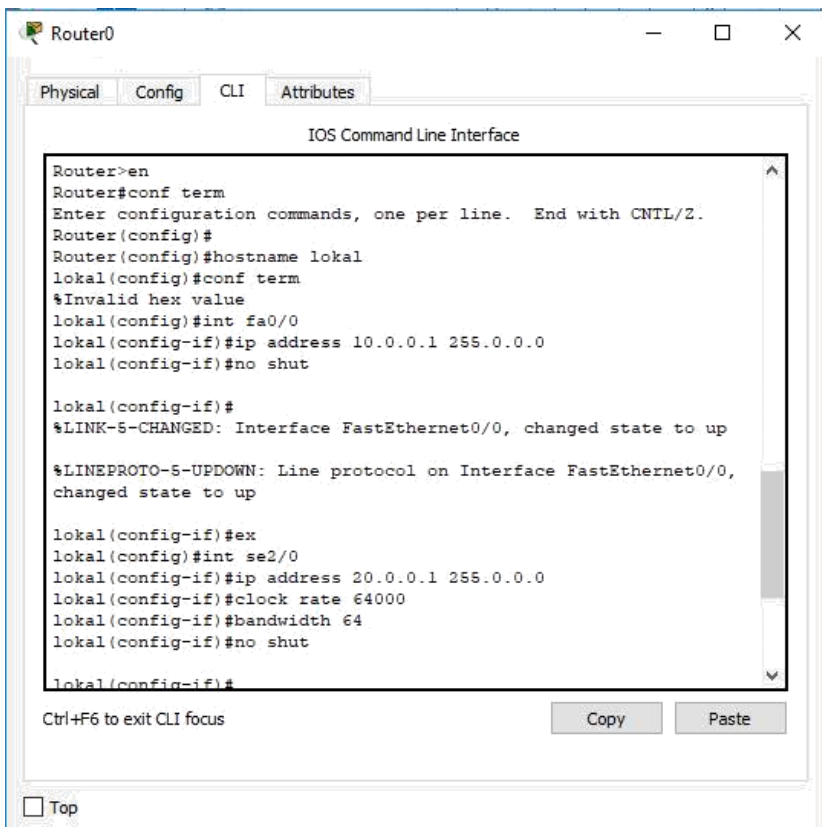


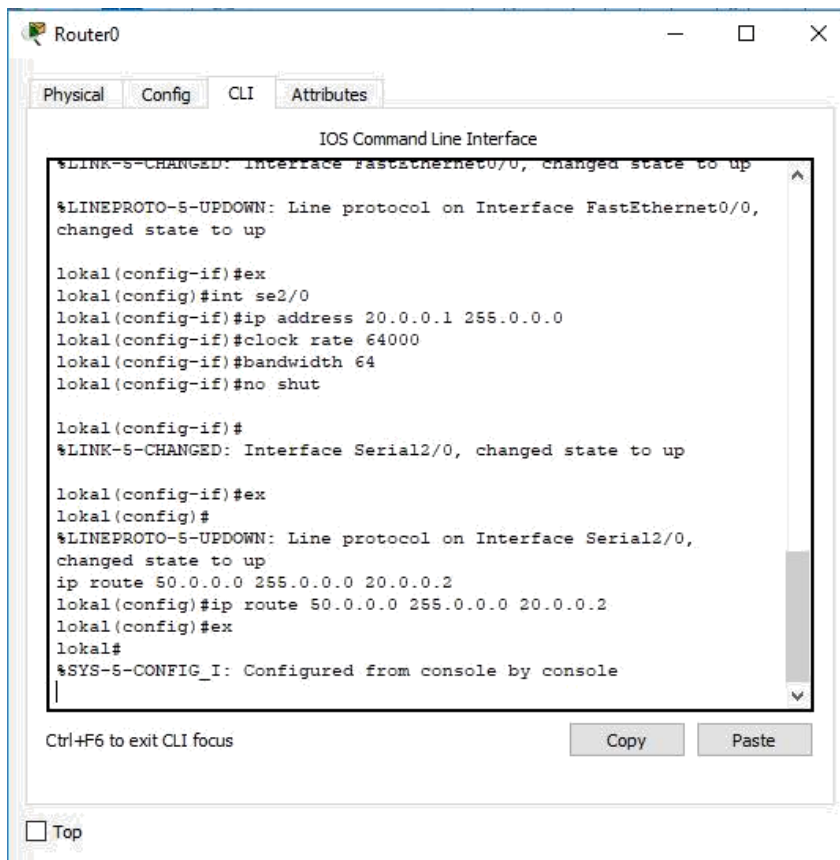

4. Uji coba koneksi dari PC lokal ke web server Ke IP private server dan IP Public server

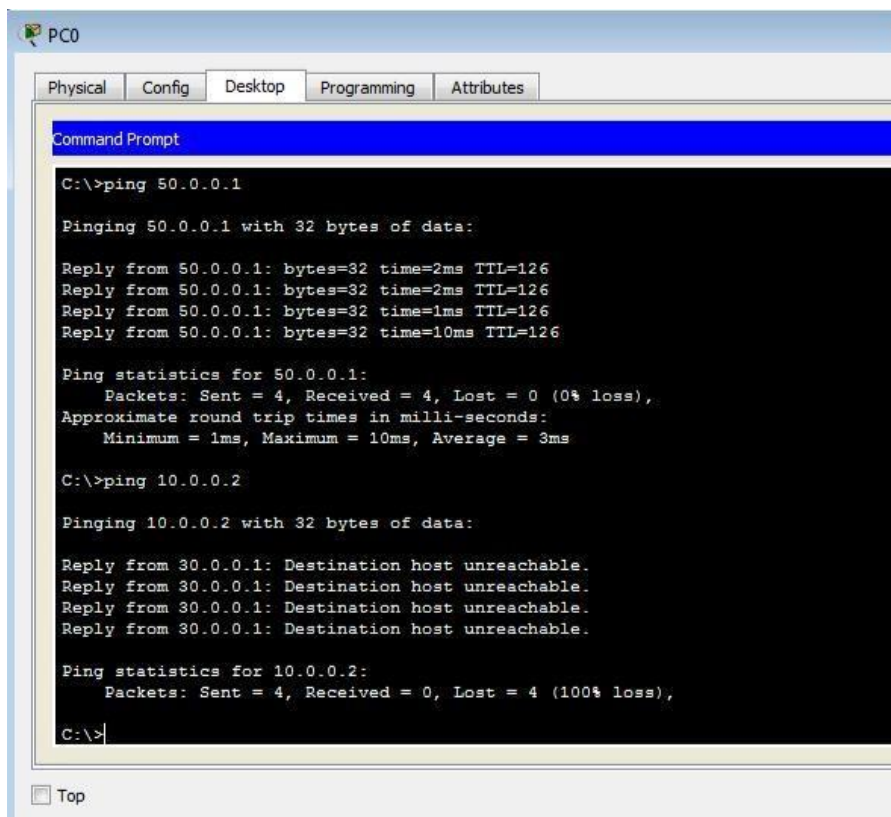

5. Kembangkan Topologi dari langkah 1

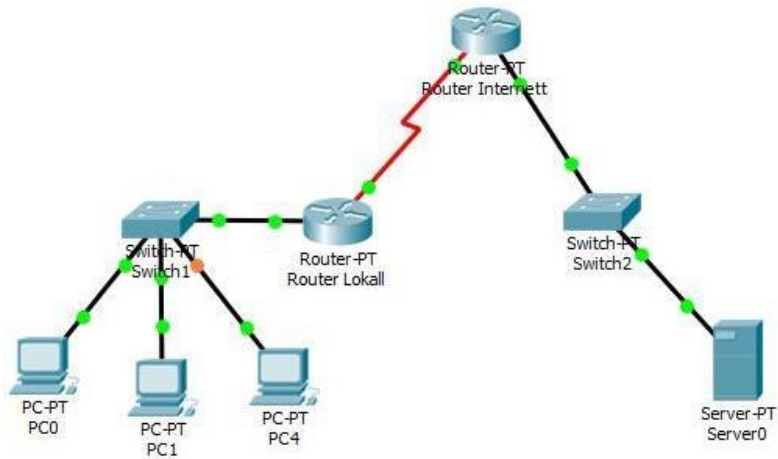

Ping pc 1 dan pc 2 supaya terkoneksi server

```
C:\>ping 50.0.0.1

Pinging 50.0.0.1 with 32 bytes of data:

Reply from 50.0.0.1: bytes=32 time=1ms TTL=126
Reply from 50.0.0.1: bytes=32 time=12ms TTL=126
Reply from 50.0.0.1: bytes=32 time=1ms TTL=126
Reply from 50.0.0.1: bytes=32 time=12ms TTL=126

Ping statistics for 50.0.0.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 1ms, Maximum = 12ms, Average = 6ms

C:\>|
```

```
C:\>ping 50.0.0.1

Pinging 50.0.0.1 with 32 bytes of data:

Reply from 50.0.0.1: bytes=32 time=2ms TTL=126
Reply from 50.0.0.1: bytes=32 time=11ms TTL=126
Reply from 50.0.0.1: bytes=32 time=13ms TTL=126
Reply from 50.0.0.1: bytes=32 time=12ms TTL=126

Ping statistics for 50.0.0.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 2ms, Maximum = 13ms, Average = 9ms

C:\>|
```

