


Nama : Wahyu Setyaji Rama Dwijaya
NIM : L200180065
Kelas : B

MODUL 3


Kegiatan Praktikum

Kegiatan 1


a. Topologi

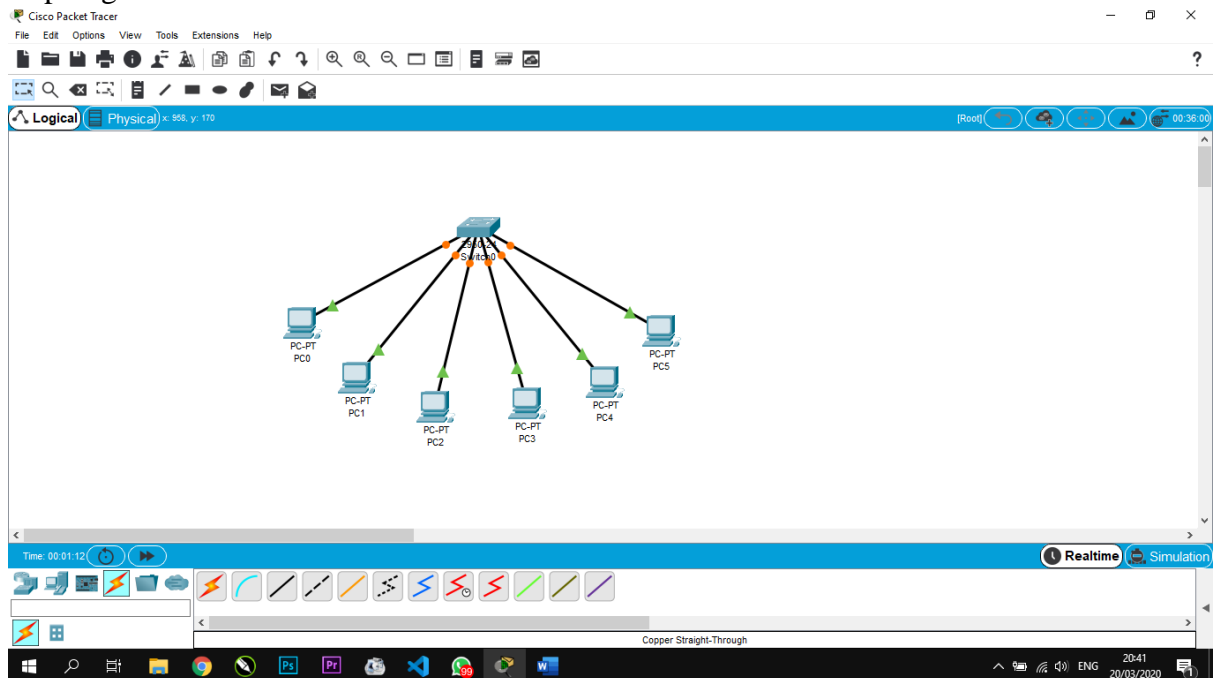


b. Memberi nama perangkat

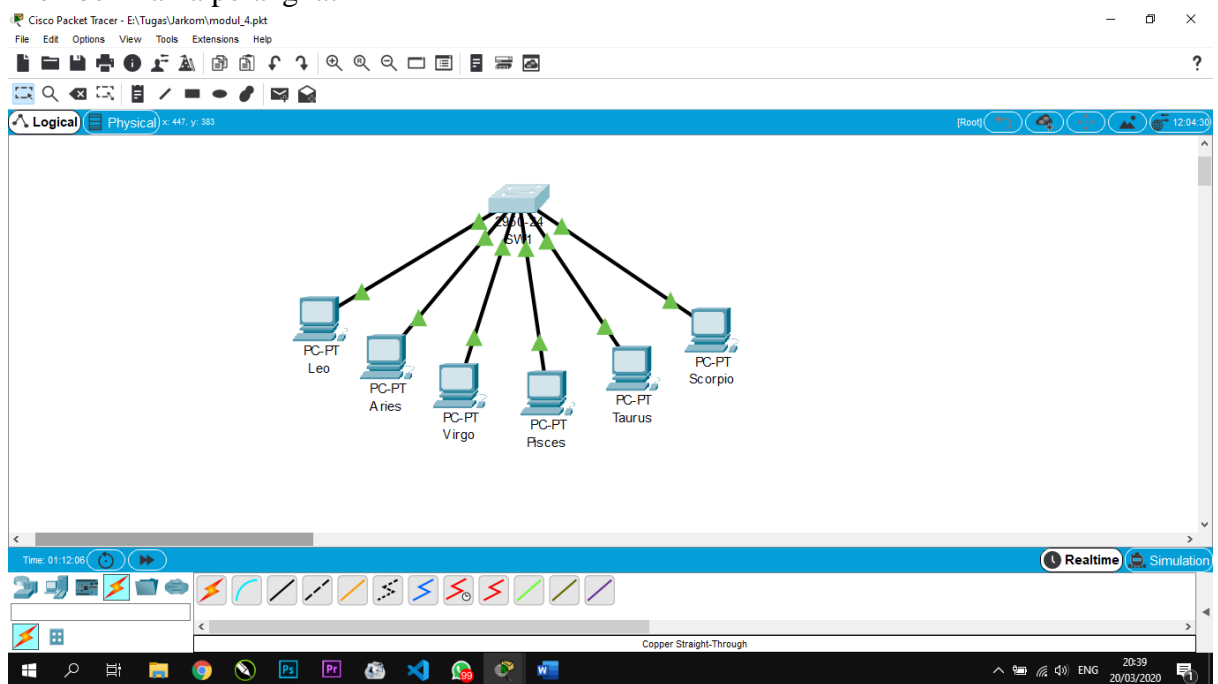


c. Config IP

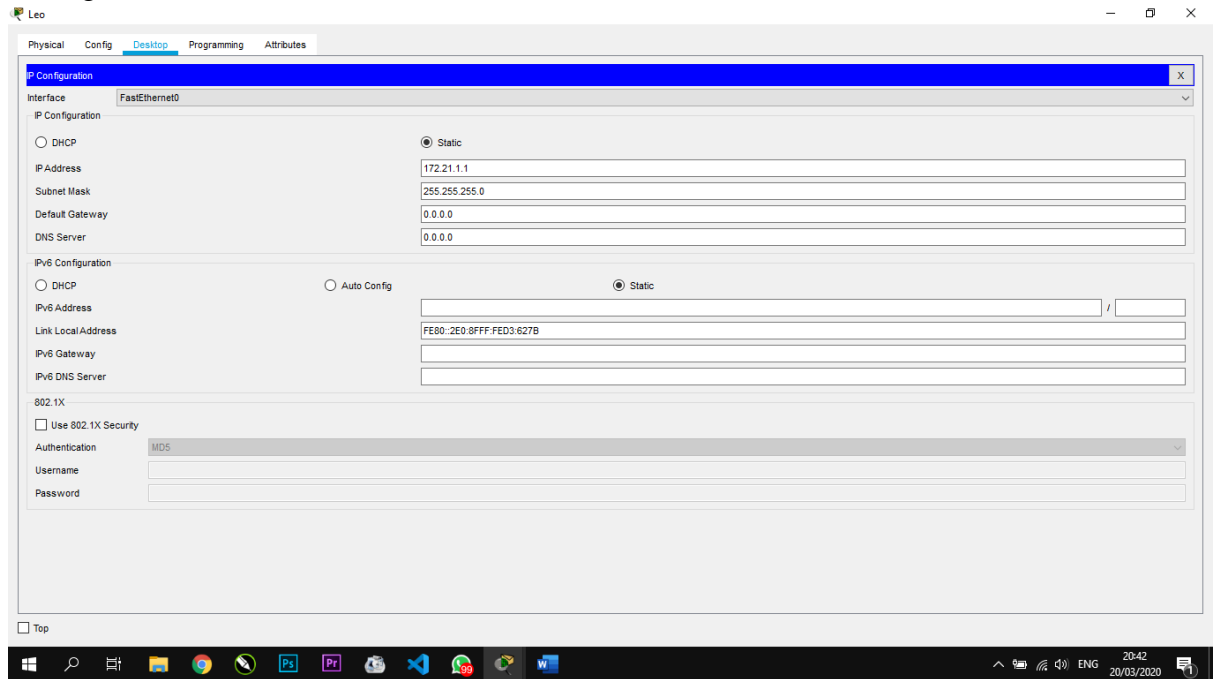


d. Config Switch

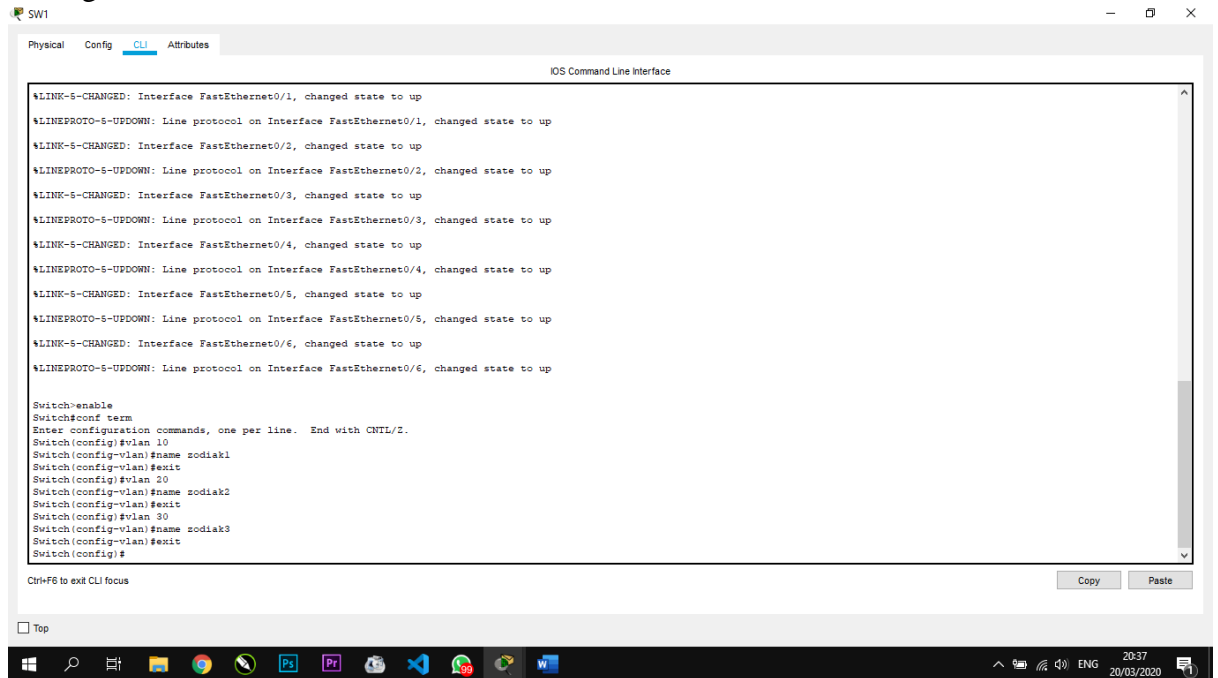

e. Config Port Switch

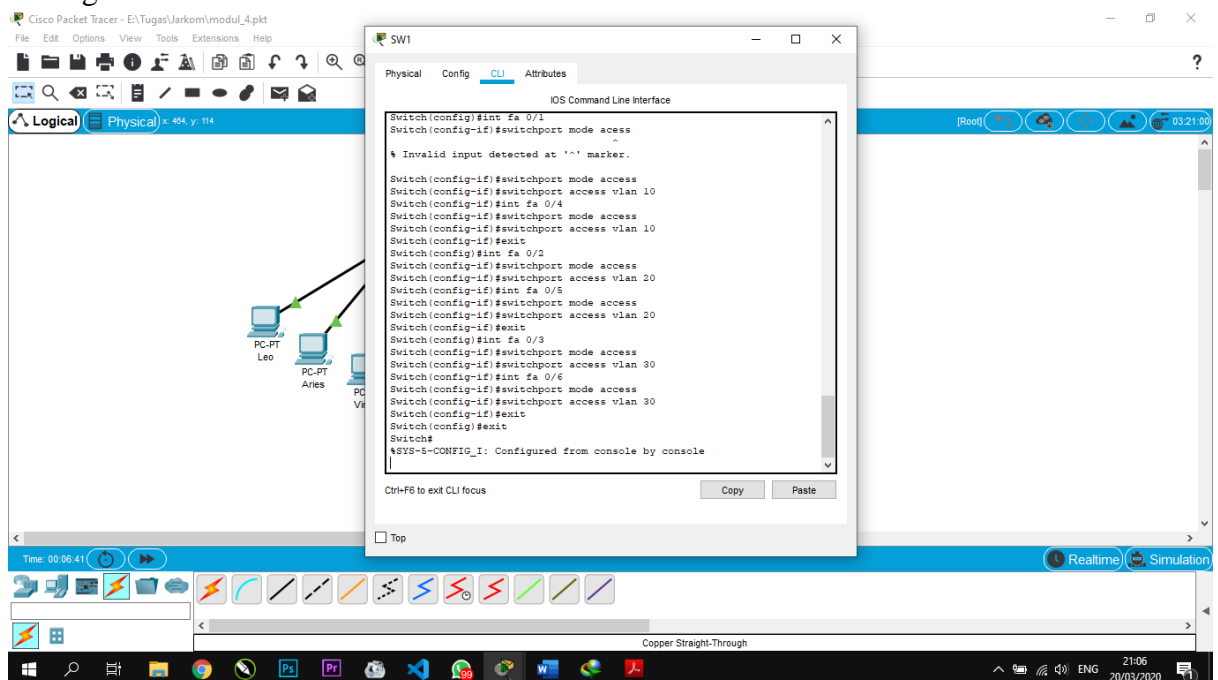

f. Cek Config

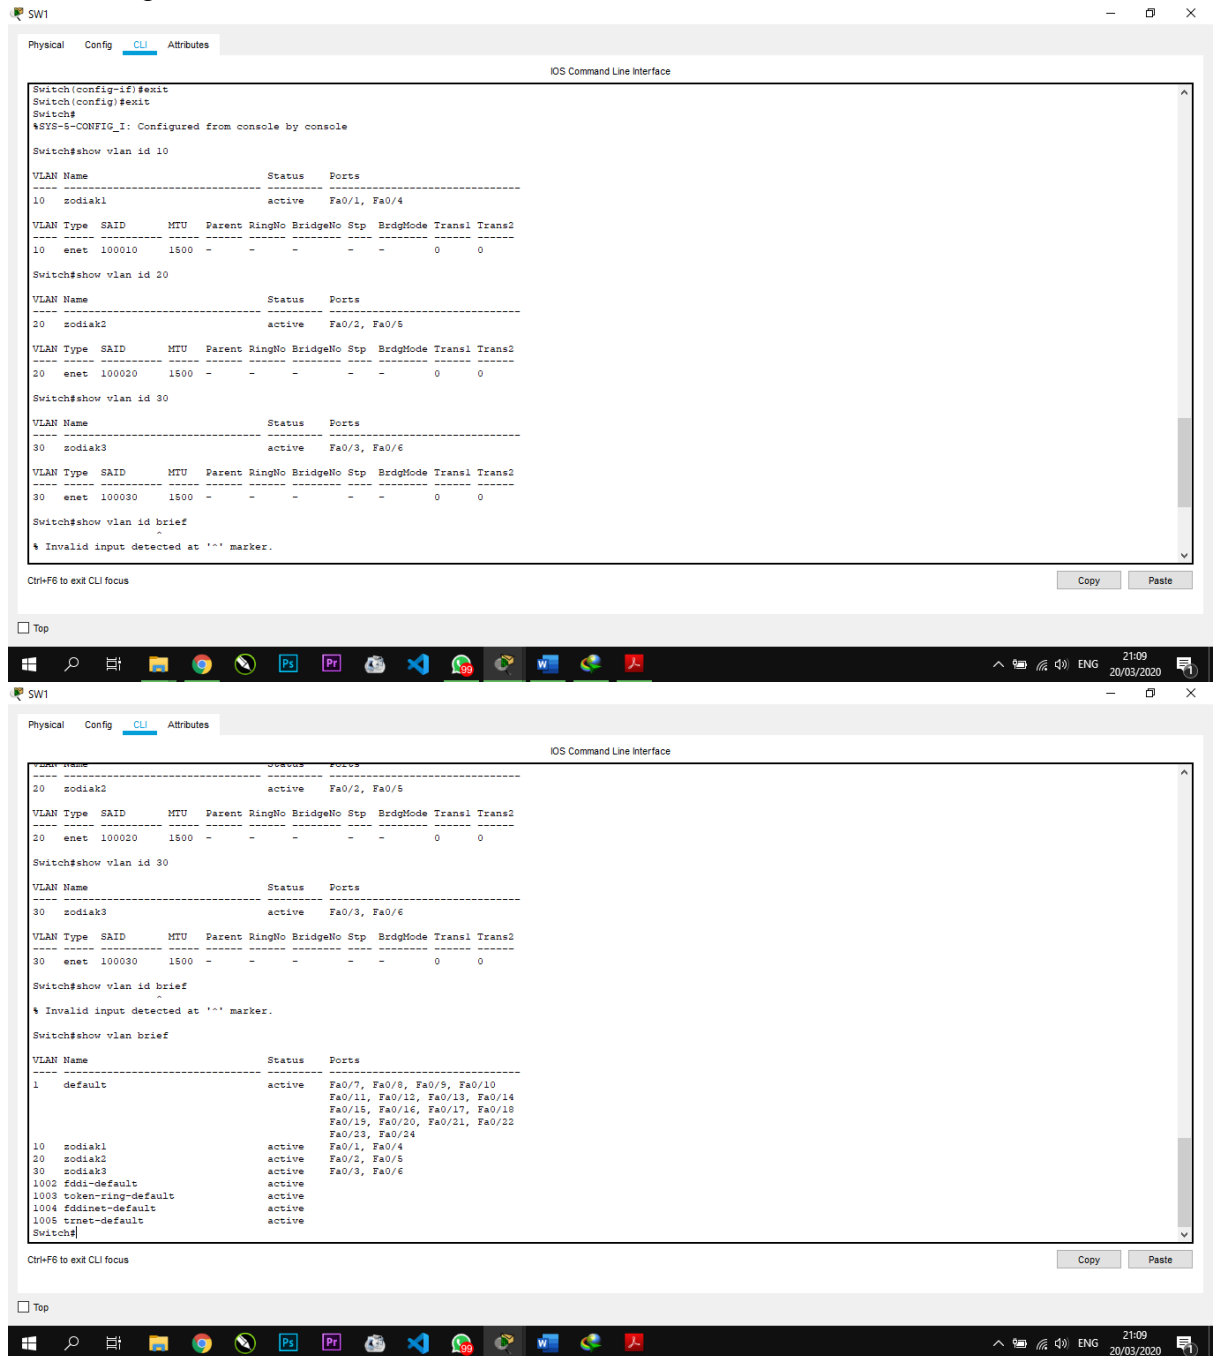

➤ Tugas 6A

- VLAN 10

No	Variabel	Nilai
1.	Nomor VLAN	10
2.	Nama VLAN	zodiak1
3.	Port	Fa 0/1, Fa 0/4
4.	Status	active

- VLAN 20

No	Variabel	Nilai
1.	Nomor VLAN	20
2.	Nama VLAN	zodiak2
3.	Port	Fa 0/2, Fa 0/5
4.	Status	active

- VLAN 30

No	Variabel	Nilai
1.	Nomor VLAN	30
2.	Nama VLAN	zodiak3
3.	Port	Fa 0/3, Fa 0/6
4.	Status	active

➤ Tugas 6B

- VLAN 10

Dengan nomor VLAN, yaitu 10, nama VLAN adalah zodiak1, memiliki port Fa 0/1 dan Fa 0/4 yang merupakan anggota dari zodiak1, yaitu Leo dan Pisces yang berstatus active.

- VLAN 20


Dengan nomor VLAN, yaitu 20, nama VLAN adalah zodiak2, memiliki port Fa 0/2 dan Fa 0/5 yang merupakan anggota dari zodiak2, yaitu Aries dan Taurus yang berstatus active.

- VLAN 30


Dengan nomor VLAN, yaitu 30, nama VLAN adalah zodiak3, memiliki port Fa 0/3 dan Fa 0/6 yang merupakan anggota dari zodiak3, yaitu Virgo dan Scorpio yang berstatus active.

Kegiatan 2

a. Topologi

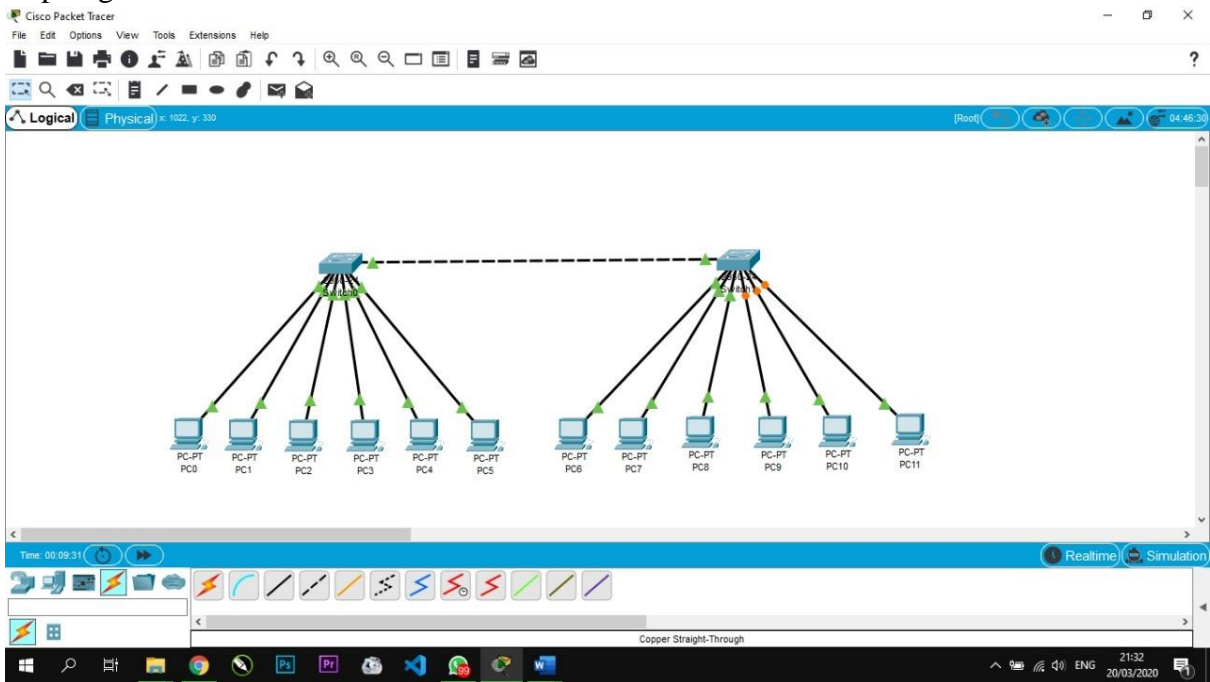

b. Memberi nama perangkat

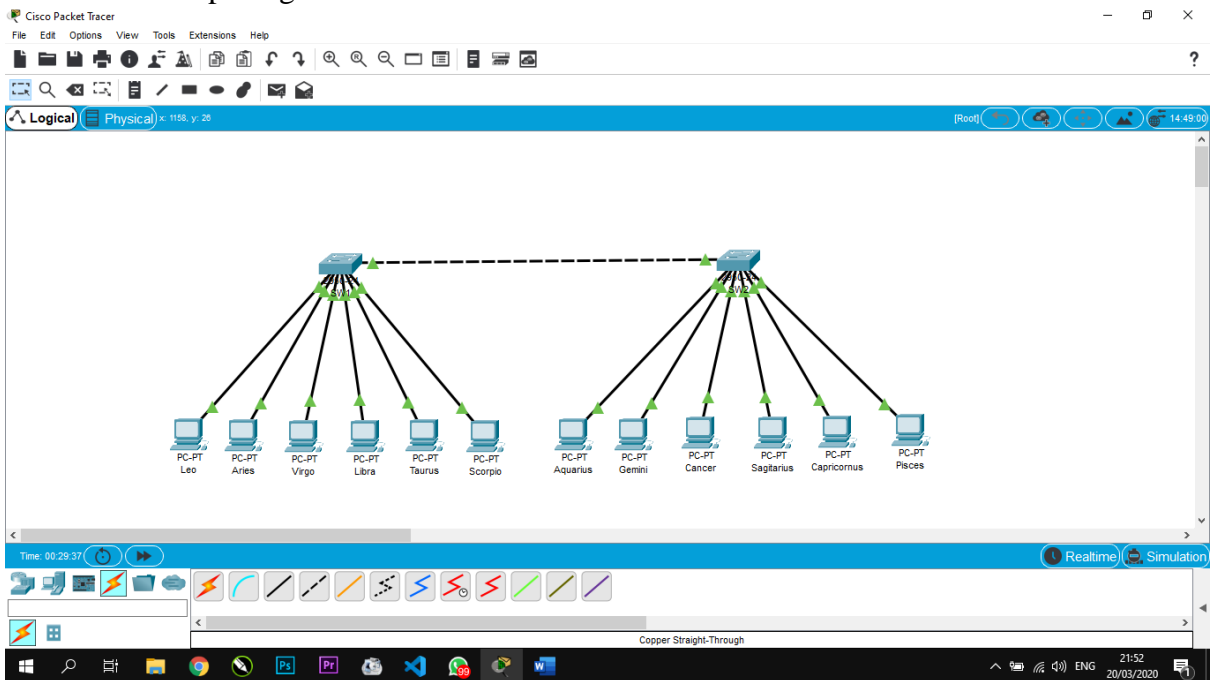

c. Config IP

Leo

Physical Config Desktop Programming Attributes

IP Configuration

Interface FastEthernet0

IP Configuration

☐ DHCP ☒ Static

IPAddress 172.21.1.1

Subnet Mask 255.255.255.0

Default Gateway 0.0.0.0

DNS Server 0.0.0.0

IPv6 Configuration

☐ DHCP ☐ Auto Config ☒ Static

IPv6 Address

Link Local Address FE80::290:CFF:FEAB:5740

IPv6 Gateway

IPv6 DNS Server

802.1X

☐ Use 802.1X Security

Authentication MDS

Username

Password

Top

Aquarius

Physical Config Desktop Programming Attributes

IP Configuration

Interface FastEthernet0

IP Configuration

☐ DHCP ☒ Static

IPAddress 172.21.1.3

Subnet Mask 255.255.255.0

Default Gateway 0.0.0.0

DNS Server 0.0.0.0

IPv6 Configuration

☐ DHCP ☐ Auto Config ☒ Static

IPv6 Address

Link Local Address FE80::260:70FF:FE08:D981

IPv6 Gateway

IPv6 DNS Server

802.1X

☐ Use 802.1X Security

Authentication MDS

Username

Password

Top

Windows taskbar: 22:00 20/03/2020

d. Config Switch 1

SW1

Physical Config CLI Attributes

IOS Command Line Interface

```
%LINK-5-CHANGED: Interface FastEthernet0/2, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/2, changed state to up
%LINK-5-CHANGED: Interface FastEthernet0/3, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/3, changed state to up
%LINK-5-CHANGED: Interface FastEthernet0/4, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/4, changed state to up
%LINK-5-CHANGED: Interface FastEthernet0/5, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/5, changed state to up
%LINK-5-CHANGED: Interface FastEthernet0/6, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/6, changed state to up
%LINK-5-CHANGED: Interface FastEthernet0/7, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/7, changed state to up

Switch#enable
Switch#conf term
Enter configuration commands, one per line. End with CNTL/Z.
Switch(config)#vlan 10
Switch(config-vlan)#name zodiak1
Switch(config-vlan)#exit
Switch(config)#vlan 20
Switch(config-vlan)#name zodiak2
Switch(config-vlan)#exit
Switch(config)#vlan 30
Switch(config-vlan)#name zodiak3
Switch(config-vlan)#exit
Switch(config)#
```


Ctrl+F6 to exit CLI focus

Copy Paste


Top

Windows taskbar: 22:12 20/03/2020


e. Config Port Switch 1

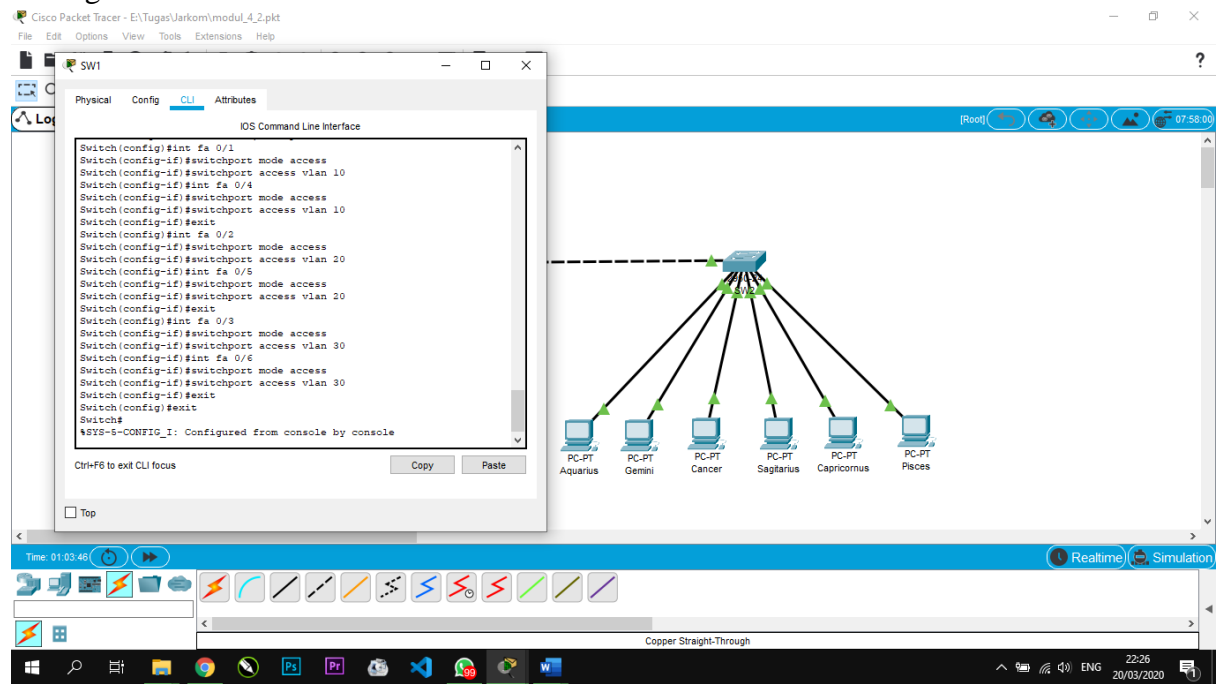

f. Config VLAN Trunking switch 1

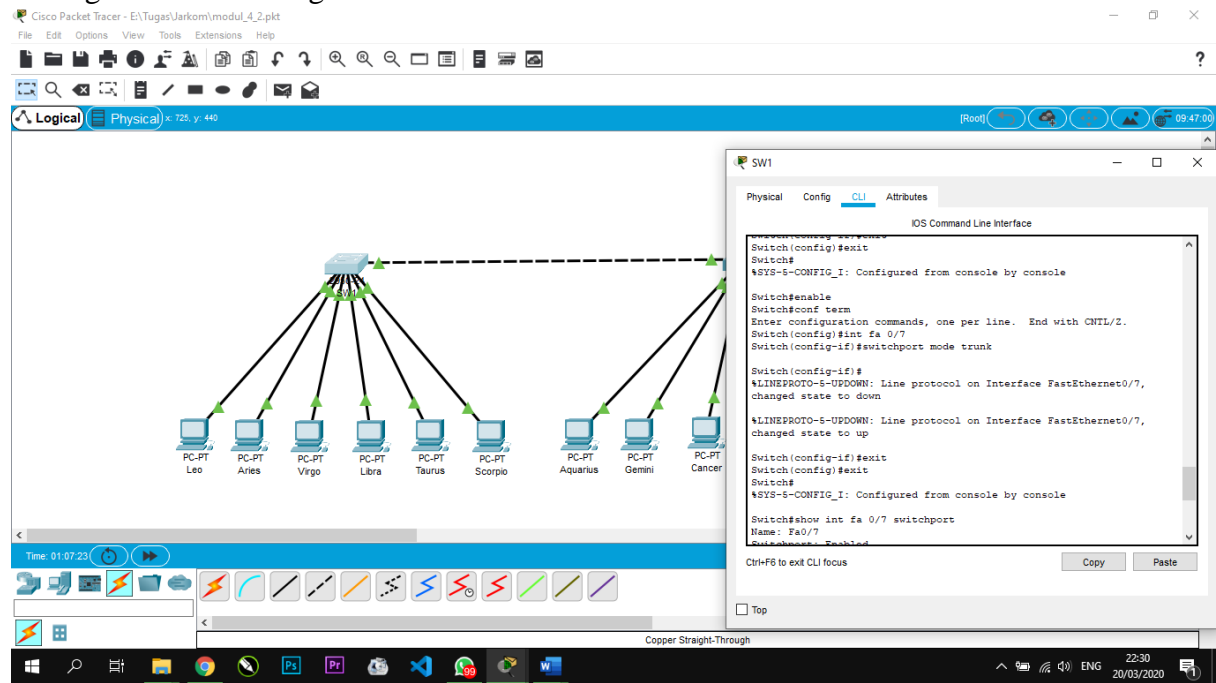


g. Cek Config VLAN Switch 1

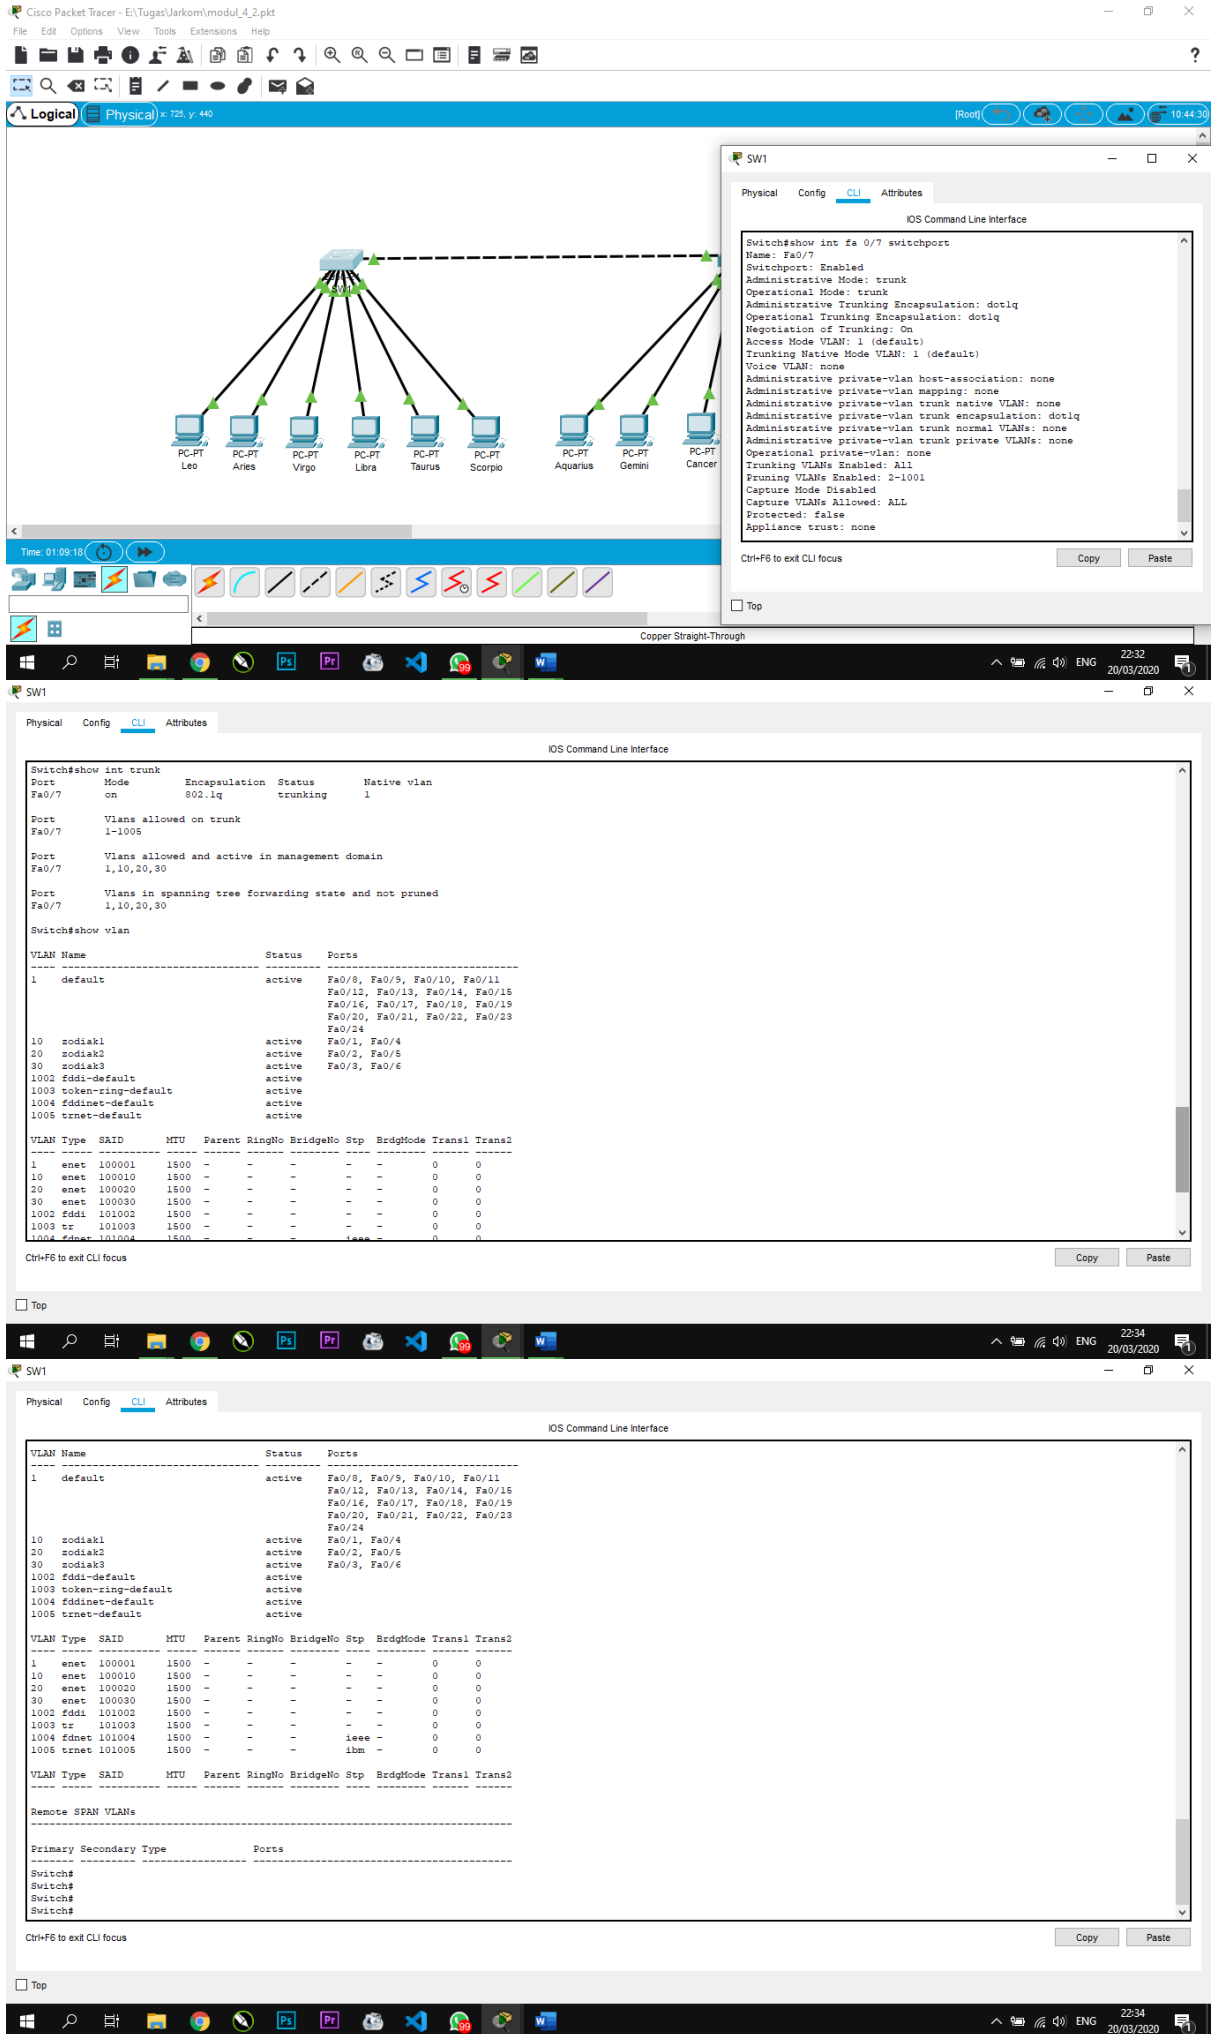

➤ Tugas 7A

Pada langkah ini port yang sudah terkonfigurasi ke dalam vlan yaitu port 0/1 sampai port 0/6, sedangkan port 0/7 untuk trunking antar switch.

h. Ping Leo ke Pisces

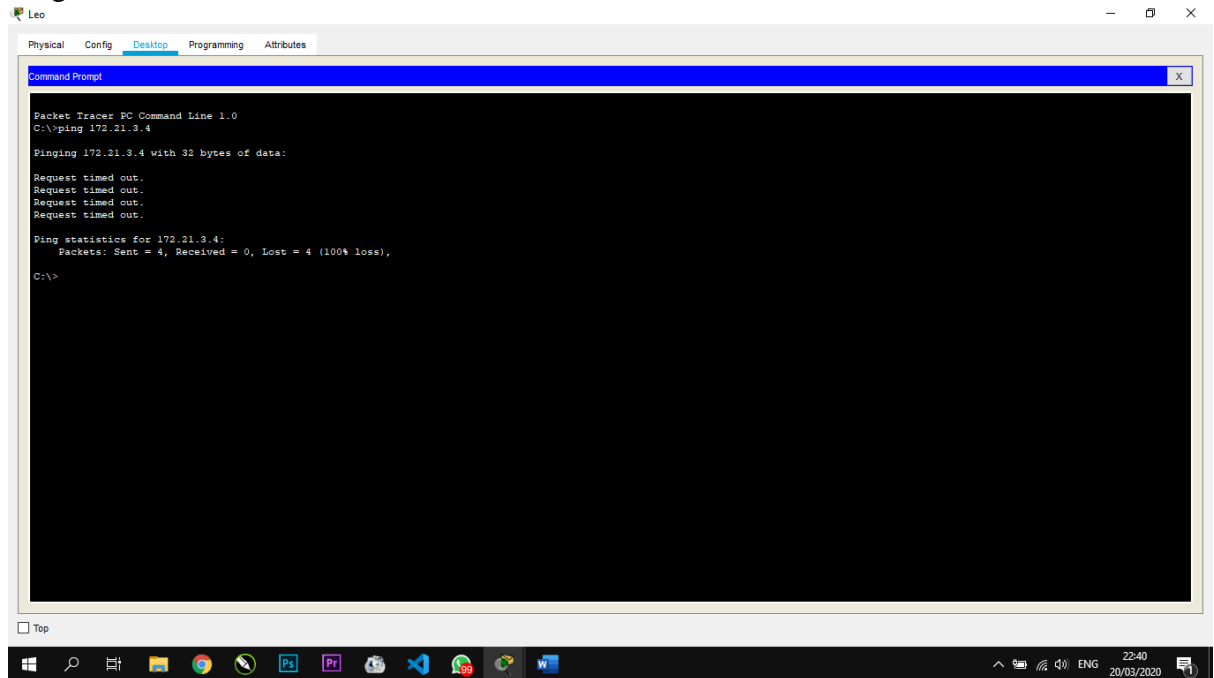

```
Packet Tracer PC Command Line 1.0
C:\>ping 172.21.3.4

Pinging 172.21.3.4 with 32 bytes of data:

Request timed out.
Request timed out.
Request timed out.
Request timed out.


Ping statistics for 172.21.3.4:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),

C:\>
```

➤ Tugas 8A

Hasil ping dari PC Leo ke PC Pisces “Request timed out” karena PC Leo dan PC Pisces tidak berada dalam satu VLAN dan memiliki network access yang berbeda.

i. Config VLAN Trunk Switch 2

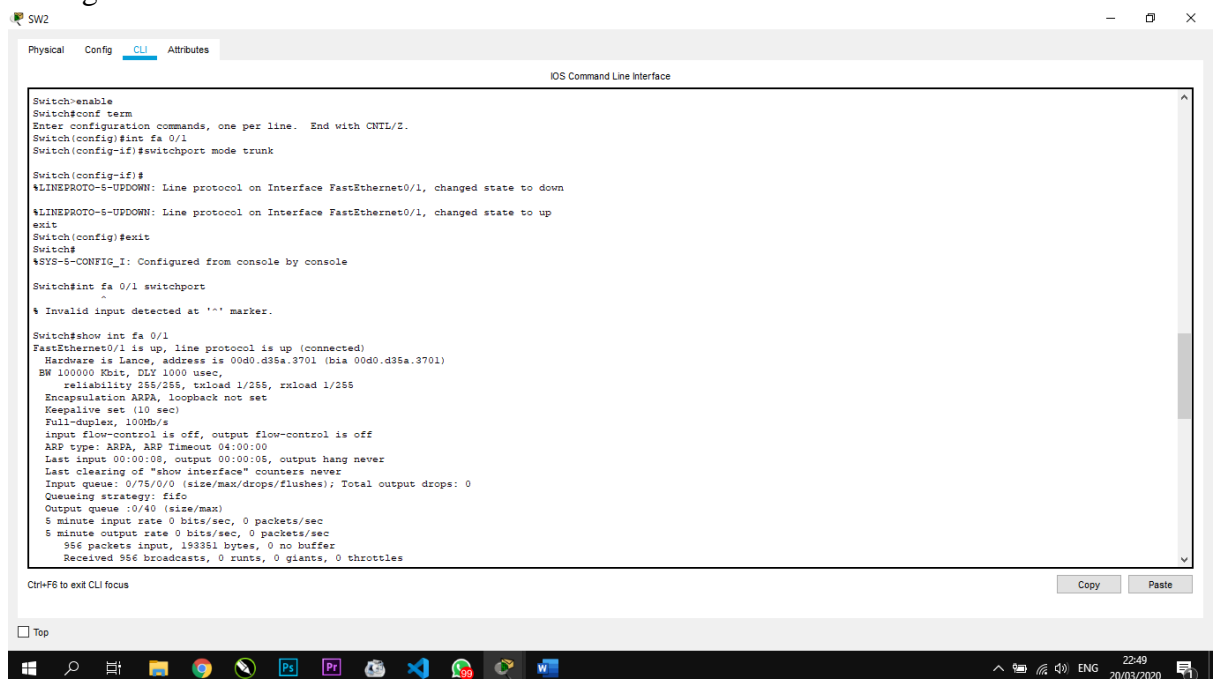

```
Switch>enable
Switch#conf term
Enter configuration commands, one per line. End with CNTL/Z.
Switch(config)#int fa 0/1
Switch(config-if)#switchport mode trunk


Switch(config-if)#
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/1, changed state to down
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/1, changed state to up
exit
Switch(config)#exit
Switch#
%SYS-5-CONFIG_I: Configured from console by console

Switch#int fa 0/1 switchport
^
% Invalid input detected at '^' marker.

Switch#show int fa 0/1
FastEthernet0/1 is up, line protocol is up (connected)
  Hardware is Lance, address is 00d0.d35a.3701 (bia 00d0.d35a.3701)
  BW 100000 Kbit, DLY 1000 usec,
    reliability 255/255, txload 1/255, rxload 1/255
  Encapsulation ARPA, loopback not set
  Keepalive set (10 sec)
  Full-duplex, 100Mb/s
  input flow-control is off, output flow-control is off
  ARP type: ARPA, ARP Timeout 04:00:00
  Last input 00:00:00, output 00:00:05, output hang never
  Last clearing of "show interface" counters never
  Input queue: 0/75/0/0 (size/max/drops/flushes); Total output drops: 0
  Queueing strategy: fifo
  Output queue :0/40 (size/max)
  5 minute input rate 0 bits/sec, 0 packets/sec
  5 minute output rate 0 bits/sec, 0 packets/sec
  956 packets input, 193951 bytes, 0 no buffer
    Received 956 broadcasts, 0 runts, 0 giants, 0 throttles

Ctrl+F6 to exit CLI focus
```


j. Cek Config VLAN Switch 2

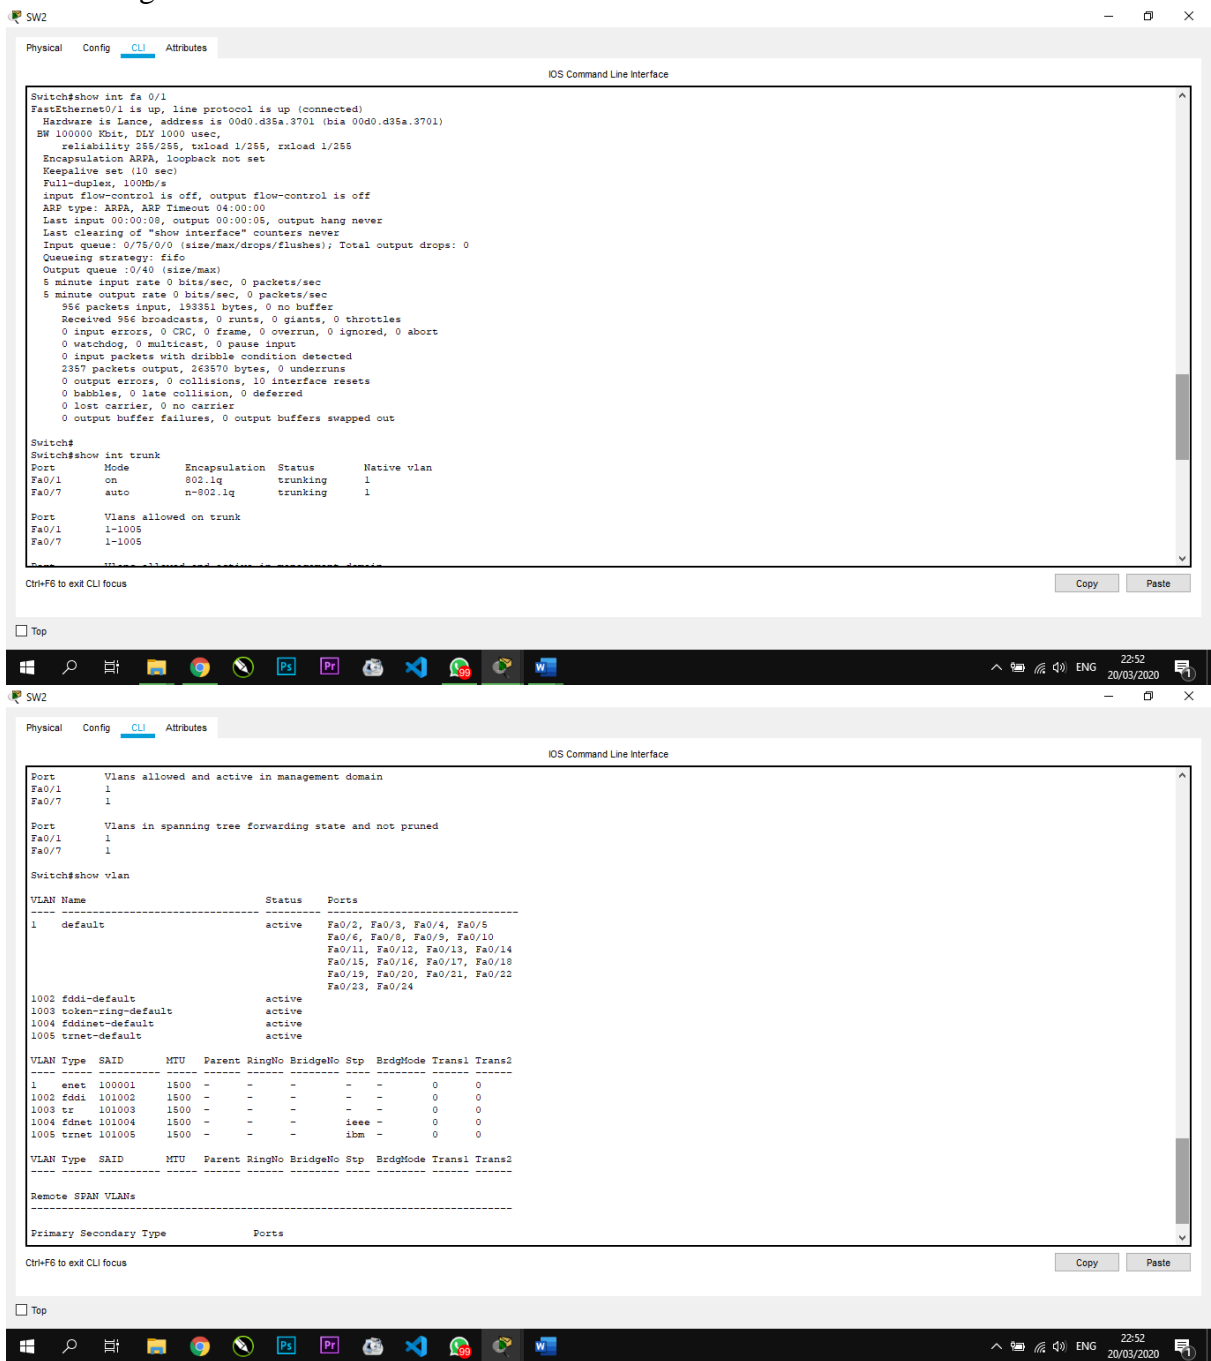

➤ Tugas 10A


Pada langkah ini port port fastethernet belum terkonfigurasi ke dalam VLAN, bahkan VLAN nya belum dibuat

k. Config Port Switch 2

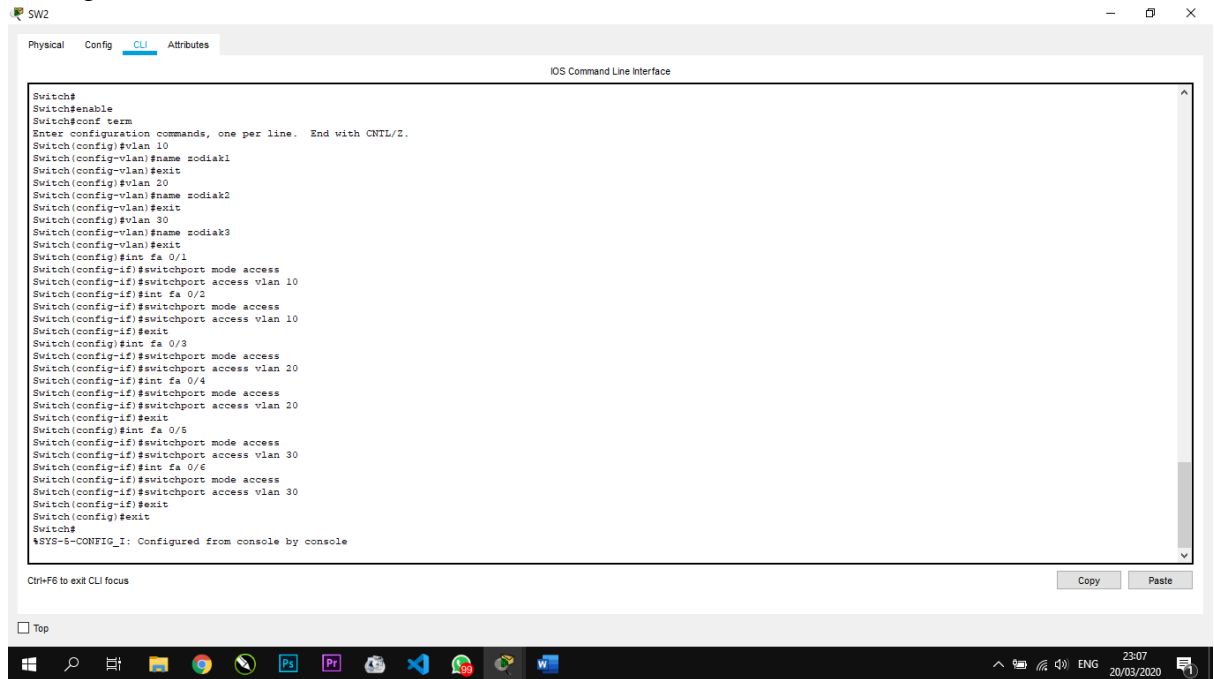

```
Switch#
Switch#enable
Switch#conf term
Enter configuration commands, one per line. End with CNTL/Z.
Switch(config)#vlan 10
Switch(config-vlan)#name sodiak1
Switch(config-vlan)#exit
Switch(config)#vlan 20
Switch(config-vlan)#name sodiak2
Switch(config-vlan)#exit
Switch(config)#vlan 30
Switch(config-vlan)#name sodiak3
Switch(config-vlan)#exit
Switch(config)#int fa 0/1
Switch(config-if)#switchport mode access
Switch(config-if)#switchport access vlan 10
Switch(config-if)#int fa 0/2
Switch(config-if)#switchport mode access
Switch(config-if)#switchport access vlan 10
Switch(config-if)#exit
Switch(config)#int fa 0/3
Switch(config-if)#switchport mode access
Switch(config-if)#switchport access vlan 20
Switch(config-if)#int fa 0/4
Switch(config-if)#switchport mode access
Switch(config-if)#switchport access vlan 20
Switch(config-if)#exit
Switch(config)#int fa 0/5
Switch(config-if)#switchport mode access
Switch(config-if)#switchport access vlan 30
Switch(config-if)#int fa 0/6
Switch(config-if)#switchport mode access
Switch(config-if)#switchport access vlan 30
Switch(config-if)#exit
Switch(config)#exit
%SYS-S-CONFIG_I: Configured from console by console
```

l. Cek Ping Leo ke Aries

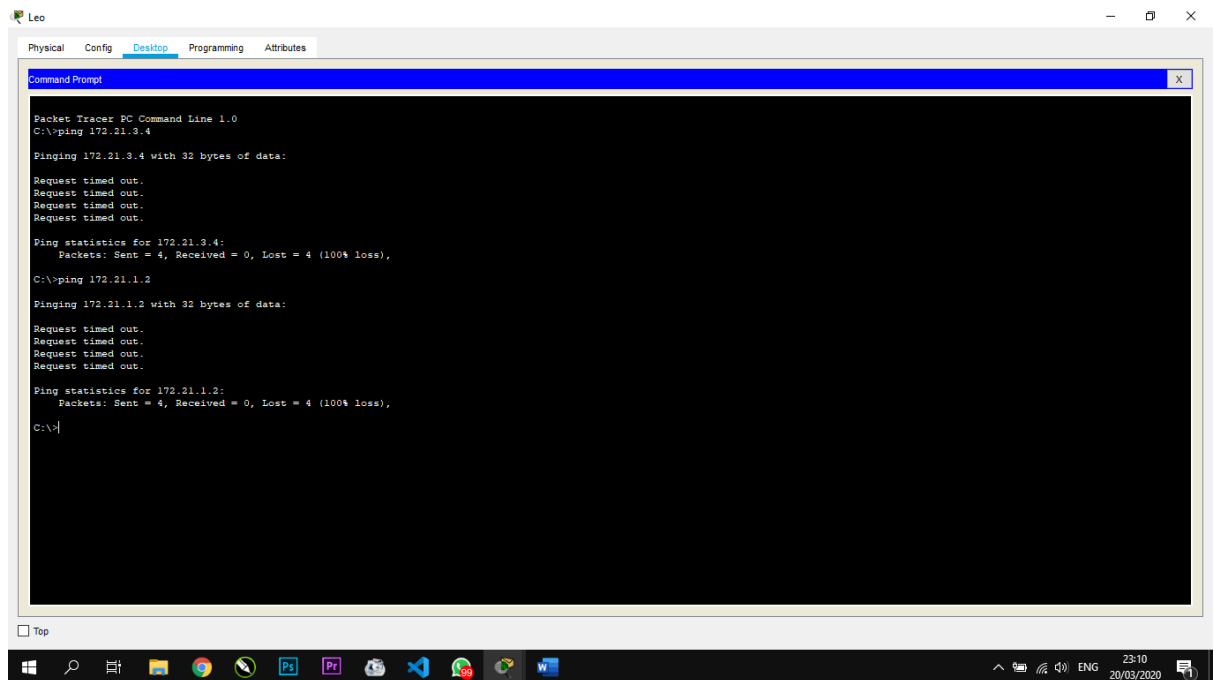

```
Packet Tracer PC Command Line 1.0
C:\>ping 172.21.3.4

Pinging 172.21.3.4 with 32 bytes of data:

Request timed out.
Request timed out.
Request timed out.
Request timed out.

Ping statistics for 172.21.3.4:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),

C:\>ping 172.21.1.2

Pinging 172.21.1.2 with 32 bytes of data:


Request timed out.
Request timed out.
Request timed out.
Request timed out.

Ping statistics for 172.21.1.2:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),

C:\>
```


Hasil ping dari PC leo ke PC aries “Request timed out” karena PC leo dan PC aries tidak berada dalam satu VLAN meskipun memiliki network access yang sama.

Leo ke Aquarius

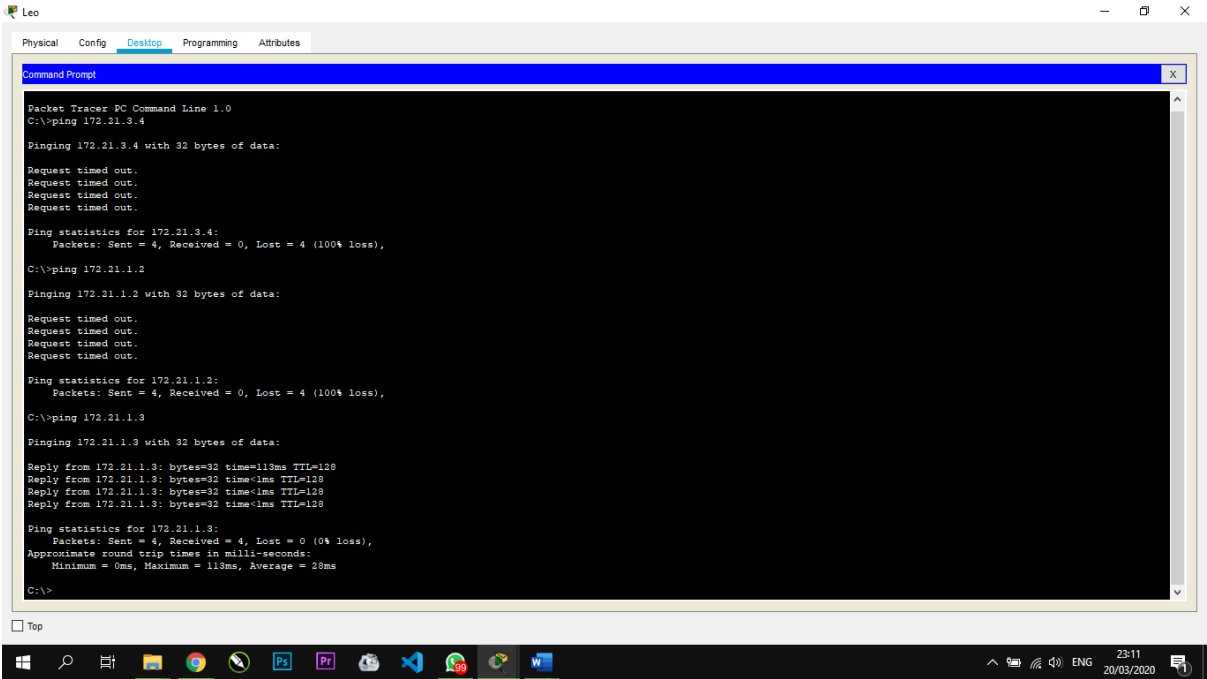


Hasil ping dari PC leo ke PC aquarius “Reply” karena PC leo dan PC aquarius berada dalam satu VLAN dan memiliki network access yang sama

Leo ke Pices

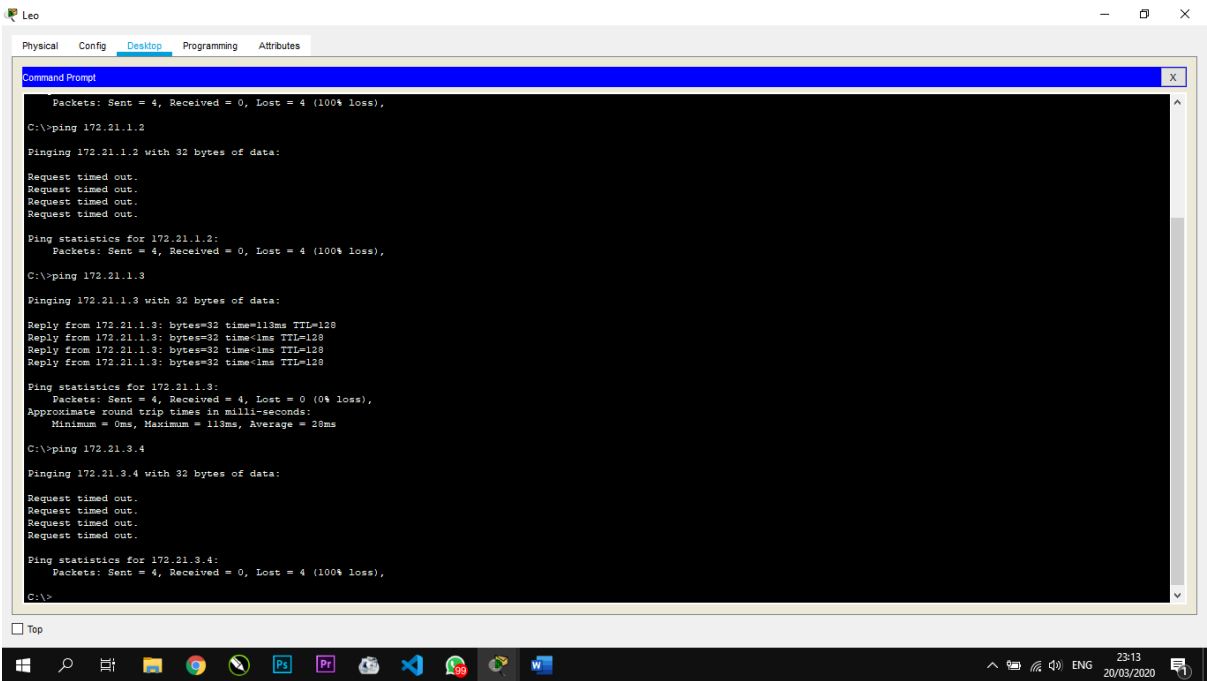


Hasil ping dari PC leo ke PC pisces “Request timed out” karena PC leo dan PC pisces tidak berada dalam satu VLAN dan memiliki network access yang berbeda.

Libra ke Cancer

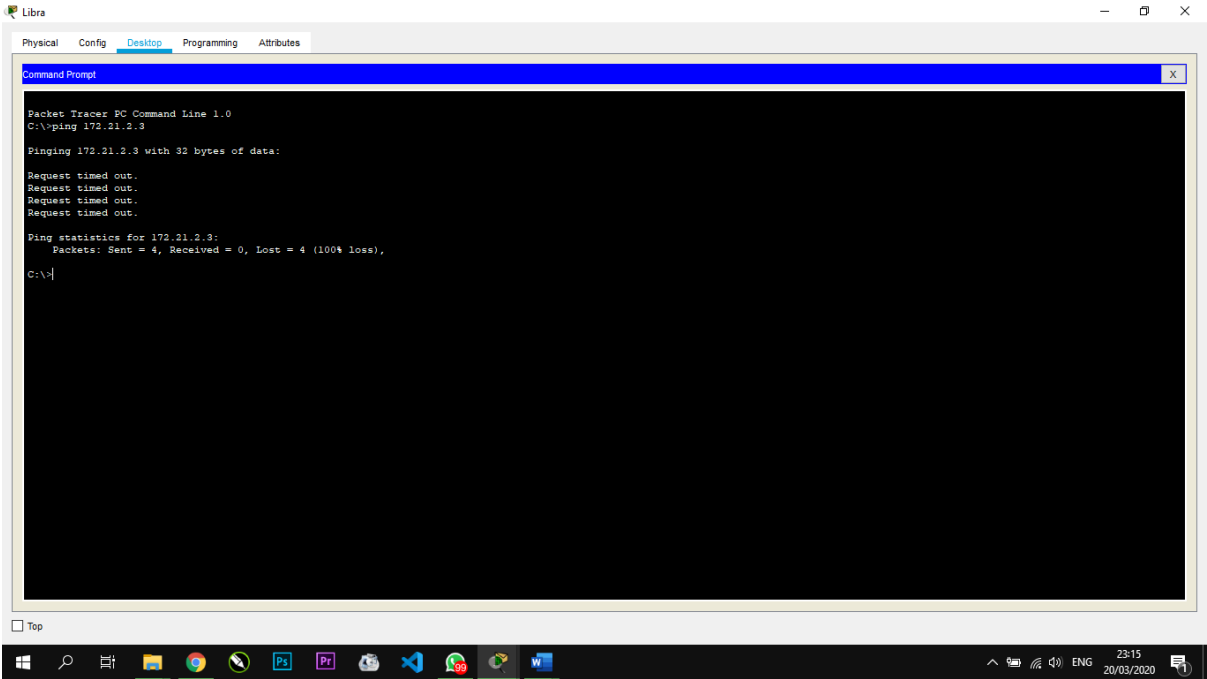

Hasil ping dari PC libra ke PC cancer “Request timed out” karena PC libra dan PC cancer tidak berada dalam satu VLAN meskipun memiliki network access yang sama.
Libra ke Leo

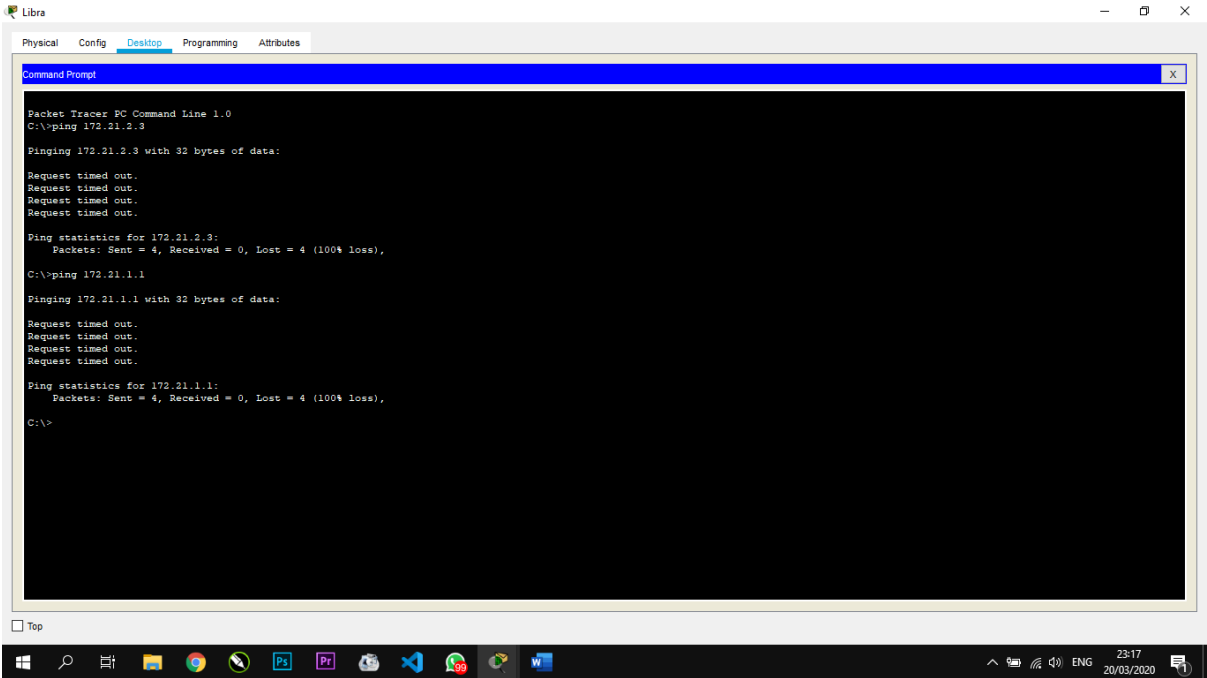

Hasil ping dari PC libra ke PC leo “Request timed out” karena PC libra dan PC leo tidak berada dalam satu VLAN meskipun memiliki network access yang sama.