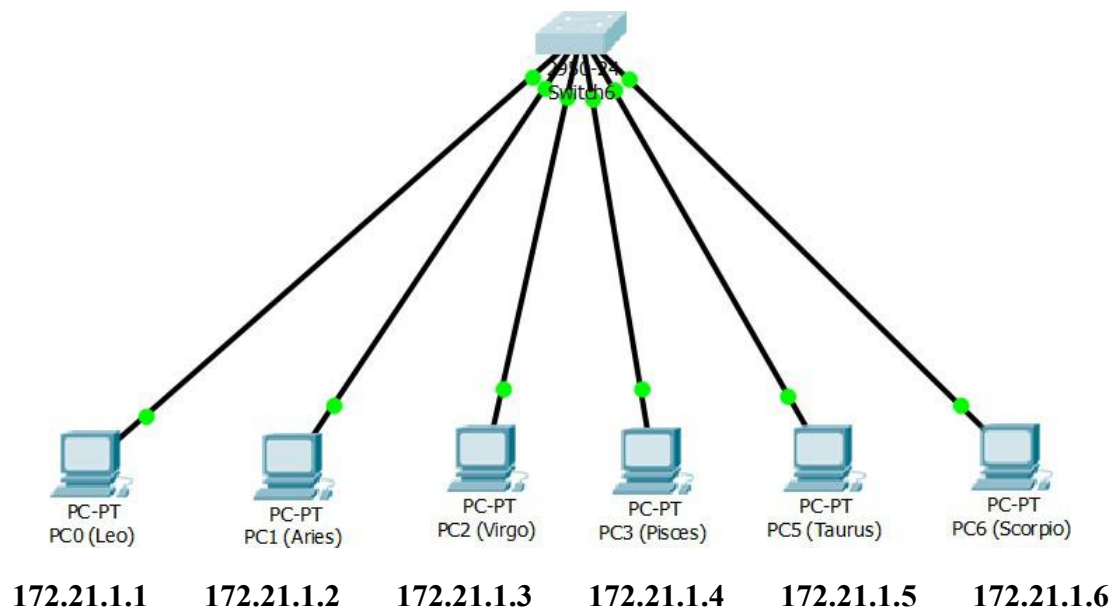Nama : Dimas
Kharismawan

Nim   : L200180102

Kelas : C

Praktikum Jarkom

Modul 4

1. Kegiatan-1 (Topologi 1)

- Desain topologi ,penamaan, dan penyetingan IP Address

172.21.1.1   172.21.1.2   172.21.1.3   172.21.1.4   172.21.1.5   172.21.1.6

- Konfigurasi pada Switch untuk membuat 3 Vlan dengan nama zodiak1, zodiak2, dan zodiak3

- Konfigurasi port-port switch ke dalam vlan zodiak1, zodiak2, dan zodiak3 dengan anggota sebagai berikut :
  - ➢ zodiak1 =Leo dan Pisces
  - ➢ zodiak2 =Aries dan Taurus
  - ➢ zodiak3 =Virgo dan Scorpion

```
Switch(config-if)#
Switch(config-if)#exit
Switch(config)#interface FastEthernet0/1
Switch(config-if)#
Switch(config-if)#exit
Switch(config)#interface FastEthernet0/1
Switch(config-if)#exit
Switch(config)#interface FastEthernet0/1
Switch(config-if)#switchport mode access
Switch(config-if)#switchport access vlan 10
Switch(config-if)#interface FastEthernet0/4
Switch(config-if)#switchport mode access
Switch(config-if)#switchport access vlan 10
Switch(config-if)#exit
Switch(config)#
Switch(config)#interface FastEthernet0/1
Switch(config-if)#
Switch(config-if)#exit
Switch(config)#interface FastEthernet0/2
Switch(config-if)#switchport mode access
Switch(config-if)#switchport access vlan 20
Switch(config-if)#interface FastEthernet0/5
Switch(config-if)#switchport mode access
Switch(config-if)#switchport access vlan 20
Switch(config-if)#exit
Switch(config)#
Switch(config)#interface FastEthernet0/2
Switch(config-if)#
Switch(config-if)#exit
Switch(config)#interface FastEthernet0/3
Switch(config-if)#switchport mode access
Switch(config-if)#switchport access vlan 30
Switch(config-if)#interface FastEthernet0/6
Switch(config-if)#switchport mode access
Switch(config-if)#switchport access vlan 30
Switch(config-if)#exit
Switch(config)#
Switch(config)#interface FastEthernet0/3
Switch(config-if)#
```

- Melihat konfigurasi secara keseluruhan

```
Show vlan brief

VLAN Name                             Status    Ports
---- -------------------------------- --------- -------------------------------
1    default                          active    Fa0/7, Fa0/8, Fa0/9, Fa0/10
                                                Fa0/11, Fa0/12, Fa0/13, Fa0/14
                                                Fa0/15, Fa0/16, Fa0/17, Fa0/18
                                                Fa0/19, Fa0/20, Fa0/21, Fa0/22
                                                Fa0/23, Fa0/24
10   zodiak1                          active    Fa0/1, Fa0/4
20   zodiak2                          active    Fa0/2, Fa0/5
30   zodiak3                          active    Fa0/3, Fa0/6
1002 fddi-default                     active
1003 token-ring-default               active
1004 fddinet-default                  active
1005 trnet-default                    active
Switch#show vlan id 2
VLAN id 2 not found in current VLAN database
```

- Melihat konfigurasi vlan 10

```
Switch#show vlan id 10

VLAN Name                             Status    Ports
---- -------------------------------- --------- -------------------------------
10   zodiak1                          active    Fa0/1, Fa0/4

VLAN Type  SAID       MTU   Parent RingNo BridgeNo Stp  BrdgMode Transl Trans2
---- ----- ---------- ----- ------ ------ -------- ---- -------- ------ ------
10   enet  100010     1500  -      -      -        -    -        0      0
```

- Melihat konfigurasi vlan 20

```
Switch#show vlan id 20

VLAN Name                             Status    Ports
---- -------------------------------- --------- -------------------------------
20   zodiak2                          active    Fa0/2, Fa0/5

VLAN Type  SAID       MTU   Parent RingNo BridgeNo Stp  BrdgMode Transl Trans2
---- ----- ---------- ----- ------ ------ -------- ---- -------- ------ ------
20   enet  100020     1500  -      -      -        -    -        0      0

Switch#
```

- Melihat konfigurasi vlan 30

```
Switch#show vlan id 30

VLAN Name                             Status    Ports
---- -------------------------------- --------- -------------------------------
30   zodiak3                          active    Fa0/3, Fa0/6

VLAN Type  SAID       MTU   Parent RingNo BridgeNo Stp  BrdgMode Transl Trans2
---- ----- ---------- ----- ------ ------ -------- ---- -------- ------ ------
30   enet  100030     1500  -      -      -        -    -        0      0

Switch#
```

- **Tabel informasi konfigurasi vlan**

No	Variabel	Nilai		
1.	Nomor VLAN	10	20	30
2.	Nama VLAN	Zodiak1	Zodiak2	Zodiak3
3.	Port	Fa 0/1 , Fa 0/4	Fa 0/2 , Fa 0/5	Fa 0/3 , Fa 0/6
4.	Status	Active	Active	Active

2. Kegiatan-2 (Topologi 2)

- **Desain topologi ,penamaan, dan penyetingan IP Address**
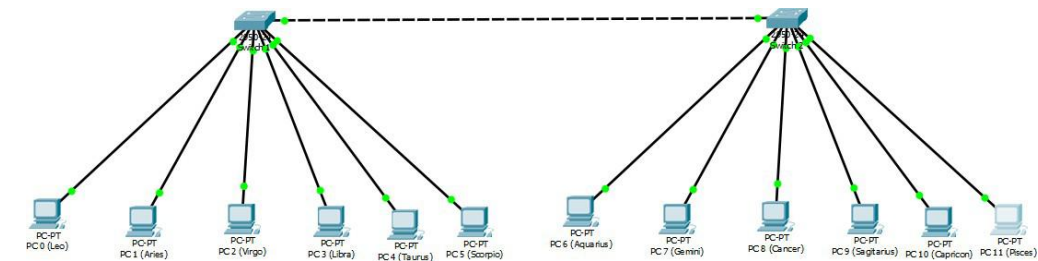
172.21.1.1 172.21.1.2 172.21.2.1 172.21.2.2 172.21.3.1 172.21.3.2 172.21.1.3 172.21.1.4 172.21.2.3 172.21.2.4 172.21.3.3 172.21.3.4

- **Konfigurasi pada Switch untuk membuat 3 Vlan dengan nama zodiak1, zodiak2, dan zodiak3**

```
Switch#conf term
Enter configuration commands, one per line.  End with CNTL/Z.
Switch(config)#vlan 10
Switch(config-vlan)#name zodiak1
Switch(config-vlan)#vlan 20
Switch(config-vlan)#name zodiak2
Switch(config-vlan)#vlan 30
Switch(config-vlan)#name zodiak3
Switch(config-vlan)#exit
Switch(config)#
```

- **Konfigurasi port-port switch ke dalam vlan zodiak1, zodiak2, dan zodiak3 dengan anggota sebagai berikut (switch 1 saja) :**
  - o **zodiak1 =Leo dan Libra**
  - o **zodiak2 =Aries dan Taurus**
  - o **zodiak3 =Virgo dan Scorpion**

```
Switch(config)#
Switch(config)#interface FastEthernet0/1
Switch(config-if)#switchport mode access
Switch(config-if)#switchport access vlan 10
Switch(config-if)#interface FastEthernet0/4
Switch(config-if)#switchport mode access
Switch(config-if)#switchport access vlan 10
Switch(config-if)#exit
Switch(config)#interface FastEthernet0/2
Switch(config-if)#switchport mode access
Switch(config-if)#switchport access vlan 20
Switch(config-if)#interface FastEthernet0/5
Switch(config-if)#switchport mode access
Switch(config-if)#switchport access vlan 20
Switch(config-if)#exit
Switch(config)#interface FastEthernet0/3
Switch(config-if)#switchport mode access
Switch(config-if)#switchport access vlan 30
Switch(config-if)#interface FastEthernet0/6
Switch(config-if)#switchport mode access
Switch(config-if)#switchport access vlan 30
Switch(config-if)#exit
Switch(config)#
```

- **Konfigurasi Vlan trunking pada Switch1**

```
Switch(config)#interface FastEthernet0/7
Switch(config-if)#switchport mode trunk

Switch(config-if)#
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/7, changed state to down

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/7, changed state to up
exit
Switch(config)#
```

- **Melihat konfigurasi trunking pada Switch1**

```
Switch#
%SYS-5-CONFIG_I: Configured from console by console
show interface fa 0/7 switchport
Name: Fa0/7
Switchport: Enabled
Administrative Mode: trunk
Operational Mode: trunk
Administrative Trunking Encapsulation: dot1q
Operational Trunking Encapsulation: dot1q
Negotiation of Trunking: On
Access Mode VLAN: 1 (default)
Trunking Native Mode VLAN: 1 (default)
Voice VLAN: none
Administrative private-vlan host-association: none
Administrative private-vlan mapping: none
Administrative private-vlan trunk native VLAN: none
Administrative private-vlan trunk encapsulation: dot1q
Administrative private-vlan trunk normal VLANs: none
Administrative private-vlan trunk private VLANs: none
Operational private-vlan: none
Trunking VLANs Enabled: All
Pruning VLANs Enabled: 2-1001
Capture Mode Disabled
Capture VLANs Allowed: ALL
Protected: false
Appliance trust: none

Switch#
```

```
Name: Fa0/7
Switchport: Enabled
Administrative Mode: trunk
Operational Mode: trunk
Administrative Trunking Encapsulation: dot1q
Operational Trunking Encapsulation: dot1q
Negotiation of Trunking: On
Access Mode VLAN: 1 (default)
Trunking Native Mode VLAN: 1 (default)
Voice VLAN: none
Administrative private-vlan host-association: none
Administrative private-vlan mapping: none
Administrative private-vlan trunk native VLAN: none
Administrative private-vlan trunk encapsulation: dot1q
Administrative private-vlan trunk normal VLANs: none
Administrative private-vlan trunk private VLANs: none
Operational private-vlan: none
Trunking VLANs Enabled: All
Pruning VLANs Enabled: 2-1001
Capture Mode Disabled
Capture VLANs Allowed: ALL
Protected: false
Appliance trust: none
```

```
Switch#show int trunk
Port        Mode          Encapsulation  Status        Native vlan
Fa0/7       on            802.1q         trunking      1

Port        Vlans allowed on trunk
Fa0/7       1-1005

Port        Vlans allowed and active in management domain
Fa0/7       1,10,20,30

Port        Vlans in spanning tree forwarding state and not pruned
Fa0/7       1,10,20,30

Switch#show vlan

VLAN Name                             Status    Ports
---- -------------------------------- --------- -------------------------------
1    default                          active    Fa0/8, Fa0/9, Fa0/10, Fa0/11
                                                Fa0/12, Fa0/13, Fa0/14, Fa0/15
                                                Fa0/16, Fa0/17, Fa0/18, Fa0/19
                                                Fa0/20, Fa0/21, Fa0/22, Fa0/23
                                                Fa0/24
10   zodiak1                          active    Fa0/1, Fa0/4
20   zodiak2                          active    Fa0/2, Fa0/5
30   zodiak3                          active    Fa0/3, Fa0/6
1002 fddi-default                     active
1003 token-ring-default               active
1004 fddinet-default                  active
1005 trnet-default                    active

VLAN Type SAID    MTU   Parent RingNo BridgeNo Stp  BrdgMode Trans1 Trans2
---- ---- ------- ----- ------ ------ -------- ---- -------- ------ ------
1    enet 100001  1500  -      -      -        -    -        0      0
10   enet 100010  1500  -      -      -        -    -        0      0
20   enet 100020  1500  -      -      -        -    -        0      0
30   enet 100030  1500  -      -      -        -    -        0      0
 --More--
```

Ctrl+F6 to exit CLI focus

Pada Konfigurasi ini Port yang sudah terkonfigurasi ke dalam Vlan yaitu, Port 0/1 sampai Port 0/6, Untuk port 0/7 pada switch 0 telah disetting untuk trunk dan berhasil. Sehingga port 0/7 tidak tersedia untuk vlan.

- **Uji Ping antar PC Leo1 dengan Pisces**

PC 0 (Leo)

| Physical | Config | Desktop | Programming | Attributes |

Command Prompt

```
Packet Tracer PC Command Line 1.0
C:\>ping 172.21.3.4

Pinging 172.21.3.4 with 32 bytes of data:

Request timed out.
Request timed out.
Request timed out.
Request timed out.

Ping statistics for 172.21.3.4:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),

C:\>
```

Hasilnya RTO, karena pada PC Pisces1 tidak berada pada Vlan yang sama dengan PC Leo1

- **Konfigurasi Vlan trunking pada Switch2**

```
Switch>enable
Switch#
Switch#vlan database
% Warning: It is recommended to configure VLAN from config mode,
  as VLAN database mode is being deprecated. Please consult user
  documentation for configuring VTP/VLAN in config mode.

Switch(vlan)#exit
APPLY completed.
Exiting....
Switch#conf term
Enter configuration commands, one per line.  End with CNTL/Z.
Switch(config)#int fa 0/7
Switch(config-if)#switchport mode trunk
Switch(config-if)#exit
Switch(config)#
```

Ctrl+F6 to exit CLI focus

- **Melihat Konfigurasi trunkingpada Switch2**

```
Switch#
%SYS-5-CONFIG_I: Configured from console by console
show vlan

VLAN Name                             Status    Ports
---- -------------------------------- --------- -------------------------------
1    default                          active    Fa0/1, Fa0/2, Fa0/3, Fa0/4
                                                Fa0/5, Fa0/6, Fa0/8, Fa0/9
                                                Fa0/10, Fa0/11, Fa0/12, Fa0/13
                                                Fa0/14, Fa0/15, Fa0/16, Fa0/17
                                                Fa0/18, Fa0/19, Fa0/20, Fa0/21
                                                Fa0/22, Fa0/23, Fa0/24
1002 fddi-default                     active
1003 token-ring-default               active
1004 fddinet-default                  active
1005 trnet-default                    active

VLAN Type  SAID       MTU   Parent RingNo BridgeNo Stp  BrdgMode Trans1 Trans2
---- ----- ---------- ----- ------ ------ -------- ---- -------- ------ ------
1    enet  100001     1500  -      -      -        -    -        0      0
1002 fddi  101002     1500  -      -      -        -    -        0      0
1003 tr    101003     1500  -      -      -        -    -        0      0
1004 fdnet 101004     1500  -      -      -        ieee -        0      0
1005 trnet 101005     1500  -      -      -        ibm  -        0      0

VLAN Type  SAID       MTU   Parent RingNo BridgeNo Stp  BrdgMode Trans1 Trans2
---- ----- ---------- ----- ------ ------ -------- ---- -------- ------ ------

Remote SPAN VLANs
-------------------------------------------------------------------------------

Primary Secondary Type             Ports
------- --------- ---------------- ------------------------------------------
Switch#
```

Ctrl+F6 to exit CLI focus

Pada langkah ini Port-port Fastethernet belum terkonfigurasi ke dalam Vlan, bahkan Vlan nya belum dibuat

- Konfigurasi port-port switch ke dalam vlan zodiak1, zodiak2, dan zodiak3 dengan anggota sebagai berikut :
  - zodiak1 = Aquarius dan Gemini
  - zodiak2 = Cancer dan Sagitarius
  - zodiak3 = Carpricons dan Pisces

```
Switch#conf term
Enter configuration commands, one per line.  End with CNTL/Z.
Switch(config)#vlan 10
Switch(config-vlan)#name zodiak1
Switch(config-vlan)#exit
Switch(config)#vlan 20
Switch(config-vlan)#name zodiak2
Switch(config-vlan)#exit
Switch(config)#vlan 30
Switch(config-vlan)#name zodiak3
Switch(config-vlan)#exit
Switch(config)#int fa 0/1
Switch(config-if)#switchport mode access
Switch(config-if)#switchport access vlan 10
Switch(config-if)#int fa 0/2
Switch(config-if)#switchport mode access
Switch(config-if)#switchport access vlan 10
Switch(config-if)#exit
Switch(config)#int fa 0/3
Switch(config-if)#switchport mode access
Switch(config-if)#switchport access vlan 20
Switch(config-if)#int fa 0/4
Switch(config-if)#switchport mode access
Switch(config-if)#switchport access vlan 20
Switch(config-if)#exit
Switch(config)#int fa 0/5
Switch(config-if)#switchport mode access
Switch(config-if)#switchport access vlan 30
Switch(config-if)#int fa 0/6
Switch(config-if)#switchport mode access
Switch(config-if)#switchport access vlan 30
Switch(config-if)#exit
Switch(config)#
```

Ctrl+F6 to exit CLI focus

- **Uji Coba Ping**
  - ❖ Ping pc leo ke pc aries

```
C:\>ping 172.21.1.2

Pinging 172.21.1.2 with 32 bytes of data:

Request timed out.
Request timed out.
Request timed out.
Request timed out.

Ping statistics for 172.21.1.2:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),

C:\>
```

  - ❖ Ping pc leo ke pc aquarius

```
C:\>ping 172.21.1.3

Pinging 172.21.1.3 with 32 bytes of data:

Reply from 172.21.1.3: bytes=32 time=11ms TTL=128
Reply from 172.21.1.3: bytes=32 time=1ms TTL=128
Reply from 172.21.1.3: bytes=32 time<1ms TTL=128
Reply from 172.21.1.3: bytes=32 time<1ms TTL=128

Ping statistics for 172.21.1.3:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 11ms, Average = 3ms

C:\>
```

❖ Ping pc leo ke pc pisces

```
C:\>ping 172.21.3.4

Pinging 172.21.3.4 with 32 bytes of data:

Request timed out.
Request timed out.
Request timed out.
Request timed out.

Ping statistics for 172.21.3.4:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),

C:\>
```

❖ Ping pc libra ke pc cancer

```
Packet Tracer PC Command Line 1.0
C:\>ping 172.21.2.3

Pinging 172.21.2.3 with 32 bytes of data:

Request timed out.
Request timed out.
Request timed out.
Request timed out.

Ping statistics for 172.21.2.3:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),

C:\>
```

❖ Ping pc libra ke pc Leo

```
C:\>ping 172.21.1.1

Pinging 172.21.1.1 with 32 bytes of data:

Reply from 172.21.1.1: bytes=32 time=1ms TTL=128
Reply from 172.21.1.1: bytes=32 time<1ms TTL=128
Reply from 172.21.1.1: bytes=32 time<1ms TTL=128
Reply from 172.21.1.1: bytes=32 time=1ms TTL=128

Ping statistics for 172.21.1.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\>
```

Dari beberapa hasil percobaandiatas, dapat disimpulkan apabila PC berada pada Vlan yang sama, maka akan menghasilkan balasan atau reply dari IP tujuan pada saat melakukan pengujian Ping, Seperti contohnya PC Leo ke PC Aquarius dan PC Libra ke PC Leo.

Akan tetapi apabila berada pada vlan yang berbeda maka akan menghasilkan status RTO, seperti pada contoh PC Leo ke PC Aries, PC Leo ke PC Pisces, dan PC Libra ke PC Cancer.