


Nama : Angga Pratama
NIM : L200180109
Kelas : C

Prak-Jarkom

Modul 5

Latihan

1. Praktikum 1 membuat DHCP Server

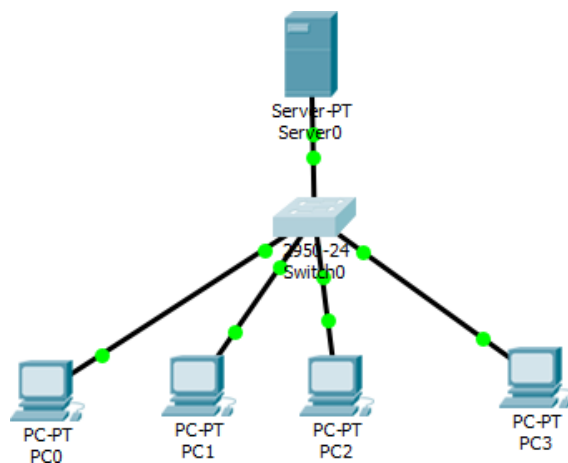

- ❖ Double-klik Server0. Pilih tab config. Pada menu interface, pilih fast-ethernet. Pada bagian ip configuration, isikan dengan ip address server, 192.168.123.1, dengan subnet mask 255.255.255.0

Physical Config Services Desktop Programming Attributes

GLOBAL

- Settings
- Algorithm Settings
- INTERFACE**
- FastEthernet0

FastEthernet0

Port Status ☒ On

Bandwidth ☒ 100 Mbps ☐ 10 Mbps ☒ Auto

Duplex ☐ Half Duplex ☒ Full Duplex ☒ Auto

MAC Address 0001.C952.5049

IP Configuration

☐ DHCP

☒ Static

IP Address 192.168.123.1

Subnet Mask 255.255.255.0

IPv6 Configuration

☐ DHCP

☐ Auto Config

☒ Static

IPv6 Address

Link Local Address: FE80::201:C9FF:FE52:5049

- ❖ Aktifkan dhcp isi start ip address 192.168.123.19 dan maximum number of user 5

Physical Config Services Desktop Programming Attributes

SERVICES

- HTTP
- DHCP
- DHCPv6
- TFTP
- DNS
- SYSLOG
- AAA
- NTP
- EMAIL
- FTP
- IoT
- VM Management

DHCP

Interface: FastEthernet0 Service: ☒ On ☐ Off

Pool Name: serverPool

Default Gateway: 0.0.0.0

DNS Server: 0.0.0.0

Start IP Address: 192 168 123 19

Subnet Mask: 255 255 255 0

Maximum Number of Users: 5

TFTP Server: 0.0.0.0

WLC Address: 0.0.0.0

Add Save Remove

Pool Name	Default Gateway	DNS Server	Start IP Address	Subnet Mask	Max User	TFTP Server	WLC Address
serverPool	0.0.0.0	0.0.0.0	192.168.123...	255.255.255.0	5	0.0.0.0	0.0.0.0

- ❖ Pada sisi semua client masuk ip configuration, pastikan pada pilihan radio button pada pilihan DHCP

Physical Config Desktop Programming Attributes

IP Configuration

IP Configuration

☒ DHCP ☐ Static DHCP request successful.

IP Address: 192.168.123.19

Subnet Mask: 255.255.255.0

Default Gateway: 0.0.0.0

DNS Server: 0.0.0.0

IPv6 Configuration

☐ DHCP ☐ Auto Config ☒ Static

IPv6 Address: /

Link Local Address: FE80::209:7CFF:FEA4:7E2

IPv6 Gateway:

IPv6 DNS Server:

Physical Config Desktop Programming Attributes

IP Configuration

IP Configuration

☒ DHCP ☐ Static DHCP request successful.

IP Address: 192.168.123.20

Subnet Mask: 255.255.255.0

Default Gateway: 0.0.0.0

DNS Server: 0.0.0.0

IPv6 Configuration

☐ DHCP ☐ Auto Config ☒ Static

IPv6 Address: /

Link Local Address: FE80::201:43FF:FE80:69D6

IPv6 Gateway:

IPv6 DNS Server:

Physical Config Desktop Programming Attributes

IP Configuration

IP Configuration

☒ DHCP ☐ Static

IP Address: 192.168.123.21

Subnet Mask: 255.255.255.0

Default Gateway: 0.0.0.0

DNS Server: 0.0.0.0

IPv6 Configuration

☐ DHCP ☐ Auto Config ☒ Static

IPv6 Address: /

Link Local Address: FE80::200:CFE:FE58:BA86

IPv6 Gateway:

IPv6 DNS Server:

Top

Physical Config Desktop Programming Attributes

IP Configuration

IP Configuration

☒ DHCP ☐ Static

IP Address: 192.168.123.22

Subnet Mask: 255.255.255.0

Default Gateway: 0.0.0.0

DNS Server: 0.0.0.0

IPv6 Configuration

☐ DHCP ☐ Auto Config ☒ Static

IPv6 Address: /

Link Local Address: FE80::2D0:97FF:FE83:7B96

IPv6 Gateway:

IPv6 DNS Server:

Top

❖ Lalu lakukan ping dengan server

Physical Config Desktop Programming Attributes

Command Prompt

```

Packet Tracer PC Command Line 1.0
C:\>ping 192.168.123.20

Pinging 192.168.123.20 with 32 bytes of data:

Reply from 192.168.123.20: bytes=32 time=13ms TTL=128
Reply from 192.168.123.20: bytes=32 time<1ms TTL=128
Reply from 192.168.123.20: bytes=32 time<1ms TTL=128
Reply from 192.168.123.20: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.123.20:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 13ms, Average = 3ms

C:\>ping 192.168.123.21

Pinging 192.168.123.21 with 32 bytes of data:

Reply from 192.168.123.21: bytes=32 time=1ms TTL=128
Reply from 192.168.123.21: bytes=32 time<1ms TTL=128
Reply from 192.168.123.21: bytes=32 time<1ms TTL=128
Reply from 192.168.123.21: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.123.21:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\>ping 192.168.123.22

Pinging 192.168.123.22 with 32 bytes of data:


Reply from 192.168.123.22: bytes=32 time=1ms TTL=128
Reply from 192.168.123.22: bytes=32 time<1ms TTL=128
Reply from 192.168.123.22: bytes=32 time<1ms TTL=128
Reply from 192.168.123.22: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.123.22:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 1ms, Average = 0ms


C:\>

```


2. Praktikum 2 membuat WEB Server

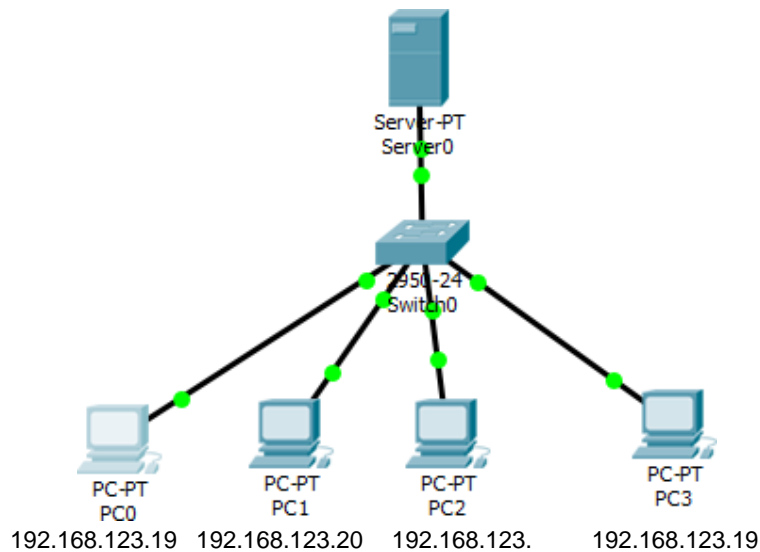


- ❖ Pastikan rancangan sudah terseting seperti kegiatan satu
- ❖ Lalu masuk ke sever0 , config services pilih http. Pastikan radio button pada service http pada pilihan on

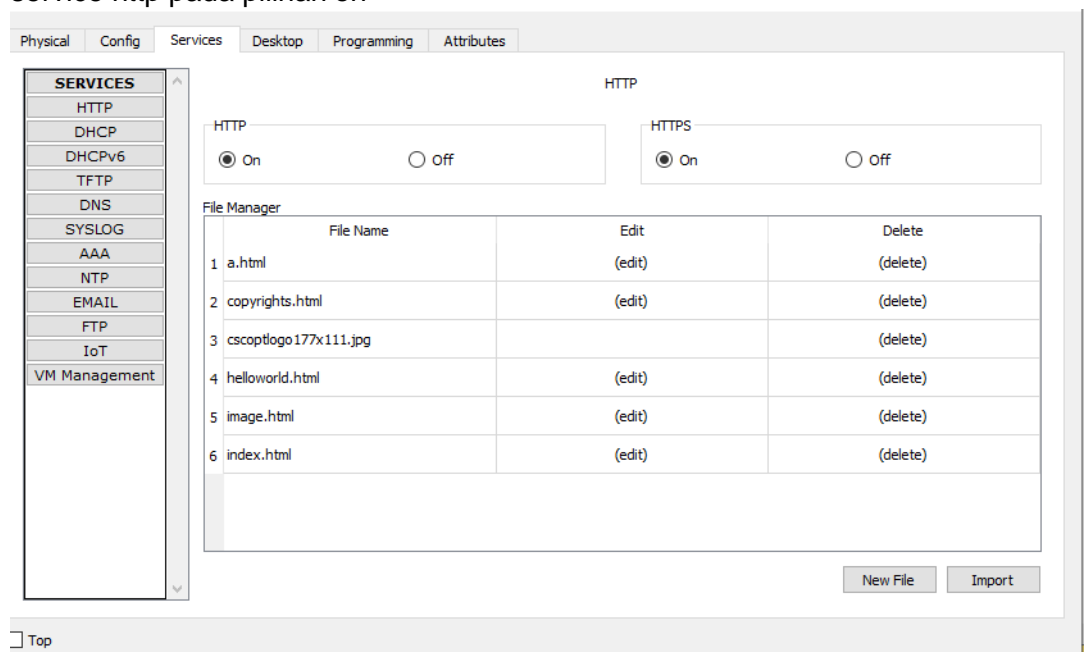

- ❖ Lalu rubah index.html sesuai yang diinginkan

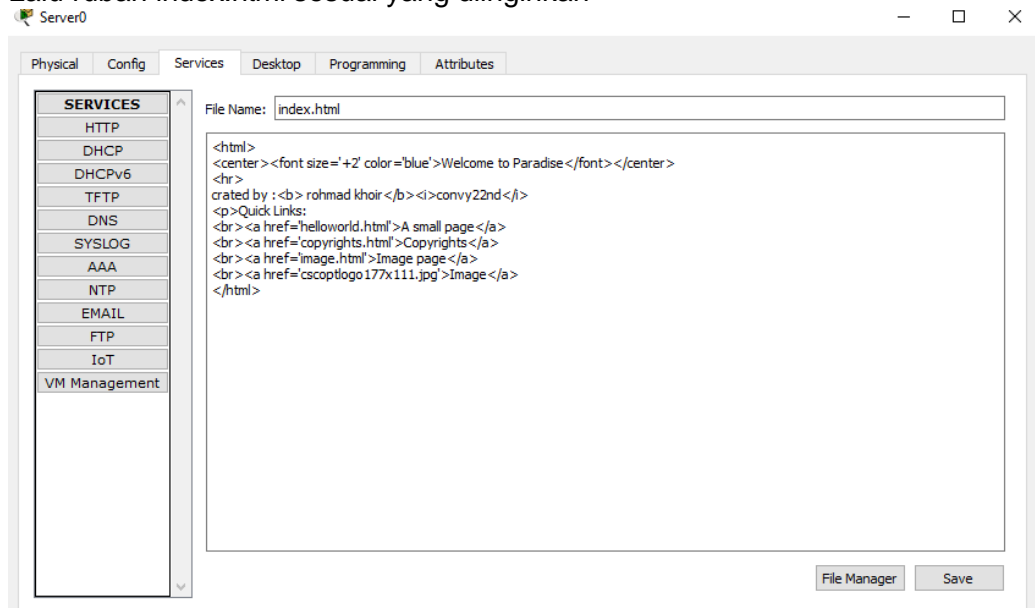


- ❖ Melakukan browsing http. Masuk pada pc0 . pilih tab desktop. Pada daftar menu pilih web browser. Ketikkan ip address 192.168.123.1 di field url

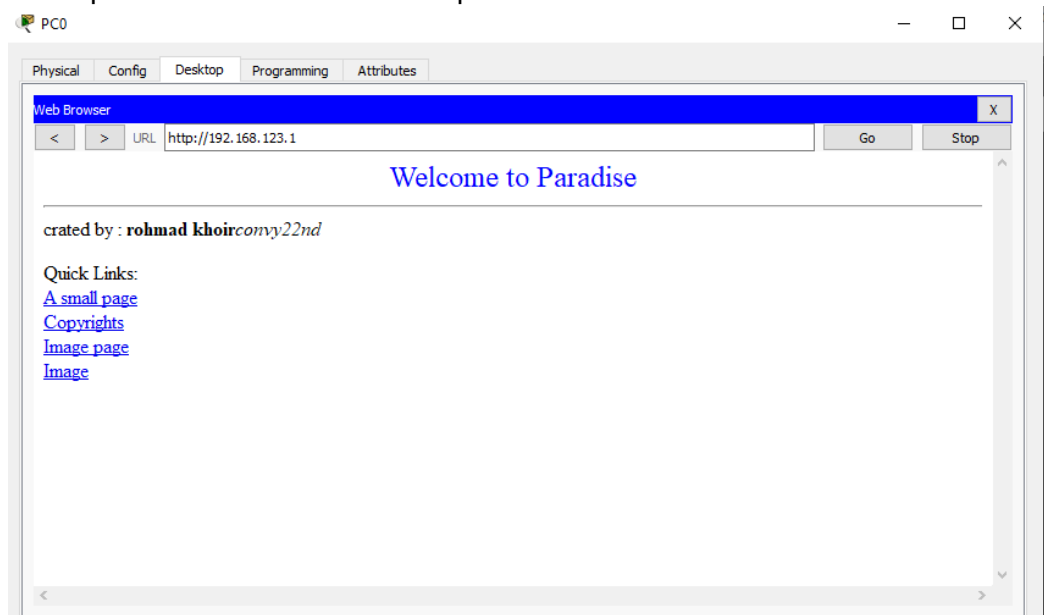

Tugas

1. Rancangan Dhcp Server

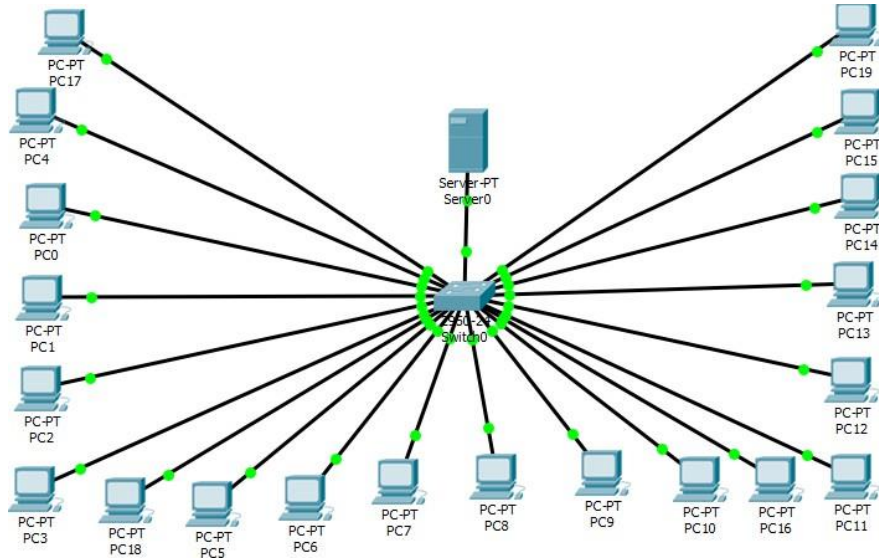

2. Lalu atur ip config server0

Server0

Physical Config Services Desktop Programming Attributes

GLOBAL

Settings

Algorithm Settings

INTERFACE

FastEthernet0

FastEthernet0

Port Status ☒ On

Bandwidth ☒ 100 Mbps ☐ 10 Mbps ☒ Auto

Duplex ☐ Half Duplex ☒ Full Duplex ☒ Auto

MAC Address 0040.0B68.9CEE

IP Configuration

☐ DHCP

☒ Static

IP Address 192.168.7.1

Subnet Mask 255.255.255.224

IPv6 Configuration

☐ DHCP

☐ Auto Config

☒ Static

IPv6 Address

Link Local Address: FE80::240:BFF:FE68:9CEE

☐ Top

3. Pastikan service dhcp on

Server0

Physical Config Services Desktop Programming Attributes

SERVICES

- HTTP
- DHCP
- DHCPv6
- TFTP
- DNS
- SYSLOG
- AAA
- NTP
- EMAIL
- FTP
- IoT
- VM Management

DHCP

Interface: FastEthernet0 Service: ☒ On ☐ Off

Pool Name: serverPool

Default Gateway: 0.0.0.0

DNS Server: 0.0.0.0

Start IP Address: 192.168.7.0

Subnet Mask: 255.255.255.224

Maximum Number of Users: 31

TFTP Server: 0.0.0.0

WLC Address: 0.0.0.0

Add Save Remove

Pool Name	Default Gateway	DNS Server	Start IP Address	Subnet Mask	Max User	TFTP Server	WLC Address
serverPool	0.0.0.0	0.0.0.0	192.168.7.0	255.255.255.224	31	0.0.0.0	0.0.0.0

☐ Top

4. Pastikan ip config pada semua client dhcp

Physical Config Desktop Programming Attributes

IP Configuration

IP Configuration

☒ DHCP ☐ Static

IP Address: 192.168.7.17

Subnet Mask: 255.255.255.224

Default Gateway: 0.0.0.0

DNS Server: 0.0.0.0

IPv6 Configuration

☐ DHCP ☐ Auto Config ☒ Static

IPv6 Address: /

Link Local Address: FE80::202:16FF:FE02:47E9

IPv6 Gateway:

IPv6 DNS Server:

5. Tes ping pada pc setiap pc, pastikan tidak rto

Physical Config Desktop Programming Attributes

Command Prompt

```
Packet Tracer PC Command Line 1.0
C:\>ping 192.168.7.19


Pinging 192.168.7.19 with 32 bytes of data:

Reply from 192.168.7.19: bytes=32 time=2ms TTL=128
Reply from 192.168.7.19: bytes=32 time=1ms TTL=128
Reply from 192.168.7.19: bytes=32 time<1ms TTL=128
Reply from 192.168.7.19: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.7.19:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 2ms, Average = 0ms

C:\>|
```

6. Masuk ke server0 , service http pastikan on, lalu edit index.html menjadi seperti gambar dibawah ini lalu save

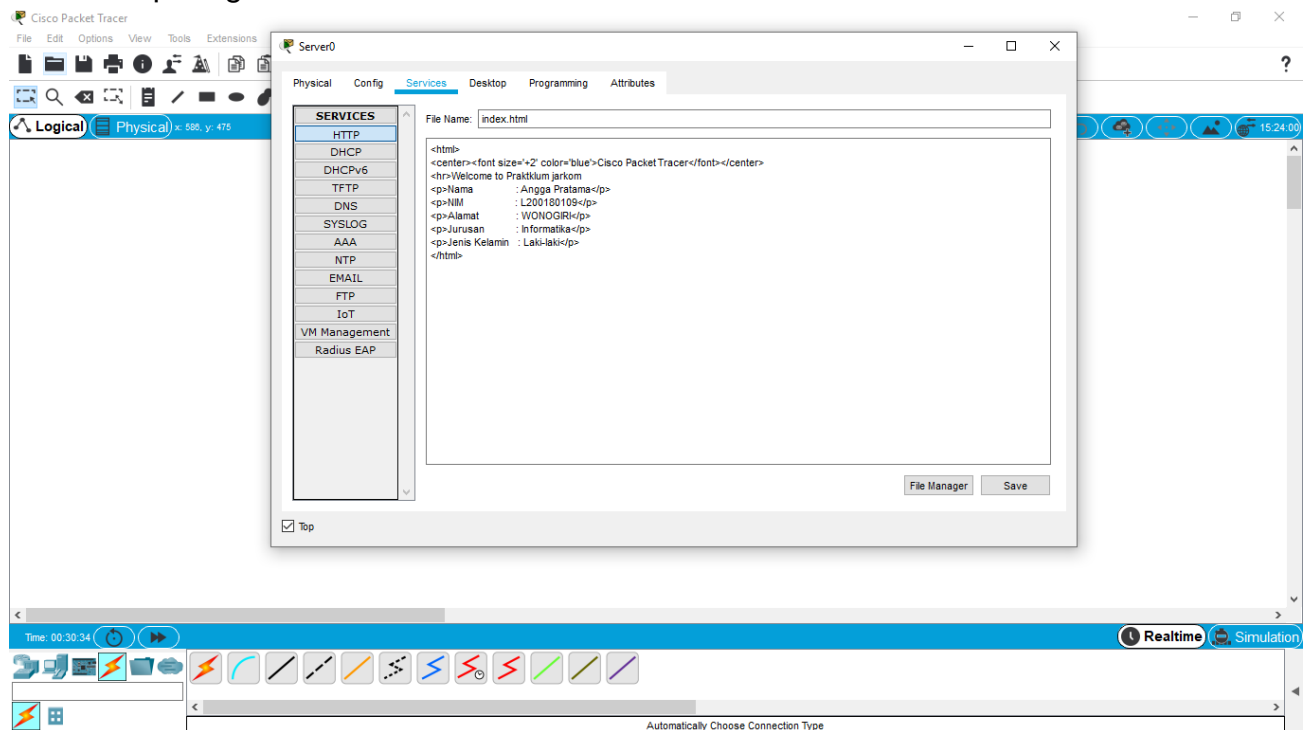

7. lakukan browsing http. Masuk pada pc0 . pilih tab desktop. Pada daftar menu pilih web browser. Ketikkan ip address 192.168.7.1 di field url

