


Nama : Maulana Alhif Ikhsan

NIM : L200180120

Kelas : C

QUIZ

Nomer 1

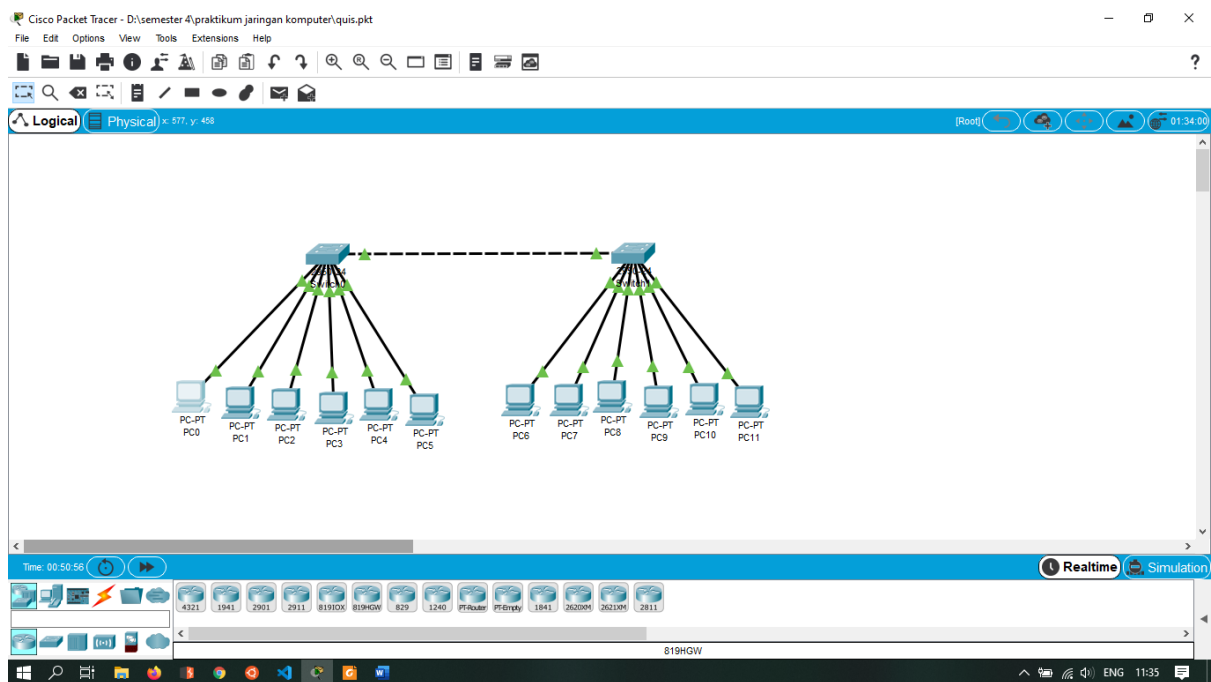

Switch0

Physical Config CLI Attributes

IOS Command Line Interface

as VLAN database mode is being deprecated. Please consult user documentation for configuring VTP/VLAN in config mode.

```
Switch(vlan)#vlan 10
VLAN 10 modified:
Switch(vlan)#vlan 20
VLAN 20 modified:
Switch(vlan)#sw
APPLY completed.
Exiting....
Switch#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Switch(config)#hostname SWITCH0
SWITCH0(config)#int fa0/1
SWITCH0(config-if)#sw mode acc
SWITCH0(config-if)#sw acc vlan 10
SWITCH0(config-if)#int fa0/2
SWITCH0(config-if)#sw mode acc
SWITCH0(config-if)#sw acc vlan 10
SWITCH0(config-if)#int fa0/3
SWITCH0(config-if)#sw mode acc
SWITCH0(config-if)#sw acc vlan 10
SWITCH0(config-if)#int fa0/4
SWITCH0(config-if)#sw mode acc
SWITCH0(config-if)#sw acc vlan 20
SWITCH0(config-if)#int fa0/5
SWITCH0(config-if)#sw mode acc
SWITCH0(config-if)#sw acc vlan 20
SWITCH0(config-if)#int fa0/6
SWITCH0(config-if)#sw mode acc
SWITCH0(config-if)#sw acc vlan 20
SWITCH0(config-if)#int fa0/7
SWITCH0(config-if)#sw mode trunk
SWITCH0(config-if)#
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/7, changed state to down
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/7, changed state to up
```

Ctrl+F6 to exit CLI focus

Copy Paste

Top

Cisco Packet Tracer - D:\semester 4\praktikum jaringan komputer\iquis.pkt

File Edit Options View Tools Extensions Help

Logical Physical x: 534, y: 335

PC0

Physical Config Desktop Programming Attributes

Command Prompt

Packet Tracer PC Command Line 1.0

C:\>ping 10.10.10.1

Pinging 10.10.10.1 with 32 bytes of data:

Request timed out.

Request timed out.

Request timed out.

Request timed out.

Ping statistics for 10.10.10.1:

Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),


C:\>

Top

Time: 00:50:50

Realtime Simulation

819HQW

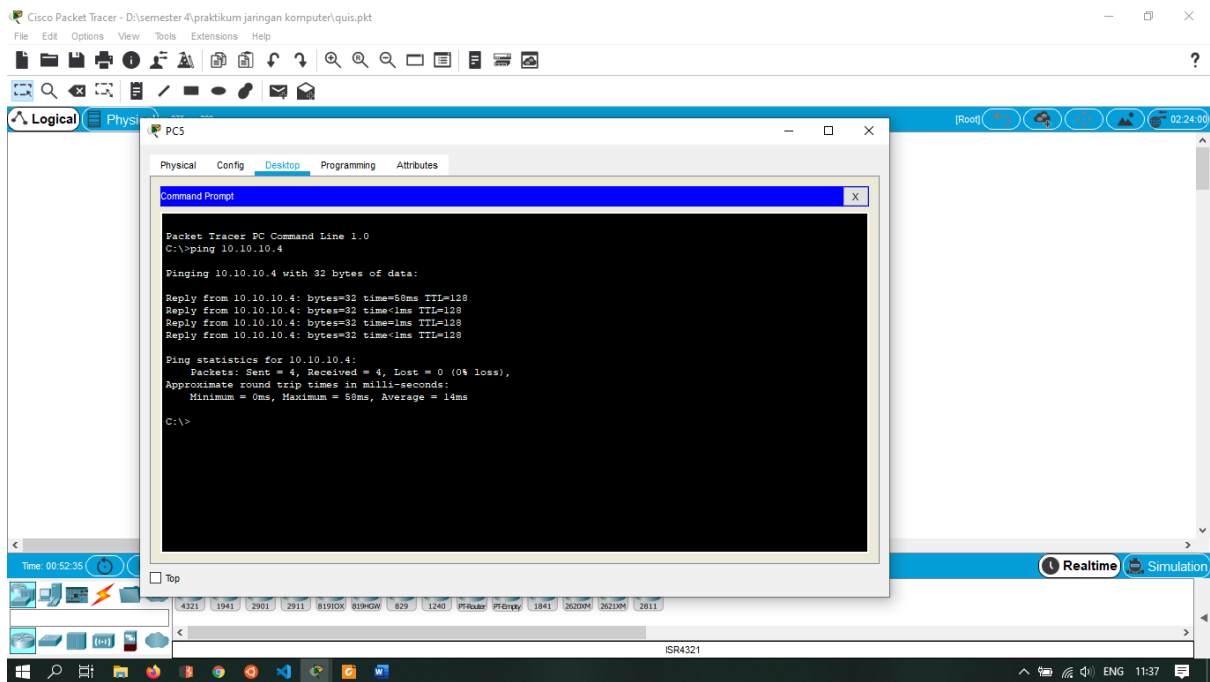

Nomer 2

