

Nama : Muhammad Azka Nur Lutfi

NIM : L200180181


Kelas : E

LAPORAN PRAKTIKUM JARINGAN DAN KOMPUTER

Modul 5

- Kegiatan 1

Konfigurasi ip server0

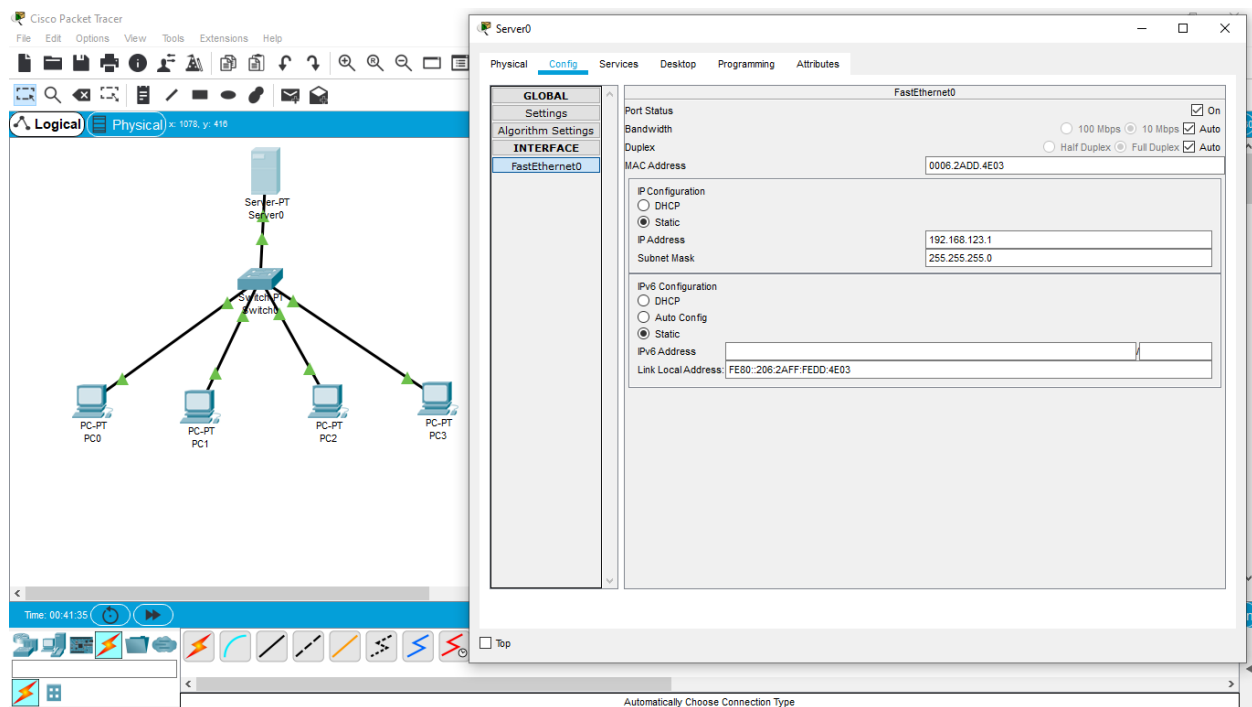

Konfigurasi DHCP server

The image shows the Cisco Packet Tracer interface. On the left, a network topology is displayed with a central Switch connected to four PCs (PC0, PC1, PC2, PC3) and a Server-PT (Server0). The Server0 configuration window is open, showing the DHCP service configuration for the FastEthernet0 interface. The service is turned on, and a pool named 'serverPool' is configured with a start IP of 192.168.123.19, a subnet mask of 255.255.255.0, and a maximum of 5 users.

Server0 Configuration - DHCP

Pool Name	Default Gateway	DNS Server	Start IP Address	Subnet Mask	Max User	TFTP Server	WLC Address
serverPool	0.0.0.0	0.0.0.0	192.168.123.19	255.255.255.0	5	0.0.0.0	0.0.0.0


Konfigurasi ip PC

The image shows the Cisco Packet Tracer interface. On the left, the same network topology is displayed. The PC0 configuration window is open, showing the IP configuration for the FastEthernet0 interface. The DHCP option is selected, and the IP address is set to 192.168.123.19, with a subnet mask of 255.255.255.0 and a default gateway of 0.0.0.0.


PC0 Configuration - IP Configuration

Interface	IP Configuration	IP Address	Subnet Mask	Default Gateway	DNS Server
FastEthernet0	DHCP	192.168.123.19	255.255.255.0	0.0.0.0	0.0.0.0

Hasil ping PC0 ke PC1

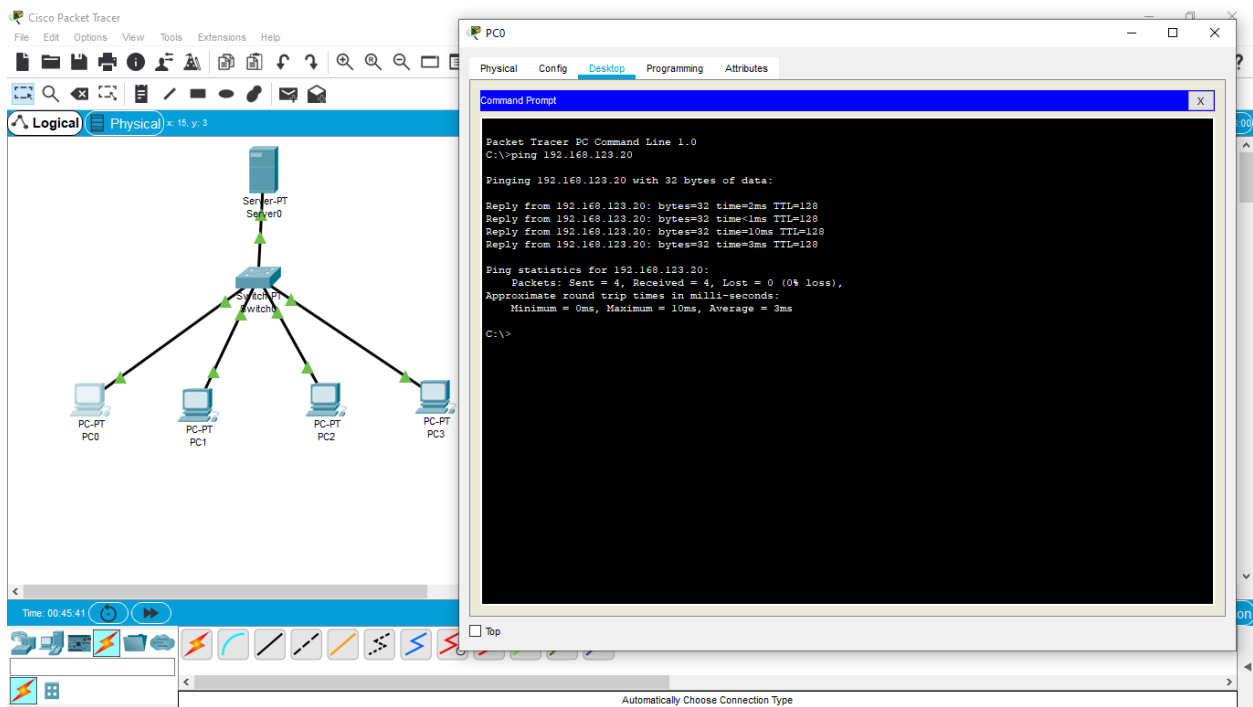


Hasil ping PC1 ke PC2

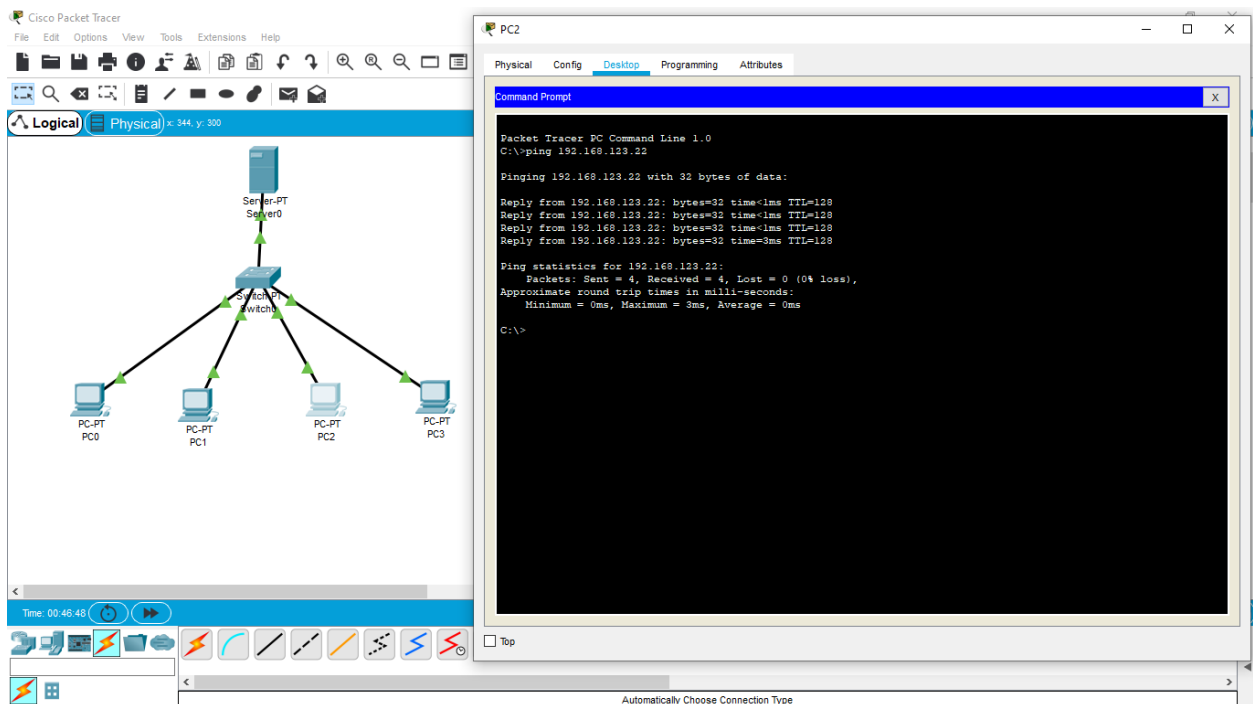


- Kegiatan 2


Konfigurasi ip server0

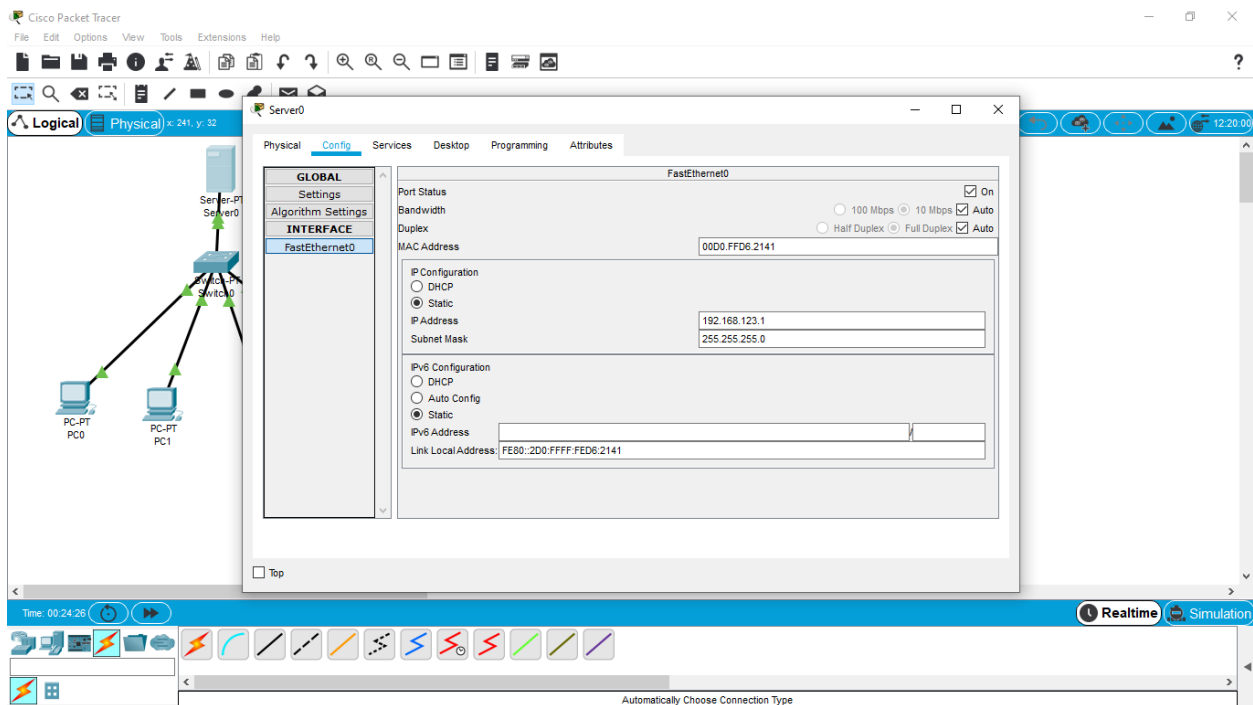


Konfigurasi HTTP server

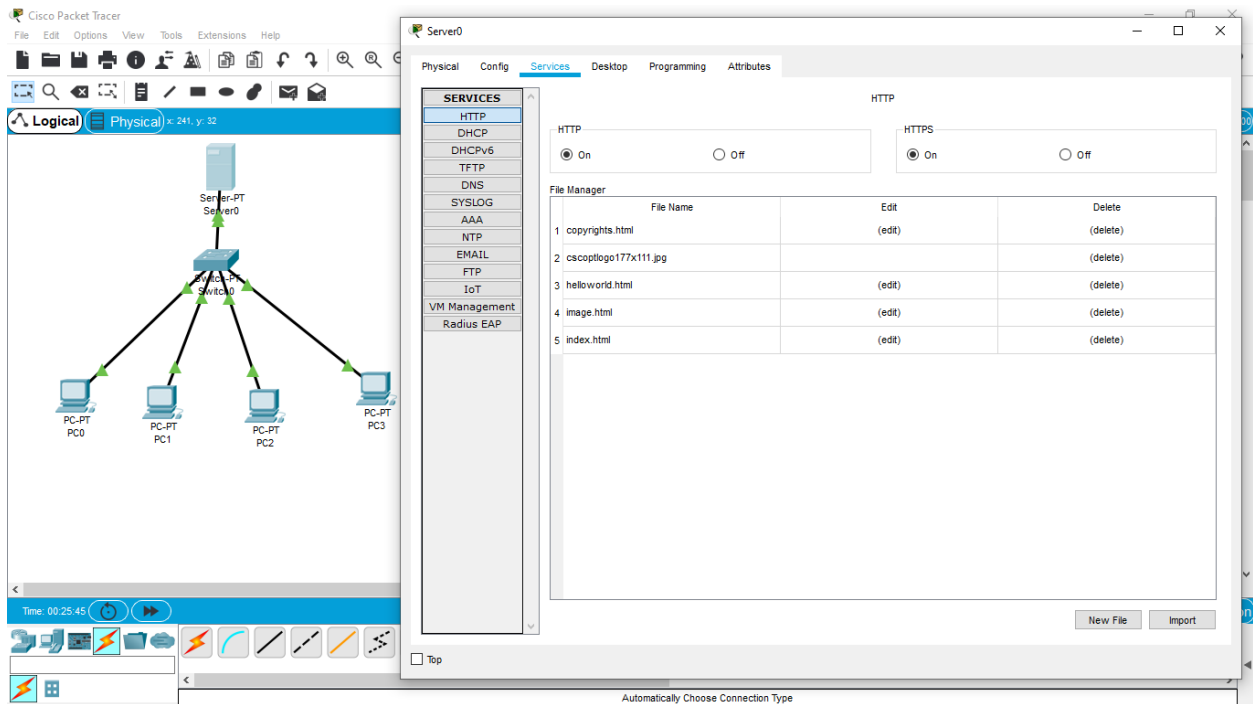

Mengubah script HTML

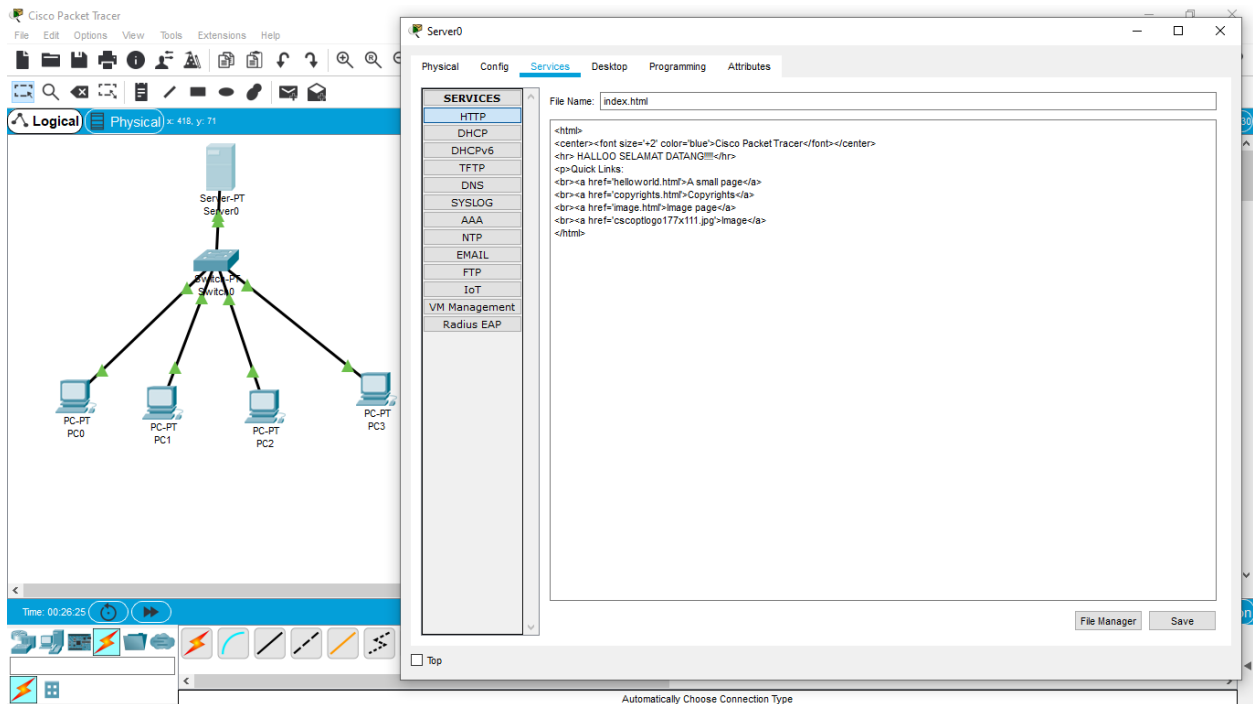


Hasil

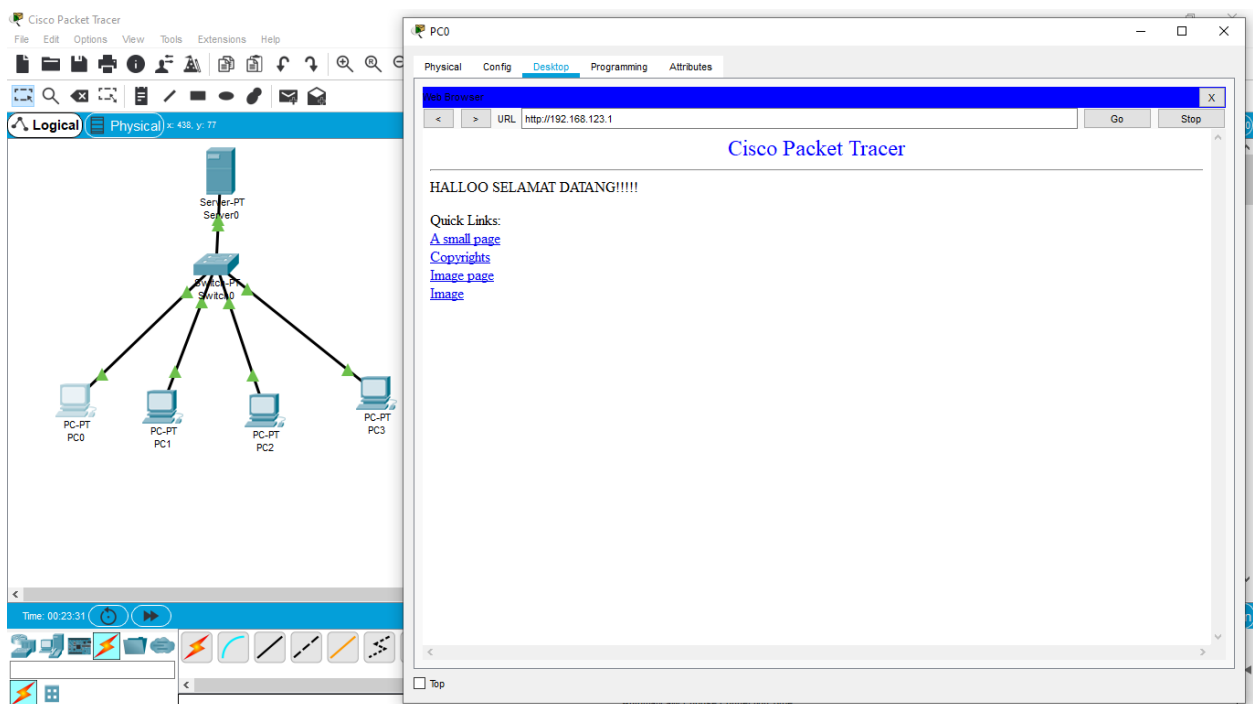

- TUGAS

1. DHCP server dengan 20 pc

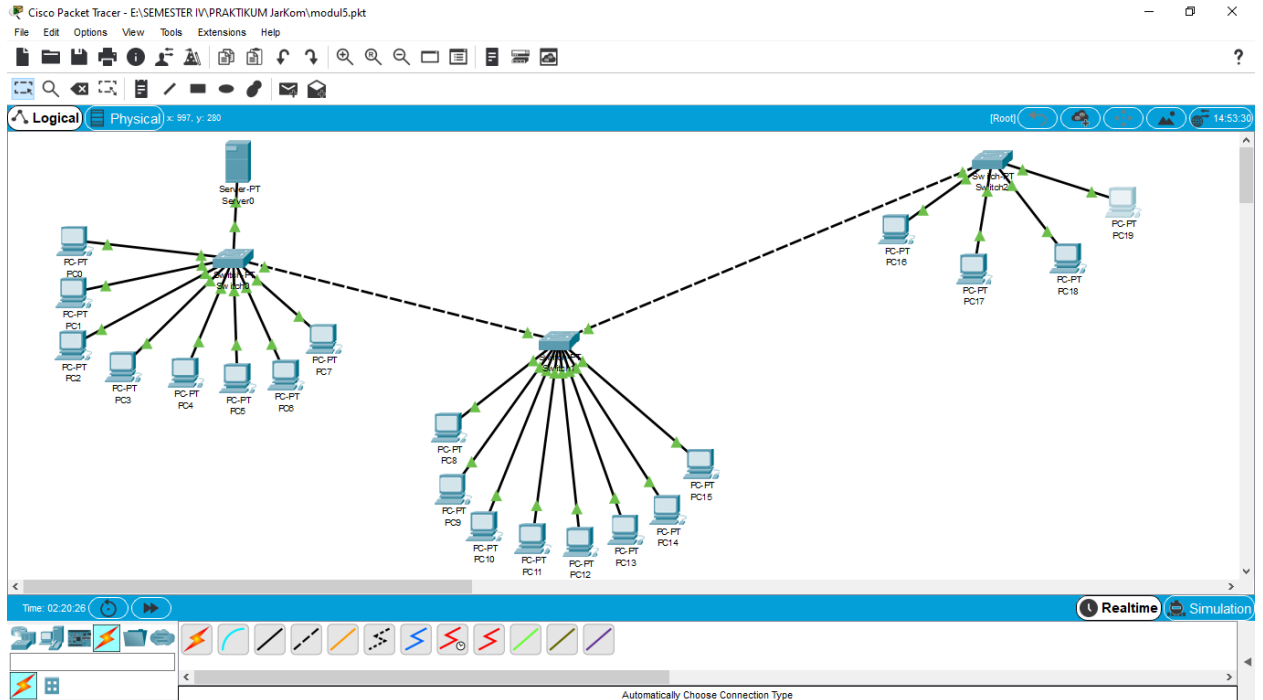

Cisco Packet Tracer - E:\SEMESTER IV\PRAKTIKUM JarKom\modul5.pkt

File Edit Options View Tools Extensions

Logical Physical x: 1330, y: 297

[Root] 15:44:30

Time: 02:22:05

Realtime Simulation

Server0

Physical Config Services Desktop Programming Attributes

SERVICES

- HTTP
- DHCP
- DHCPv6
- TFTP
- DNS
- SYSLOG
- AAA
- NTP
- EMAIL
- FTP
- IoT
- VM Management
- Radius EAP

DHCP

Interface: FastEthernet0 Service: ☒ On ☐ Off

Pool Name: serverPool

Default Gateway: 0.0.0.0

DNS Server: 0.0.0.0

Start IP Address: 192 168 123 19

Subnet Mask: 255 255 255 0

Maximum Number of Users: 20

TFTP Server: 0.0.0.0

WLC Address: 0.0.0.0


Add Save Remove

Pool Name	Default Gateway	DNS Server	Start IP Address	Subnet Mask	Max User	TFTP Server	WLC Address
serverPool	0.0.0.0	0.0.0.0	192.168.123.19	255.255.255.0	20	0.0.0.0	0.0.0.0

Top


Automatically Choose Connection Type

Contoh Hasil ping pc 5 ke pc 9

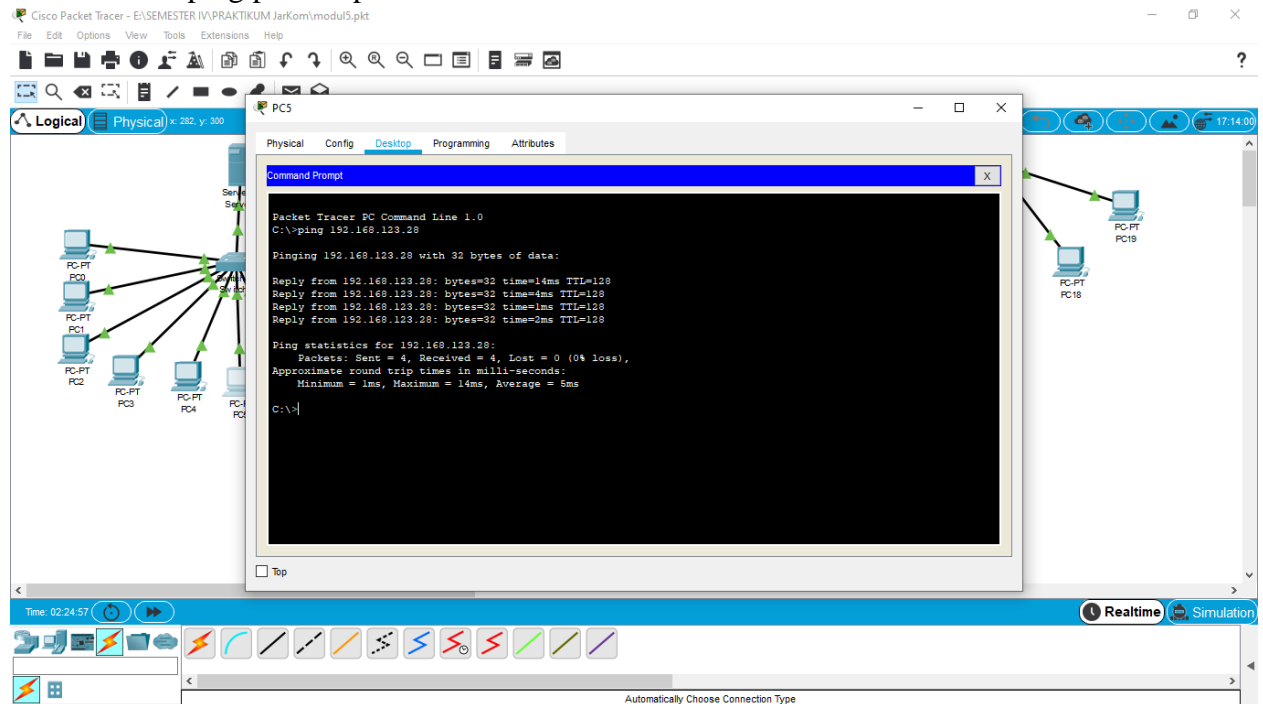

2. Buat web server dengan tampilan tertentu

Mengubah script HTML

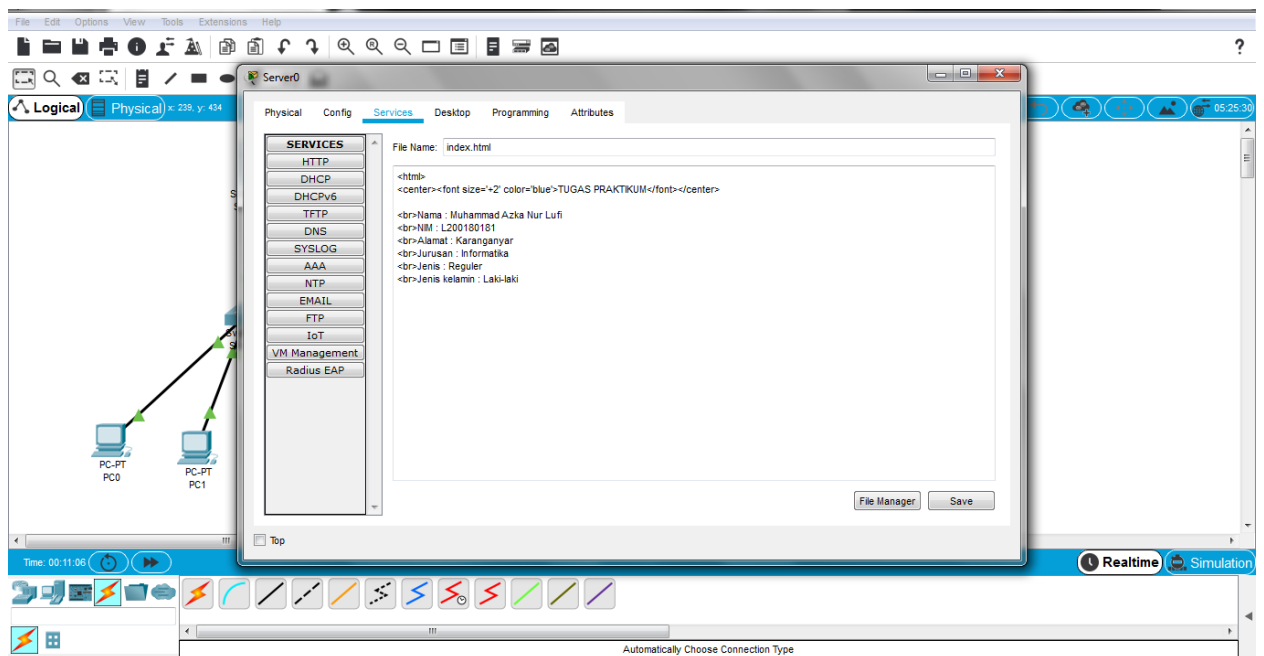

Hasil

