

**COMPUTER NETWORKS PRACTICUM  
PRACTICUM 8**




**By:**

**GANNO TRIBUANA KURNIAJI**

**NIM: L200184092**

**INFORMATION TECHNOLOGY  
FACULTY OF COMMUNICATION AND INFORMATICS  
UNIVERSITY OF MUHAMMADIYAH SURAKARTA  
2020**

# 1. Activity 1

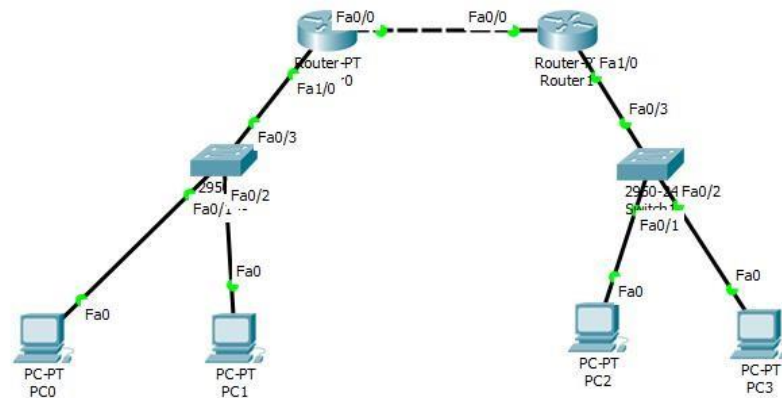

Physical Config CLI Attributes

**GLOBAL**

Settings

Algorithm Settings

**ROUTING**

**INTERFACE**

FastEthernet0/0

FastEthernet1/0

Serial2/0

Serial3/0

FastEthernet4/0

FastEthernet5/0

FastEthernet0/0

Port Status ☒ On

Bandwidth ☒ 100 Mbps ☐ 10 Mbps ☒ Auto

Duplex ☐ Half Duplex ☒ Full Duplex ☒ Auto

MAC Address 0001.96E9.86E1

IP Configuration

IP Address 192.168.10.1

Subnet Mask 255.255.255.0

Tx Ring Limit 10

Equivalent IOS Commands

```

Router>enable
Router#
Router#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#interface FastEthernet0/0
Router(config-if)#
  
```

Top

Physical Config CLI Attributes

**GLOBAL**

Settings

Algorithm Settings

**ROUTING**

**INTERFACE**

FastEthernet0/0

FastEthernet1/0

Serial2/0

Serial3/0

FastEthernet4/0

FastEthernet5/0

FastEthernet1/0

Port Status ☒ On

Bandwidth ☒ 100 Mbps ☐ 10 Mbps ☒ Auto

Duplex ☐ Half Duplex ☒ Full Duplex ☒ Auto

MAC Address 0002.1761.2578

IP Configuration

IP Address 192.168.110.254

Subnet Mask 255.255.255.0

Tx Ring Limit 10

Equivalent IOS Commands

```

Router>enable
Router#
Router#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#interface FastEthernet0/0
Router(config-if)#
Router(config)#exit
Router(config)#interface FastEthernet1/0
Router(config-if)#
  
```

Top

Physical Config CLI Attributes

**GLOBAL**

Settings

Algorithm Settings

**ROUTING**

Static

RIP

**INTERFACE**

FastEthernet0/0

FastEthernet1/0

Serial2/0

Serial3/0

FastEthernet4/0

FastEthernet5/0

FastEthernet1/0

Port Status ☒ On

Bandwidth ☒ 100 Mbps ☐ 10 Mbps ☒ Auto

Duplex ☐ Half Duplex ☒ Full Duplex ☒ Auto

MAC Address 00E0.F7AE.1C76

IP Configuration

IP Address 192.168.10.2

Subnet Mask 255.255.255.0

Tx Ring Limit 10

Equivalent IOS Commands

```

Router>enable
Router#
Router#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#
Router(config)#interface FastEthernet0/0
Router(config-if)#
  
```

Top

Physical Config CLI Attributes

**GLOBAL**

Settings

Algorithm Settings

**ROUTING**

Static

RIP

**INTERFACE**

FastEthernet0/0

FastEthernet1/0

Serial2/0

Serial3/0

FastEthernet4/0

FastEthernet5/0

FastEthernet1/0

Port Status ☒ On

Bandwidth ☒ 100 Mbps ☐ 10 Mbps ☒ Auto

Duplex ☐ Half Duplex ☒ Full Duplex ☒ Auto

MAC Address 0001.63BD.81E1

IP Configuration

IP Address 192.168.120.254

Subnet Mask 255.255.255.0

Tx Ring Limit 10

Equivalent IOS Commands

```

Router>enable
Router#
Router#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#
Router(config)#interface FastEthernet0/0
Router(config-if)#
Router(config-if)#exit
Router(config)#interface FastEthernet1/0
Router(config-if)#
  
```

Top

Physical Config **Desktop** Programming Attributes

☐ DHCP ☒ Static

IP Address 192.168.110.3  
Subnet Mask 255.255.255.0  
Default Gateway 192.168.110.254  
DNS Server 0.0.0.0

Pv6 Configuration

☐ DHCP ☐ Auto Config ☒ Static

Pv6 Address  
Link Local Address FE80:230:A3FF:FE79:A74C  
Pv6 Gateway  
Pv6 DNS Server

802.1X

☐ Use 802.1X Security

Authentication MDS  
Username

Physical Config **Desktop** Programming Attributes

☐ DHCP ☒ Static

IP Address 192.168.110.4  
Subnet Mask 255.255.255.0  
Default Gateway 192.168.110.254  
DNS Server 0.0.0.0

Pv6 Configuration

☐ DHCP ☐ Auto Config ☒ Static

Pv6 Address  
Link Local Address FE80:202:17FF:FE80:7167  
Pv6 Gateway  
Pv6 DNS Server

802.1X

☐ Use 802.1X Security

Authentication MDS  
Username  
Password

Physical Config **Desktop** Programming Attributes

☐ DHCP ☒ Static

IP Address 192.168.120.3  
Subnet Mask 255.255.255.0  
Default Gateway 192.168.120.254  
DNS Server 0.0.0.0

Pv6 Configuration

☐ DHCP ☐ Auto Config ☒ Static

Pv6 Address  
Link Local Address FE80:200:CFF:FE89:7A98  
Pv6 Gateway  
Pv6 DNS Server

802.1X

☐ Use 802.1X Security

Authentication MDS  
Username  
Password

☐ Top

Physical Config **Desktop** Programming Attributes

☐ DHCP ☒ Static

IP Address 192.168.120.4  
Subnet Mask 255.255.255.0  
Default Gateway 192.168.120.254  
DNS Server 0.0.0.0

Pv6 Configuration

☐ DHCP ☐ Auto Config ☒ Static

Pv6 Address  
Link Local Address FE80:200:CFF:FE9C:8510  
Pv6 Gateway  
Pv6 DNS Server

802.1X

☐ Use 802.1X Security

Authentication MDS  
Username  
Password

```
Router>enable
Router#conf
Configuring from terminal, memory, or network [terminal]?
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#router rip
Router(config-router)#network 192.168.110.0
Router(config-router)#network 192.168.10.0
Router(config-router)#^Z
Router#
%SYS-5-CONFIG_I: Configured from console by console
```

```
Router>enable
Router#conf
Configuring from terminal, memory, or network [terminal]?
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#router rip
Router(config-router)#network 192.168.120.0
Router(config-router)#network 192.168.10.0
Router(config-router)#^Z
Router#
%SYS-5-CONFIG_I: Configured from console by console
```

```
Router#show ip route
Codes: C - connected, S - static, I - IGRP, R - RIP, M - mobile,
B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter
       area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external
       type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2, E -
       EGP
       i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia -
       IS-IS inter area
       * - candidate default, U - per-user static route, o - ODR
       P - periodic downloaded static route

Gateway of last resort is not set

C    192.168.10.0/24 is directly connected, FastEthernet0/0
R    192.168.110.0/24 [120/1] via 192.168.10.1, 00:00:23,
FastEthernet0/0
C    192.168.120.0/24 is directly connected, FastEthernet1/0
```

```

Packet Tracer PC Command Line 1.0
C:\>ping 192.168.120.4

Pinging 192.168.120.4 with 32 bytes of data:

Request timed out.
Reply from 192.168.120.4: bytes=32 time<1ms TTL=126
Reply from 192.168.120.4: bytes=32 time<1ms TTL=126
Reply from 192.168.120.4: bytes=32 time<1ms TTL=126

Ping statistics for 192.168.120.4:
    Packets: Sent = 4, Received = 3, Lost = 1 (25% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>

```

```

Router>enable
Router#conf
Configuring from terminal, memory, or network [terminal]?
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#access-list 10 permit 192.168.120.0 0.0.255.255
Router(config)#end

Router#conf
Configuring from terminal, memory, or network [terminal]?
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#int fa 1/0
Router(config-if)#ip access-group 10 out
Router(config-if)#^Z

Router#show access-lists
Standard IP access list 10
    10 permit 192.168.0.0 0.0.255.255

```

```

C:\>ping 192.168.110.3

Pinging 192.168.110.3 with 32 bytes of data:

Reply from 192.168.110.3: bytes=32 time=1ms TTL=126
Reply from 192.168.110.3: bytes=32 time=1ms TTL=126
Reply from 192.168.110.3: bytes=32 time=1ms TTL=126
Reply from 192.168.110.3: bytes=32 time=1ms TTL=126

Ping statistics for 192.168.110.3:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\>

```

```

Router#conf
Configuring from terminal, memory, or network [terminal]?
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#access-list 20 permit 192.168.120.4 0.0.0.0
Router(config)#^Z
Router#
%SYS-5-CONFIG_I: Configured from console by console

Router#conf
Configuring from terminal, memory, or network [terminal]?
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#int fa 1/0
Router(config-if)#ip access-group 20 out
Router(config-if)#^Z

```

```

C:\>ping 192.168.110.3

Pinging 192.168.110.3 with 32 bytes of data:

Reply from 192.168.10.1: Destination host unreachable.
Reply from 192.168.10.1: Destination host unreachable.
Reply from 192.168.10.1: Destination host unreachable.
Reply from 192.168.10.1: Destination host unreachable.

Ping statistics for 192.168.110.3:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),

C:\>ping 192.168.110.4

Pinging 192.168.110.4 with 32 bytes of data:

Reply from 192.168.10.1: Destination host unreachable.
Reply from 192.168.10.1: Destination host unreachable.
Reply from 192.168.10.1: Destination host unreachable.
Reply from 192.168.10.1: Destination host unreachable.

Ping statistics for 192.168.110.4:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),

```

```

C:\>ping 192.168.110.3

Pinging 192.168.110.3 with 32 bytes of data:

Reply from 192.168.110.3: bytes=32 time=1ms TTL=126
Reply from 192.168.110.3: bytes=32 time=1ms TTL=126
Reply from 192.168.110.3: bytes=32 time<1ms TTL=126
Reply from 192.168.110.3: bytes=32 time<1ms TTL=126

Ping statistics for 192.168.110.3:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\>ping 192.168.110.4


Pinging 192.168.110.4 with 32 bytes of data:

Request timed out.
Reply from 192.168.110.4: bytes=32 time<1ms TTL=126
Reply from 192.168.110.4: bytes=32 time=1ms TTL=126
Reply from 192.168.110.4: bytes=32 time<1ms TTL=126

Ping statistics for 192.168.110.4:
    Packets: Sent = 4, Received = 3, Lost = 1 (25% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 1ms, Average = 0ms

```

## 2. Activity 2

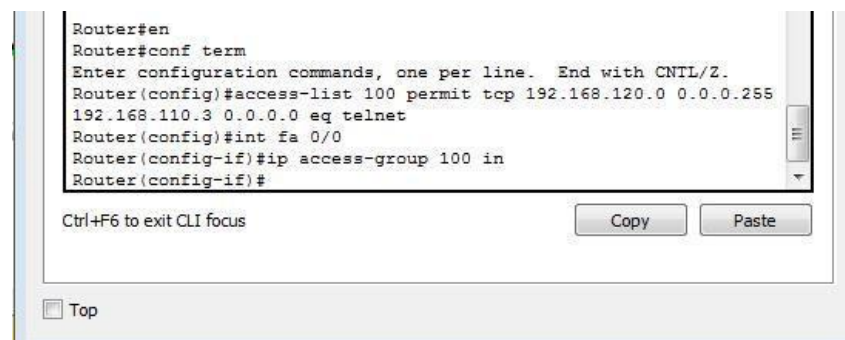



Router0

Physical Config CLI Attributes

IOS Command Line Interface

```
%SYS-5-CONFIG_I: Configured from console by console
show access-lists
Standard IP access list 10
  10 permit 192.168.0.0 0.0.255.255 (4 match(es))
Standard IP access list 20
  10 permit host 192.168.120.4

Router#
Router#conf term
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#access-list 100 permit tcp 192.168.120.0 0.0.0.255
192.168.110.3 0.0.0.0 eq telnet
Router(config)#int fa 0/0
Router(config-if)#ip access-group 100 in
Router(config-if)#^Z
Router#
%SYS-5-CONFIG_I: Configured from console by console
show access-lists
Standard IP access list 10
  10 permit 192.168.0.0 0.0.255.255 (4 match(es))
Standard IP access list 20
  10 permit host 192.168.120.4 (12 match(es))
Extended IP access list 100
  10 permit tcp 192.168.120.0 0.0.0.255 host 192.168.110.3 eq
telnet
Router#
```

Ctrl+F6 to exit CLI focus

Copy Paste

☐ Top

```
Router#
Router#conf term
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#access-list 10 deny 192.168.120.4 0.0.0.0
Router(config)#^Z
Router#
%SYS-5-CONFIG_I: Configured from console by console
show access-lists
Standard IP access list 10
  10 permit 192.168.0.0 0.0.255.255
  20 deny host 192.168.120.4
Standard IP access list 20
  10 permit host 192.168.120.4
Extended IP access list 100
  10 permit tcp 192.168.120.0 0.0.0.255 host 192.168.110.3 eq
telnet
Router#
```

Ctrl+F6 to exit CLI focus

Copy Paste

☐ Top

```
Packet Tracer PC Command Line 1.0
C:\>ping 192.168.110.3

Pinging 192.168.110.3 with 32 bytes of data:

Request timed out.
Request timed out.
Request timed out.
Request timed out.

Ping statistics for 192.168.110.3:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),

C:\>
```