



REV.	DESCRIPTION	DATE
Α	NEW DRAWING	11/17/2005
В	added PCB slot dimensions	10/7/2010

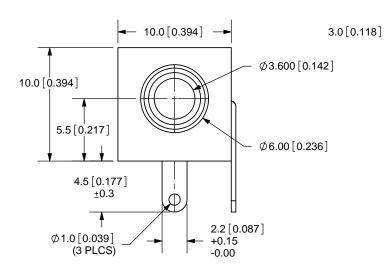







SPECIFICATIONS:
RATING: 12V DC @ 1A
CONTACT RESISTANCE: 30m OHMS MAX
INSULATION RESISTANCE: 50M OHMS MIN: 100V DC
VOLTAGE WITHSTAND: 500V AC R.M.S. FOR 1 MINUTE
LIFE: 5,000 CYCLES

SPECIFICATIONS:
RATING: 12V DC @ 1A
CONTACT RESISTANCE: 30m OHMS MAX
INSULATION RESISTANCE: 50M OHMS MIN: 100V DC
VOLTAGE WITHSTAND: 500V AC R.M.S. FOR 1 MINUTE
LIFE: 5,000 CYCLES

	CUI	INC
--	-----	-----

TOLERANCE: X.X ±0.2mm X.XX ±0.1mm X.XXX ±0.05mm

20050 SW 112th Ave. Tualatin, OR 97062 Phone: 503-612-2300 800-275-4899 Fax: 503-612-2383

RoHS

	MATERIAL	PLATING	Website: www.cui.com		
BUSHING	Brass	Nickel	TITLE: 3.5mm AUDIO JACK - MO	ONO	REV: B
TERMINAL 1	Brass	Tin	PART NO.	UNITS:	
TERMINAL 2	Copper Alloy	Tin	MJ-3536N	MM [IN	CHES]
TERMINAL 3	Brass	Tin	DRAWN BY: APPROV	ED BY:	SCALE:
HOUSING	PBT		ZRJ		3:1

	MODEL NO.	MJ-3536N	
	DIA	NON-THREAD	
	DIA.	M6X0.5	
	SCHEMATIC	0 1 0 3 0 2	

PC FILE NAME: MJ-3536N COPYRIGHT 2010 BY CUI INC.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

CUI Inc.: