

School of Engineering & Design
Electronic & Computer Engineering

MSc in Data Communications Systems



Grid Monitoring

Theofylaktos Papapanagiotou

Dr.Paul Kyberd

March 2011

A Dissertation submitted in partial fulfillment of the
requirements for the degree of Master of Science

School of Engineering & Design
Electronic & Computer Engineering

MSc in Data Communications Systems



Grid Monitoring

Student's name: Theofylaktos Papapanagiotou

Signature of student:

Declaration: I have read and I understand the MSc dissertation guidelines on plagiarism and cheating, and I certify that this submission fully complies with these guidelines.

Abstract

EGI has been replaced EGEE in as the main European Grid Initiative. Multi Level Monitoring architecture suggested central points in regional level where metrics from each information system of the grid will be aggregated. MyEGI, MyEGEE and Nagios replace SAM in availability monitoring. Performance monitoring is approached using Ganglia as the source of performance metrics, and WSRF/BDII as the carrier of that information.

Both Globus and gLite resource brokers come with their favorite information service. Grid Monitoring Architecture suggests the model by which the information should be discovered and transferred. Monitoring and Discovery Service is responsible to provide that information. Two different methods exist about the way that the information is transferred, BDII and WSRF. Both are implementing the Glue schema, support Information Providers, and export the metrics in standard formats.

Linux kernel load average is the main metric that is taken by Ganglia, and through the information providers is passed to Nagios, LDAP and the container that supports the WSRF. Ganglia distribute the metrics to all its nodes using XDR over the multicast network. Nagios store the historical data using NDOUtils to its database repository. Ganglia python client is integrated with BDII LDAP to provide real-time metrics of Gmond to information consumers. WSRF transforms through XSLT the XML taken by Gmond and passes it to the framework's Index to be discovered and aggregated.

Finally, data are represented in graphs using RRDtool through pnp4nagios plugin of Nagios system. LDAP queries using PHP provide the real-time data from BDII. DOM library of PHP used to parse data using XPath queries in WebMDS frontend of WSRF.

Contents

1	Introduction	1
1.1	Context	1
1.2	Aims & Objectives	2
1.3	Organization	4
2	Literature Review	5
2.1	Grid Computing	5
2.2	Resource Brokers	6
2.3	Information Services	7
2.4	Performance Monitoring	11
2.5	European Grid Infrastructure	12
3	Design/Methods	15
3.1	Approach Adopted	15
3.2	Design Methods	16
3.3	Data-acquisition Systems	20
3.4	Range of cases examined	25
4	Results	36
4.1	Events source	36
4.2	Aggregation and transfer	40
4.3	Presentation	46
5	Analysis	50
5.1	Methods Adopted	50
5.2	Interpretation of Results	54

5.3	Specific Interpretations	54
5.4	Enveloping Interpretations	55
6	Conclusions	56
6.1	Conclusions	56
6.2	Further Work	56

List of Tables

1.1	Key activities necessary to complete the project	4
3.1	GLUE schema for Host Processor Information Provider	27
4.1	Sample output from both calls with DOM or LDAP	47
4.2	Example Nagios service status details for ganglia check	49

Listings

3.1	Ganglia to Nagios script	23
3.2	Ganglia Resource Provider for WSRF Index	30
3.3	Web Service Deployment Descriptor for WSRF Index	31
3.4	WSRF command line query	32
4.1	Linux kernel CALC_LOAD macro	37
4.2	Gmond networking	38
4.3	Gmond XML cluster report	38
4.4	XDR sample	39
4.5	Gstat output	40
4.6	WSRF query output	41

4.7	WebMDS results from XPath query	42
4.8	BDII LDAP search for Glue CE ProcessorLoad attributes . . .	43
4.9	Perl Ganglia Information Provider for MDS	44
4.10	Python Ganglia client MDS export	45
4.11	PHP DOM call to WebMDS	47
4.12	PHP LDAP call to BDII	48
4.13	Nagios log with load check	48
4.14	NPCD temporary file in spool directory	49
5.1	libmetrics code to get load average	51
5.2	WSRF XSLT for Ganglia Information Provider	52

List of Figures

2.1	Grid Resource Brokers grouped by Information Systems[?] . .	6
2.2	Globus Toolkit version 4 (GT4)	7
2.3	gLite architecture	8
2.4	Berkeley Database Information Index	10
2.5	Ganglia Data Flow	13
3.1	Overview of Information Systems used to monitor the grid . .	16
3.2	Grid Monitoring Architecture	17
3.3	GLUE schema 2.0 extention for Host and SMP Load	19
3.4	Load Average calculation	21
3.5	Ganglia Network Communications	22
3.6	Nagios configuration and check ganglia values	24
3.7	PNP 4 Nagios data flow	25
3.8	Web Service Resource Framework	29
3.9	WebMDS application	35

Chapter 1

Introduction

1.1 Context

Performance monitoring of a grid is a key part in grid computing. Based on the reports of grid performance, decisions on capacity planning are being made. Visualization of performance status in different levels helps scientists and managers focus on the exact point of the infrastructure where a bottleneck on service exists. Current interfaces delivers performance graphs without following the standard topology schema that is presented by the grid information system.

WSRF aggregation framework and GLUE schema are examined to understand the gathering process of metrics. BDII LDAP also examined as the carrier of the information data. Ganglia's hierarchical delegation to create manageable monitoring domains is an important aspect. Performance metrics are taken using Linux kernel's load average. Performance in the aspect of how many jobs are served by each site is not examined in this project. Which of the two information services better transfer the metrics for the multi level monitoring architecture.

Build a lab to gather performance data and start working on the development of the integration parts. It is assumed that the environment is a grid site, that already have the components needed to work together. Ganglia daemons on each node, presented by the GLUE schema on site BDII, Nagios/MyEGI

monitoring frameworks. A web interface is available to present the work of the integration of Ganglia into Nagios/MyEGI.

1.2 Aims & Objectives

Different role users are going to use a portal to get information about the performance status of the grid, to export the appropriate report for their job. This project aims to develop these particular pieces of code to support the aggregation of the metrics from Nagios, to allow the web based customization of the visualization of the reports. These metrics are needed to report the availability and reliability of NGIs and particular sites of the grid.

The procedures that are going to be used in order to achieve the above aims should include at the beginning some opening and exploration of the environment where the interface is going to be placed. The usage of grid computing in the world should be well known, so a visibility of the importance and the possible uses of the software will be recognized. The appropriate access to the infrastructure should be gained, on different platforms and levels. Brunel University site and GridPP/NGS VO at the beginning, as long as the UKI ROC operations may be a good point of collaboration with researchers to reach the bests possible requirements and data to analyze. The middleware used in both these VOs should be examined so with the knowledge of running projects and global usage of them may target to export better specifications. Existing operations on the grid should also be discovered. The European initiative milestones on the operations of the regional level should be considered as a route, and registration to news about the upcoming research projects that are going to use the grid should also be take place.

After that wide-opening to get the whole picture, a targeted and focused view should follow. Existing monitoring tools must be used to check the problems and search for requirements. The experience of SAM, Gridview, Gridmap, Gstat, GridICE, etc should be taken in order to merge their functionality as possible as it is. Information systems that already reside over the

infrastructure, must also be learned. Standards and specifications should be examined, on how the message bus works and delivers the data in an hierarchical manner. A contact with the CERN team working on MyEGEE and Indiana University's MyOSG team should be established, to collaborate on the core of MyOSG source. Changes submission to subversion system as long as ticket closure of the development project tool will help to get to know the core of MyEGEE and Nagios. It is possible to create and upstream a Nagios customized web interface, to create different views of Nagios resources scheme to grid topology oriented architecture. Nagios, NRPE and Ganglia installations should be deployed across the CE&SE nodes of Brunel's sites to have a working production environment to work on. Attention should be taken on the potential performance impact of these sensors deployment. UKI MyEGEE validation/testing portal will be used as a pre-production environment to check changes. PNP should be fixed in GridPP Nagios to be evaluated. Statistical access log analysis of existing tools may have results on trends of users/admins preferred views.

Various tools are going to be used to track changes and collaborate. Monitoring articles in GridPP wiki & CERN twiki should be made. Snippets upstream & status changes must be a regular operation in SVN/JIRA/Trac in CERN interfaces. Ongoing task through the dissertation project is the reading of papers and methodical updates of Mendeley citation management tool to have the bibliography organized. Possible changes suggestions to MSc on DCS course notes about grid monitoring may be made, as long as the EGI roadmap updates. Finally with the appropriate supervision and follow-up of meetings and presentations, a paper publishing might take place.

1.3 Organization


1.3.1 Tools

This project was developed in \LaTeX using Vi editor. Its releases may be found in Google Code, where Mercurial was used for source control. Citation management through Mendeley software. Papers obtained by becoming member of IEEE, ACM and USENIX. Operating Systems Laboratory of Technological Education Institute of Piraeus was used to build a testbed of grid site and tools to study existing monitoring tools.

1.3.2 Time-plan (Gantt Chart)

Task	Start date	End date	Days
Preliminary	09/29/10	10/24/10	20
- Identify Concepts	09/29/10	10/08/10	8
- Gain Access	10/08/10	10/24/10	12
Planning	11/12/10	12/04/10	17
- Explore existing technologies	11/12/10	11/28/10	12
- Write Interim Report	11/28/10	12/04/10	5
Experimental-Development	12/04/10	02/14/11	51
- Evaluate performance monitoring tools	12/04/10	12/25/10	15
- Information/topology databases	12/17/10	12/29/10	8
- Develop Customized Interface	12/29/10	02/14/11	34
— Coding of information aggregation	12/29/10	01/21/11	16
— Development of the frontend	01/21/11	02/10/11	14
— Complete the interface (auth, scale, etc)	02/10/11	02/14/11	4
Report	02/16/11	03/29/11	32
- Begin Writing	02/17/11	03/01/11	11
- Submit Draft & Make Changes	03/01/11	03/14/11	9
- Prepare Final	03/14/11	03/29/11	11

Table 1.1: Key activities necessary to complete the project

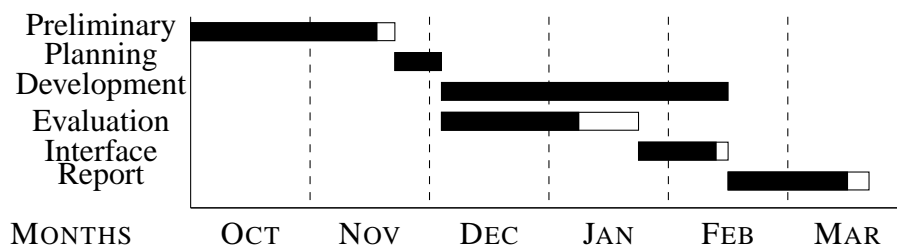

Chapter 2

Literature Review

2.1 Grid Computing

Grid computing [?] is the most recent decade's technology innovation in high performance computing. A large number of scientists working on the operations of this huge co-operative project of EU. Monitoring & information architecture [?] has been standardized in the initial state of that project, to succeed in today scale of 150.000 cores in production. Use of grid computing nowadays takes place in academic and research environments. Also, applications in industry-based needs such as promising Power Grid control [?] are emerging.

Grid computing may be the infrastructure over which Cloud Computing may reside. Cloud computing promise that it will change how services are developed, deployed and managed. The elastic demands of education and research community is a good place where cloud computing may be developed. Many datacenters all over Europe which are currently serving grid computing infrastructure for LHC, could later share the resources to help some other big academic projects scale up as needed.

2.2 Resource Brokers

Resource Brokers [?] were developed to manage the workload on Computer elements and Resource elements. Globus is a non-service based RB, and gLite RB which is service based. A Workload Management System (WMS) exists in gLite to do the distribution and management of the Computing and Storage oriented tasks.

Based on the middleware that resource brokers rely on, they use the equivalent information system. From resource broker's point of view, the relevant information is the data store and query. There are two main categories of information systems in middlewares. The Directory-based and the Service-based. They are used for resource mapping by the brokers when they access the resource data.

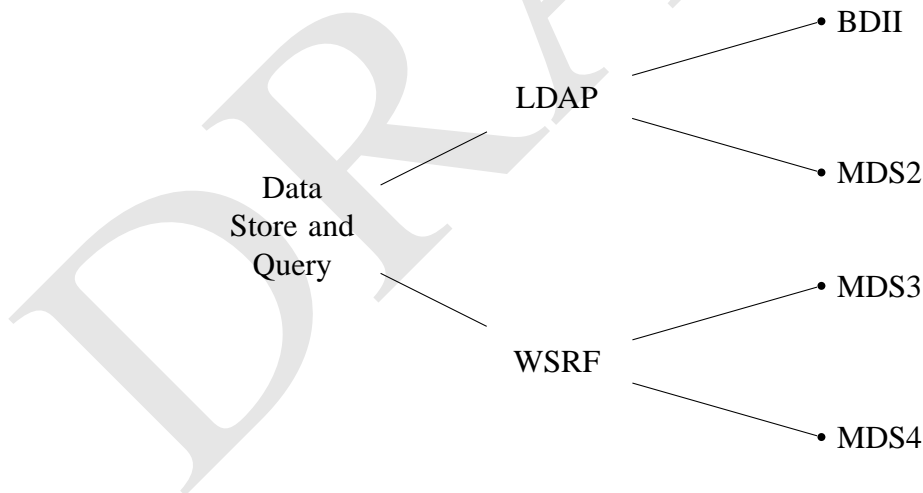


Figure 2.1: Grid Resource Brokers grouped by Information Systems[?]

2.2.1 Globus

Globus Toolkit is an open source toolkit used to build grids. It provides standards such as OGSA, OGSI, WSRF and GSI, and the implementations of OGF protocols such as MDS and GRAM.

Monitoring and Discovery Service (MDS) is part of Globus Toolkit, and provides the information for the availability and status of grid resources. As a suite of Web Services, it offers a set of components that help to the discovery

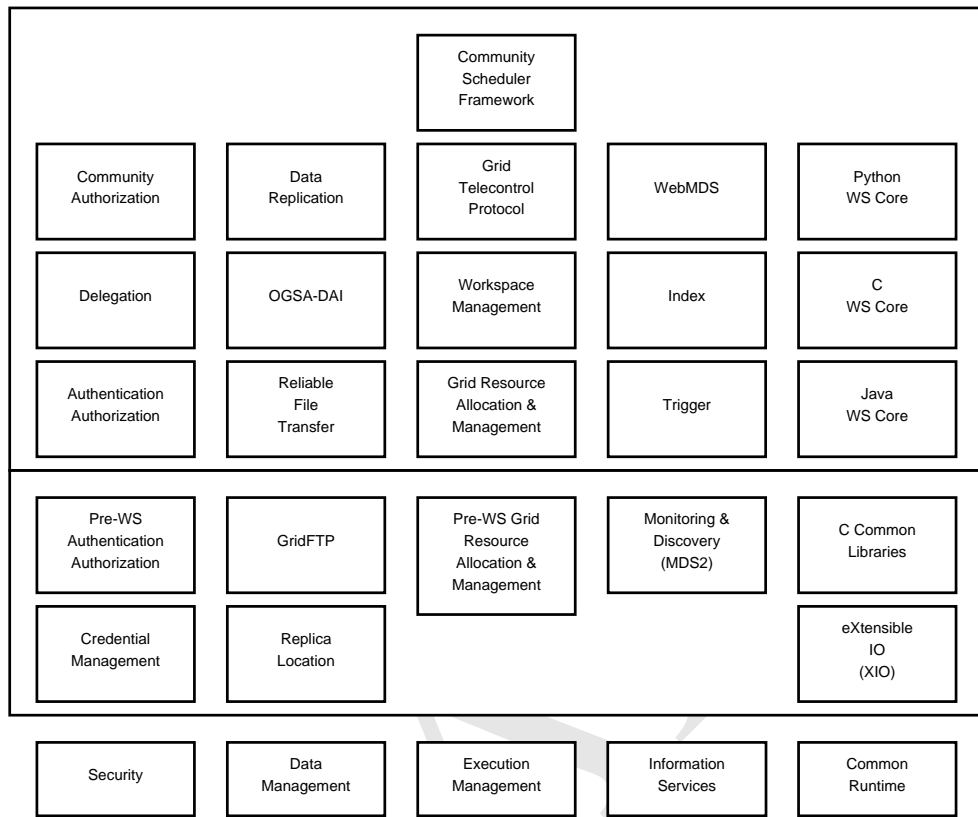


Figure 2.2: Globus Toolkit version 4 (GT4)

and monitoring of the resources that are available to a Virtual Organization.

2.2.2 gLite

gLite is a middleware which was created to be used in the operation of the experiment LHC in CERN. The user community is grouped in Virtual Organizations, and the security model is GSI. A grid using gLite consists of User Interface, Computer Element, Storage Element, Workload Management System and Information Service.

The information service in version 3.1 of gLite is similar to MDS of Globus middleware, except that the GRIS and GIIS are provided by BDII (see Section BDII) which is an LDAP based service.

2.3 Information Services

A Grid Monitoring Architecture [?] was proposed in early 2000's. Information systems were developed to create repositories of information needed to

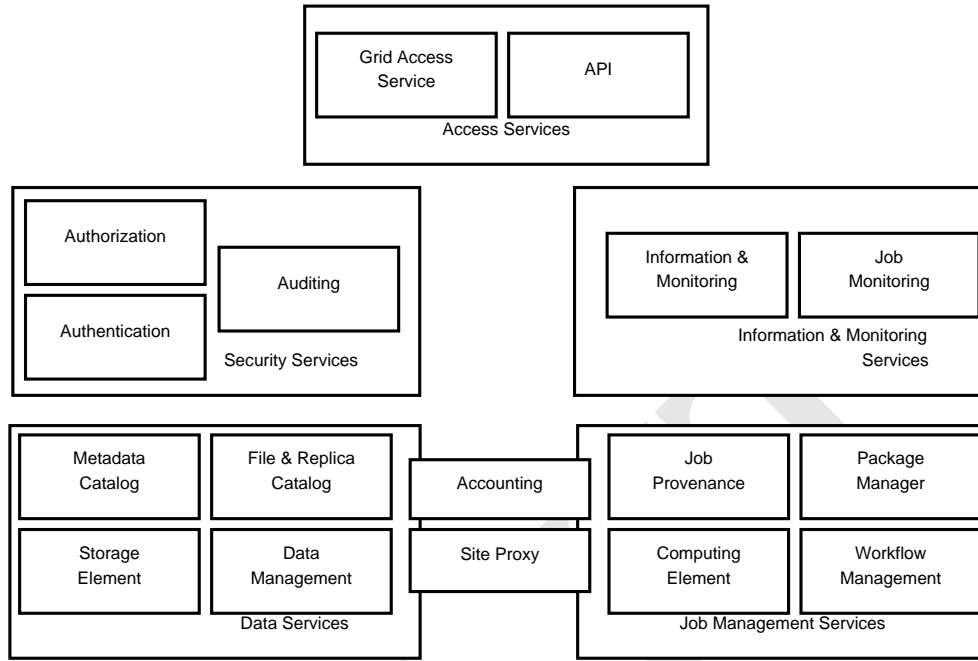


Figure 2.3: gLite architecture

be stored for monitoring and statistical reporting reasons. Such an organized system later was specified by the Aggregated Topology Provider (ATP) definition. The largest world grids adopt that model, forming OIM in OSG (USA) and GOCDB as that information base in EGEE (Europe). Message Bus was also defined as a mean to transfer the underlying data, and well known tools came up such as Gstat, GOCDB and BDII with Glue specification. Grid performance monitoring and keeping of such an information system has also impact in the performance of the system it self [?], so various methods were developed to give the solution to the scaling and performance problem, such as MDS2 (GIIS & GRIS), GMA and R-GMA [?], which offers relational environment [?], has experience on production systems [?] and scales to reach huge needs such as CMS project [?, ?].

2.3.1 MDS

Monitoring and Discovery Services is about collecting, distributing, indexing and archiving information of the status of resources, services and configurations. The collected information is used to detect new services and resources, or to monitor the state of a system.

Globus Toolkit was using LDAP-based implementation for its information system since its early versions, back in 1998 [?]. MDS2 in Globus Toolkit fully implemented referral with a combined GRIS and GIIS, using mds-voname=local to refer to the GRIS and all other strings to refer to a GIIS. It was widely accepted as a standard implementation of a grid information system [?], with good scalability and performance [?].

MDS 4 consists of the Web Services Resource Framework and a web service data browser, WebMDS. The WSRF Aggregator Framework includes:

1. MDS-Index, which provides a collection of services monitoring information and an interface to query such information.
2. MDS-Trigger, which provides a mechanism to take action on collected information.
3. MDS-Archive, is planned for future release of MDS, to provide access to archived data of monitoring information.

External software components that are used to collect information (such as Ganglia)[?] are called Information Providers.

2.3.2 Glue

As long as Information Services are used to connect different infrastructures, the schema of its structure had to be standardized. To inter-operate EU and USA grids, DataTAG developed the GLUE schema implementation. GLUE specification quickly adopted by the communities and currently its recommended LDAP DIT is specified in GLUE specification v.2.0 from GLUE Working Group of OSG.

Many objectclasses of the Glue schema define a Computer Element, a Storage Element, etc. As seen in Figure 3.3 in later chapter, performance monitoring attributes such as processor load are defined in objectclasses that extends Computer Element objectclass.

2.3.3 BDII

BDII is used by gLite as the Information Index Service of the LHC experiment. It is LDAP based and may be at top-level or site-level. The GIIS has been replaced by site BDII, which is fundamental for a site in order to be visible in the grid.

Top-level BDII contains aggregated information about the sites and the services they provide. Site BDII collects the information from its Computer Elements, Storage Elements, etc as long as every configured service that is installed on the site.

Information about the status of a service and its parameters is pushed on BDII using external processes. An information provider is also used (such as in WSRF) to describe the service attributes using the GLUE schema.

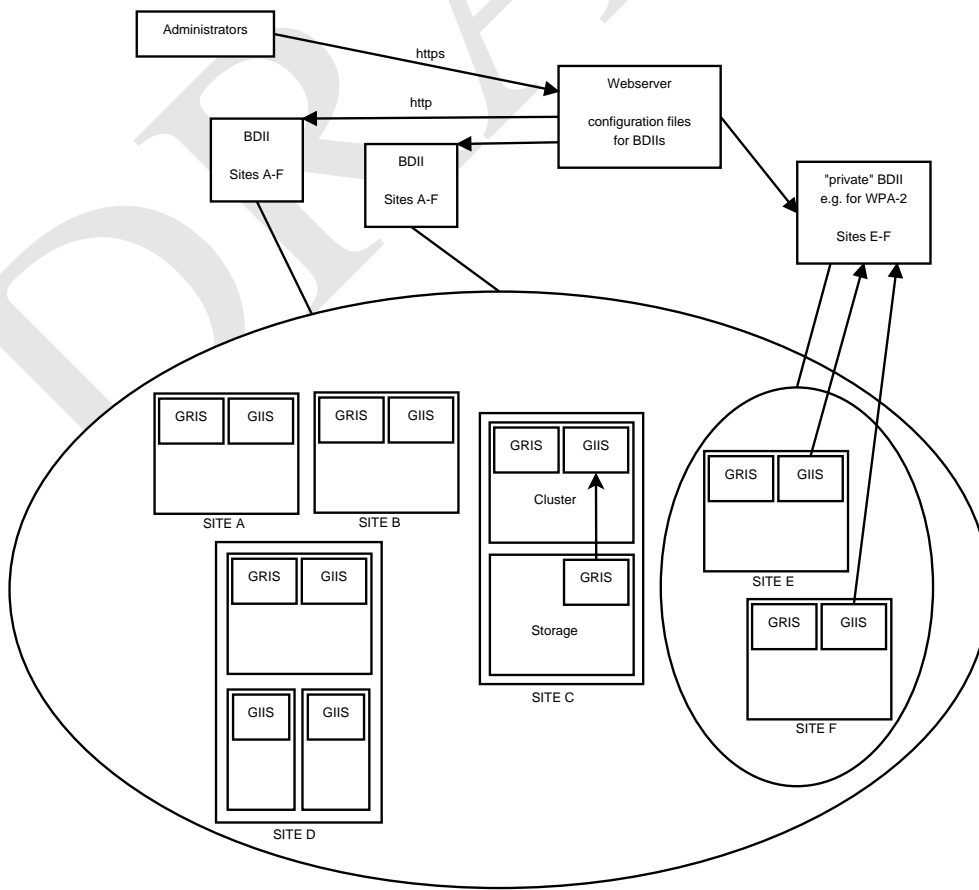


Figure 2.4: Berkeley Database Information Index

2.4 Performance Monitoring

Standards are being published about the operational models that the grid computing initiative will use. Last decade the EGEE I, II & III was adopted by european universities to fund and establish a collaborative community of researchers under a central point, the CERN oriented research project in Particle Physics. After EGEE, the European Grid Initiative were formed to lead to the explode of that community into regional initiatives. Performance and availability monitoring tools and views also follow that format, phasing out commonly used SAM [?] and having the adoption of Nagios as the monitoring of regional performance tool.

A taxonomy effort has been made [?] to present the differences of performance monitoring systems of the grid, and later a more general [?] taxonomy paper was published to give a more general visibility of these tools. GridICE was generally used to aggregate the performance metrics of ROCs in high level reports [?]. Later GridICE was left as long as the SAM left, to meet the milestone of EGI to have a regional monitoring tool (Nagios) to report the reliability of the joined sites and report the values for SLA reasons.

Grid performance can be also measured using benchmark tools in different levels of the grid architecture, using the micro-benchmarks at the Worker Node level, the Site (CE) level and the Grid VO level. Various benchmarks exist in these levels, using different libraries and algorithms, such as This project focuses on mathematically compute of the performance of a grid based on the metrics that are taken at the Worker Node level.

Different metrics and benchmarks exist, such as the measurement of the performance of CPUs in **MIPS using EPWhetstone** and the evaluation of the performance of a CPU in **FLOP/s and MB/s using BlasBench**. GridBench [?] provides a framework to collect those metrics using its own description language, **GBDL**.

GcpSensor [?] introduce a new performance metric called WMFLOPS. It uses PAPI [?] (Performance API) to access the hardware performance coun-

ters. For data distribution it uses MDS information system which provides dynamic metrics for CPU load average, one for 1, for 5 and for 15 minutes load.

2.4.1 Ganglia

Ganglia is a monitoring tool which provides a complete real time monitoring environment. It is used by both academia and industry to monitor large installations of clusters, grids. Any number of host metrics may be monitored in real time using the monitoring core, a multithreaded daemon called Gmond. It runs on every host that is in scope of monitoring. Its four main responsibilities are:

1. Monitor the changes that happen in the host state
2. Multicast over the network, the changes that has been made
3. Listen to network for changes that other ganglia nodes are multicasting and
4. Answer the status of the whole cluster to specific requests, using XML.

All the data that are gathered of the multicast channel are written to a hash table in memory. The metric data of each node that runs gmond and sends information over the multicast channel are been processed and saved. Data sent over the multicast channel is happening using external data representation (XDR). When there is a request over a TCP connection, the response is in XML.

2.4.2 Nagios

2.5 European Grid Infrastructure

Latest EGI directive to form regional operation tools pushed the use of Nagios [?] as the main tools of availability & performance (an so reliability) moni-

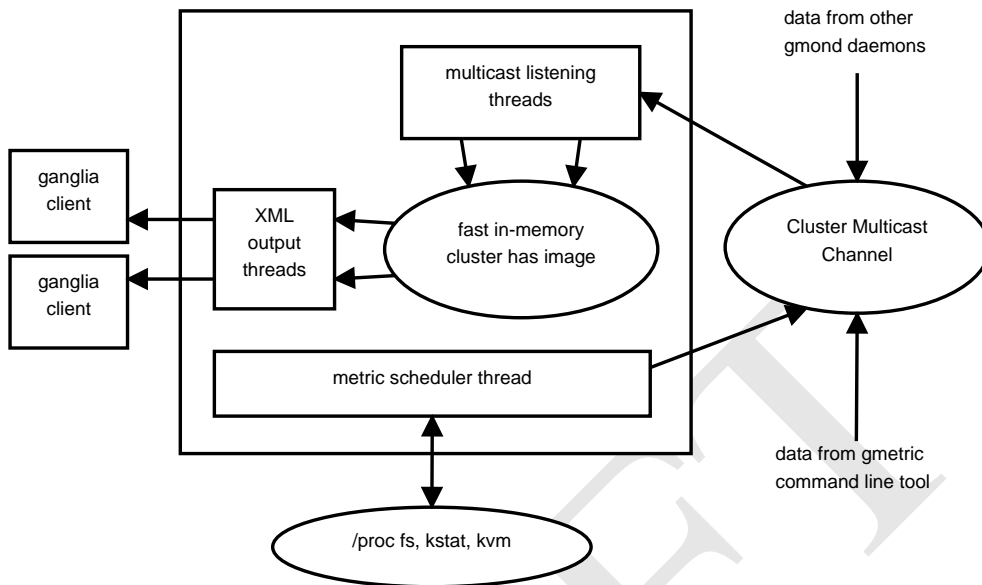


Figure 2.5: Ganglia Data Flow

toring of the grid. Each NGI/ROC (regional level) has its own interface, and hierarchically there is a Super Nagios interface to report the top level view of general system availability. Nagios offers extensions such as NRPE to remotely invoke check commands in inaccessible/private installations. Another important add-on to Nagios is the NdoUtils, which offers an SQL store of history data to the monitoring interface. Nagios Configuration Generator was introduced to help the automatic generation of the configuration based on the information system of nodes and services.

Finally, there has been proposed an integration of SAM views to a Nagios customized interface, to offer the last good known SAM interface to the old users. Nagios also integrates with GGUS, a ticketing system that european grid initiative uses. Monitoring infrastructure in EGI is fully distributed using regional Nagios servers and the corresponding regional MyEGI portals.

2.5.1 NGS and GridPP

Brunel University takes part in regional and european initiatives. 5 different Computer Elements exist, and 3 Storage Elements, consisting the UKI-LT2-Brunel site. LT2 stands for London Grid, a co-operation with other London Universities. GridPP and NGS are two collaboration groups that Brunel Uni-

versity is member of, and papers on the web interface [?] and real time visualization of the grid status were presented [?] by GridPP

In GridPP, regional monitoring tools exist to provide distributed monitoring services in UK. Regional Nagios and MyEGI/MyEGEE instances co-exist in Oxford University that offer service availability monitoring for all UK sites. Ganglia installations exist in site level deployments, and a Ganglia frontend which aggregates Tier-1 sites is offered through RAL.

Chapter 3

Design/Methods

3.1 Approach Adopted

Grid performance monitoring in this project is examined using **GMA**, an architecture that established to provide the standards for a distributed monitoring system. The technologies that will be discussed here are about the Information Infrastructure that provides the metrics to the users/applications.

The metrics are generated using **Linux kernel's** load average functions. **Ganglia** is used to take that metrics and synchronize all cluster nodes with the relevant information, over the **multicast channel**.

Nagios is configured using a **custom script** that takes the information for the cluster nodes, and periodically queries the **Gmond** to get the metrics for the discovered nodes. The results are stored in its repository and using RRDTool and pnp4nagios, graph reports are generated on demand.

To pass the information, two different information systems are examined, **BDII and WSRF**. Both are used in modern grid implementations and are described in **MDS specification**. BDII queries event source (Gmond) using Perl/Python LDAP libraries. The results taken, fill the directory schema which has been extended using **Glue schema** specification for Processor Load in Computing Element structure.

MDS4 introduces the use of **WSRF** in grid information system. A **Ganglia Information Provider** using **XSLT** takes the XML output from Gmond

and aggregates the metrics using **WSRF Aggregation Framework**. In front of it, a Tomcat instance serves the **WebMDS** frontend to allow **XPath** queries to the results that has been aggregated.

Finally, two sample small applications has been developed to provide a homogeneous interface that display the same information using the two different information systems.

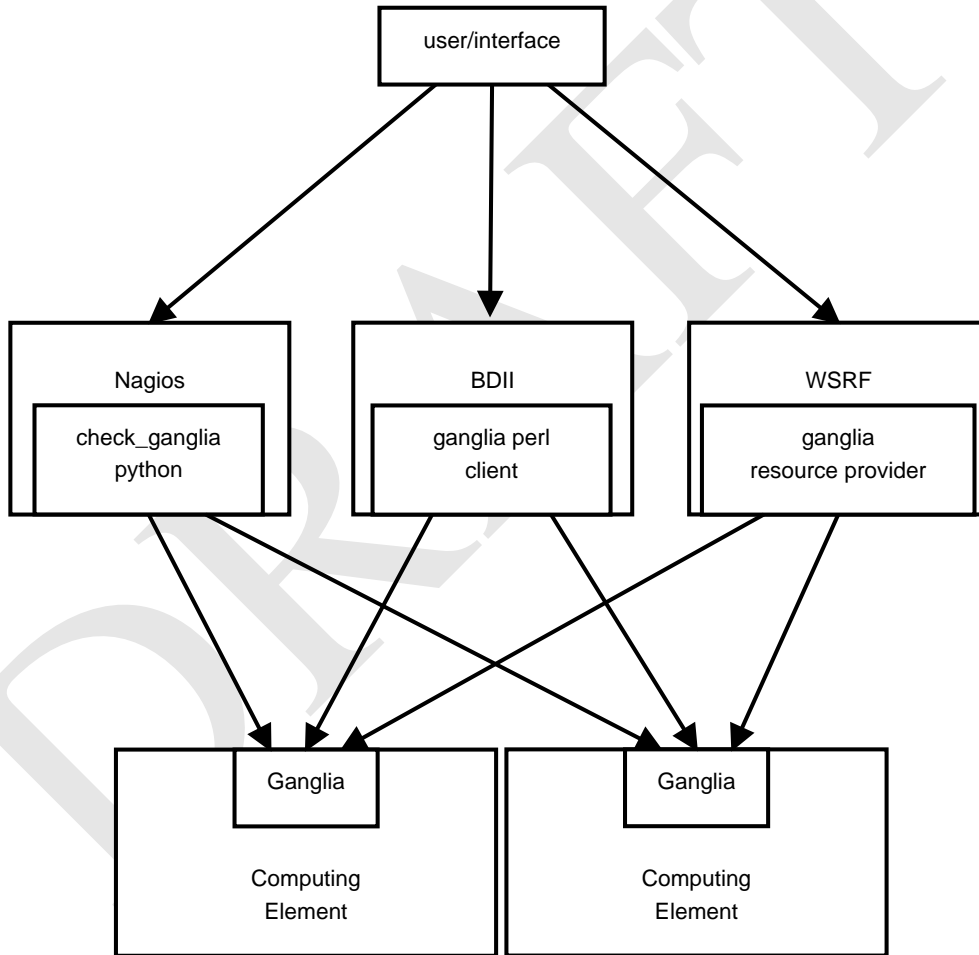


Figure 3.1: Overview of Information Systems used to monitor the grid

3.2 Design Methods

3.2.1 Grid Monitoring Architecture

By definition [?] Grid Monitoring Architecture consists of three components, as shown in Figure 3.2:

1. **Directory Service** which supports the publish and discovery of the information
2. **Producer component**: which is responsible for the availability of the performance data that takes from the event source and
3. **Consumer component**: the one that requests the performance data and receives the metrics from the producer.

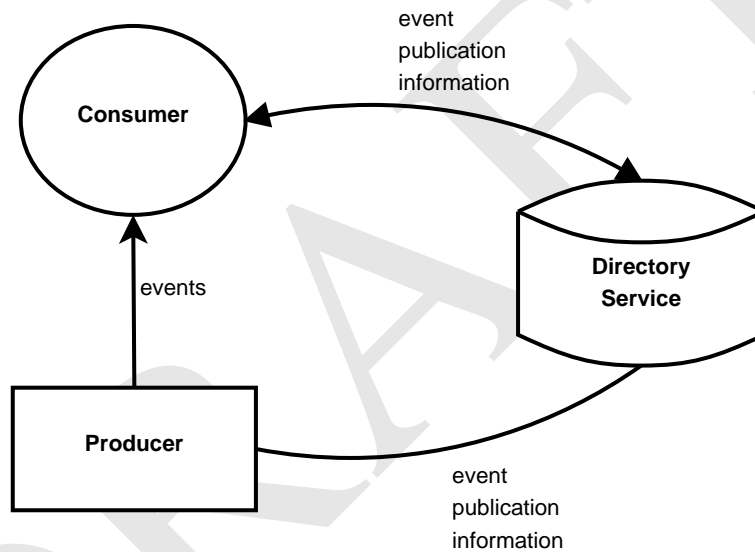


Figure 3.2: Grid Monitoring Architecture

In GMA, all metrics that are transmitted by the producer are handled as events with a timestamp, so performance data should be accurate. These events are transmitted to the consumer directly, and not through the directory service (whose role is just to advertise producers to consumers and vice versa). The GMA recommends that the structure of the data should be following a schema definition.

Grid Monitoring Architecture supports two models to handle the communication between producers and consumers:

- **Streaming publish/subscribe model**
- **Query/Response model**

The directory service is used by both producers to discover consumers and consumers to discover producers. The information of the availability of each

producer/consumer is published to the directory service, and each component may initiate a connection to another type of component that has discovered in the directory service. Even though the role of the directory service is so centric in the discovery of components between each other, the performance data messages are transferred between the producer/consumer directly and not via the Directory Service.

3.2.2 GLUE Schema

gained wide acceptance given its adoption by Globus MDS3

GLUE schema came to provide the interoperability needed between US and European Physics Grid Projects. As a standard, a common schema was introduced to describe and monitor the grid resources. Major components include:

- Computing Element (CE)
- Storage Element (SE)
- Network Element (NE)

The implementation of Glue schema may be using LDAP, XML or SQL. The MDS implementation of the Glue schema in this project includes the core Information Provider and the Ganglia Interface for the cluster information.

3.2.3 Information Infrastructure

To design the Information Infrastructure for distributed computing applications some requirements have been considered such as performance, scalability, cost and uniformity.

Because grid computing applications usually operate in large scale installations, there are performance requirements for the information infrastructure. It should allow rapid access to configuration information that is frequently used, using **caching to query periodically each host or index server for the metrics.**

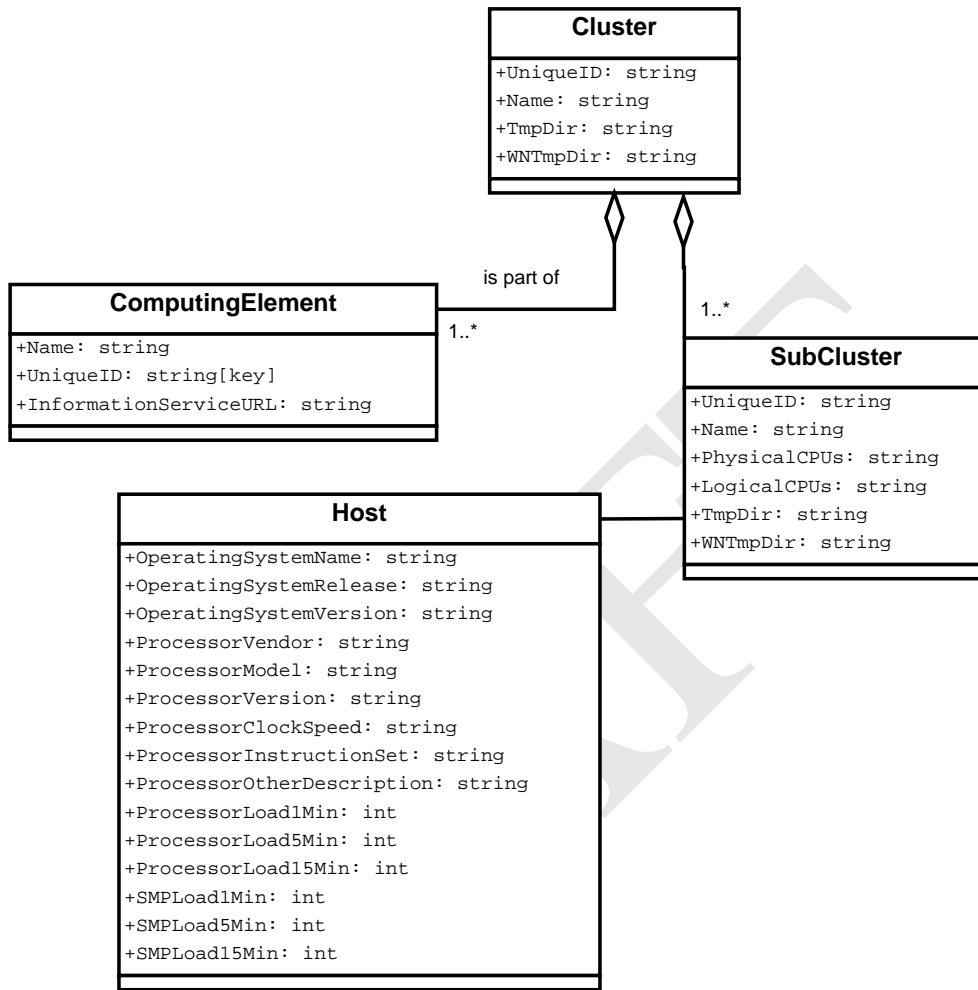


Figure 3.3: GLUE schema 2.0 extension for Host and SMP Load

The number of components in a grid infrastructure scales up to hundreds of thousands of nodes, and these components should be available for queries by many different tools. That information should be discoverable using information indexes.

Deployments, maintenance and operations in a large installation of many systems has operational costs for human resources. The information system should automatically discover and serve the availability paths for applications and grid resources/services.

Because of the large number of different heterogeneous networks of nodes and clusters, there is a need of uniformity. Uniformity helps to simplify the developers to build applications that give better configuration decisions. APIs for common operations and data models for the representation of that information. Resources are divided in groups of computing, storage, network ele-

ments, etc.

The solution proposed by GLUE standard and X.500 (Directory Service) is the key feature to scale, and get uniformity. It may be used to provide extensible distributed directory services. It is optimised for reads, its binary-tree like hierarchy and usually backend data structure provides a framework that well organize the information that need to be delivered by an Information Infrastructure.[?]

3.3 Data-acquisition Systems

3.3.1 Metrics

CPU load is taken using the pseudo `/proc/loadavg` file which in turn is filled by Linux kernel's `CALC_LOAD` macro. This function takes 3 parameters. The load-average bucket, a y constant that is calculated using formula

$$y = \frac{2^{11}}{2^{((5\log_2(e))/60x)}}$$

for values $x = 1$, $x = 5$ and $x = 15$ (where x represent the minutes and y the exponent constant), and the number of how many processes are in the queue, in running or uninterruptible state.

3.3.2 Ganglia

The metrics about load in one, five and fifteen minutes are taken from Gmond daemon through the `proc` filesystem as seen in Figure 3.4. These values are multicasted using a UDP message on the network, only if the value has been changed from the previous one taken. There is also a time threshold that after that time the value is been sent again, even if it haven't changed, so new hosts on the network may gather the data needed for their Gmond. Each host of a cluster have the information about the metrics of itself and each other node, so it stores the whole cluster state. Using loopback interface, every Gmond

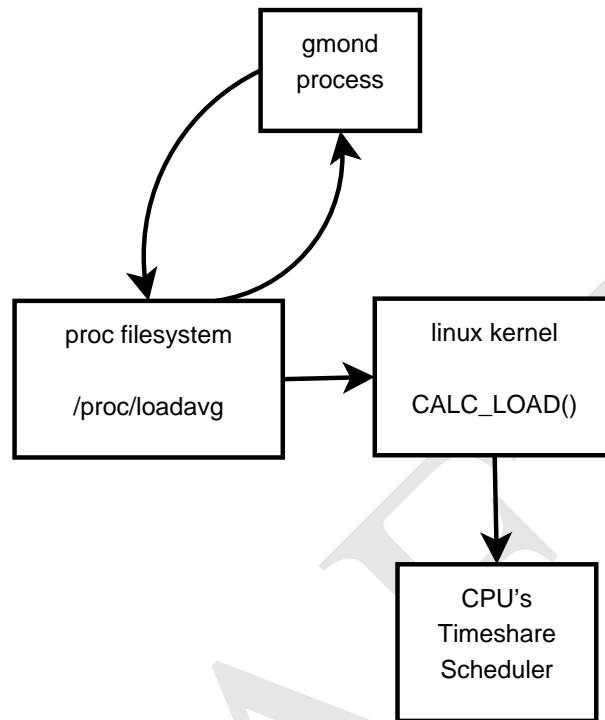


Figure 3.4: Load Average calculation

sends its metrics to itself.

If a TCP connection on the Gmond listening port 8649 is made, Gmond writes a full cluster state of metrics in XML including its DTD. There is a typical access list in the configuration called trusted hosts, and of course every node that is in the cluster that a specific node is configured to be part of, is allowed to connect to get the XML.

Installation and configuration

To install ganglia, some dependencies where needed to be installed on each node of the Computing Element. In the testbed, there where an LTSP installation existed [?] and easily deployment of ganglia succeeded. Ganglia sources compiled for Gmond on the nodes and Gmetad on the systems that Ganglia Web interface needed to be installed. Finally on worker nodes, iptables should accept connections on 8649/TCP port.

```
# yum install rrdtool perl-rrdtool rrdtool-devel apr-devel \
    libconfuse libconfuse-devel expat \
    expat-devel pcre pcre-devel
```

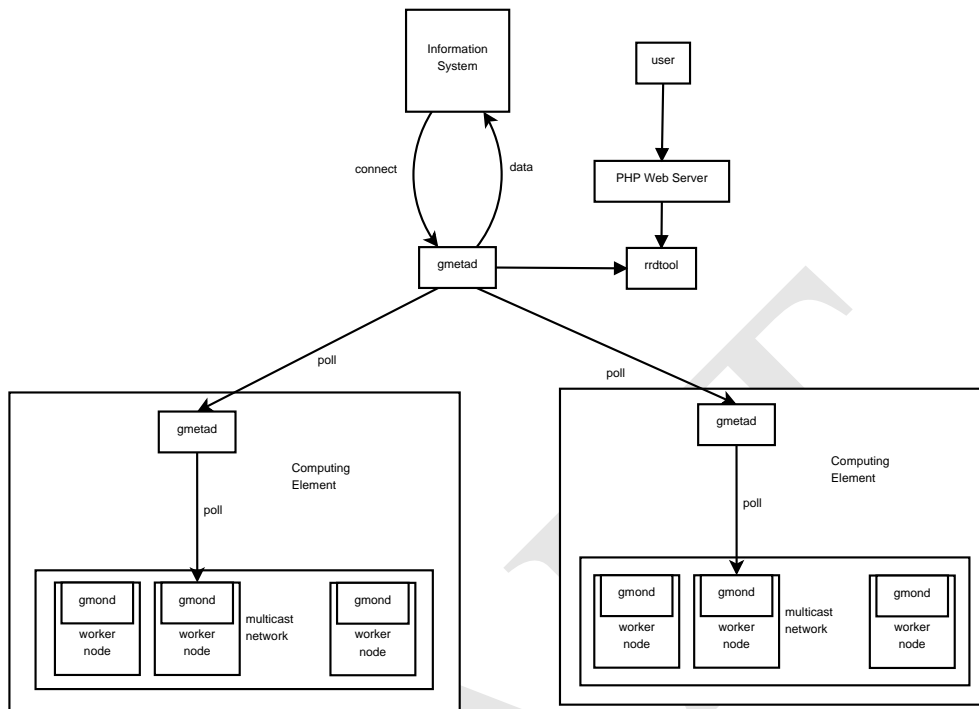


Figure 3.5: Ganglia Network Communications

```
# GANGLIA_ACK_SYSCONFDIR=1 ./configure --with-gmetad
# make
# make install
# mkdir -p /var/lib/ganglia/rrds
# chown -R nobody /var/lib/ganglia

# yum install apr-devel libconfuse libconfuse-devel expat \
    expat-devel pcre pcre-devel
# GANGLIA_ACK_SYSCONFDIR=1 ./configure
# make
# make install
# iptables -A RH-Firewall-1-INPUT -m state --state NEW \
    -m tcp -p tcp --dport 8649 -j ACCEPT
```

Gmond and Gmetad default configuration may be generated using the daemon itself. Gmond may be configured using multicast to communicate metrics between nodes or unicast to solve problems with jitter when deployed in environments like amazon ec2 that do not support multicast.

3.3.3 Nagios

Nagios is the core monitoring tool that is used for grid computing monitoring as Multi Level Monitoring architecture proposes, to meet the needs of EGEE/EGI. Following SAM and Gridview, Nagios instances have been deployed in many levels of grid infrastructure, enhancing the functionality of scheduling and execution of site tests. The message bus that uses is MSG, which offers an integration between Nagios and the other monitoring tools of grid.

CERN provides MSG-Nagios-bridge, a mechanism to transfer test results between different levels of Nagios deployment (regional, project, site). MSG-Nagios-bridge both submit tests to other Nagios installations and consume results from them.

A Regional Metric Store is also used by nagios. It is a database that provides a backend to Nagios current and historical metrics, and connected with the frontend and the message bridge. The adaptor that provides such functionality called NDOUtils, and may have a MySQL/PostgreSQL or Oracle backend.

In the front-end, users are allowed to discover the nodes and services provided in the monitoring levels by regions, projects and sites, using cgi scripts that are part of the Nagios core distribution. Access control between levels of Nagios instances and between users and Nagios installations, is performed using the standard methods of grid, which is GOCDB as described in ATP. User authentication is done by user certificates.

To integrate Ganglia with Nagios as shown in Figure 3.6, a custom script has been created. This script queries the Gmond source for the current state of nodes of the cluster. The returned result is being transformed to a Nagios configuration file to configure the host check of the cluster nodes. The nagios service checks for these hosts are preconfigured to match what is needed. Script source may be found in Listing 3.1.

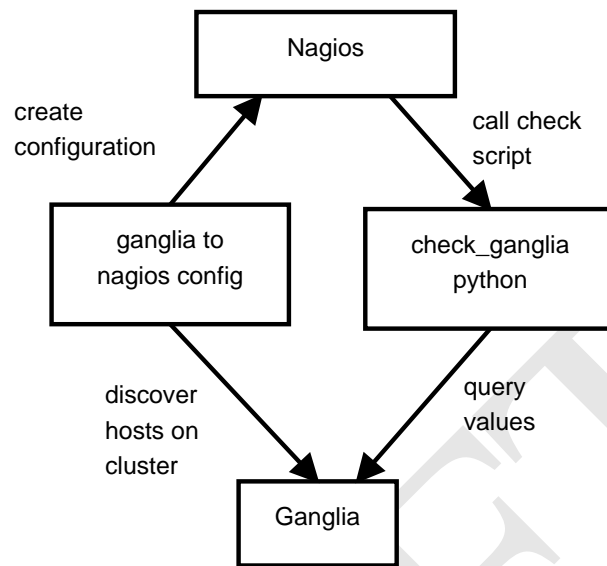


Figure 3.6: Nagios configuration and check ganglia values

Listing 3.1: Ganglia to Nagios script

```

#!/bin/bash

if [ ! $1 ]
then
    echo "Please HOST argument"
    echo "ex. ganglia_to_nagios 10.0.0.1"
    exit
fi

/usr/src/redhat/SOURCES/ganglia-python-3.3.0/ganglia.py --host $1 --live | while read host
do
    echo ";$host.oslab.teipir.gr

define host{
    use          gmond-host

    host_name    $host.oslab.teipir.gr
    alias        $host
    address      $host.oslab.teipir.gr
    hostgroups    worker-nodes
}

"

done > /etc/nagios/teipir/hosts.cfg
  
```

When a nagios check command is executed, results are stored in a file, and Performance Data are calculated by a perl script. To scale this process, the Buld Mode method is used to move the file to a spool directory which happened immediately with no important performance impact to the system. The NPCD (Nagios Performance C Daemon) is a daemon that is running on the Nagios host and its role is to monitor a spool directory for new files and pass the names of the files to process_perfdata.pl. The script in turn, processes the performance data, and this operation is fully Nagios independent so it may be scaled-out more easily. Results are finally delivered to RRDTool, and graphs are being generated. This process is presented in Figure 3.7

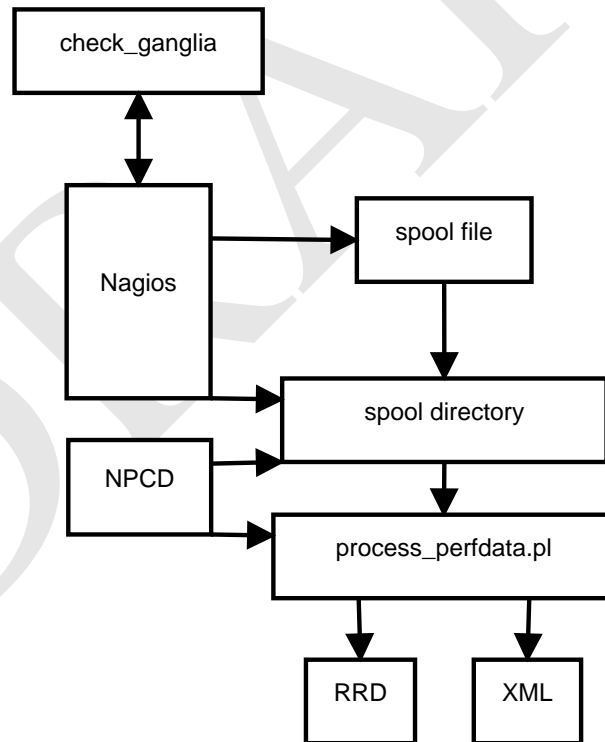


Figure 3.7: PNP 4 Nagios data flow

3.4 Range of cases examined

To deliver Ganglia metrics, two different information systems were evaluated:

- **BDII**, which is used by gLite and is based on **LDAP** and
- **WSRF**, the framework that Globus uses to aggregate and deliver information using **Web Services**.

both information services are following the MDS specification and are using the Glue Schema.

3.4.1 LDAP based

To evaluate the LDAP based information service, a system had to have installed the gLite so it have the BDII service running. To do this, a Scientific Linux installation were used, and CERN repositories were added. The installation of gLite-UI automatically installs BDII, so using **yum command** the needed packages where installed. An `ldapsearch` returned the top elements of the BDII as shown below:

```
[root@osweb~]# ldapsearch -x -h osweb.teipir.gr -p 2170 -b\
    "" -s base "(objectClass=*)" namingContexts
...
namingContexts: o=grid
namingContexts: o=glue
namingContexts: o=infosys
```

To test the connection to the Gmond service over TCP, and the transformation to MDS, two different ways where used. The official ganglia python client, and a perl script that is doing the same transformation:

```
# /usr/bin/ganglia --host mon.oslab.teipir.gr --format↵
=MDS
dn: mds-vo-name=local, o=grid
objectclass: GlueTop
objectclass: GlueGeneralTop
GlueSchemaVersionMajor: 1
GlueSchemaVersionMinor: 1
...
```



```
# /root/ganglia_ip -h mon.oslab.teipir.gr -p 8649 -o ↵
    mds
dn: GlueHostName=gr02.oslab.teipir.gr, mds=vo=↵
    local, o=grid
objectclass: GlueHost
GlueHostName: gr02.oslab.teipir.gr
GlueHostUniqueID: RDLAB-TEIPIR-gr02.oslab.teipir.gr
objectclass: GlueHostProcessorLoad
GlueHostProcessorLoadLast1Min: 1
GlueHostProcessorLoadLast5Min: 1
GlueHostProcessorLoadLast15Min: 0
...
```

As we can see, the LDIF exported by these tools, follow the schema defined by the Glue specification, whose attributes and objectclasses extended by Glue-CE ProcessorLoad as shown in Table 3.1.

Common Name	Attribute	Objectclass
Hostname	GlueHostName	GlueHost
Unique ID assigned to the host	GlueHostUniqueID	GlueHost
Processor Load, 1 Min Average	GlueHostProcessorLoadLast1Min	GlueHostProcessorLoad
Processor Load, 5 Min Average	GlueHostProcessorLoadLast5Min	GlueHostProcessorLoad
Processor Load, 15 Min Average	GlueHostProcessorLoadLast15Min	GlueHostProcessorLoad
SMP Load, 1 Min Average	GlueHostSMPLoadLast1Min	GlueHostSMPLoad
SMP Load, 5 Min Average	GlueHostSMPLoadLast5Min	GlueHostSMPLoad
SMP Load, 15 Min Average	GlueHostSMPLoadLast15Min	GlueHostSMPLoad
Number of CPUs	GlueHostArchitectureSMPSize	GlueHostArchitecture
Processor Clock Speed (MHz)	GlueHostProcessorClockSpeed	GlueHostProcessor
Network Interface name	GlueHostNetworkAdapterName	GlueHostNetworkAdapter
Network Adapter IP address	GlueHostNetworkAdapterIPAddress	GlueHostNetworkAdapter
The amount of RAM	GlueHostMainMemoryRAMSize	GlueHostMainMemory
Free RAM (in KBytes)	GlueHostMainMemoryRAMAvailable	GlueHostMainMemory

Table 3.1: GLUE schema for Host Processor Information Provider

Finally, BDII configured using **yaim** with site-info definitions as shown below:

```
# /opt/glite/yaim/bin/yaim -c -s site-info.def -n BDII_site
...
# cat site-info.def
```

```

CE_HOST="osweb.teipir.gr"
SITE_BDII_HOST="osweb.teipir.gr"
SITE_EMAIL="theofpa@teipir.gr"
SITE_LAT=37.979166
SITE_LONG=23.674719
SITE_DESC="TEI of Piraeus"
SITE_LOC="Athens, Greece"
SITE_WEB="http://oslab.teipir.gr"
SITE_SECURITY_EMAIL=$SITE_EMAIL
SITE_SUPPORT_EMAIL=$SITE_EMAIL
SITE_OTHER_GRID="EGEE"
BDII_REGIONS="oslab.teipir.gr"

```

To integrate Ganglia with MDS in early versions of Globus and BDII of gLite, the schema of OpenLDAP should be extended using the Glue-CE definitions from the DataTAG web site (MDS version 2.4). The Ganglia Information Provider that used is a ganglia client on perl, and not the python client given by the ganglia development team itself.

gLite have a dedicated directory for information providers, where the wrappers of each provider reside. To use the information provider with BDII, there has been created a one-line wrapper to call the perl script as shown below:

```

[root@osweb ~]# ps -ef | grep bdi[i]
edguser  24951  1  0 19:47 /usr/sbin/slapd -f \
                                /opt/bdii/etc/bdii-slapd.conf \
                                -h ldap://osweb.teipir.gr:2170 \
                                -u edguser
edguser  24990  1  0 19:47 /usr/bin/python \
                                /opt/bdii/bin/bdii-update -c \
                                /opt/bdii/etc/bdii.conf -d

```

```

[root@osweb ~]# grep PROVIDER /opt/bdii/etc/bdii.conf

```

```

BDII_PROVIDER_DIR=/opt/glite/etc/gip/provider

[root@osweb ~]# cat \

/opt/glite/etc/gip/provider/glite-provider-ganglia-wrapper

#!/bin/bash

/opt/bin/ganglia_ip -h 195.251.70.54 -p 8649 -o mds

```

3.4.2 Web Service based - WSRF

Globus on the other side, from version 4 and later provides the Web Service Resource Framework that offers a scalable information system with build-in aggregation framework and index service as shown in Figure 3.8. WSRF is an OASIS organization standard and follows the Glue schema and MDS specification.

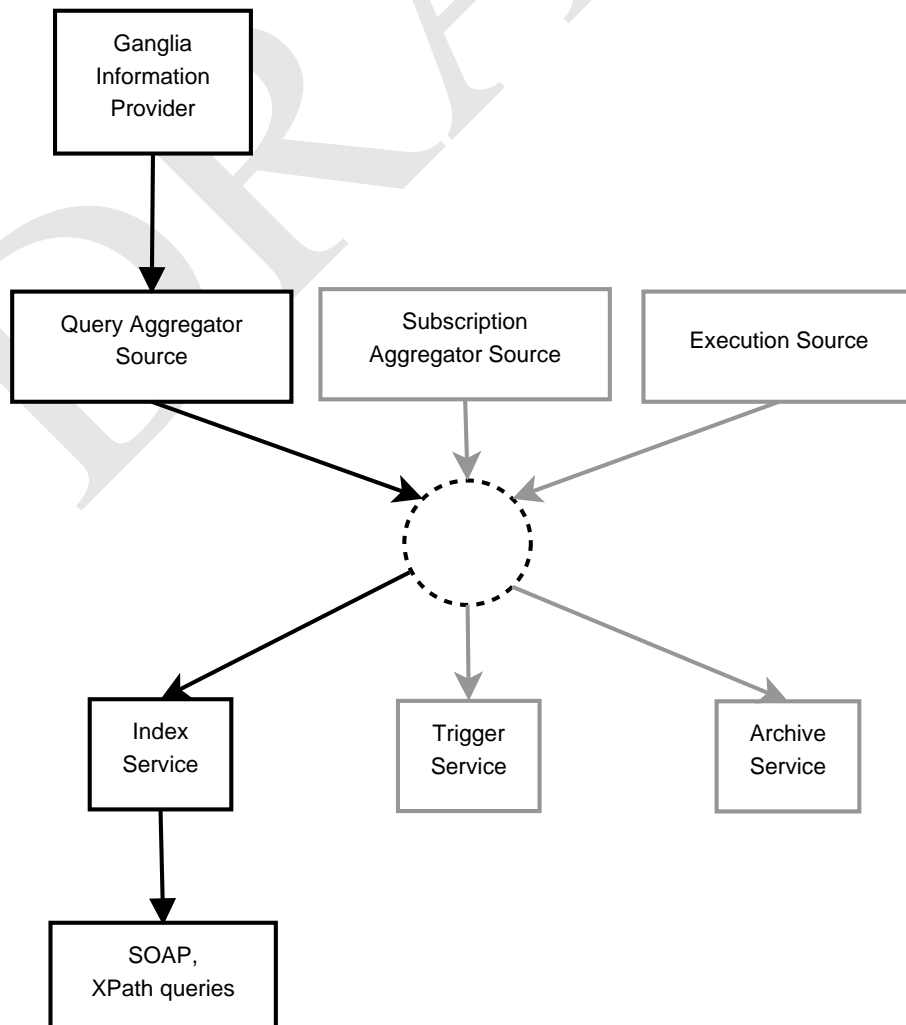


Figure 3.8: Web Service Resource Framework

To install WSRF, Globus Toolkit version 4.0.7 was used. From its binary distribution, where extracted in the target system. A PostgreSQL database was installed and a special user and DB was created to host the RFT schema and data in order to have a minimal globus environment and start the container to service WSRF. A custom start/stop script was created for that container and the file `rpprovider-config-gluece.xml` was created as shown in Listing 3.2.

Listing 3.2: Ganglia Resource Provider for WSRF Index

```
<ns1:ResourcePropertyProviderConfigArray xsi:type="↵
    ns1:ResourcePropertyProviderConfigArray" xmlns:ns1=↵
    "http://mds.globus.org/rpprovider/2005/08" ↵
    xmlns:xsi="http://www.w3.org/2001/XMLSchema-↵
    instance">
<ns1:configArray xsi:type="↵
    ns1:resourcePropertyProviderConfig">
    <ns1:resourcePropertyName xsi:type="xsd:QName" ↵
        xmlns:mds="http://mds.globus.org/glue/ce/1.1">↵
        mds:GLUECE</ns1:resourcePropertyName>
    <ns1:resourcePropertyImpl xsi:type="xsd:string">org.↵
        globus.mds.usefulrp.rpprovider.↵
        GLUEResourceProperty</ns1:resourcePropertyImpl>
    <ns1:resourcePropertyElementProducers xsi:type="↵
        ns1:resourcePropertyElementProducerConfig">
        <ns1:className xsi:type="xsd:string">org.globus.↵
            mds.usefulrp.glue.GangliaElementProducer</↵
            ns1:className>
        <ns1:arguments xsi:type="xsd:string">195.251.70.55↵
            </ns1:arguments>
        <ns1:arguments xsi:type="xsd:string">8649</↵
            ns1:arguments>
        <ns1:period xsi:type="xsd:int">60</ns1:period>
```

```

    <ns1:transformClass xsi:type="xsd:string">org.↵
        globus.mds.usefulrp.rpprovider.transforms.↵
        GLUEComputeElementTransform</ns1:transformClass↵
    >
</ns1:resourcePropertyElementProducers>
<ns1:resourcePropertyElementProducers xsi:type="↵
    ns1:resourcePropertyElementProducerConfig">
    <ns1:className xsi:type="xsd:string">org.globus.↵
        mds.usefulrp.rpprovider.producers.↵
        SchedulerInfoElementProducer</ns1:className>
    <ns1:arguments xsi:type="xsd:string">libexec/↵
        globus-scheduler-provider-fork</ns1:arguments>
    <ns1:transformClass xsi:type="xsd:string">org.↵
        globus.mds.usefulrp.rpprovider.transforms.↵
        GLUESchedulerElementTransform</↵
        ns1:transformClass>
    <ns1:period xsi:type="xsd:int">300</ns1:period>
</ns1:resourcePropertyElementProducers>
</ns1:configArray>
</ns1:ResourcePropertyProviderConfigArray>

```

File `rpprovider-config-gluece.xml` was included by the `server-config.wsdd` of the container as shown in Listing 3.3.

Listing 3.3: Web Service Deployment Descriptor for WSRF Index

```

<service name="DefaultIndexService" provider="↵
    Handler "
    use="literal" style="document">
    <parameter name="providers "
        value="org.globus.mds.usefulrp.↵
            rpprovider.↵
            ResourcePropertyProviderCollection↵

```

```

        org.globus.wsrf.impl.↵
        servicegroup.↵
        ServiceGroupRegistrationProvider↵

        GetRPPProvider
        GetMRPPProvider
        QueryRPPProvider
        DestroyProvider
        SetTerminationTimeProvider
        SubscribeProvider
        GetCurrentMessageProvider"/>
<parameter name="rpProviderConfigFile" value="↵
    /etc/globus_wsrf_mds_index/rpprovider-↵
    config-gluece.xml"/>
<parameter name="handlerClass" value="org.↵
    globus.axis.providers.RPCProvider"/>
<parameter name="scope" value="Application"/>
<parameter name="allowedMethods" value="*" />
<parameter name="className"
    value="org.globus.mds.index.impl.↵
        DefaultIndexService"/>
<wsdlFile>share/schema/mds/index/index_service↵
    .wsdl</wsdlFile>
</service>

```

When the container was started, using a user certificate and the following commands, some XPath queries were issued to test the integration:

Listing 3.4: WSRF command line query

```

[root@osweb ~]# /opt/globus/bin/grid-proxy-init
Your identity: /C=GR/O=HellasGrid/OU=teipir.gr/CN=↵

```

```

Theofylaktos Papapanagiotou
Enter GRID pass phrase for this identity:
Creating proxy ..... ←
Done
Your proxy is valid until: Thu Feb 17 11:11:59 2011
[root@osweb ~]# /opt/globus/bin/wsrf-query -s https://↵
osweb.teipir.gr:8443/wsrf/services/↵
DefaultIndexService "/*[local-name()='Host']"
<ns1:Host ns1:Name="gr02.oslab.teipir.gr" ns1:UniqueID↵
="gr02.oslab.teipir.gr" xmlns:ns1="http://mds.↵
globus.org/glue/ce/1.1">
<ns1:Processor ns1:CacheL1="0" ns1:CacheL1D="0" ns1:↵
CacheL1I="0" ns1:CacheL2="0" ns1:ClockSpeed="2527"↵
ns1:InstructionSet="x86"/>
<ns1:MainMemory ns1:RAMAvailable="75" ns1:RAMSize="↵
495" ns1:VirtualAvailable="1129" ns1:VirtualSize="↵
1559"/>
<ns1:OperatingSystem ns1:Name="Linux" ns1:Release="↵
2.6.18-194.26.1.el5"/>
<ns1:Architecture ns1:SMPSize="1"/>
<ns1:FileSystem ns1:AvailableSpace="34082" ns1:Name="↵
entire-system" ns1:ReadOnly="false" ns1:Root="/" ↵
ns1:Size="38624"/>
<ns1:NetworkAdapter ns1:IPAddress="10.0.0.32" ns1:↵
InboundIP="true" ns1:MTU="0" ns1:Name="gr02.oslab.↵
teipir.gr" ns1:OutboundIP="true"/>
<ns1:ProcessorLoad ns1:Last15Min="0" ns1:Last1Min="0"↵
ns1:Last5Min="0"/>
...

```

XPath

XPath is used to parse an XML document and get a part of it using an address scheme. For XPath, the XML document is a tree consisting of nodes, and its purpose as a language is to get the nodes that are addressed using the XPath query from that document.

Its syntax is compact, non-XML and much like the filesystem addressing, so it facilitates the use of XPath within URIs.

Example queries used in this project are:

The following is used in the PHP code that queries the WebMDS for all nodes of the XML of the WSRF containing nodes with name *Host*:

```
//*[local-name()='Host']
```

Another example is a more complex query that asks the WSRF for all nodes with name *Host* that contains a sub-node named *ProcessorLoad* and its *Last15Min* attribute has value larger than 20:

```
//glue:Host[glue:ProcessorLoad[@glue:Last15Min>20]]
```

Finally the following example may return only the *ProcessorLoad* node of the *Host* that has the attribute Name set to *xenia.teipir.gr*:

```
//glue:Host[@glue:Name='xenia.teipir.gr']/glue:ProcessorLoad
```

WebMDS

WebMDS is a web interface to query WSRF resource property information. It consists of forms and views of raw XML or organized in tables of results. This user friendly frontend comes as a part of Globus Toolkit version 4 and it can be deployed in any application server. Behind this application reside the data that the WSRF aggregation framework provides through the Index Service.

For this project an Apache Tomcat server was installed in the box that globus toolkit was running, and the **webmds application** from the GT4 home was deployed. In webmds configuration file, the global option to allow user specified queries using XPath was enabled.

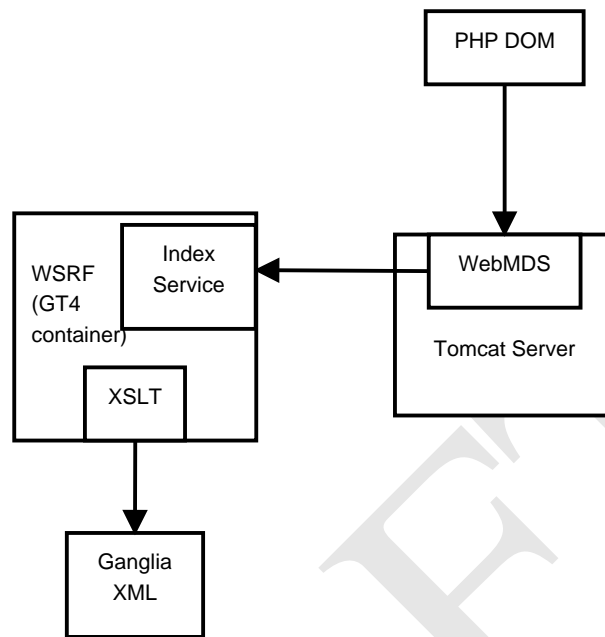


Figure 3.9: WebMDS application

```
[root@osweb ~]# cat /opt/globus/lib/webmds/globalconfig.xml
<WebmdsGlobalConfig>
  <newStyleErrors>true</newStyleErrors>
  <allowUserSpecifiedQuery>true</allowUserSpecifiedQuery>
</WebmdsGlobalConfig>
```

Chapter 4

Results

4.1 Events source

Results are displayed from the generation of metrics to the aggregation using various information services and the presentation using ready and custom developed interfaces.

4.1.1 Unix stuff

As described in subsection Metrics of the previous chapter, linux provides through the **proc pseudo-filesystem** a simple file interface to the metrics taken from the scheduler of processes that are queued in the processor.

The three metrics about cpu load on 1, 5 and 15 minutes average is displayed as follows:

```
[root@gr03 ~]# cat /proc/loadavg
2.29 0.73 0.32 1/230 3584
```

which may also be displayed using the **uptime command**:

```
[root@gr03 ~]# uptime
00:01:20 up 1:41, 3 users, load average: 2.29 0.73 0.32
```

Examining the Linux kernel source code, there is the **CALC_LOAD** macro command which takes the options that have been discussed and returns the re-

sult of the metric. The definition of the macro can be seen in file `/usr/src/kernels/`uname -r`/include/linux/sched.h`, Listing 4.1.

Listing 4.1: Linux kernel CALC_LOAD macro

```
extern unsigned long avenrun[];          /* Load ↵
    averages */
extern void get_avenrun(unsigned long *loads,
                        unsigned long offset, int ↵
                        shift);

#define FSHIFT      11          /* nr of bits of ↵
    precision */
#define FIXED_1     (1<<FSHIFT) /* 1.0 as fixed-point */
#define LOAD_FREQ   (5*HZ+1)    /* 5 sec intervals */
#define EXP_1       1884        /* 1/exp(5 sec/1 min) as ↵
    fixed-point */
#define EXP_5       2014        /* 1/exp(5 sec/5 min) */
#define EXP_15      2037        /* 1/exp(5 sec/15 min) */

#define CALC_LOAD(load, exp, n) \
    load *= exp; \
    load += n*(FIXED_1-exp); \
    load >>= FSHIFT;

extern unsigned long total_forks;
extern int nr_threads;
DECLARE_PER_CPU(unsigned long, process_counts);
extern int nr_processes(void);
extern unsigned long nr_running(void);
extern unsigned long nr_uninterruptible(void);
extern unsigned long nr_iowait(void);
extern unsigned long nr_iowait_cpu(int cpu);
```

```
extern unsigned long this_cpu_load(void);
```

4.1.2 Ganglia

When gmond starts, it listens on port 8649/TCP by default, to accept TCP connections and throw XML report for the whole cluster. It also binds to the multicast address on port 8649/UDP to get other hosts messages for metrics changes, and also multicast its own metrics. Listing 4.2 shows the opened sockets of Gmond daemon, and Listing 4.3 display a sample xml output when connecting to 8649/TCP to transfer metrics through XML.

Listing 4.2: Gmond networking

```
[root@gr01 ~]# lsof -i 4 -a -p `pidof gmond`
COMMAND  PID   USER   FD   TYPE DEVICE SIZE NODE NAME
gmond    11900 nobody  4u   IPv4  33699      UDP ←
      239.2.11.71:8649
gmond    11900 nobody  5u   IPv4  33701      TCP ←
      *:8649 (LISTEN)
gmond    11900 nobody  6u   IPv4  33703      UDP gr01←
      .oslab.teipir.gr:39991->239.2.11.71:8649
```

Listing 4.3: Gmond XML cluster report

```
<?xml version="1.0" encoding="ISO-8859-1" standalone="↵
yes"?>
<GANGLIA.XML VERSION="3.1.7" SOURCE="gmond">
  <CLUSTER NAME="RDLAB" LOCALTIME="1297198943" OWNER="↵
    TEIPIR" LATLONG="unspecified" URL="unspecified">
  <HOST NAME="gr02.oslab.teipir.gr" IP="10.0.0.32" ↵
    REPORTED="1297198934" TN="8" TMAX="20" DMAX="0"↵
    LOCATION="unspecified" GMOND.STARTED="↵
```

```

1296569542">
<METRIC NAME="load_one" VAL="0.01" TYPE="float" ↵
    UNITS=" " TN="50" TMAX="70" DMAX="0" SLOPE="↵
    both">
<EXTRA_DATA>
<EXTRA_ELEMENT NAME="GROUP" VAL="load"/>
<EXTRA_ELEMENT NAME="DESC" VAL="One minute load ↵
    average"/>
<EXTRA_ELEMENT NAME="TITLE" VAL="One Minute Load↵
    Average"/>
</EXTRA_DATA>
</METRIC>
</HOST>
</CLUSTER>
</GANGLIA.XML>

```

Worker nodes are configured to transfer metrics data using multicast. Each Gmond daemon of each Computing Element node, by Ganglia definition has to know the state of the whole Computing Element cluster. Using standard unix commands to listen the data transfered on the multicast network, we observe a sample transfer of load_one metric. As described in Subsection 3.3.2, metric data are multicasted by Gmond when there is a change in the value, or when the time threshold is reached.

Listing 4.4: XDR sample

```

[root@gr01 ~]# tcpdump -A -i eth2 dst host 239.2.11.71
22:38:26.062266 IP gr01.oslab.teipir.gr.39991 > ↵
    239.2.11.71.8649: UDP, length 56
E..T..@.....G.7!..@.X.....gr01.oslab.teipir.gr↵
....load_one.....%.2f..

```

Using Ganglia build-in command *gstat*, a nice output of Processor Load metrics is shown for the whole cluster in Listing 4.5

Listing 4.5: Gstat output

```
[root@gr01 ~]# gstat -all
gr03.oslab.teipir.gr      2 (    0/   87) [  0.00, ←
    0.00,  0.00] [    0.0,    0.0,    0.0,  99.9,  0.1] ←
    OFF
gr01.oslab.teipir.gr      1 (    0/   75) [  0.00, ←
    0.00,  0.00] [    0.0,    0.0,    0.0,  99.9,  0.0] ←
    OFF
gr02.oslab.teipir.gr      1 (    0/   99) [  0.00, ←
    0.00,  0.00] [    0.0,    0.0,    0.1,  99.9,  0.0] ←
    OFF
```

4.2 Aggregation and transfer

Metrics taken from the event source are passed to the information service using the informatio/resource provider.

4.2.1 WSRF

In WSRF the *wsrf-query* command is executed using the URL of the container where the WSRF has deployed. The container should run in a host with a host certificate signed by a certificate authority, and a certificate proxy should be initialized with a valid user certificate that is requesting the information.

```
/opt/globus/bin/wsrf-query -s https://osweb.teipir.gr↵
:8443/wsrf/services/DefaultIndexService "/*[local↵
name()='Host ']"
```

The result of the above query returns a list of all cluster nodes. An abstract result is displayed here in Listing 4.6.

Listing 4.6: WSRF query output

```
<ns1:GLUECE xmlns:ns1="http://mds.globus.org/glue/ce/1.1">
  <ns1:Cluster ns1:Name="OSLAB" ns1:UniqueID="OSLAB">
    <ns1:SubCluster ns1:Name="main" ns1:UniqueID="main">
      <ns1:Host ns1:Name="gr03.oslab.teipir.gr"
        ns1:UniqueID="gr03.oslab.teipir.gr"
        xmlns:ns1="http://mds.globus.org/glue/ce/1.1">
        <ns1:Processor ns1:CacheL1="0" ns1:CacheL1D="0"
          ns1:CacheL1I="0" ns1:CacheL2="0" ns1:ClockSpeed="2392"
          ns1:InstructionSet="x86"/>
        <ns1:MainMemory ns1:RAMAvailable="299"
          ns1:RAMSize="1010"
          ns1:VirtualAvailable="2403" ns1:VirtualSize="3132"
          "/>
        <ns1:OperatingSystem ns1:Name="Linux"
          ns1:Release="2.6.18-194.26.1.el5"/>
        <ns1:Architecture ns1:SMPSize="2"/>
        <ns1:FileSystem ns1:AvailableSpace="201850"
          ns1:Name="entire-system" ns1:ReadOnly="false"
          ns1:Root="/" ns1:Size="214584"/>
        <ns1:NetworkAdapter ns1:IPAddress="10.0.0.33"
          ns1:InboundIP="true" ns1:MTU="0"
          ns1:Name="gr03.oslab.teipir.gr" ns1:OutboundIP="true"/>
      </ns1:Host>
    </ns1:SubCluster>
  </ns1:Cluster>
</ns1:GLUECE>
```

```

<ns1:ProcessorLoad ns1:Last15Min="45" ↔
    ns1:Last1Min="337"
    ns1:Last5Min="126" />
</ns1:Host>
</ns1:SubCluster>
</ns1:Cluster>
</ns1:GLUECE>

```

WebMDS and XPath

The role-based access control model of the grid security context allow queries only by authenticated and authorized users. Building a testbed with full grid security in mind would be out of this project scope, so XML result of Web Service calls is taken through WebMDS instead of WSDL discovery and SOAP messaging.

Using the following XPath query in the WebMDS form, a request to get the metrics of Host node with name *ltsp.oslab.teipir.gr* was sent.

```
//glue:Host[@glue:Name='ltsp.oslab.teipir.gr']
```

WebMDS match the query in its cache and replies only the specific node that was requested. If the cache was expired (its default value is 60 seconds) it is using the Resource Provider to fetch the XML from Gmond and transform it using XSLT to Glue schema and serve the new values as shown in Listing 4.7.

Listing 4.7: WebMDS results from XPath query

```

<WebmdsResults>
  <ns1:Host ns1:Name="ltsp.oslab.teipir.gr"
    ns1:UniqueID="ltsp.oslab.teipir.gr">
    <ns1:Processor ns1:CacheL1="0" ns1:CacheL1D="0"

```



```

ns1:CacheL1I="0" ns1:CacheL2="0" ns1:ClockSpeed="↵
1600"
ns1:InstructionSet="x86_64" />
<ns1:MainMemory ns1:RAMAvailable="17806" ↵
ns1:RAMSize="20121"
ns1:VirtualAvailable="22137" ns1:VirtualSize="24508↵
"/>
<ns1:OperatingSystem ns1:Name="Linux"
ns1:Release="2.6.32-24-server" />
<ns1:Architecture ns1:SMPSize="8" />
<ns1:FileSystem ns1:AvailableSpace="34243"
ns1:Name="entire-system" ns1:ReadOnly="false" ↵
ns1:Root="/"
ns1:Size="251687" />
<ns1:NetworkAdapter ns1:IPAddress="192.168.0.101"
ns1:InboundIP="true" ns1:MTU="0" ns1:Name="ltsp.↵
oslab.teipir.gr"
ns1:OutboundIP="true" />
<ns1:ProcessorLoad ns1:Last15Min="9" ns1:Last1Min="↵
1"
ns1:Last5Min="9" />
</ns1:Host>
</WebmdsResults>

```

4.2.2 BDII

On the other information service, using *ldapsearch* command and specifying the base DN for the search, the host URI and the desired attributes to return, we may get the values asked from the BDII as seen on Listing 4.8

```
# ldapsearch -H ldap://osweb.teipir.gr:2170 -x \
-b GlueHostName=ainex.local,Mds-Vo-name=local,o=grid \
GlueHostProcessorLoadLast1Min ↵
    GlueHostProcessorLoadLast5Min \
GlueHostProcessorLoadLast15Min

# ainex.local, local, grid
dn: GlueHostName=ainex.local,Mds-Vo-name=local,o=grid
GlueHostProcessorLoadLast1Min: 27
GlueHostProcessorLoadLast15Min: 22
GlueHostProcessorLoadLast5Min: 20
```

The above information has been given by the BDII LDAP instance which used the wrapper of Ganglia Resource Provider, a customised Perl script to export MDS format as shown in Listing 4.9.

Listing 4.9: Perl Ganglia Information Provider for MDS

```
[root@mon ~]# ./ganglia_ip -h mon -p 8649 -o mds | ↵
grep -A 22 host=gr03

dn: host=gr03.oslab.teipir.gr, cl=RDLAB, \
    mds-vo-name=local, o=grid
objectclass: GlueHost
GlueHostName: gr03.oslab.teipir.gr
GlueHostUniqueID: RDLAB-TEIPIR-gr03.oslab.teipir.gr
objectclass: GlueHostProcessorLoad
GlueHostProcessorLoadLast1Min: 2.57
GlueHostProcessorLoadLast5Min: 1.48
GlueHostProcessorLoadLast15Min: 0.58
objectclass: GlueHostSMPLoad
GlueHostSMPLoadLast1Min: 2.57
GlueHostSMPLoadLast5Min: 1.48
```

```

GlueHostSMPLoadLast15Min: 0.58
objectclass: GlueHostArchitecture
GlueHostArchitectureSMPSize: 2
objectclass: GlueHostProcessor
GlueHostProcessorClockSpeed: 2392
objectclass: GlueHostNetworkAdapter
GlueHostNetworkAdapterName: gr03.oslab.teipir.gr
GlueHostNetworkAdapterIPAddress: 10.0.0.33
objectclass: GlueHostMainMemory
GlueHostMainMemoryRAMSize: 1035104
GlueHostMainMemoryRAMAvailable: 306280

```

Using the Ganglia official python client (Listing 4.10 which is distributed with the source code of Ganglia Client, rejected as an option because Perl is easier in handling regular expressions for string operations and transformation.

Listing 4.10: Python Ganglia client MDS export

```

[root@mon ~]# /opt/ganglia/bin/ganglia --format=MDS | ↵
grep -A 30 host=gr03

dn: host=gr03.oslab.teipir.gr, scl=sub2, cl=datatag↵
    CNAF, \
    mds-vo-name=local, o=grid
objectclass: GlueHost
GlueHostName: gr03.oslab.teipir.gr
GlueHostUniqueID: RDLAB-TEIPIR-gr03.oslab.teipir.gr
objectclass: GlueHostArchitecture
GlueHostArchitecturePlatformType: x86-Linux
GlueHostArchitectureSMPSize: 2
objectclass: GlueHostProcessor
GlueHostProcessorClockSpeed: 2392

```

```

objectclass: GlueHostMainMemory
GlueHostMainMemoryRAMSize: 1035104
GlueHostMainMemoryRAMAvailable: 306280
objectclass: GlueHostNetworkAdapter
GlueHostNetworkAdapterName: gr03.oslab.teipir.gr
GlueHostNetworkAdapterIPAddress: 10.0.0.33
GlueHostNetworkAdapterMTU: unknown
GlueHostNetworkAdapterOutboundIP: 1
GlueHostNetworkAdapterInboundIP: 1
objectclass: GlueHostProcessorLoad
GlueHostProcessorLoadLast1Min: 2.57
GlueHostProcessorLoadLast5Min: 1.48
GlueHostProcessorLoadLast15Min: 0.58
objectclass: GlueHostSMPLoad
GlueHostSMPLoadLast1Min: 2.57
GlueHostSMPLoadLast5Min: 1.48
GlueHostSMPLoadLast15Min: 0.58
objectclass: GlueHostStorageDevice
GlueHostStorageDeviceSize: 209555000
GlueHostStorageDeviceAvailableSpace: 197120000
GlueHostStorageDeviceType: disk

```

4.3 Presentation

Finally, to present the information there has been used two custom developed interfaces in PHP. Both programs reside in Brunel University webserver which supports the needed libraries and network connections. The source code is available under that page, and when called using BDII or WSRF, the result is exactly the same and looks like Table 4.1.

Hostname	1min	5min	15min
ltsp.oslab.teipir.gr	0.01	0.09	0.09
xenia.oslab.teipir.gr	0.00	0.06	0.06
gr201.oslab.teipir.gr	0.52	0.59	0.42
gr130.oslab.teipir.gr	0.00	0.06	0.16
gr131.oslab.teipir.gr	1.22	0.79	0.40
gr212.oslab.teipir.gr	0.06	0.09	0.09
gr180.oslab.teipir.gr	2.06	1.49	0.59
gr181.oslab.teipir.gr	0.71	0.57	0.32

Table 4.1: Sample output from both calls with DOM or LDAP

4.3.1 DOM

The one uses PHP DOM functions to call the WebMDS and get the XML as it would happen calling the WSRF Web Service with security in mind. Listing 4.11 is an abstraction of the code deployed in Brunel's webserver and returns only one value. The purpose of this listing is to present the use of functions and not the HTML stuff.

Listing 4.11: PHP DOM call to WebMDS

```

$url="http://osweb.teipir.gr:8080/webmds/webmds?info=<
    indexinfo&xsl=&xmlSource.indexinfo.param.xpathQuery<
    =%2F%2F*[local-name%28%29%3D%27Host%27]";

$file = file_get_contents($url);
$dom = DOMDocument::loadXML($file);
$host = $dom->getElementsByTagName('Host');
$procload = $host->item($k)->getElementsByTagName('<
    ProcessorLoad');
echo $procload->item($i)->getAttribute('Last1Min');
```

4.3.2 LDAP

The other PHP is using LDAP functions to connect to BDII instance and get the results from objects that instantiate the GlueHostProcessorLoad class. Listing 4.12 displays the method to bind anonymously, form the query and

get a sample result.

Listing 4.12: PHP LDAP call to BDII

```
$ds=ldap_connect("osweb.teipir.gr","2170");
if ($ds)
{
    $r=ldap_bind($ds);
    $sr=ldap_search($ds, "mds-vo-name=local,o=grid", "<
        (&(objectClass=GlueHostProcessorLoad))");
    if ($sr)
    {
        $info = ldap_get_entries($ds, $sr) or die("<
            could not fetch entries");
        echo ($info[0][gluehostprocessorloadlast1min<
            ][0])/100;
    }
    ldap_close($ds);
}
```

4.3.3 Nagios

Nagios calls `check_ganglia` periodically (configured as check interval) and logs the state of each service and host check. Load averages are described as services. Listing 4.13 shows the log file of nagios service check for these values straight from Ganglia.

Listing 4.13: Nagios log with load check

```
[1297634400] CURRENT SERVICE STATE: xenia.oslab.teipir<
    .gr;load_fifteen;OK;HARD;1;CHECKGANGLIA OK: <
    load_fifteen is 0.00
[1297634400] CURRENT SERVICE STATE: xenia.oslab.teipir<
```

```
.gr;load_five;OK;HARD;1;CHECKGANGLIA OK: load_five ←
is 0.00
[1297634400] CURRENT SERVICE STATE: xenia.oslab.teipir←
.gr;load_one;OK;HARD;1;CHECKGANGLIA OK: load_one is←
0.00
```

NPCD is configured in bulk mode so with some luck a file may be found in the spool directory before the interval passes to process it with perl script to RRD database. Listing 4.14 contains the performance data metrics.

Listing 4.14: NPCD temporary file in spool directory

```
[root@osweb ~]# cat /var/spool/pnp4nagios/host←
perfdata.1297973378
DATATYPE::HOSTPERFDATA TIMET::1297973368 HOSTNAME::←
osweb.teipir.gr HOSTPERFDATA::rta=0.057000ms←
;3000.000000;5000.000000;0.000000 pl=0%;80;100;0 ←
HOSTCHECKCOMMAND::ncg_check_host_alive HOSTSTATE::←
UP HOSTSTATETYPE::HARD
```

Finally, Nagios Web interface displays the aggregated values of host performance state in multiple views, as shown in Table 4.2.

Host	Service	Status	Last Check	Status Information
gr129	load_fifteen	OK	02-08-2011 20:17:23	CHECKGANGLIA OK: load_fifteen is 0.17
	load_five	OK	02-08-2011 20:18:12	CHECKGANGLIA OK: load_five is 0.27
	load_one	OK	02-08-2011 20:17:43	CHECKGANGLIA OK: load_one is 0.02
gr130	load_fifteen	OK	02-08-2011 20:14:23	CHECKGANGLIA OK: load_fifteen is 1.77
	load_five	WARNING	02-08-2011 20:14:15	CHECKGANGLIA OK: load_five is 4.75
	load_one	CRITICAL	02-08-2011 20:14:43	CHECKGANGLIA OK: load_one is 11.60

Table 4.2: Example Nagios service status details for ganglia check

Chapter 5

Analysis

5.1 Methods Adopted

In complex distributed systems such as grids, performance bottlenecks may be located using monitoring data. From the processor usage on a single node of a computing element to the total usage of processed jobs in a large cluster, performance data help to focus on the problem that impacts the overall performance.

In order to succeed in grid monitoring, some requirements should be considered. A very large amount of data should be delivered real-time, from many heterogeneous sources on different networks or even countries. These data must be accurate and consistent. There should be synchronized timestamps on the generation of each metric, to the measurement value that should be comparable between different architectures. The time synchronization of the hosts of each cluster may be done using network time protocol, so all metrics are taken on the time that they actually report. Metrics should have error bounds to preserve accuracy, and the consistency issue is solved using coordination of that activity, so the impact of a metric to other sensors is controlled.

The flow of the monitoring process initialization is described from the GMA standard. The application-consumer queries the directory service in order to declare its interest to get metrics for a specific host/cluster. The sensors of the elements that is equivalent to the specific query generates the metrics

that will be given to the consumer from the producer, which in turn queries the directory service to find the consumer. The producer is the one that initializes the connection to the consumer in order to deliver the measurements, even if the consumer had asked the directory service for this. [?]

5.1.1 Performance Metrics

CALC_LOAD - load average

extra

Transport and sample

Gmond code uses the ganglia libmetrics library which in case of Linux operating system parses the `/proc/loadavg` pseudo-file to get linux kernel calculated system load average.

Listing 5.1: libmetrics code to get load average

```
timely_file proc_loadavg = { {0,0} , 5., "/proc/↵
    loadavg" };
/* ... */
g_val_t
load_one_func ( void )
{
    g_val_t val;
    val.f = strtod( update_file(&proc_loadavg), (char ↵
        **)NULL);
    return val;
}
```

code from gmond client

5.1.2 Information Systems

BDII

values left as decimal numbers because its easy for ldap to handle string values of numbers

WSRF

The XML that Ganglia Resource Provider took from Gmond process through TCP, using XSLT technology is transformed on WSRF to another XML document, that is following the Glue-CE schema. globus.wsrf.mds.usefulrp directory of globus configuration root, there is the file ganglia_to_glue.xslt where we can focus on the transformation rules. A snippet of interest for the case of ProcessorLoad class is seen in Listing 5.2.

there is some XPath and a multiplication with 100 to get an integer that should be mentioned:

Listing 5.2: WSRF XSLT for Ganglia Information Provider

```
<glue:ProcessorLoad>

<xsl:attribute name="glue:Last1Min">
  <xsl:call-template name="emitProperNumeric">
    <xsl:with-param name="numeric"
      select="floor(100 * METRIC[@NAME='load_one']/@VAL)<math>\leftarrow</math>
    " />
  </xsl:call-template>
</xsl:attribute>

<xsl:attribute name="glue:Last5Min">
  <xsl:call-template name="emitProperNumeric">
    <xsl:with-param name="numeric"
      select="floor(100 * METRIC[@NAME='load_five']/@VAL)<math>\leftarrow</math>
```

```

        )"/>
    </xsl:call-template>
</xsl:attribute>

<xsl:attribute name="glue:Last15Min">
    <xsl:call-template name="emitProperNumeric">
        <xsl:with-param name="numeric"
            select="floor(100 * METRIC[@NAME='load_fifteen']/
                @VAL)"/>
    </xsl:call-template>
</xsl:attribute>

</glue:ProcessorLoad>

```

5.1.3 Nagios

```

define command{
    command_name    check-ganglia
    command_line    check_ganglia.py -h $HOSTNAME$ -m ↵
                    $ARG1$ \
                    -w $ARG2$ -c $ARG3$ -s 195.251.70.54 -p↵
                    8649
}

define service{
    use              wn
    hostgroup_name   worker-nodes
    service_description    load_one
    check_command     check-ganglia!load_one!4!5
    action_url        https://osweb.teipir.gr/nagios↵
                    /html/pnp4nagios/index.php?host=$HOSTNAME$&srv=↵

```

```

$SERVICEDESC$

```

```

}

```

5.2 Interpretation of Results

Discussion about performance results based on load average.

some UNIX internals, processes, scheduler not a percentage counter of CPU usage

Difference between these metrics and the availability of a grid based on the queue of jobs have been submitted.

Availability monitoring

-MyEGI, monitor visualization environment -django data models -MRS database, ATP based schema

5.3 Specific Interpretations

5.3.1 Scaling

LDAP

there is a paper about how information systems perform in large scale

LDAP as the core technology of MDS2 has been investigated [?] and proved that scales and performs good when the data are kept in cache. The performance of the information system when it is accessed by a large number of cocurrent users have degrades dramatically when data caching is not used.

WSRF

deserialization of MDS query in gmond to WSRF

performance analysis of WSRF here [?]

and MDS4 vs MDS2

5.4 Enveloping Interpretations

DRAFT

Chapter 6

Conclusions

6.1 Conclusions

LDAP without caching may be used in site level monitoring. WSRF has caching and Indexer and Aggregator so it may be used for regional and top level monitoring

Conclusions should be based on an in depth critical analysis of the information presented in the dissertation and should be related to the objectives stated in the introduction.

- do not simply summarize the dissertation

- do not recapitulate the analysis or discussion

- do not introduce new ideas

- identify specific points that have been clarified or discovered, and specific actions to be taken

- identify specific additional investigation that is required (and why)

It is important to remember that conclusions should only be drawn on the basis of the information presented in the dissertation. Generalized conclusions without supporting evidence are to be discouraged.

6.2 Further Work

Identify specific additional investigation that is required to be carried out.

For testing purposes some URLs of other

/opt/globus/etc/wsrfl.../hierarchy.xml maybe in an "aggregation" section

Storage Element performance monitoring, IOPS. Cases using IBM Total-Storage, NetApp OnTap and EMC Navisphere

Bibliography

- [1] M. Li and M. Baker, *The grid: core technologies*. John Wiley & Sons Inc, 2005.
- [2] S. Fisher, “DataGrid information and monitoring services architecture: design, requirements and evaluation criteria’,” tech. rep., Technical Report, DataGrid, 2002.
- [3] G. Taylor, M. Irving, P. Hobson, C. Huang, P. Kyberd, and R. Taylor, *Distributed monitoring and control of future power systems via grid computing*. IEEE, 2006.
- [4] A. Kertész and P. Kacsuk, “A Taxonomy of Grid Resource Brokers,” in *6th Austrian-Hungarian Workshop on Distributed and Parallel Systems (DAPSYS)*, pp. 318–366, Basil Blackwell, 2006.
- [5] B. Tierney, R. Aydt, D. Gunter, W. Smith, M. Swany, V. Taylor, and R. Wolski, “A grid monitoring architecture,” in *The Global Grid Forum GWD-GP-16-2*, Citeseer, 2002.
- [6] X. Zhang, J. L. Freschl, and J. M. Schopf, “A performance study of monitoring and information services for distributed systems,” in *12th IEEE International Symposium on High Performance Distributed Computing, 2003. Proceedings*, pp. 270–281, 2003.
- [7] A. J. Wilson, R. Byrom, L. A. Cornwall, M. S. Craig, A. Djaoui, S. M. Fisher, S. Hicks, R. P. Middleton, J. A. Walk, A. Cooke, and Others, “Information and monitoring services within a grid environment,” in *Computing in High Energy and Nuclear Physics (CHEP)*, Citeseer, 2004.

- [8] S. Fisher, “Relational model for information and monitoring,” in *Global Grid Forum, GWD-Perf-7*, vol. 1, 2001.
- [9] R. Byrom, B. Coghlan, A. Cooke, R. Cordenonsi, L. Cornwall, M. Craig, A. Djaoui, S. Fisher, A. Gray, S. Hicks, and Others, “Production services for information and monitoring in the grid,” *AHM2004, Nottingham, UK*, 2005.
- [10] D. Bonacorsi, D. Colling, L. Field, S. Fisher, C. Grandi, P. Hobson, P. Kyberd, B. MacEvoy, J. Nebrensky, H. Tallini, and S. Traylen, “Scalability tests of R-GMA-based grid job monitoring system for CMS Monte Carlo data production,” *IEEE Transactions on Nuclear Science*, vol. 51, pp. 3026–3029, December 2004.
- [11] R. Byrom, D. Colling, S. Fisher, C. Grandi, P. Hobson, P. Kyberd, B. MacEvoy, J. Nebrensky, and S. Traylen, *Performance of R-GMA for Monitoring Grid Jobs for CMS Data Production*. IEEE, 2005.
- [12] G. Von Laszewski and I. Foster, “Usage of LDAP in Globus,” *Mathematics and Computer Science Division, Argonne National Laboratory*, 1998.
- [13] K. Czajkowski, S. Fitzgerald, I. Foster, and C. Kesselman, “Grid information services for distributed resource sharing,” in *High Performance Distributed Computing, 2001. Proceedings. 10th IEEE International Symposium on*, 2001.
- [14] X. Zhang and J. M. Schopf, “Performance analysis of the globus toolkit monitoring and discovery service, mds2,” *Arxiv preprint cs/0407062*, 2004.
- [15] Y. Liu and S. Gao, “Wsrif-based distributed visualization,” in *Cluster Computing and the Grid, 2009. CCGRID '09. 9th IEEE/ACM International Symposium on*, pp. 615–619, May 2009.

- [16] Luciano Gaido, “DSA1.2.2: Assessment of production service status,” 2010.
- [17] M. Gerndt, R. Wismuller, Z. Balaton, G. Gombás, P. Kacsuk, Z. Németh, N. Podhorszki, H. L. Truong, T. Fahringer, M. Bubak, and Others, “Performance Tools for the Grid: State of the Art and Future, APART White Paper,” 2004.
- [18] S. Zaniolas, *Importance-Aware Monitoring for Large-Scale Grid Information Services*. PhD thesis, the University of Manchester, 2007.
- [19] S. Andreatozzi, N. De Bortoli, S. Fantinel, A. Ghiselli, G. L. Rubini, G. Tortone, and M. C. Vistoli, “Gridice: a monitoring service for grid systems,” *Future Gener. Comput. Syst.*, vol. 21, pp. 559–571, April 2005.
- [20] G. Tsouloupas and M. Dikaiakos, “Gridbench: a tool for benchmarking grids,” in *Grid Computing, 2003. Proceedings. Fourth International Workshop on*, pp. 60 – 67, Nov. 2003.
- [21] D. Guo, L. Hu, M. Zhang, and Z. Zhang, “Gcpsensor: a cpu performance tool for grid environments,” in *Quality Software, 2005. (QSIC 2005). Fifth International Conference on*, pp. 273 – 278, 2005.
- [22] S. Browne, J. Dongarra, N. Garner, G. Ho, and P. Mucci, “A portable programming interface for performance evaluation on modern processors,” *International Journal of High Performance Computing Applications*, vol. 14, no. 3, p. 189, 2000.
- [23] E. Imamagic and D. Dobrenic, “Grid infrastructure monitoring system based on Nagios,” in *Proceedings of the 2007 workshop on Grid monitoring*, p. 28, ACM, 2007.
- [24] P. R. Hobson, E. Frizziero, C. Huang, M. R. Irving, T. Kalganova, P. Kyberd, F. Lelli, A. Petrucci, R. Pugliese, G. Taylor, and R. Taylor, *Grid*

Computing Technologies for Renewable Electricity Generator Monitoring and Control. IEEE, June 2007.

- [25] C. Huang, P. R. Hobson, G. A. Taylor, and P. Kyberd, *A Study of Publish/Subscribe Systems for Real-Time Grid Monitoring*. IEEE, March 2007.
- [26] S. Fitzgerald, I. Foster, C. Kesselman, G. von Laszewski, W. Smith, and S. Tuecke, “A directory service for configuring high-performance distributed computations,” in *High Performance Distributed Computing, 1997. Proceedings. The Sixth IEEE International Symposium on*, pp. 365–375, Aug. 1997.
- [27] T. Papapanagiotou and G. Dilintas, “Free software thin client computing in educational environment,” in *3rd International Scientific Conference eRA*, (Aegina, Greece), 09/2008 2008.
- [28] Z. Balaton, P. Kacsuk, N. Podhorszki, and F. Vajda, “Use cases and the proposed grid monitoring architecture,” tech. rep., Tech. Rep. LDS-1/2001, Computer and Automation Research Institute of the Hungarian Academy of Sciences, 2001. <http://www.lpds.sztaki.hu/publications/reports/lpds-1-2001.pdf>, 2001.
- [29] J. Schopf, M. D’arcy, N. Miller, L. Pearlman, I. Foster, and C. Kesselman, “Monitoring and discovery in a web services framework: Functionality and performance of the globus toolkit’s MDS4,” in *Proceedings of the 15th IEEE International Symposium on High Performance Distributed Computing*, IEEE Computer Society Press, Los Alamitos, Citeseer, 2006.
- [30] J. Huo, L. Liu, L. Liu, Y. Yang, and L. Li, “A Study on Distributed Resource Information Service in Grid System,” in *Computer Software and Applications Conference, 2007. COMPSAC 2007. 31st Annual International*, vol. 1, pp. 613–618, 2007.

- [31] J. Novak, “Nagios SAM Portal for ROCs,” 2009.
- [32] S. Zanicolas and R. Sakellariou, “A taxonomy of grid monitoring systems,” *Future Generation Computer Systems*, vol. 21, no. 1, pp. 163 – 188, 2005.
- [33] B. K. Singh, A. Amintabar, A. Aggarwal, R. D. Kent, A. Rahman, F. Mirza, and Z. Rahman, “Secure grid monitoring, a web-based framework,” in *Proceedings of the first international conference on Networks for grid applications*, GridNets ’07, (ICST, Brussels, Belgium, Belgium), pp. 15:1–15:7, ICST (Institute for Computer Sciences, Social-Informatics and Telecommunications Engineering), 2007.
- [34] K. Goel and I. Chana, “Agent-Based Resource Monitoring for Grid Environment,” *ICON 2008*, p. 62, 2008.
- [35] T. Kiss, P. Kacsuk, G. Terstyanszky, and S. Winter, “Workflow level interoperation of grid data resources,” in *Cluster Computing and the Grid, 2008. CCGRID ’08. 8th IEEE International Symposium on*, pp. 194 – 201, May 2008.

School of Engineering & Design
Electronic & Computer Engineering



Industrial Mentor's Report on a MSc Dissertation

Student's name: Theofylaktos Papapanagiotou

Dissertation Title: Grid Monitoring

I confirm / cannot confirm* that the MSc dissertation submitted by the above student truly reflects the respective contributions of the student and others, with whom the student has worked during the MSc project.

* delete as appropriate

Comments:

Signed:

Name: Dr.Paul Kyberd

Date: