
DI3MC-02

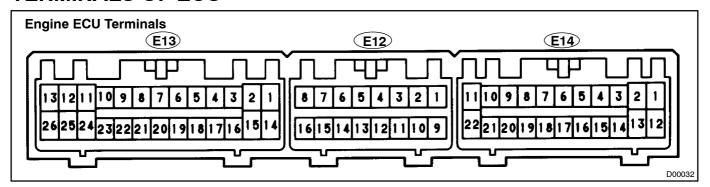

Symbols (Terminals No.)	Wiring Color	Condition	STD Voltage (V)
FPMS (E 14-7) - E1 (E13-14)	L-W ↔ BR	IG switch ON Fuel tank changeover switch OFF	0 – 3.0 V
		IG switch ON Fuel tank changeover switch ON	9 – 14 V
FPM1 (E14-8) - E1 (E13-14)	B ↔ BR	Idling Fuel tank changeover switch OFF	9 – 14 V
		Idling Fuel tank changeover switch ON	0 – 3.0 V
FPM2 (E 14-19) - E1 (E13-14)	B-O ↔ BR	Idling Fuel tank changeover switch OFF	0 – 3.0 V
		Idling Fuel tank changeover switch ON	9 – 14 V
FPR1 (E12-15) - E01 (E13-13)	G–W ↔ W–B	IG switch ON	9 – 14 V
FPR2 (E.14-15) - E01 (E13-13)	⊥ ↔ W-B	4.0 seconds or more after starting the engine	9 – 14 V
		Sarting the engine Water temperature is 60 °C (140°F) or more	9 – 14 V
		1 second or more and 4 seconds or less after starting the engine Water temperature is 60 °C (140°F) or less	3 – 3.0 V
FC (E 14-4) - E01 (E13-13)	B−W ↔ W−B	IG switch ON	9 – 14 V
FPLD (E 14-14) - E01 (E13-13)	O ↔ W-B	Idling Fuel tank changeover switch OFF	9 – 14 V
		Idling Fuel tank changeover switch ON	0 – 3.0 V