

APD4B-50-2.5G-B

OVERVIEW

Avalanche photodiode coupled to an optical fiber and packaged into a hermetic case.

MAIN FEATURES

- Bandwidth: 2.5 GHz
- Spectral range: 850 - 1650 nm
- Typical responsivity 1 A/W at 1550 nm and M = 1
- Package types: coaxial with or without bracket
- Low dark current typ. 1 nA at 0.9 Vbr

ORDERING INFORMATION

APD4B-50-2.5G-B-X-X-X-X-X-X

Optical matching

R45: return loss 45 dB (SM1, SM3, SMP13 fiber)

R30: return loss 30 dB (MM5, MM6 fiber)

RM: refractive index matched (SM1, SM3, SMP13, MM5, MM6 fiber)

LS: MM6, MM105, MM200 fiber (focused beam)r)

Case type

COAX: compact coaxial (low duty cycle pulse mode only)

COAXB: compact coaxial with a bracket

COAXH: compact coaxial with a board-mount bracket

Pinout code

5: see more details on page 5

Fiber type

SM1: SM, G.657.A1, [Corning SMF-28 Ultra](#), furcation tubing Ø0.9 mm or **BSM1** Ø0.25mm

SM3: SM, G.657.B3, [Corning ClearCurve ZBL](#), furcation tubing Ø0.9 mm or **BSM3** Ø0.25mm

SMP13: PM, [Corning PM1300](#), PANDA type, furcation tubing Ø0.9 mm

MM5: MM, [50/125.OM3](#), furcation tubing Ø0.9 mm

MM6: MM, [62.5/125.OM1](#), furcation tubing Ø0.9 mm

MM105: MM, 105/125

MM200: MM, 200/220 NA0.22

Other type on request

Connector type

FU: FC/UPC (SM1, SM3, MM5, MM6, MM105, MM200)

FA: FC/APC (SM1, SM3, MM5, MM6)

SU: SC/UPC (SM1)

SA: SC/APC (SM1)

N: no connector (scissors cut)

Other type: on request

Fiber length

0.5: 500+/-50 mm

1.0: 1000+/-100 mm

Other length on request

APD4B-50-2.5G-B

ABSOLUTE MAXIMUM RATINGS

Parameter		Value	Unit	Conditions
APD reverse voltage		V _{br}		I _d = 100 uA
APD reverse current	I _R	0.5	mA	
APD forward current	I _F	3	mA	
Operating temperature*	T _{op}	-40 - +85	°C	
Storage temperature	T _{stg}	-40 - +85	°C	
Soldering temperature	T _{sold}	260	°C	Max. 5 seconds

*Operating temperature is defined by the case temperature. It is necessary to ensure sufficient heat dissipation so that the module's maximum operating temperature is not exceeded. Operation at elevated temperatures reduces the lifetime of the module.

APD4B-50-2.5G-B

ELECTRICAL-OPTICAL CHARACTERISTICS (T = 25 °C)

Parameter		MIN	TYP	MAX	Unit	Conditions
Operating wavelength	λ	850		1650	nm	
Responsivity @ M = 1	R	0.9	1.0		A/W	$\lambda=1550\text{nm}$
Breakdown voltage	V_{BR}	40	47	50	V	$I_d = 100 \mu\text{A}$
Breakdown voltage temperature coefficient $\Delta V_{BR}/\Delta T$	δ	0.08	0.10	0.12	V/C	T = 25 C
Dark current	I_d		1	5	nA	$V_R = 0.9 V_{BR}$
Total capacitance	C_t			0.5	pF	1 MHz
RF Bandwidth	BW	2.0	2.5		GHz	M = 10, $R_L = 50 \text{ Ohm}$

R45 technology: low back reflection, applicable to SMF, PMF

R45 tech	Responsivity @0.95 V_{BR}	R	15	22		A/W	$\lambda=1550\text{nm}$
	Return loss	RL	40	45		dB	
	Polarization dependent loss	PDL			2	%	

R30 technology: low back reflection, applicable to MMF

R30 tech	Responsivity @0.95 V_{BR}	R	15	22		A/W	$\lambda=1550\text{nm}$
	Return loss	RL	25	30		dB	



RM technology: refractive index matched, larger responsivity, small PDL


RM tech SMF, MMF	Responsivity @0.95 V_{BR}	R	15	23		A/W	$\lambda=1550\text{nm}$
	Return loss	RL	14	16		dB	
	Polarization dependent loss	PDL			0.3	%	

LS technology: beam focusing from MMF with core diameter > APD active area diameter


LS tech MMF	Responsivity @0.95 V_{BR}	R	8	10		A/W	$\lambda=1550\text{nm}$, MM105
	Responsivity @0.95 V_{BR}	R	3	4		A/W	$\lambda=1550\text{nm}$, MM200
	Return loss	RL	12	15		dB	

APD4B-50-2.5G-B

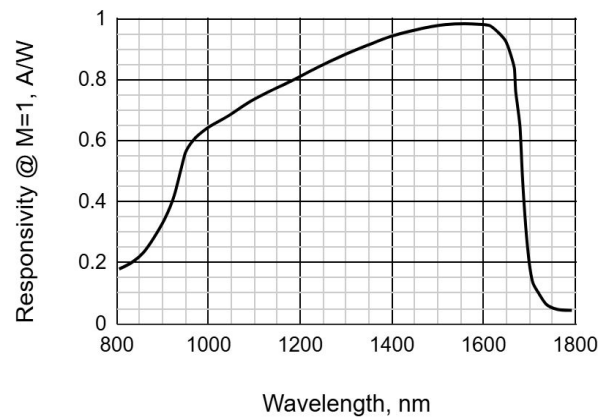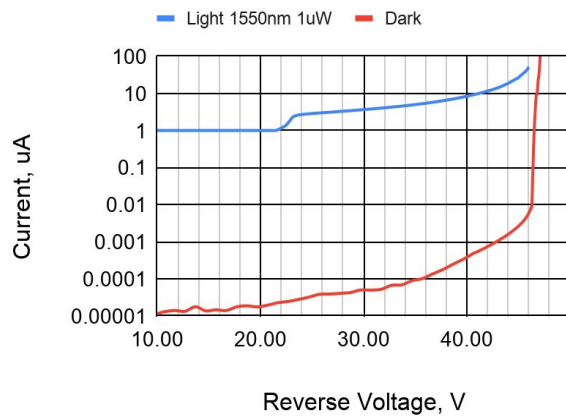

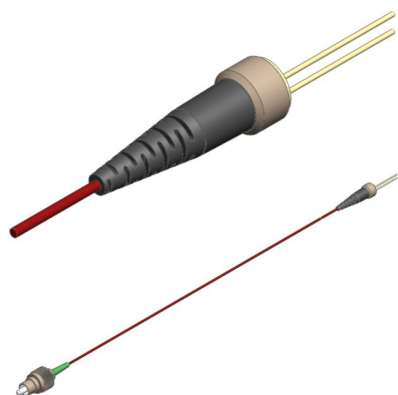
APD4B-50-2.5G-B**COAX**

BACK VIEW



PINOUT

#5

Download more
information


Drawing




3D model



Application Notes

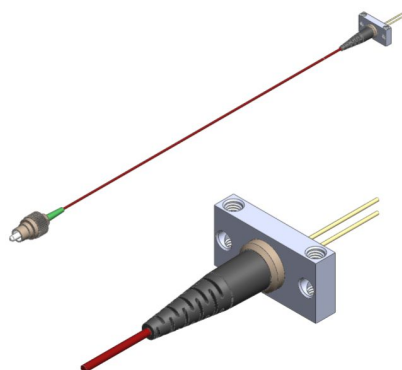
**COAXB**

BACK VIEW



PINOUT

#5

Download more
information


Drawing




3D model



Application Notes

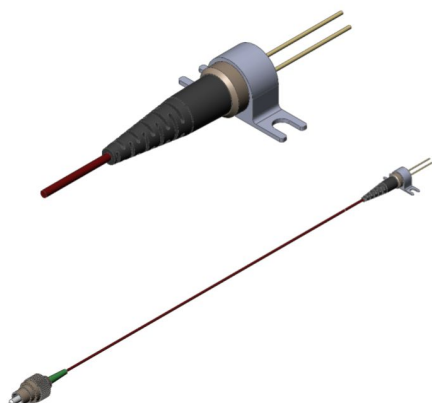**COAXH**

BACK VIEW

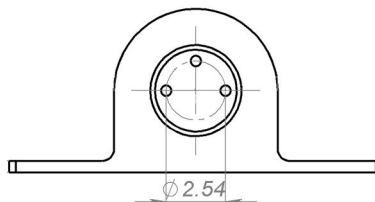

PINOUT

#5



Drawing



3D model



Application Notes

APD4B-50-2.5G-B

Characteristics, data, materials and structures specified in this datasheet are subject to change without notice. Please refer to the latest specification before use of the products.

Safety and handling cautions

1. Avoid smashing and burning of the module. Avoid storing and using the module in conditions where water, organic solvents or aggressive acids or bases may contact the module or where there is a possibility of exposure to corrosive gases, explosive gases, dust, salinity or other harsh conditions. The module should be disposed as special industrial waste.
2. Exceeding absolute maximum ratings even for a short time can cause permanent damage of the module.
3. The module is sensitive to and can be broken by ESD (static electricity).

Conflict Minerals Policy Statement

LD4B achieves business objectives and customer needs with social responsibility. We do not support or contribute to the violence and human rights violations associated with the mining of conflict minerals coming from Conflict Regions according to US "Dodd-Frank Act". When possible, our suppliers' conflict mineral statements are reviewed. We do not directly purchase Conflict Minerals from any source and do not knowingly procure any parts and products containing Conflict Minerals from Conflict Regions.

RoHS Compliance Statement

Restriction of Hazardous Substances (RoHS) directive (Directive 2011/65/EC amended with Directive (EU) 2015/863) is the directive aimed at reducing the harmful environmental impact of waste electrical equipment by restricting the use of known dangerous substances. Based on information received from our supply sources, LD4B hereby states that the banned substances listed in the RoHS directive are not found in the parts and materials used above the threshold level listed other than exceptions approved by the European Commission.

REACH Compliance Statement

Registration, Evaluation, Authorisation and Restriction of Chemicals (REACH) is a European Union regulation 1907/2006/EC that addresses the production and use of chemical substances, and their potential impacts on human health and the environment. Based on information received from our supply sources, LD4B hereby states compliance of the parts and materials used in manufacturing to REACH regulation. LD4B does not manufacture or import any substances or preparations as defined under REACH.