
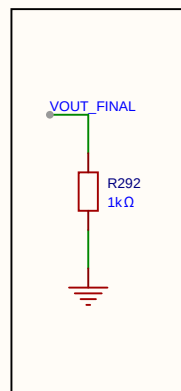


配置电阻阻值	请求电压
6.8K Ω	9V
24K Ω	12V
56K Ω	15V
120K Ω	20V
210K Ω	28V

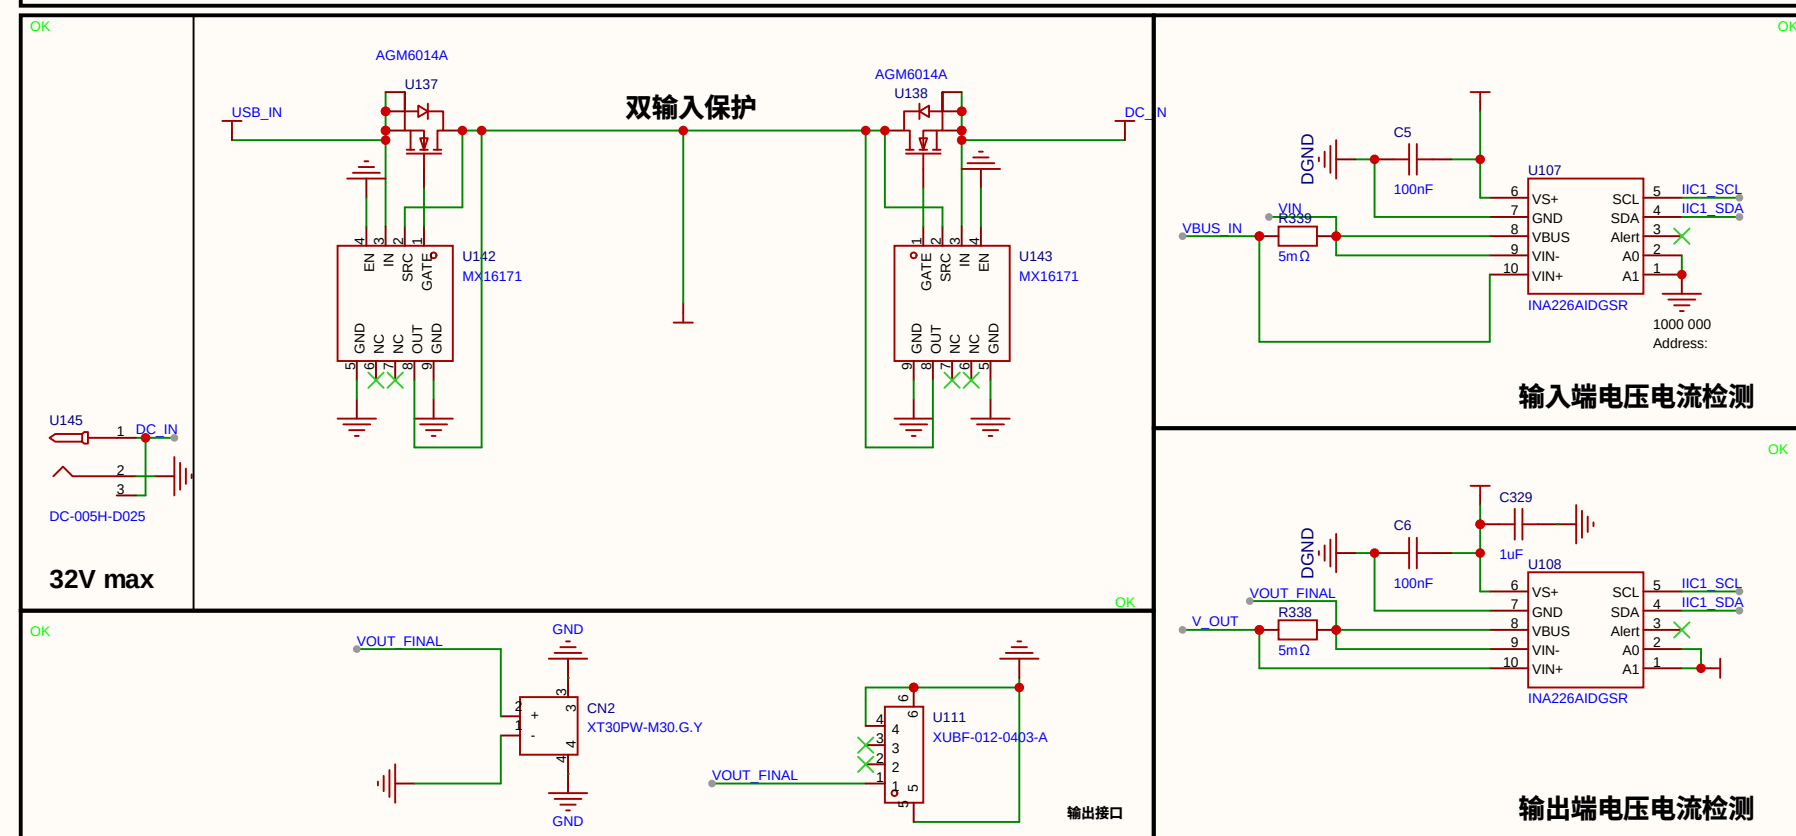

配置电阻阻值	请求电压
6.8K Ω	9V
24K Ω	12V
56K Ω	15V
120K Ω	20V
210K Ω	28V

原理图	Schematic2			创建日期	2026-08-26
板子	功率部分			更新日期	2026-09-12
绘制	数控可调电源				
审阅					
	版本	尺寸	页 1 共 1		
		V1.0	A4	嘉立创EDA	