



POM NUT (black)

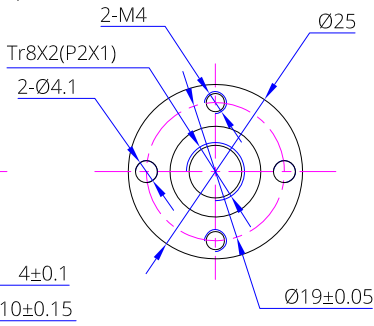

UL1007 24AWG
twisted cable

Connector: Molex
50-57-9404, or Equivalent.

Diagram



Item	Specification		
Phase Number	2		
Step Angle / Length	1.8 ± 0.9° / 0.04mm		
Rated Current	DC 1.0A / Phase		
Resistance	8.0 ± 15% Ω / Phase		
Push Force	11 Kg (107N) REF.		
Rotate Direction	ACBDA CW		
Insulation Class	Class B 130°C		
Weight	0.24 Kg REF		

A	----	NEW RELEASE		Xu SD	J.B.
REV.	ECN NO.	DESCRIPTION		MADE BY	DATE
		VIEW		LDO Motors Co., Ltd.	
		SCALE		Part NO.	
DRAWN BY		CHECKED BY		DATE	
Xu SD		J.B.		6/8/20	
APPR. BY		DATE		FACTORY CODE	
J.B.		6/8/20		SHEET NO.	
				1/1	