


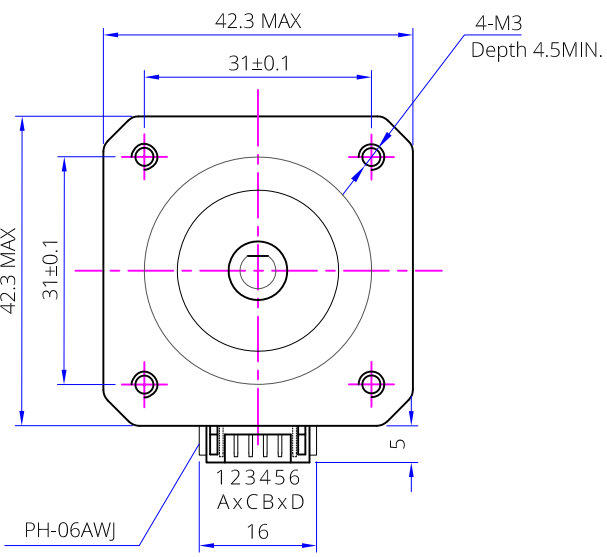
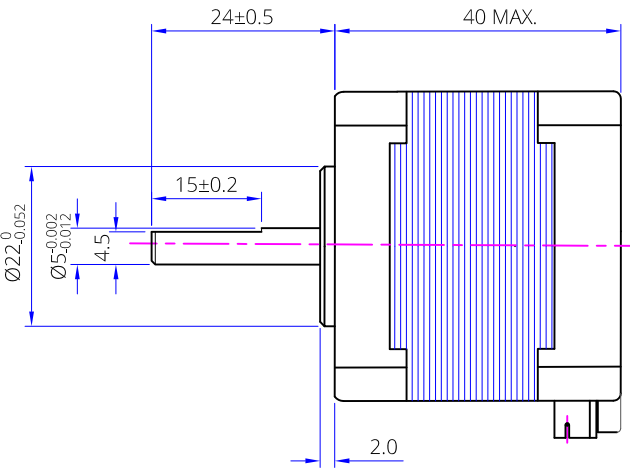


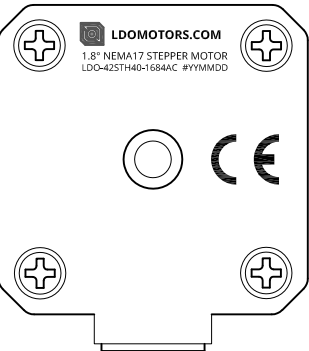

Label by laser engrave.

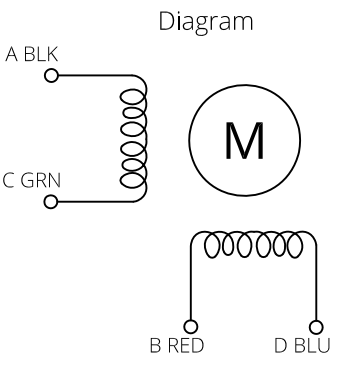

JST-XHP-4
male connector
Or Equivalent
(to driver)

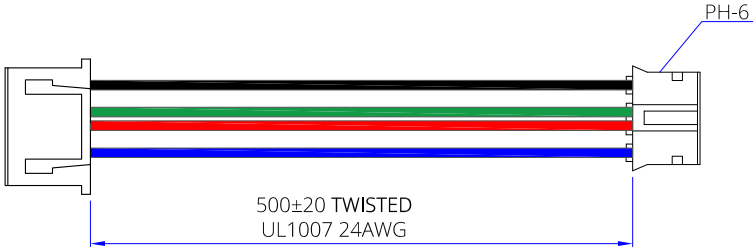

Item	Specification	Item	Specification
Phase Number	2	Step Angle	1.8° ± 5%
Rated Voltage	DC 2.8V / Phase	Rated Current	DC 1.68A / Phase
Phase Resistance	1.65x(1±20%) Ω	Phase Inductance	3.6x(1±20%) mH
Holding Torque	4.5 Kg·cm(0.45Nm) MIN	Detent Torque	20 mN·m REF.
Rotation Direction	ACBDA CW	Insulation Resistance	100Mohm(DC500V)
HI-POT	AC600V/1mA/1S	Insulation Class	Class B 130°C
Rotor Inertia	53 g·cm² REF	Weight	0.28 Kg REF

A	----	NEW RELEASE			Xu SD	J.B.	10/3/20
REV.	ECN NO.	DESCRIPTION			MADE BY	APPR. BY	DATE
		VIEW	 Part NO. NEMA17 Stepper Motor LDO-425TH40-1684AC				
		SCALE					
		NA					
DRAWN BY	CHECKED BY	APPR. BY	DATE	FACTORY CODE		SHEET NO.	
Xu SD	J.B.	J.B.	10/3/20			1/1	