


# GlowCore

v1.0 RC1

## Pinout

- used for internal hardware
- can be used for analog signals
- can be used for touch inputs
- pins remain usable in deep sleep
- recommended for I2C

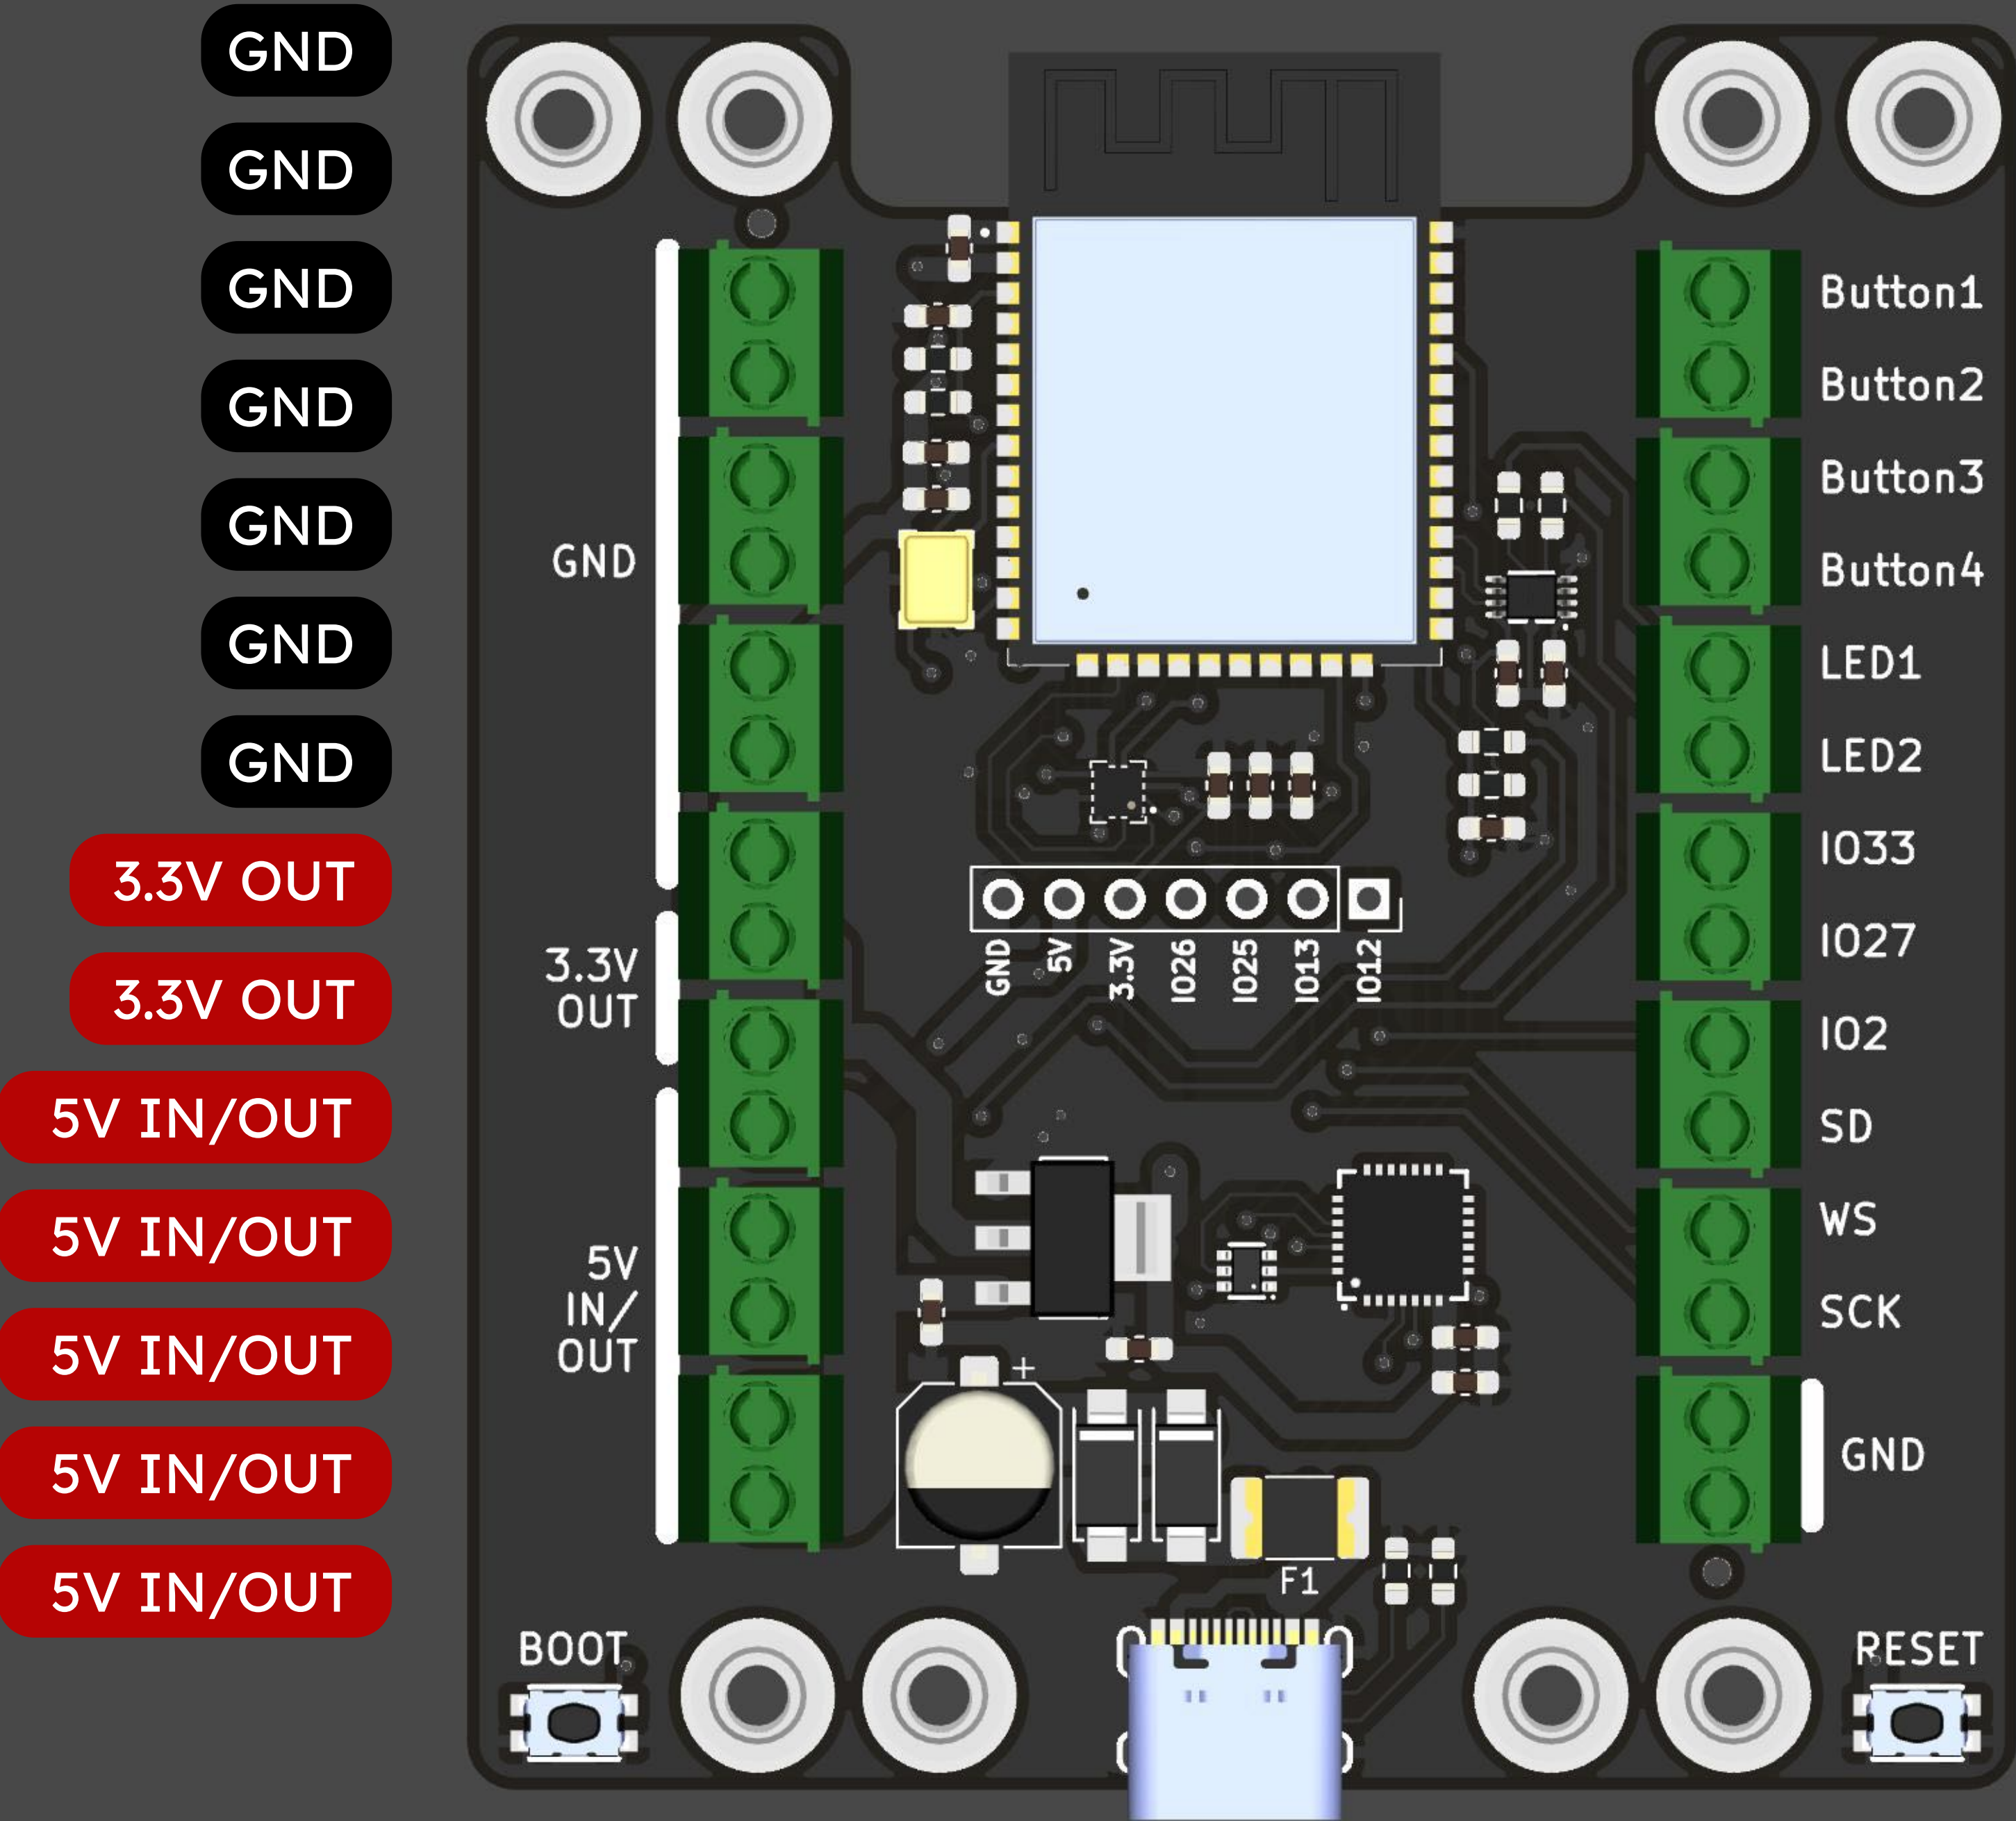

GPIO 36	Button 1	ADC1	SENSOR VP
GPIO 39	Button 2	ADC1	SENSOR VN
GPIO 34	Button 3	ADC1	
GPIO 35	Button 4	ADC1	
GPIO 16	LED 1 DATA OUT		
GPIO 17	LED 2 DATA OUT		
GPIO 33	ADC1	TOUCH8	RTC GPIO8 I2C SDA
GPIO 27	ADC2	TOUCH7	RTC GPIO17 I2C SCL
GPIO 2	ADC2	TOUCH2	RTC GPIO12
GPIO 32	ADC1	TOUCH9	RTC GPIO9 MICROPHONE SD
GPIO 15	ADC2	TOUCH3	RTC GPIO13 MICROPHONE WS
GPIO 14	ADC2	TOUCH6	RTC GPIO16 MICROPHONE SCK
GND			
GND			