



UNIVERSIDAD TECNICA
FEDERICO SANTA MARIA

Tesis de Magister

Design and Sizing of an Energy Storage System for a Hybrid Tugboat

Tesis para optar al título de
Magister en Ciencias de la Ingeniería Electrónico

Alumno
Leonardo Solis Zamora

Profesor Guía
Dr. Marcelo Pérez Leiva

Comisión evaluadora
Nombre del primer correferente, Correferente, UTFSM
Nombre del segundo correferente, Correferente, CODELCO

Enero 2025 , Valparaíso, Chile

This is the dedicatory page.

Agradecimientos

This is the abstract

Resumen

This is the abstract

Abstract

This is the abstract

Índice general

Agradecimientos	ii
Resumen	iii
Abstract	iv
1. Introduction	1
1.1. Motivation and Background	1
1.2. Challenges and Research Opportunities	6
1.3. Thesis Objectives and Outline	6
Bibliografía	7

Índice de figuras

1.1. Global sources of greenhouse gas emissions. Source: theroundup.org	1
1.2. Breakdown of CO ₂ emissions from the energy sector and the transport subsector. Source: theroundup.org	2
1.3. The MARPOL Annex VI emission limits for global and Emission Controlled Areas (ECAs perspective (a) SO _x and (b) NO _x . (Source: DieselNet	3
1.4. IMO greenhouse gas emissions strategy. Source: Lloyd Register, NOV, Assestment of IMO Mandated Energy Efficiency Measures for International Shipping	4

Índice de tablas

Capítulo 1

Introduction

1.1. Motivation and Background

The growing global concern over climate change has significantly pressured industries to adopt sustainable practices. The maritime sector, responsible for approximately 2.5 % of energy sector CO₂ emissions, has continuously increased its emissions, as shown in Fig. 1.

<https://theroundup.org/co2-greenhouse-gas-emission-statistics/>

<https://www.container-xchange.com/blog/shipping-emissions/>

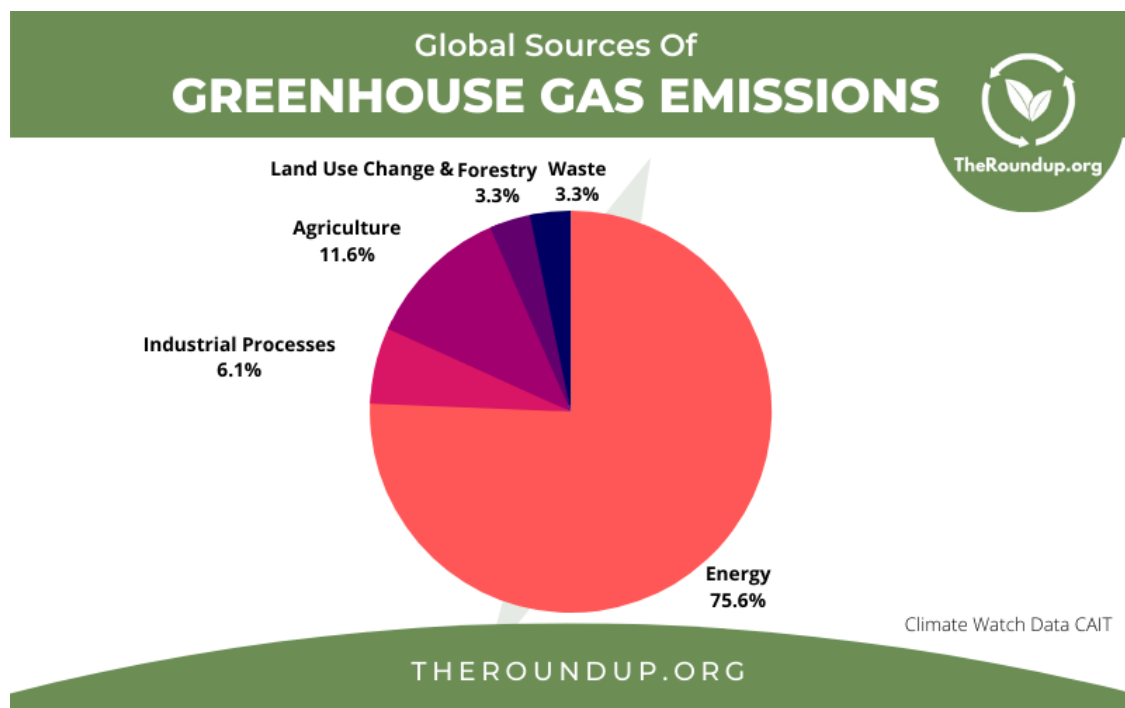


Figura 1.1: Global sources of greenhouse gas emissions. Source: theroundup.org

The International Maritime Organization (IMO) is implementing strategies to reduce the emissions from international shipping by establishing standards, imposing restrictions and providing incentives. The initial strategy envisages a reduction in total GHG emissions from international shipping by at least 50 % by 2050 compared to 2008, consistent with the Paris Agreement. IMO's

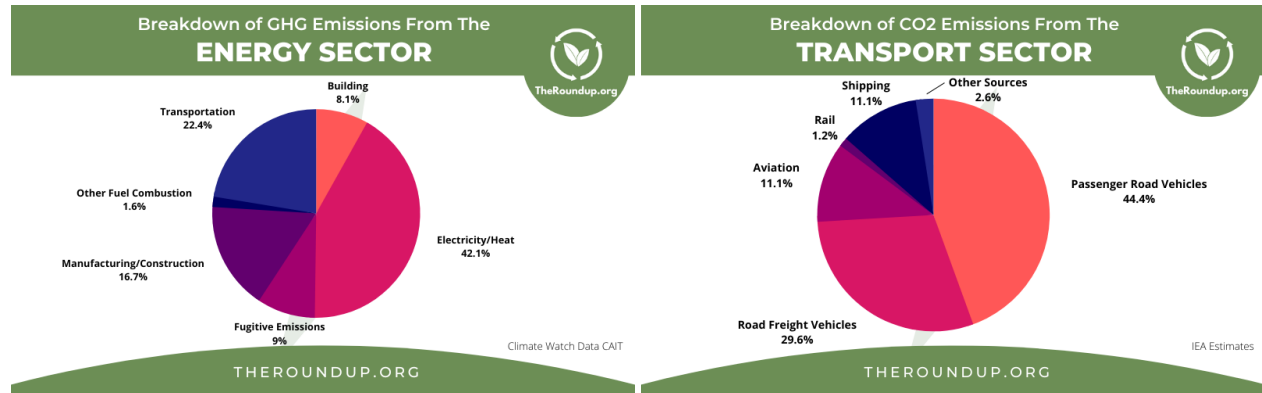
(a) CO₂ emissions from the energy sector.(b) CO₂ emissions from the transport subsector.

Figura 1.2: Breakdown of CO₂ emissions from the energy sector and the transport subsector. Source: theroundup.org

current global standard for SO_x emissions is 0.5 % mass by mass (m/m) by 2025 per the International Convention for the Prevention of Pollution by Ships (MARPOL 73/78) Annex VI. Similarly, the emission limit for NO_x from engines is dependent on the type of the engine and the nominal engine speed. The global limit has been set to 14.4 g/kWh for engines with speeds less than 130 rev/min and 7.7 g/kWh for engines with speed greater than 2000 rev/min.

To comply with the standards and emissions reduction goals set by IMO, the maritime industry is looking for reduced and zero-emission technologies and approaches. The transition from traditional fossil fuel engines to zero-emissions technologies is challenging in a competitive market, where manufacturers are struggling to increase revenue and reduce production cost. The incentives to reduce emissions and improve the efficiency of equipment are motivating ship manufacturers to adopt zero-emission technologies. Fuel cells and energy storages (for example, batteries and supercapacitors) reduce GHG emissions and are the key enablers for the realization of low-emissions operation of marine vessels.

Electric and hybrid propulsion architectures, allowed by innovative and high performance components (batteries, fuel cells, supercapacitors, etc) are a promising track to reduce strongly pollutants and GHG emissions [3]. New developments of electrically propelled ships are based on an integrated energy distribution system architecture that releases large propulsion machines [4].

The main advantages of full-electric propulsion include better dynamic performance (start-up, arrest, changes in speed, and regenerative braking), reduced fuel consumption due to the more efficient and flexible use of generators that work within their minimum specific fuel consumption region, and the possibility of having shorter shaft lines because only the electric motor must be installed close to the propeller.

The hybrid propulsion system uses a combination of diesel engines or gas turbines with electric motors to provide a wide range of propeller speeds [4]. One of the main advantages of this configuration concerns an increase in efficiency at low loads. Hence, less fuel consumption, fewer emissions, and a small footprint are achieved. Hybrid propulsion systems are interesting when there is a large variation in power demand during operations. The design rules of this type of systems can differ significantly for different types of vessel, mainly due to the different types of mission profiles and operation requirements [3].

Hybridization of the propulsion chains are based on the separation or simultaneous use of several different energy sources. The choice of different sources, and sources combinations is

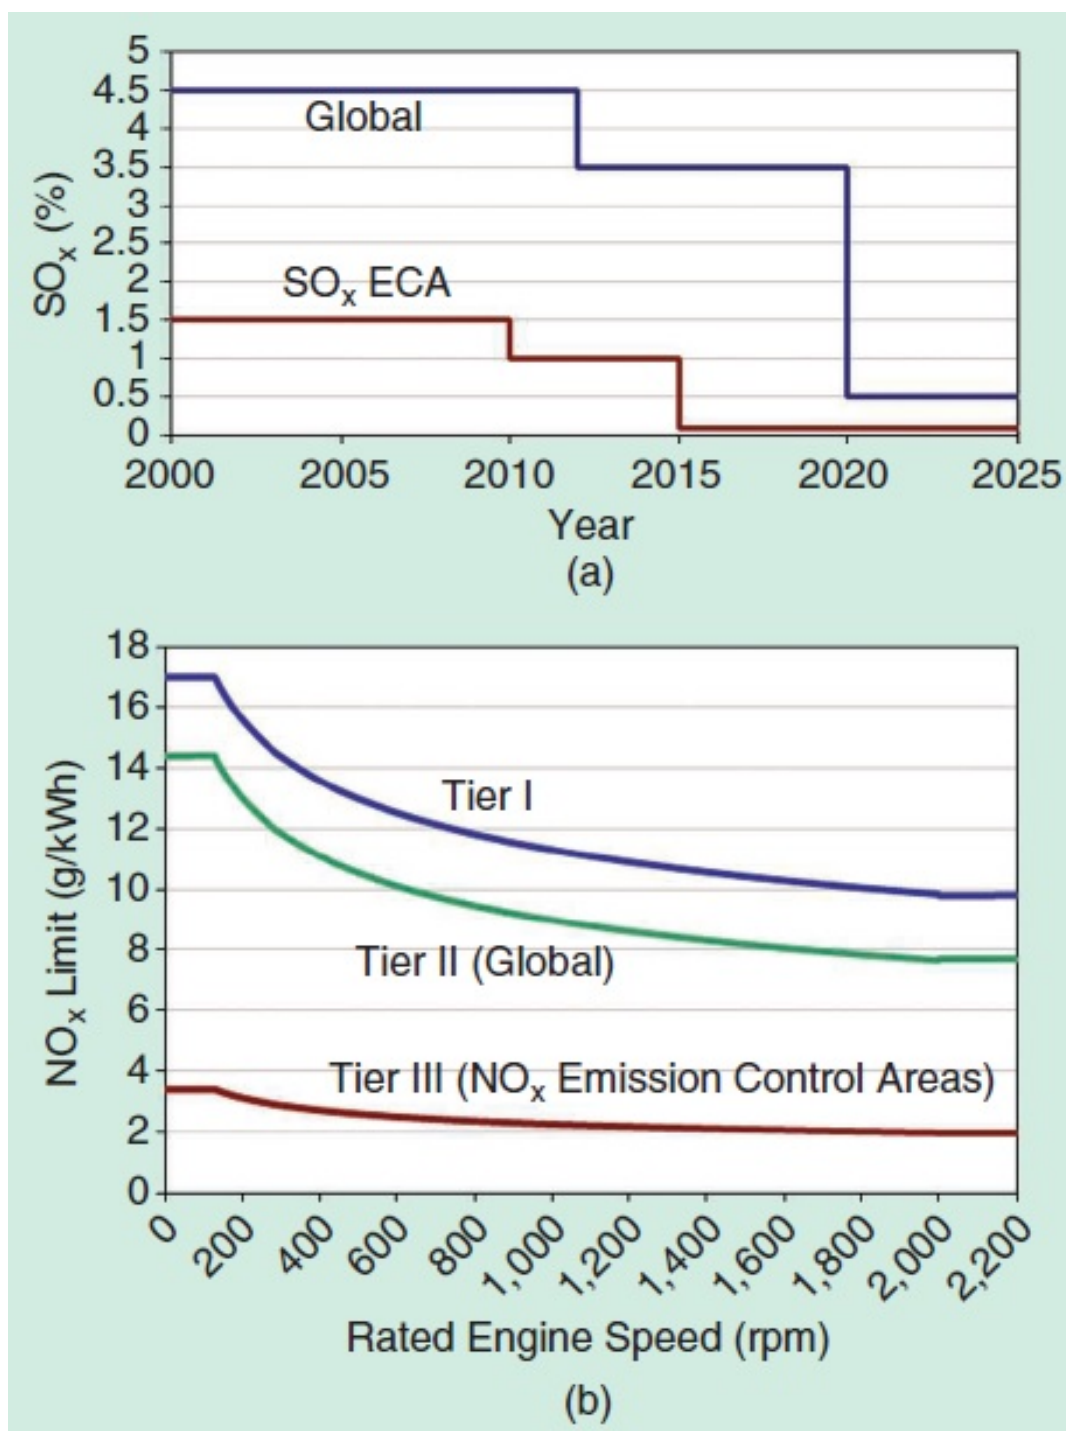


Figura 1.3: The MARPOL Annex VI emission limits for global and Emission Controlled Areas (ECAs perspective (a) SO_x and (b) NO_x. (Source: DieselNet

designed to adapt to the ship power and energy requirements which include the needs of low and high power, the needs of flexibility in changes of rhythm and the needs of redundancy and reliability.

There are three main architectures for hybrid propulsion chains.

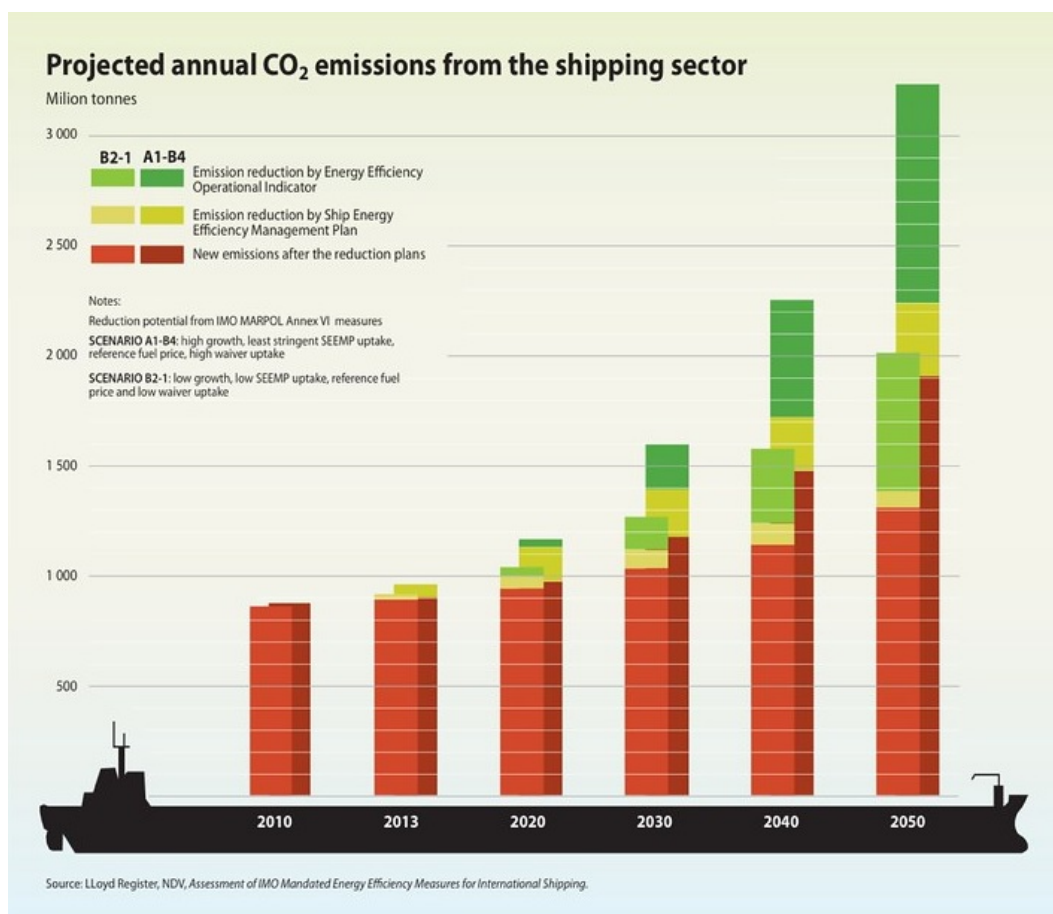


Figura 1.4: IMO greenhouse gas emissions strategy. Source: Lloyd Register, NOV, Assessment of IMO Mandated Energy Efficiency Measures for International Shipping

■ Series Hybrid architecture

In this type of HPS architecture, two kind of energy system (combustion engines and electric systems) are used in series. The propulsion is done by a variable speed electrical drive (propulsion motor and power converter). The electrical power of the propulsion motor is generally supplied by a set of generators driven by combustion engines. Another option is to use fuel cells to provide electricity or a combination of fuel cells and generators driven by combustion engine. Energy storage systems (ESS) (battery, supercapacitors, etc.) can be connected to the electrical bus to provide propulsion power. This ESS can be used separately or with the generators. In this configuration, electricity is used as an energy vector between the combustion engine and the propulsion motor, so there will be no direct mechanical connection between the engine and the propeller. This configuration allows dissociating the operating points of the combustion engine and of the propeller. This is why it allows increasing the global efficiency of the system by optimizing the operating point of combustion engine and propeller in efficiency point of view. Of course, this advantage would be more significant if several generators and ESS are used, because it allows providing the required propulsion power by choosing an optimal combination of sources in order to keep the running combustion engines in their optimal operating area. However, for small ships, the possibility of multiplying the sources is very limited by volume and mass constraints.

- Parallel Hybrid architecture

Parallel hybrid architecture combines two kinds of propulsion motors: electric motors and combustion engines which are mechanically coupled by the same shafts through gearboxes and clutches. The electrical motors and drive are supplied by electrical ESS and/or independent power sources generators driven by combustion engines and/or Fuel Cell for example. The two propulsion systems can be used together or separately. In most cases one of the propulsion systems is devoted to be used for low speed operations (classically the electric system) and the other one (classically the combustion engine) is used for high speeds. The first system can also be used as a boost system to provide a supplementary power during transient (starting, acceleration, etc.). This architecture reduces the number of elements compared to hybridization series and allows optimizing the sizing of each of the energy sources.

Tugboats are ideal candidates for hybridization due to their operational profiles, which involve prolonged idling, low-speed maneuvering, and frequent speed changes that lead to inefficient fuel consumption [9]. Among vessel types, tugboats—used for towing and maneuvering large ships—are among the highest emitters per unit of energy due to their highly variable load profiles [3].

A tug, or more commonly a tugboat, is an assistance boat which helps in the mooring or berthing operation of a ship by either towing or pushing a vessel towards the port [5] [6] .

A tug is a particular class of boat which helps mega-ships enter or leave a port. In addition to towing the vessel towards the harbour, tug boats can also be engaged to provide essentials, such as water, air, etc., to a vessel.

Tug boats are also essential for non-self-propelled barges, oil platforms, log rafts, etc. Due to their solid structural engineering, tugs are small but relatively powerful machines.

The usage and functions of tugs vary from port to port, as different ports have different requirements and intakes. The common thing is pushing or towing mega boats or barges. Their usage depends on the following factors:

- Port traffic Volume
- Types of ships to be served by that tug
- Navigational obstacles to be catered to
- Conditions of environmental protection
- Local laws and
- Domains to be carried by a tug

An average tug boat has 500-2500 kW engines (680-3400 hp), but those which are larger and venture out into deep waters have engines with a power close to 20000 kW (27200 hp) and a power: tonnage ratio ranging between 2.20-4.50 for large tugs and 4.0-9.5 for harbour tugs. These are high ratios, considering the ratio of cargo ships or vessels varies between 0.35 and 1.20.

Based on purpose, they serve marine tugs can be of two types:

- Escort Tugs: The tugs designed generally to escort and manouvre ferries and barges to their destination are known as escort tugs.

- Support Tugs: These tugs provide support services for offshore and towing operations. These tugs play a significant role in berthing operations.

Mainly, tugs used in the marine industry are of three types, which are listed:

1. Conventional tug
2. Tractor tug
3. Azimuth tug

The efficiency of vessels is based on fuel consumption in relation to load capacities, always taking into account both the propulsion system and the energy conversion system that determines it. The efficiency of conventional propulsion systems varies between 38 % and 41 % for a power range between 100 kW and 2,500 kW. For vessels with higher power ratings, efficiency increases to 48 % [7] [8]. Low efficiency is further affected by the variability of the operating and load conditions to which engines are subjected. This variability leads to an increase in specific fuel consumption, which causes higher emissions and energy waste through exhaust gases and cooling systems [7]. However, this level of efficiency can and could be optimized by the hybridization.

1.2. Challenges and Research Opportunities

Several studies have examined hybrid propulsion systems. A genetic algorithm to obtain the optimal operating points regard with series hybrid configurations in power generation, especially for the case of heavy duty hybrid drive applications [9]. A marine hybrid propulsion system, focusing on vector control of the electric motor during different modes and verifying the control feasibility [10]. The optimization of hybrid propulsion system design for a tugboat has been explored, presenting a methodology that streamlines powertrain component sizing and control, minimizing costs for a specific operating profile [11]. A coordinated control strategy for a variable-speed hybrid tugboat have been presented to improve fuel economy. The proposed strategy, validated through simulations and a smallscale experimental testbed, showed reduced costs and lower CO₂ emissions [12].

1.3. Thesis Objectives and Outline

The specific objective of this work is to develop a methodology for the design and sizing of the battery bank for a hybrid tugboat, which will allow us to determine the benefits that would be obtained from hybridization.

Specific objectives include:

- Model the operation of a conventional tugboat
- Define hybrid architecture.
- Propose the service power of the electrical system.
- Preliminary design of the battery bank based on technical and economic criteria.
- Simulation of the proposed cell and battery bank.

Bibliografía

- [1] A. Carreno, M. Malinowski, M. A. Perez, and J. Ding, "Effects of grid voltage and load unbalances on the efficiency of a hybrid distribution transformer," *IEEE Open Journal of the Industrial Electronics Society*, vol. 5, pp. 1206–1220, 2024.
- [2] Völker, Thorsten. "Hybrid Propulsion Concepts on Ships." 2013.
- [3] N. Bennabi, J. F. Charpentier, H. Menana, J. Y. Billard and P. Genet, "Hybrid propulsion systems for small ships: Context and challenges," *XXII International Conference on Electrical Machines (ICEM)*, Lausanne, Switzerland, 2016, pp. 2948-2954, doi: 10.1109/ICELMACH.2016.7732943.
- [4] C. A. Reusser, H. A. Young, J. R. Perez Osses, M. A. Perez and O. J. Simmonds, "Power Electronics and Drives: Applications to Modern Ship Propulsion Systems," in *IEEE Industrial Electronics Magazine*, vol. 14, no. 4, pp. 106-122, Dec. 2020, doi: 10.1109/MIE.2020.3002493.
- [5] "Harbour Towage", SAAM [Online]: saamtowage.com
- [6] "The Ultimate Guide to Tug Boats: Types, Functions, and Applications", Marine Insight [Online]: marineinsight.com
- [7] D. Griffiths, "Marine Medium Speed Diesel Engines", Institute of Marine Engineers, London 1999.
- [8] C. Wik, "Reducing Medium-Speed Engine Emissions", *Journal of Marine Engineering and Technology*, A17, 8, 2010.
- [9] P. H. Bauer and E. Pérez-Bernabeu, "The effect of the operating point choice on fuel economy in series hybrids," 2013 World Electric Vehicle Symposium and Exhibition (EVS27), Barcelona, Spain, 2013, pp. 1-4, doi: 10.1109/EVS.2013.6914858.
- [10] Z. Fan, C. Liang, Y. Dong, G. Chang, W. Pan and S. Shao, "Control of the Diesel-Electric Hybrid Propulsion in a Practical Cruise Vessel," 2021 IEEE International Conference on Power, Intelligent Computing and Systems (ICPICS), Shenyang, China, 2021, pp. 311-316, doi: 10.1109/ICPICS52425.2021.9524194.
- [11] T. Hofman, M. Naaborg and E. Sciberras, "System-Level Design Optimization of a Hybrid Tug," 2017 IEEE Vehicle Power and Propulsion Conference (VPPC), Belfort, France, 2017, pp. 1-6, doi: 10.1109/VPPC.2017.8331009.
- [12] B. A. Kumar, R. Selvaraj, K. Desingu, T. R. Chelliah and R. S. Upadhyayula, "A Coordinated Control Strategy for a Diesel-Electric Tugboat System for Improved Fuel Economy," in *IEEE Transactions on Industry Applications*, vol. 56, no. 5, pp. 5439-5451, Sept.-Oct. 2020, doi: 10.1109/TIA.2020.3010779.