



UNIVERSIDAD TECNICA FEDERICO SANTA MARIA

Master's Thesis

Design and Sizing of an Energy Storage System for a Hybrid Tugboat

Thesis as a requirement to obtain the degree of
Magister en Ciencias de la Ingeniería Electrónica

Thesis presented by
Leonardo Solis Zamora

Supervisor
Dr. Marcelo Pérez Leiva

Evaluation Committee
Dr. Christian Rojas, UTFSM
Msc. Joel Perez, UACH
Dr. Jon Are Suul, NTNU, Norway

January 2025 , Valparaíso, Chile



UNIVERSIDAD TECNICA
FEDERICO SANTA MARIA

CONSTANCIA DE VALIDACIÓN Y CONFIDENCIALIDAD DE MONOGRAFÍA A REPOSITORIO ACADÉMICO

1.- IDENTIFICACIÓN DEL TRABAJO ACADÉMICO

Tipo de monografía (marcar una opción): ☐ Memoria o trabajo de título ☐ Tesis de Postgrado

Título del trabajo:

Nombre del candidato(a):

Carrera / Grado:

Campus: Casa Central Valparaíso

Departamento: Electrónica

2.- VALIDACIÓN DEL PROFESOR GUÍA/DIRECTOR DE TESIS

Yo, Marcelo Pérez Leiva, en mi calidad de profesor(a) guía/director(a) del trabajo académico mencionado anteriormente **DEJO CONSTANCIA** que:

- He revisado esta versión del documento y corresponde a la versión final aprobada del trabajo.
- El trabajo cumple con los requisitos académicos y de formato establecidos por la institución.

3.- EVALUACIÓN DE CONFIDENCIALIDAD POR PROPIEDAD INDUSTRIAL (marcar una opción)

☐ El trabajo **NO** contiene información que amerite confidencialidad y puede ser publicado de inmediato en repositorio con acceso abierto.

☐ El trabajo **CONTIENE** información con potenciales implicancias de propiedad industrial o intelectual y requiere un periodo de confidencialidad (embargo) por (marcar una opción):

☐ 6 meses ☐ 12 meses ☐ 2 años ☐ 3 años ☐ 5 años ☐ 10 años

Fundamentación de la necesidad de confidencialidad (obligatorio si se solicita embargo):

4.- FIRMAS

Profesor(a) guía o director(a) de memoria o tesis:

Fecha: _____

Firma: _____

Estudiante o Candidato(a):

Fecha: _____

Firma: _____

Este formulario debe ser insertado como página 2 de la memoria o tesis, completado y firmado por estudiante y profesor(a) antes de la entrega en portal PRISMA de Biblioteca USM.

This is the dedicatory page.

Acknowledgments

This is the abstract

Abstract

The global maritime industry is increasingly prioritizing sustainability, promoting the adoption of various hybrid and fully electric propulsion systems for different vessel types. This document presents a design and sizing methodology of an energy storage system for a hybrid tugboat, customized to meet the operational demands while minimizing environmental impact. The proposed framework integrates analysis of load profile, energy storage sizing, battery technologies selection, and propulsion system optimization to achieve an optimal balance between performance, and emissions reduction. The results demonstrate that a well-designed energy storage system for a hybrid tugboat can achieve reductions in fuel consumption and greenhouse gas emissions without compromising the availability and robustness required for towing and transit operations.

Resumen

La industria marítima mundial está dando cada vez más prioridad a la sostenibilidad, promoviendo la adopción de diversos sistemas de propulsión híbridos y totalmente eléctricos para diferentes tipos de buques. En este documento se presenta una metodología de diseño y dimensionamiento de un sistema de almacenamiento de energía para un remolcador híbrido, personalizado para satisfacer las exigencias operativas y minimizar el impacto medioambiental. El marco propuesto integra el análisis del perfil de carga, el dimensionamiento del almacenamiento de energía, la selección de tecnologías de baterías y la optimización del sistema de propulsión para lograr un equilibrio óptimo entre el rendimiento y la reducción de emisiones. Los resultados demuestran que un sistema de almacenamiento de energía bien diseñado para un remolcador híbrido puede lograr reducciones en el consumo de combustible y las emisiones de gases de efecto invernadero sin comprometer la disponibilidad y la robustez necesarias para las operaciones de remolque y tránsito.

Contents

Acknowledgments	iii
Abstract	iv
Resumen	v
1 Introduction	1
1.1 Motivation and Background	1
1.1.1 Propulsion Architectures	3
1.1.2 Power Generation Systems	5
1.1.3 Energy Storage Systems	6
1.1.4 Battery Systems in Maritime Applications	7
1.1.5 Tugboats	13
1.2 Challenges and Research Opportunities	14
1.3 Thesis Objectives and Outline	15
1.4 Methodology	15
1.5 Scope and Limitations	15
1.6 Chapter Summary	16
Bibliography	17

List of Figures

1.1	Global sources of greenhouse gas emissions and breakdown of CO ₂ emissions from the energy sector and the transport subsector [1].	1
1.2	The MARPOL Annex VI emission limits for global and Emission Controlled Areas (ECAs) perspective.	2
1.3	GFI reduction factors and reference value in NZF [3].	2
1.4	Hybridization schemes.	4
1.5	Components of a battery [19].	6
1.6	Functional roles of battery systems onboard ships [19].	8
1.7	Traditional diesel-mechanic propulsion of a large merchant vessel.	11
1.8	Semi-hybridization.	11
1.9	Electric motor incorporation.	12
1.10	Tugboat	13

List of Tables

1.1	Energy Storage Systems Comparison [21].	7
1.2	Lithuim-ion batteries types [19].	10
1.3	Energy Storage Systems Comparison [21]	10
1.4	Ships 2022.	13

Chapter 1

Introduction

1.1 Motivation and Background

The growing global concern over climate change has significantly pressured industries to adopt sustainable practices. The maritime sector, responsible for approximately 2.5% of energy sector CO₂ emissions as shown in figure 1.1, has continuously increased in emissions [1] [2].

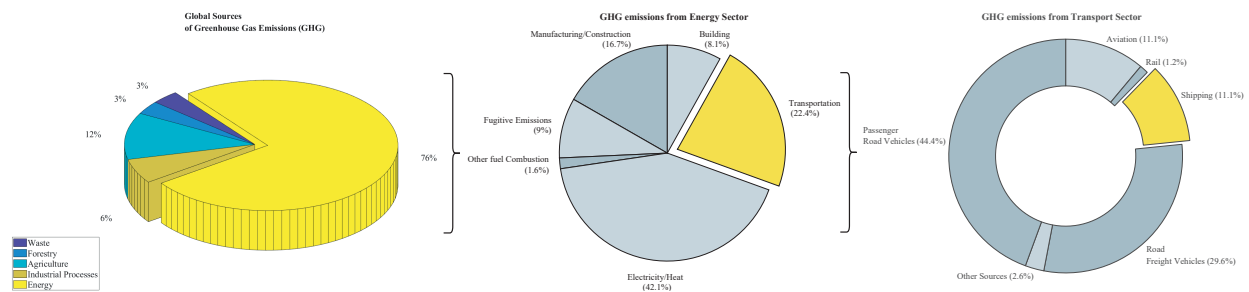


Figure 1.1: Global sources of greenhouse gas emissions and breakdown of CO₂ emissions from the energy sector and the transport subsector [1].

The International Maritime Organization (IMO) is implementing strategies to reduce the emissions from international shipping by establishing standards, imposing restrictions and providing incentives. The initial strategy avoids a reduction in total GHG emissions from international shipping by at least 50% by 2030 compared to 2008, consistent with the Paris Agreement. IMO's current global standard for SO_x emissions is 0.5% mass by mass (m/m) by 2030 per the **International Convention for the Prevention of Pollution by Ships (MARPOL 73/78) Annex VI**, as shown in figure 1.2a. Similarly, the emission limit for NO_x from engines is dependent on the type of the engine and the nominal engine speed, as shown in figure 1.2b. The global limit has been set to 14.4 g/kWh for engines with speeds less than 130 rev/min and 7.7 g/kWh for engines with speed greater than 2000 rev/min.

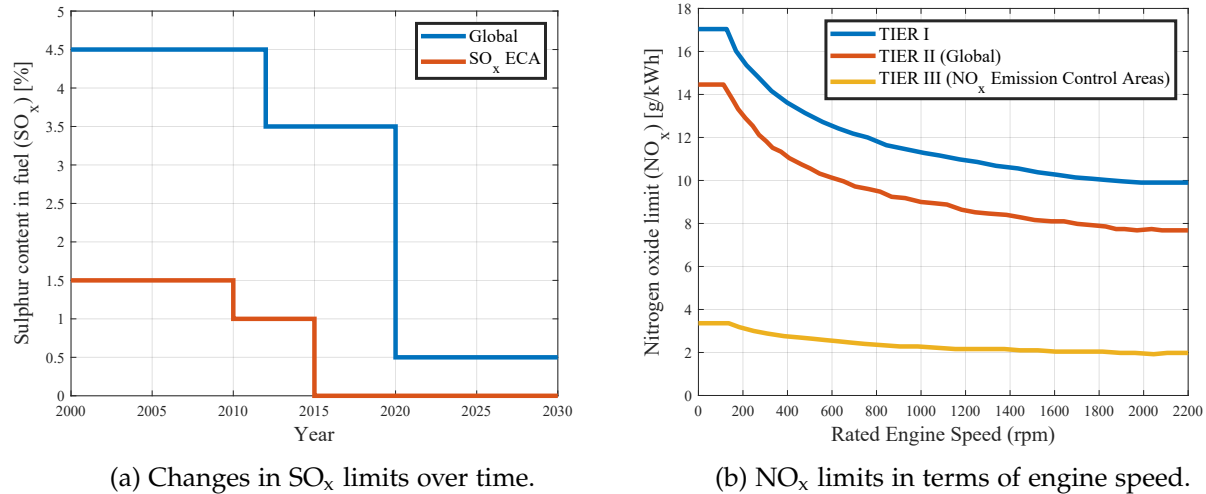


Figure 1.2: The MARPOL Annex VI emission limits for global and Emission Controlled Areas (ECAs) perspective.

With the **Net-Zero Framework (NZF)** approved by the IMO in April 2025, the course is being set for the global maritime fuel transition [3]. The NZF aims to meet the emission reduction targets set out in the 2023 IMO GHG Strategy. Pending adoption in October 2025, a GHG fuel intensity (GFI) metric, in combination with a two-tier GHG pricing mechanism, will require operators to reduce their ship's GHG emissions intensity by 21% by 2030, with financial penalties for those who fail to do so. Beyond 2030, the requirements become rapidly stricter.

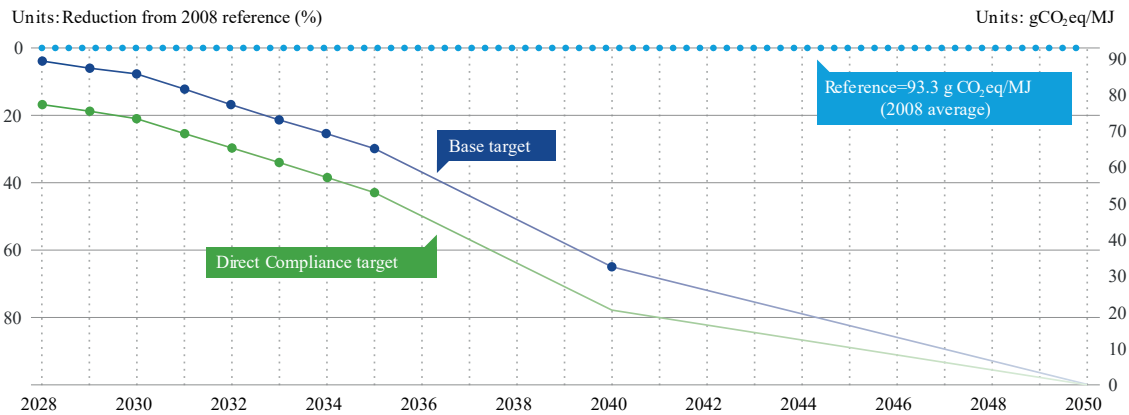


Figure 1.3: GFI reduction factors and reference value in NZF [3].

Specifically, The NZF aims to accelerate the adoption of low-GHG fuels and technologies, thereby supporting the achievement of the revised 2023 IMO GHG Strategy, namely a 20% reduction in emissions by 2030, a 70% reduction by 2040 (compared to 2008 levels), and net-zero emissions 'by or around' 2050, as is shown in fig 1.3. It is based on the GHG fuel intensity (GFI) metric expressed in gCO₂eq/MJ of all energy used on board in a calendar year on a well-to-wake (WtW) basis. Gradually stricter GFI targets are to be set every year from 2028. In effect, the NZF penalizes vessels with a GFI higher than the targets and incentivizes the use of low-GHG fuels and other technologies that can reduce the GFI. So, in response to the NZF, shipowners should carefully identify, evaluate and use technologies, fuels and solutions that help minimize energy

consumption and lower GFI for ships.

Many vessels chartered in the coming years could still be in operation in 2050, so it is necessary to take into account the strict requirements that lie ahead in order to maintain their commercial appeal, asset value, and profitability in the coming decades. Furthermore, beyond 2030, ships in operation may need to consider modernization options that allow for the use of fuels with low greenhouse gas emissions.

The incentives to reduce emissions and improve the efficiency of equipment are motivating ship manufacturers to adopt zero-emission technologies. Fuel cells and energy storages (for example, batteries and supercapacitors) reduce GHG emissions and are the key enablers for the realization of low-emissions operation of marine vessels.

1.1.1 Propulsion Architectures

While conventional maritime transport is characterized by restricting the amount of fuel produced by diesel engines in propulsion systems through Tier standards, which translates into a continuous decrease in fossil fuel consumption, fully electric and hybrid propulsion architectures, made possible by innovative high-performance energy storage systems (batteries, fuel cells, supercapacitors, etc.), are a promising way to significantly reduce fossil fuel consumption, pollutants, and greenhouse gas emissions [5].

New developments of electrically propelled ships are based on an integrated energy distribution system architecture that releases large propulsion machines [6].

For full-electric propulsion, the main advantages include better dynamic performance (start-up, arrest, changes in speed, and regenerative braking), reduced fuel consumption due to the more efficient and flexible use of generators that work within their minimum specific fuel consumption region, and the possibility of having shorter shaft lines because only the electric motor must be installed close to the propeller.

The hybrid propulsion system uses a combination of diesel engines or gas turbines with electric motors to provide a wide range of propeller speeds [6]. One of the main advantages of this configuration concerns an increase in efficiency at low loads. Hence, less fuel consumption, fewer emissions, and a small footprint are achieved. Hybrid propulsion systems (HPS) are interesting when there is a large variation in power demand during operations. The design rules of this type of systems can differ significantly for different types of vessel, mainly due to the different types of mission profiles and operation requirements [5].

Hybridization of the propulsion chains are based on the separation or simultaneous use of several different energy sources. The choice of different power sources, and sources combinations is designed to adapt to the ship power and energy requirements which include the needs of low and high power, the needs of flexibility in changes of rhythm and the needs of redundancy and reliability.

As can be seen in the following subsections, there are three main architectures for hybrid propulsion chains [5]:

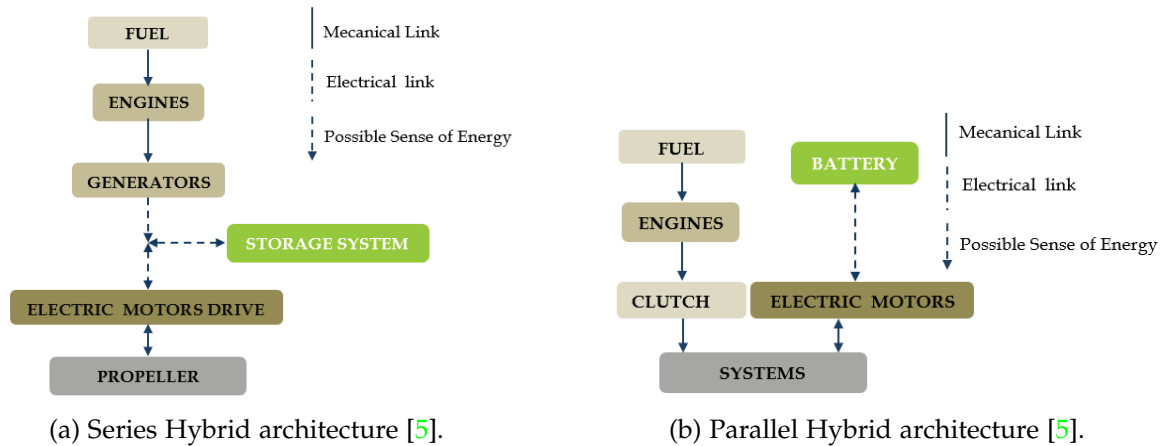


Figure 1.4: Hybridization schemes.

a) Series Hybrid Architectures

In this type of HPS architecture, two kind of energy system (combustion engines and electric systems) are used in series. The propulsion is done by a variable speed electrical drive (propulsion motor and power converter), as can be seen in the figure 1.4a. The electrical power of the propulsion motor is generally supplied by a set of generators driven by combustion engines. Another option is to use fuel cells to provide electric power or a combination of fuel cells and generators driven by combustion engine. Energy storage systems (ESS) (battery, supercapacitors, etc.) can be connected to the electrical bus to provide propulsion power. This ESS can be used separately or with the generators. In this configuration, electric power is used as an energy vector between the combustion engine and the propulsion motor, so there will be no direct mechanical connection between the engine and the propeller. This configuration allows dissociating the operating points of the combustion engine and of the propeller. This is why it allows increasing the global efficiency of the system by optimizing the operating point of combustion engine and propeller in efficiency point of view. Of course, this advantage would be more significant if several generators and ESS are used, because it allows providing the required propulsion power by choosing an optimal combination of sources in order to keep the running combustion engines in their optimal operating area. However, for small ships, the possibility of multiplying the sources is very limited by volume and mass constraints.

b) Parallel Hybrid Architectures

Parallel hybrid architecture combines two kinds of propulsion motors: electric motors and combustion engines which are mechanically coupled by the same shafts through gearboxes and clutches, as can be seen in the figure 1.4b. The electrical motors and drive are supplied by electrical ESS and/or independent power sources generators driven by combustion engines and/or Fuel Cell for example. The two propulsion systems can be used together or separately. In most cases one of the propulsion systems is devoted to be used for low speed operations (classically the electric system) and the other one (classically the combustion engine) is used for high speeds. The first system can also be used as a boost system to provide a supplementary power during transient (starting, acceleration, etc.). This architecture reduces the number of elements compared to hybridization series and allows optimizing the sizing of each of the energy sources.

c) Series-Parallel Hybrid Architectures

The series-parallel architecture combines both architectures defined previously. This association allows the passage of a parallel-type operation to a serial type operation.

Hybrid Propulsion systems are based on the combination of several power sources and energy storage systems.

1.1.2 Power Generation Systems

There are different power generation systems associated with propulsion systems for boats. The main ones are listed below:

a) Steam Turbine

A steam turbine is a device that extracts thermal energy from pressurized steam and uses it to do mechanical work on a rotating output shaft [11] [12]. Steam turbines work by expanding steam through a series of blades mounted on a shaft, which turns a propeller to move the ship. They are particularly favoured for their smooth operation, high power output, and efficiency at high speeds, making them suitable for large vessels like liquefied natural gas (LNG) carriers and naval ships.

Steam turbines revolutionized ship propulsion with their introduction in the late 19th century, offering advantages such as small size, reduced maintenance, and low vibration. Despite the need for precise reduction gears or turbo-electric transmission to match the high RPM of turbines to the effective propeller speeds, the benefits included light weight and compact engine rooms.

b) Gas Turbine

Gas turbine engines are defined as aerospace engines that convert the chemical energy in fuel into thermal energy through combustion with air, resulting in the rapid expansion of gas that can perform work in the turbine and exhaust nozzle [13].

The gas turbine engine is recognized for its relative mechanical simplicity and its capacity to use a broad spectrum of fuels. The excellent power-weight ratio of gas turbine engines can be effectively exploited. The performance of gas turbine engines is affected by compressor efficiency, turbine efficiency, pressure ratio, peak cycle temperature, and combustion efficiency. Compressor and turbine efficiencies are continuously increasing through better design and manufacturing techniques, but little room is left for improvement.

The first time a gas turbine was mounted on a watercraft occurred in 1947 in the United Kingdom, when a diesel free power turbine was mounted on a modified gunboat as a proof of concept [14]. This craft endured sea trials for 4 years, until the technology was proven to be a viable concept for the future of naval propulsion. The HMS Grey Goose became the first ship powered entirely by gas turbines, launched in the United Kingdom in 1953, fulfilling its mission to demonstrate the viability of gas turbine propulsion at sea. Since the inception of this technology, gas turbine engines or combinations of them with other engine technologies have been utilized in a wide range of watercraft, ranging from hovercraft all the way up to full-size aircraft carriers, with power outputs starting at single digits of MW all the way to hundreds of MW.

c) Diesel Engines

A diesel engine is a prime mover with the function to convert chemical energy stored in fuel to mechanical energy [5] [7]. Compared to other prime movers such as a gas turbine or steam

turbine, the diesel engine has a high efficiency. Its low fuel consumption is the main reason it is widely used in marine applications.

This power source is characterized by a high level of autonomy and by a relatively low cost compared to other sources. Diesel engines are characterized by a high level of greenhouse gases and pollutants emission particularly if they are used at a lower level of power than their rated power.

1.1.3 Energy Storage Systems

An intermediate energy storage system can be used to better manage energy and reduce the size of power generation system. The integration of energy storage systems offers interesting solutions for energy efficiency and optimal energy use.

a) Supercapacitors

Supercapacitors can be interesting intermediate energy storage systems for small ships with short power transients [5]. They are characterized by a high value of charge and discharge peak power and can be used to rapid dynamic storage with very low specific energy. They are usually associated with slower systems, such as batteries and fuel cells, to manage high power short transients. They can operate at very low temperatures at which many types of electrochemical batteries stop working.

b) Flywheels

Flywheels can be used in some particular cases. Like supercapacitors, they are characterized by a high power density but a relatively low energy density. However using flywheels leads to implement safety systems to protect crew and passengers from possible flywheel failure. So their use in small ship context seems very limited.

c) Batteries

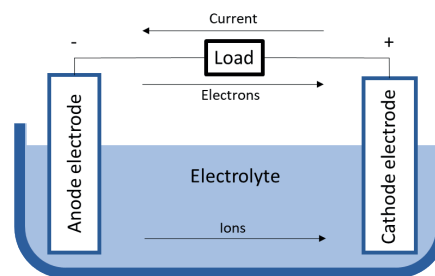


Figure 1.5: Components of a battery [19].

Table 1.1: Energy Storage Systems Comparison [21].

Technology	Battery	Supercapacitor	Flywheel
Energy Density (Wh/kg)	50-250	0.05-5	5-100
Power Density (W/Kg)	50-2000	100k	1000
Lifecycle (cycle)	400-9000	50k	20k-100k
Lifetime (years)	5-10	5-8	15-20
Overall Efficiency (%)	85-99	60-65	15-20

The oldest and most classical method for storing electrical energy is using batteries. In general, as can be seen in fig. 1.5, a battery is comprised of two different poles – a positive electrode called the cathode and a negative electrode called the anode. Then some material is used inside the battery, called electrolyte, that enables ions, or charge carriers, to be transferred back and forth between these poles by electrochemical reactions [19]. A separator can be placed between the cathode and anode, preventing them from touching each other. Hence, when the poles are connected by an electrical conducting material, electrons will flow through the external electrical circuit, and ions to flow through the electrolyte. This process allows energy to be stored or produced in the battery. The chosen energy carrier material, electrode and electrolyte composition, and the shape of the electrodes determine the properties of the batteries.

Battery technology has matured significantly during the past two decades as not only the world but also energy has become increasingly mobile [20].

As shown in the table 1.1, the battery provides the highest power density but lacks overall efficiency compared to energy storage systems. The flywheel, on the other hand, is the most durable system, offering a cycle life of between 20,000 and 100,000 cycles and a service life of between 15 and 20 years. However, due to its low power density, it may not provide enough power for a vessel.

The comparison seen in table 1.1 helps to understand why batteries are usually chosen over other types of energy storage systems: because of their reliability and high energy density.

1.1.4 Battery Systems in Maritime Applications

Battery application onboard ships can have multiple functional roles. While batteries can fully power a vessel for short distance or duration, improving performance and energy efficiency of the overall vessel is often the key purpose.

In 2018, the European Maritime Safety Agency (EMSA) commissioned DNV GL to perform a study on the use of electrical storage systems in shipping, with the objective of providing an overview of technology, research, feasibility, regulations and safety of battery systems in maritime applications [19]. Figure 1.6 shows the different uses of batteries recognized by EMSA:

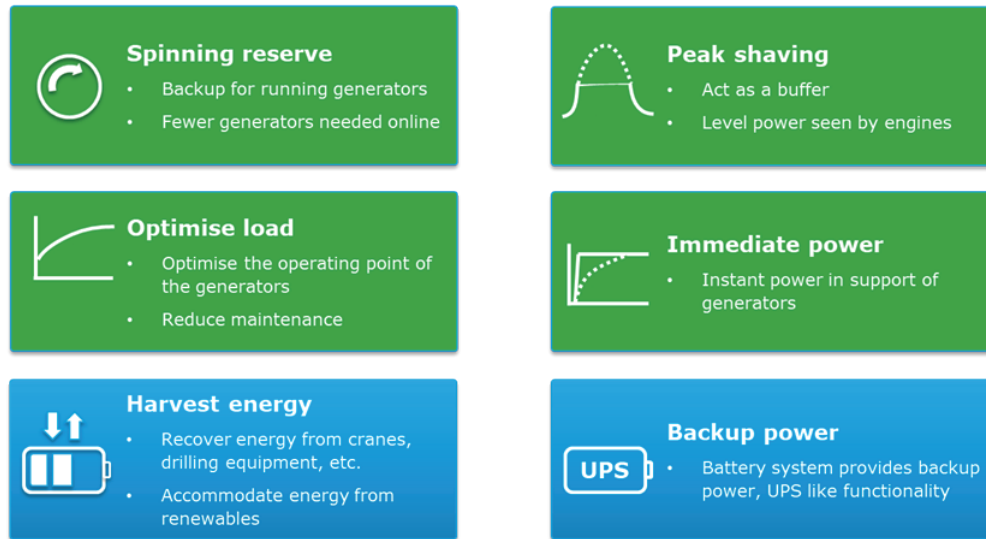


Figure 1.6: Functional roles of battery systems onboard ships [19].

- **Spinning reserve:** This mainly applies to diesel electric dynamic positioning vessels. Using a battery-provided spinning reserve allows the vessel to reduce the number of generators running required to maintain the spinning reserve. It allows for lower fuel consumption, lower emissions, higher efficiency of running engines and lower maintenance costs due to reduced running hours [23].
- **Peak shaving:** Battery energy storage systems also provide additional electric power required for short-term additional power demands. In conventional propulsion systems, it is necessary to run additional diesel generator to meet those demands. Using a battery instead, the additional generator can be turned off, therefore saving on fuel and wear and tear of the engine. Vessels equipped with heavy electricity consumers such as cranes or electric-driven thrusters will benefit from this arrangement [23].
- **Optimise load:** BESSs are used to keep the load of the diesel engine/generator constant, allowing them to operate at maximum efficiency by charging when the load demand is low, then contributing to the fulfilment of the load request [25].
- **Immediate power:** This concept is recognized also like *Ramp Levelling* and is used to enhance dynamic engine performance [25]. Gas engines and other energy sources are not capable of handling fast load variations. In such cases, a BESS can be utilized to take care of the variations, while the main energy source produces slowly varying power [23].
- **Harvest energy:** This service consists of a time shift of energy generation by storing energy from photovoltaic panels, and/or other renewable sources such as wind, and then releasing it when they are absent. In addition, regenerative power improves ship energy management, using BESS to store energy obtained from the regenerative process of double speed engine braking (e.g., ships with cranes or large winches) [25].
- **Backup power:** BESS allows the vessel to stop diesel engines when onboard electricity consumption is low (e.g., in port). The generators are started only to charge the batteries. It is possible to reduce emissions because the diesel engines operate at optimal load (with maximum efficiency and minimum specific fuel consumption) during charging [23].

Additionally, other authors acknowledge the service of the **zero-emission mode** [25], that utilizes full electric propulsion for a limited time, reducing ship noise and vibration. Here, a BESS allows for switching-off all the onboard internal combustion engines. However, when fully powered by its own BESS, these ships are subject to specific technical limitations, such as max speed and maximum operation time, depending on battery power and energy content.

Among the commercially available battery technologies that can be used to provide services to boats, considering that is not feasible or possible to cover the entire spectrum of all technologies, because for any given chemistry there is most often a wide range of products representing different levels of quality and performance, information on some of them is provided [19]:

- **Lead-acid:** Lead-acid batteries are supplied worldwide by a large supplier base at a very low cost. Automotive batteries and industries where standby electrical power is critical are the biggest markets. It is considered to be very safe, since the electrolyte and active materials are not flammable; although the batteries are known to produce hydrogen under charging. The main drawbacks for such batteries are the specific energy and energy density. The power density is considered high for lead acid battery but is also here outperformed by Li-ion.
- **Nickel Cadmium (Ni-Cd):** Nickel cadmium batteries are mature technologies, that are widely used in UPS applications, for example. This technology is economically priced and presents the lowest per cycle cost. Good ventilation is important in the room to avoid explosive concentration of hydrogen. Ni-Cd have memory effect that causes a loss of capacity if not given a periodic full discharge cycle.
- **Nickel Metal Hybride (Ni-MH):** Nickel metal hybride has become one of the most readily available rechargeable batteries for consumer use and is used for the most at the same applications as Ni-Cd. It provides 40 percent higher specific energy than the standard Ni-Cd. Good ventilation is important in the room to avoid explosive concentration of hydrogen. The battery is more delicate and trickier to charge than Ni-Cd. High self-discharge is of ongoing concern, and devices with a Ni-MH battery gets “flat” when put away for only a few weeks.
- **Sodium Sulphur (Na-S):** The sodium sulphur batteries, are manufactured from cheap and plentiful raw materials and has higher specific energy compared to Li-ion batteries. However, the manufacturing processes and the need for insulation, heating and thermal management make these batteries quite expensive and counteracts the benefits, because these type of batteries need molten sodium-metal as a anode, making it necessary to operate at 300°C.
- **Lithium-ion (Li-ion):** Lithium-ion batteries can consist of different material and chemistries in the electrodes and the electrolyte, as well as manufacturing processes and related materials. Has the highest specific energy of commercially available batteries and highest energy density of commercially available batteries. Some disadvantages are flammable electrolyte and potentially limited availability of materials. Among the different **cathodes** and **anodes** of lithium-ion batteries are shown in the table 1.2:

Table 1.2: Lithium-ion batteries types [19].

Lithium-ion Battery	
Cathode Chemistries	Anode Chemistries
Nickel Manganese Cobalt Oxide (NMC)	Graphene
Nickel Cobalt Aluminium (NCA)	Titanate
Lithium Cobalt Oxide (LCO)	Silicon
Lithium Manganese Oxide Spinel (LMO)	
Lithium Iron Phosphate (LFP)	

- **Li-polymer:** Also known like *solid-state battery*, this type of technology gives freedom in design of the battery geometry and improvement of the packing efficiency of the cells. It facilitates a long cycle life and offers the possibility of employing high-voltage cathodes. All these effects increase the practical battery energy density. The biggest challenge however is regarded as the volume changes of the electrodes during charging and discharging, that causes loss of contact between the electrode and the electrolyte. These effects all make ion conductivity low. An polymer interlayer between the electrodes and the solid electrolyte has been proposed to overcome these challenges. Some disadvantage of this technology are its high production cost and low lifetime.
- **Lithium-Sulphur (Li-S):** Like conventional lithium-ion batteries, these batteries use Li⁺ ions as energy carriers. They react with sulfur at the cathode giving some high theoretical values for specific energy and energy density. Hence these batteries will be very attractive for marine applications. Safety concerns related to these batteries, like dendrite formation, have been improved. However, this compromises the specific energy and energy density and increases the cost dramatically. Other obstacles to overcome are high electrical resistance, capacity fading, self-discharge, mainly due to the so-called shuttle effect.

About the different types of batteries described above, there is a technical comparison in the table 1.3.

Table 1.3: Energy Storage Systems Comparison [21]

Battery	Energy Density (Wh/kg)	Volumetric Energy Density (Wh/L)	Cost (USD/kWh)	Lifecycle	Efficiency (%)
Lead-Acid	20-40	60-110	165	500-1000	50-95
Ni-Cd	20-60	60-150	-	2000-2500	70-90
Ni-MH	50-70	140-300	146	500-2000	89-92
Na-S	~120	150-300	400	>1500	86-92
Li-ion	50-250	250-675	200-600	400-9000	85-99
Li-polymer	~150	250-730	-	-	-
Li-S	400	350	400-500	1500	-

Different ships have different operating profiles and batteries must respond to specific energy and power demand while also having in consideration the desired/expected life-cycle for the battery [19]. In this scenario, lithium batteries are superior to the other mentioned batteries in terms of energy density, lifecycle, and efficiency [21]. Lithium batteries have been gaining traction

throughout the years, with many applications including portable electronics such as mobile phones, and automobile applications such as electric vehicles. Also are slowly being adopted for aerospace, military and marine applications. Lithium batteries are highly versatile energy storage devices that can be altered to meet specific demands, making them one of the best choices for marine application.

Considering the incorporation of batteries into the propulsion system of vessels, different propulsion architectures are recognized that provide a different use for batteries, even without considering them, as is the case with conventional propulsion architecture [19] [20]. This can be seen in the figures 1.7, 1.8 and 1.9.

a) Diesel-mechanic engine conventional system



Figure 1.7: Traditional diesel-mechanic propulsion of a large merchant vessel.

In general, the configuration shown in Figure 1.7 is the most common installation on large ocean-going vessels [20]. It consists of a two-stroke main engine responsible for propulsion, while the ship's load is covered by auxiliary engines/sensets installed on board the vessel.

b) Diesel-mechanic engine hybrid system

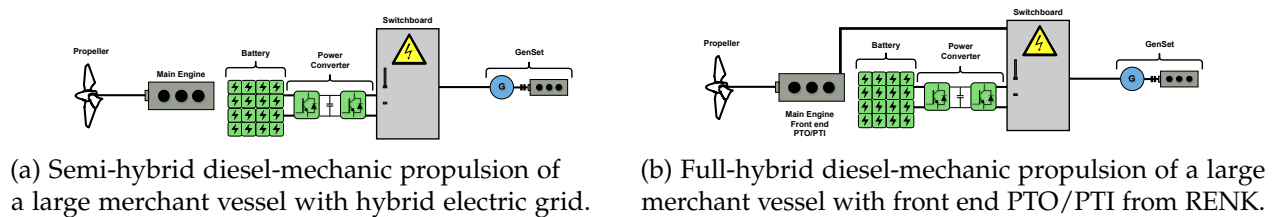


Figure 1.8: Semi-hybridization.


In Fig. 1.8a, a battery is included in a traditional system where the electric grid is separated from the propulsion of the vessel [20]. The battery will in such a solution be effective for smoothing the connected hotel electrical loads and contribute to handle large load steps or peaks [19]. When large load steps are increased, the number of auxiliary motors also increases. In some cases, the load can regenerate energy, for example, in crane operations. In such cases, the battery can be used to capture the energy.

In 1.8b, a battery is included in combination with a shaft generator power take-out (PTO) and power take-in (PTI) [20]:

- **Power Take-Out (PTO):** The electrical/mechanical hybrid solution allows electricity to be generated by the main engine.
- **Power Take-In (PTI):** The electrical/mechanical hybrid solution allows propulsion power to be produced by generator sets and batteries. Additional power is possible (boost mode) when the main engine and PTI motor are running in parallel.

In addition, a ship with a hybrid electric/mechanical propulsion system may have a direct current distribution system, which can adjust the speed of the primary generator engines to the optimum fuel level depending on the load. This will reduce fuel consumption and minimize environmental impact [19].

c) Hybrid/electric propulsion system with electric motors

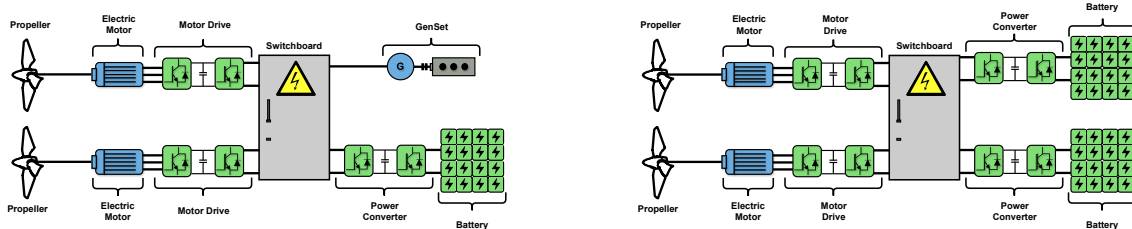

(a) Full-hybrid diesel-electric propulsion with batteries in a hybrid system.

(b) Pure electric propulsion with batteries as the primary energy source.

Figure 1.9: Electric motor incorporation.

A full-hybrid diesel-electric solution, as is shown in fig. 1.9a, reduces the noise and vibration level on the ship [19]. Supplementary to be a source of energy for propulsion, the batteries will also smooth the load variations on the generator sets. This type of solution can for instance facilitate the use of zero emission operation when entering a harbour. Another version of this solution is with the batteries distributed into the drives directly [19]. In this way, each propulsion unit is independent of a common power source, which could be valuable for vessels that require highly reliable propulsion thrust.

In the fig. 1.9b, the propellers are connected to electric motors, which are driven by the energy stored in a battery system that is typically charged from shore [20]. In some battery-electric systems, a smaller diesel generator is sometimes included to ensure operation if the batteries fail to charge or to enable longer voyages, i.e. when the vessel has to dock [20]. For such a solution the batteries will be charged through an AC/DC converter. The converter can either be located on board the vessel or on shore. The fig. 1.9b shows two independent battery systems that deliver power to the thruster. This is according to class rules, which require that two independent battery systems are installed to provide propulsion power in case one of the systems fail [19].

Electrification of ship's propulsion is increasingly recognised as a core part of the maritime industry's future [23]. According to [26], the adoption of alternative fuels in the global fleet by number of ships is dominated by Liquefied Natural Gas (LNG) together with hybrid/battery ships, as is shown in Table 1.4.

Table 1.4: Ships 2022.

Alternative Fuel Ships		
	In operation during 2022	Ordered
LNG	926	534
Hybrid/battery powered ships	396	417
Total	1349	1046

In Table 1.4, can be seen that the proportion of hybrid/battery propulsion systems has been increasing since 2022. However, it should be noted that the use of batteries as a source of propulsion for ships is limited to certain types of ships, the main ones being ferries, dynamic positioning ships and platforms, dredging, short-range ships, wind farm support vessels, and tugs. For ships that travel most of the time at constant speed, such as container ships, it make no sense to replace a diesel mechanical drive by hybrid concepts, because the diesel-mechanical drives are optimized for this operation and then getting a lower consumption than a diesel electric or hybrid system [4].

Harbour tugs are a sector of the maritime industry with great potential for the implementation of hybrid propulsion, as they experience significant variations in power demand during operations [5].

Ports are imposing more and more stringent regulations on exhaust and noise emissions. Those demands for cleaner operation can be easily met by the implementation of battery energy storage systems (BESS) (with hybrid-electric propulsion). Using a combination of electric power, BESS and combustion engines, a hybrid tug optimizes engine loading, resulting in lower specific fuel consumption, higher efficiency, lower emissions and lower fuel consumption.

1.1.5 Tugboats



Figure 1.10: Tugboat

Tugboats, as can be seen in fig. 1.10, are ideal candidates for hybridization due to their operational profiles, which involve prolonged idling, low-speed maneuvering, and frequent speed changes that lead to inefficient fuel consumption [21]. Among vessel types, tugboats—used for towing and maneuvering large ships—are among the highest emitters per unit of energy due to their highly variable load profiles [4].

1.2 Challenges and Research Opportunities

Several studies have examined hybrid propulsion systems [8], identifying the main topics of study related to hybridization, which are listed below [23]:

- Optimal sizing of the batteries.
- Optimal control strategy for the parallel operation of a battery and diesel generators.
- Control and safe operation of lithium battery packs.
- BESS control system architecture.
- Design of a battery management system (BMS).
- Safety assessment of the BESS, its elements and safeguarding measures required by the classification societies.
- Safety assessment of the BESS, its elements and safeguarding measures required by the classification societies.

- Degradation of Li-ion batteries.
- Battery application for large vessels.
- Reduction of fuel consumption and emissions.

Some studies related to hybridization are listed below, with emphasis on those related to tugboat hybridization:

- The feasibility of hybrid propulsion concepts is examined for different types of vessels, including tugboats [4], showing that there are definitely opportunities to save energy by using hybrid drive systems on ships, even return the much higher investment by savings in fuel.
- A genetic algorithm to obtain the optimal operating points regard with series hybrid configurations in power generation, especially for the case of heavy duty hybrid drive applications [18].
- A marine hybrid propulsion system, focusing on vector control of the electric motor during different modes and verifying the control feasibility [22].
- An analytical design methodology for BESS in hybrid marine vessels [24].
- The optimization of hybrid propulsion system design for a tugboat has been explored, presenting a methodology that streamlines powertrain component sizing and control, minimizing costs for a specific operating profile [27].
- A coordinated control strategy for a variable-speed hybrid tugboat have been presented to improve fuel economy. The proposed strategy, validated through simulations and a smallscale experimental testbed, showed reduced costs and lower CO₂ emissions [28].

However, the challenge lies in finding a clear and detailed methodology for the hybridization of vessels such as tugboats that provides a path from the conceptual phase to the technical details and subsequent implementation, taking into account technical and economic aspects.

1.3 Thesis Objectives and Outline

The general objective of this work is to develop a methodology for the design and sizing of the battery bank for a hybrid tugboat, which will allow us to determine the benefits that would be obtained from hybridization.

Specific objectives include:

- Model the operation of a conventional tugboat
- Define hybrid architecture.
- Propose the service power of the electrical system.
- Preliminary design of the battery bank based on technical and economic criteria.
- Simulation of the proposed cell and battery bank.

1.4 Methodology

The methodology to follow for the development of this work is:

- **State of Art:** Review of existing hybrid propulsion system types and battery technologies.
- **Mathematical Analysis and Modeling:** Theoretical study of the tugboat's load profile and the implementation of batteries to support the vessel's operation.
- **Results:** Simulation of the models obtained to complete the conceptual analysis.

1.5 Scope and Limitations

The limitations of the work are:

- Architecture Layout.
- Bill of Components (BOM).
- Simulation considerations.

In conclusion, this work will contribute to the analysis of the different initial stages of hybridizing a tugboat, considering the essential technical aspects that allow us to understand the benefits of this conversion, with an emphasis on the electrical stage, specifically the batteries.

1.6 Chapter Summary

Chapter 2

Identification of essential technical and operational characteristics of a tugboat and analysis of the associated operational load profile.

Chapter 3

Hybridization analysis and new operational services that a hybrid tugboat can offer based on its cargo operational profile.

Chapter 4

Design and sizing of battery banks, considering different technologies, technical variables, and economic analysis.

Chapter 5

Simulation of the battery bank selected for the vessel, considering the mathematical model of a cell.

Bibliography

- [1] “45 Latest Greenhouse Gas & Climate Change Statistics”, TheRoundup.org [Online]: theroundup.org
- [2] “How to reduce shipping emissions? Best way to cut emissions & save money in 2024”, Container xChange [Online]: container-xchange.com
- [3] DNV, “Energy Transition Outlook 2025 - Maritime Forecast to 2025, A deep dive into shipping’s decarbonization journey”, 2025
- [4] Völker, Thorsten. “Hybrid Propulsion Concepts on Ships.” 2013.
- [5] N. Bennabi, J. F. Charpentier, H. Menana, J. Y. Billard and P. Genet, “Hybrid propulsion systems for small ships: Context and challenges,” *XXII International Conference on Electrical Machines (ICEM)*, Lausanne, Switzerland, 2016, pp. 2948-2954, doi: 10.1109/ICELMACH.2016.7732943.
- [6] C. A. Reusser, H. A. Young, J. R. Perez Osses, M. A. Perez and O. J. Simmonds, “Power Electronics and Drives: Applications to Modern Ship Propulsion Systems,” in *IEEE Industrial Electronics Magazine*, vol. 14, no. 4, pp. 106-122, Dec. 2020, doi: 10.1109/MIE.2020.3002493.
- [7] B. Kwasięckij, “Hybrid Propulsion Systems: Efficiency analysis and design methodology of hybrid propulsion systems”, Master Thesis conducted at MAN Diesel & Turbo SE, Augsburg, 2013.
- [8] L. Solis-Zamora, J. Perez and M. A. Perez, “Design and Sizing of an Energy Storage System for a Hybrid Tugboat,” 2025 IEEE 19th International Conference on Compatibility, Power Electronics and Power Engineering (CPE-POWERENG), Antalya, Türkiye, 2025, pp. 1-6.
- [9] Lloyd Register, DNV, “ASSESSMENT OF IMO MANDATED ENERGY EFFICIENCY MEASURES FOR INTERNATIONAL SHIPPING” in Project Final Report, MEPC 63/INF.2, Annex, Page 1, 2011.
- [10] SAAM, “Harbour Towage”. [Online]: saamtowage.com
- [11] Wärtsilä, “Encyclopedia of Marine And Energy Technology”. [Online]: <https://www.wartsila.com/encyclopedia/term/steam-turbine>
- [12] Maritime Education, “Marine Steam Turbines”. <https://maritimeducation.com/marine-steam-turbines/>
- [13] Science Direct, “Gas Turbine Engines”. <https://www.sciencedirect.com/topics/physics-and-astronomy/gas-turbine-engines>

- [14] S. Grigoryev, "Gas turbines in marine propulsion", Bachelor's thesis 2025, LUT University.
- [15] "The Ultimate Guide to Tug Boats: Types, Functions, and Applications", Marine Insight [Online]: marineinsight.com
- [16] D. Griffiths, "Marine Medium Speed Diesel Engines", Institute of Marine Engineers, London 1999.
- [17] C. Wik, "Reducing Medium-Speed Engine Emissions", Journal of Marine Engineering and Technology, A17, 8, 2010.
- [18] P. H. Bauer and E. Pérez-Bernabeu, "The effect of the operating point choice on fuel economy in series hybrids," 2013 World Electric Vehicle Symposium and Exhibition (EVS27), Barcelona, Spain, 2013, pp. 1-4, doi: 10.1109/EVS.2013.6914858.
- [19] DNV GL AS Maritime, "Electrical Energy Storage for Ships", EMSA European Maritime Safety Agency, 2019-0217, Rev. 04, 2020.
- [20] MAN Energy Solutions, "Batteries on Board ocean-going Vessels", 2019
- [21] Chin, C.S.; Tan, Y.-J.; Kumar, M.V. "Study of Hybrid Propulsion Systems for Lower Emissions and Fuel Saving on Merchant Ship during Voyage". J. Mar. Sci. Eng. 2022, 10, 393.
- [22] Z. Fan, C. Liang, Y. Dong, G. Chang, W. Pan and S. Shao, "Control of the Diesel-Electric Hybrid Propulsion in a Practical Cruise Vessel," 2021 IEEE International Conference on Power, Intelligent Computing and Systems (ICPICS), Shenyang, China, 2021, pp. 311-316, doi: 10.1109/ICPICS52425.2021.9524194.
- [23] Kolodziejski, M.; Michalska-Pozoga, I. "Battery Energy Storage Systems in Ships' Hybrid/Electric Propulsion Systems". Energies 2023, 16, 1122.
- [24] R. Barrera-Cardenas, O. Mo and G. Guidi, "Optimal Sizing of Battery Energy Storage Systems for Hybrid Marine Power Systems," 2019 IEEE Electric Ship Technologies Symposium (ESTS), Washington, DC, USA, 2019, pp. 293-302.
- [25] Lucà Trombetta, G.; Leonardi, S.G.; Aloisio, D.; Andaloro, L.; Sergi, F. "Lithium-Ion Batteries on Board: A Review on Their Integration for Enabling the Energy Transition in Shipping Industry". Energies 2024, 17, 1019. <https://doi.org/10.3390/en17051019>
- [26] DNV Maritime Forecast to 2050—Energy Transition Outlook 2022.
- [27] T. Hofman, M. Naaborg and E. Sciberras, "System-Level Design Optimization of a Hybrid Tug," 2017 IEEE Vehicle Power and Propulsion Conference (VPPC), Belfort, France, 2017, pp. 1-6, doi: 10.1109/VPPC.2017.8331009.
- [28] B. A. Kumar, R. Selvaraj, K. Desingu, T. R. Chelliah and R. S. Upadhyayula, "A Coordinated Control Strategy for a Diesel-Electric Tugboat System for Improved Fuel Economy," in IEEE Transactions on Industry Applications, vol. 56, no. 5, pp. 5439-5451, Sept.-Oct. 2020, doi: 10.1109/TIA.2020.3010779.
- [29] INEAL, "Descubre las top 5 Funciones Principales del Remolcador de Puerto". [Online]: ineal.com.mx

- [30] ESC Group, "Comprender el Tirón de los Bolardos: Un Factor Clave en las Maniobras de los Barcos". [Online]: www.esglobalgroup.com
- [31] A. Bruce, A. Bermejo, "Remolque en la Mar", Trabajo de Fin de Grado en Náutica y Transporte Marítimo, Universidad de La Laguna, sept. 2020
- [32] Murimar, "Remolcadores, elemento clave en la logística marítima", [Online]: murimar.com
- [33] Ingeniero Marino, "Remolcador", [Online]: <https://ingenieromarino.com>
- [34] Algeciras al minuto.es, "Los remolcadores del puerto de Algeciras denuncian la excesiva carga de trabajo", [Online]: <https://www.algecirasalminuto.es>
- [35] Robert Allan, "Rastar Series", [Online]: <https://ral.ca>
- [36] Vessel Finder, "SAR BALDER", [Online]: <https://www.vesselfinder.com>
- [37] Prácticos de Puerto, "Remolque Portuario", [Online]: <https://www.practicosdepuerto.es>
- [38] Salvamento Marítimo, "Remolcadores de Salvamento", [Online]: <https://www.salvamentomaritimo.es>
- [39] Cotecmar, "Remolcado Offshore", [Online]: <https://www.cotecmar.com>
- [40] Portal Portuario, "SAAM recibe dos nuevos remolcadores para reforzar su flota en Chile, Mayo 2016", [Online]: <https://portalportuario.cl>
- [41] M. Jiménez Fernández, Dr. J. González Almeida, "Remolcadores: Diseño y Desempeño," Grado en Náutica y Transporte Marítimo, Escuela Politécnica Superior de Ingeniería Sección Náutica, Máquinas y Radioelectrónica Naval, Universidad de La Laguna, Marzo de 2025.
- [42] J. Farina Orihuela, A. Poleo Mora, "Maniobras con Remolcadores " Grado en Náutica y Transporte Marítimo, Escuela Politécnica Superior de Ingeniería Sección Náutica, Máquinas y Radioelectrónica Naval, Universidad de La Laguna, Junio de 2015.
- [43] wle online, "Measuring Length Overall", [Online]: <https://wleonline.com>
- [44] HZ-Containers, "Glosario: Beam-Ancho del Barco", [Online]: <https://hz-containers.com>
- [45] Discover Boating, "What Is a Boat Beam and Why Is It Important?", [Online]: <https://www.discoverboating.com>
- [46] Marine Rubber Fender, "Difference between Gross Tonnage, Net Tonnage, and Deadweight Tonnage". [Online]: <https://www.chinarubberfender.com>
- [47] Britannica, "Cars and Other Vehicles: Tonnage", [Online]: <https://www.britannica.com>
- [48] G. Çakıroğlu, B. Sener, A. Balin, "Applying a fuzzy-ahp for the selection of a suitable tugboat based on propulsion system type". Brodogradnja. 69. 1-13. 10.21278/brod69401, 2018.
- [49] Shiphandling for Professionals, "Types of Tugs", [Online]: <https://www.shiphandlingpro.com>
- [50] Yacht Buyer, "Horsepower vs Brake Horsepower (hp vs bhp): What's the Difference?", [Online]: <https://www.yachtbuyer.com>