



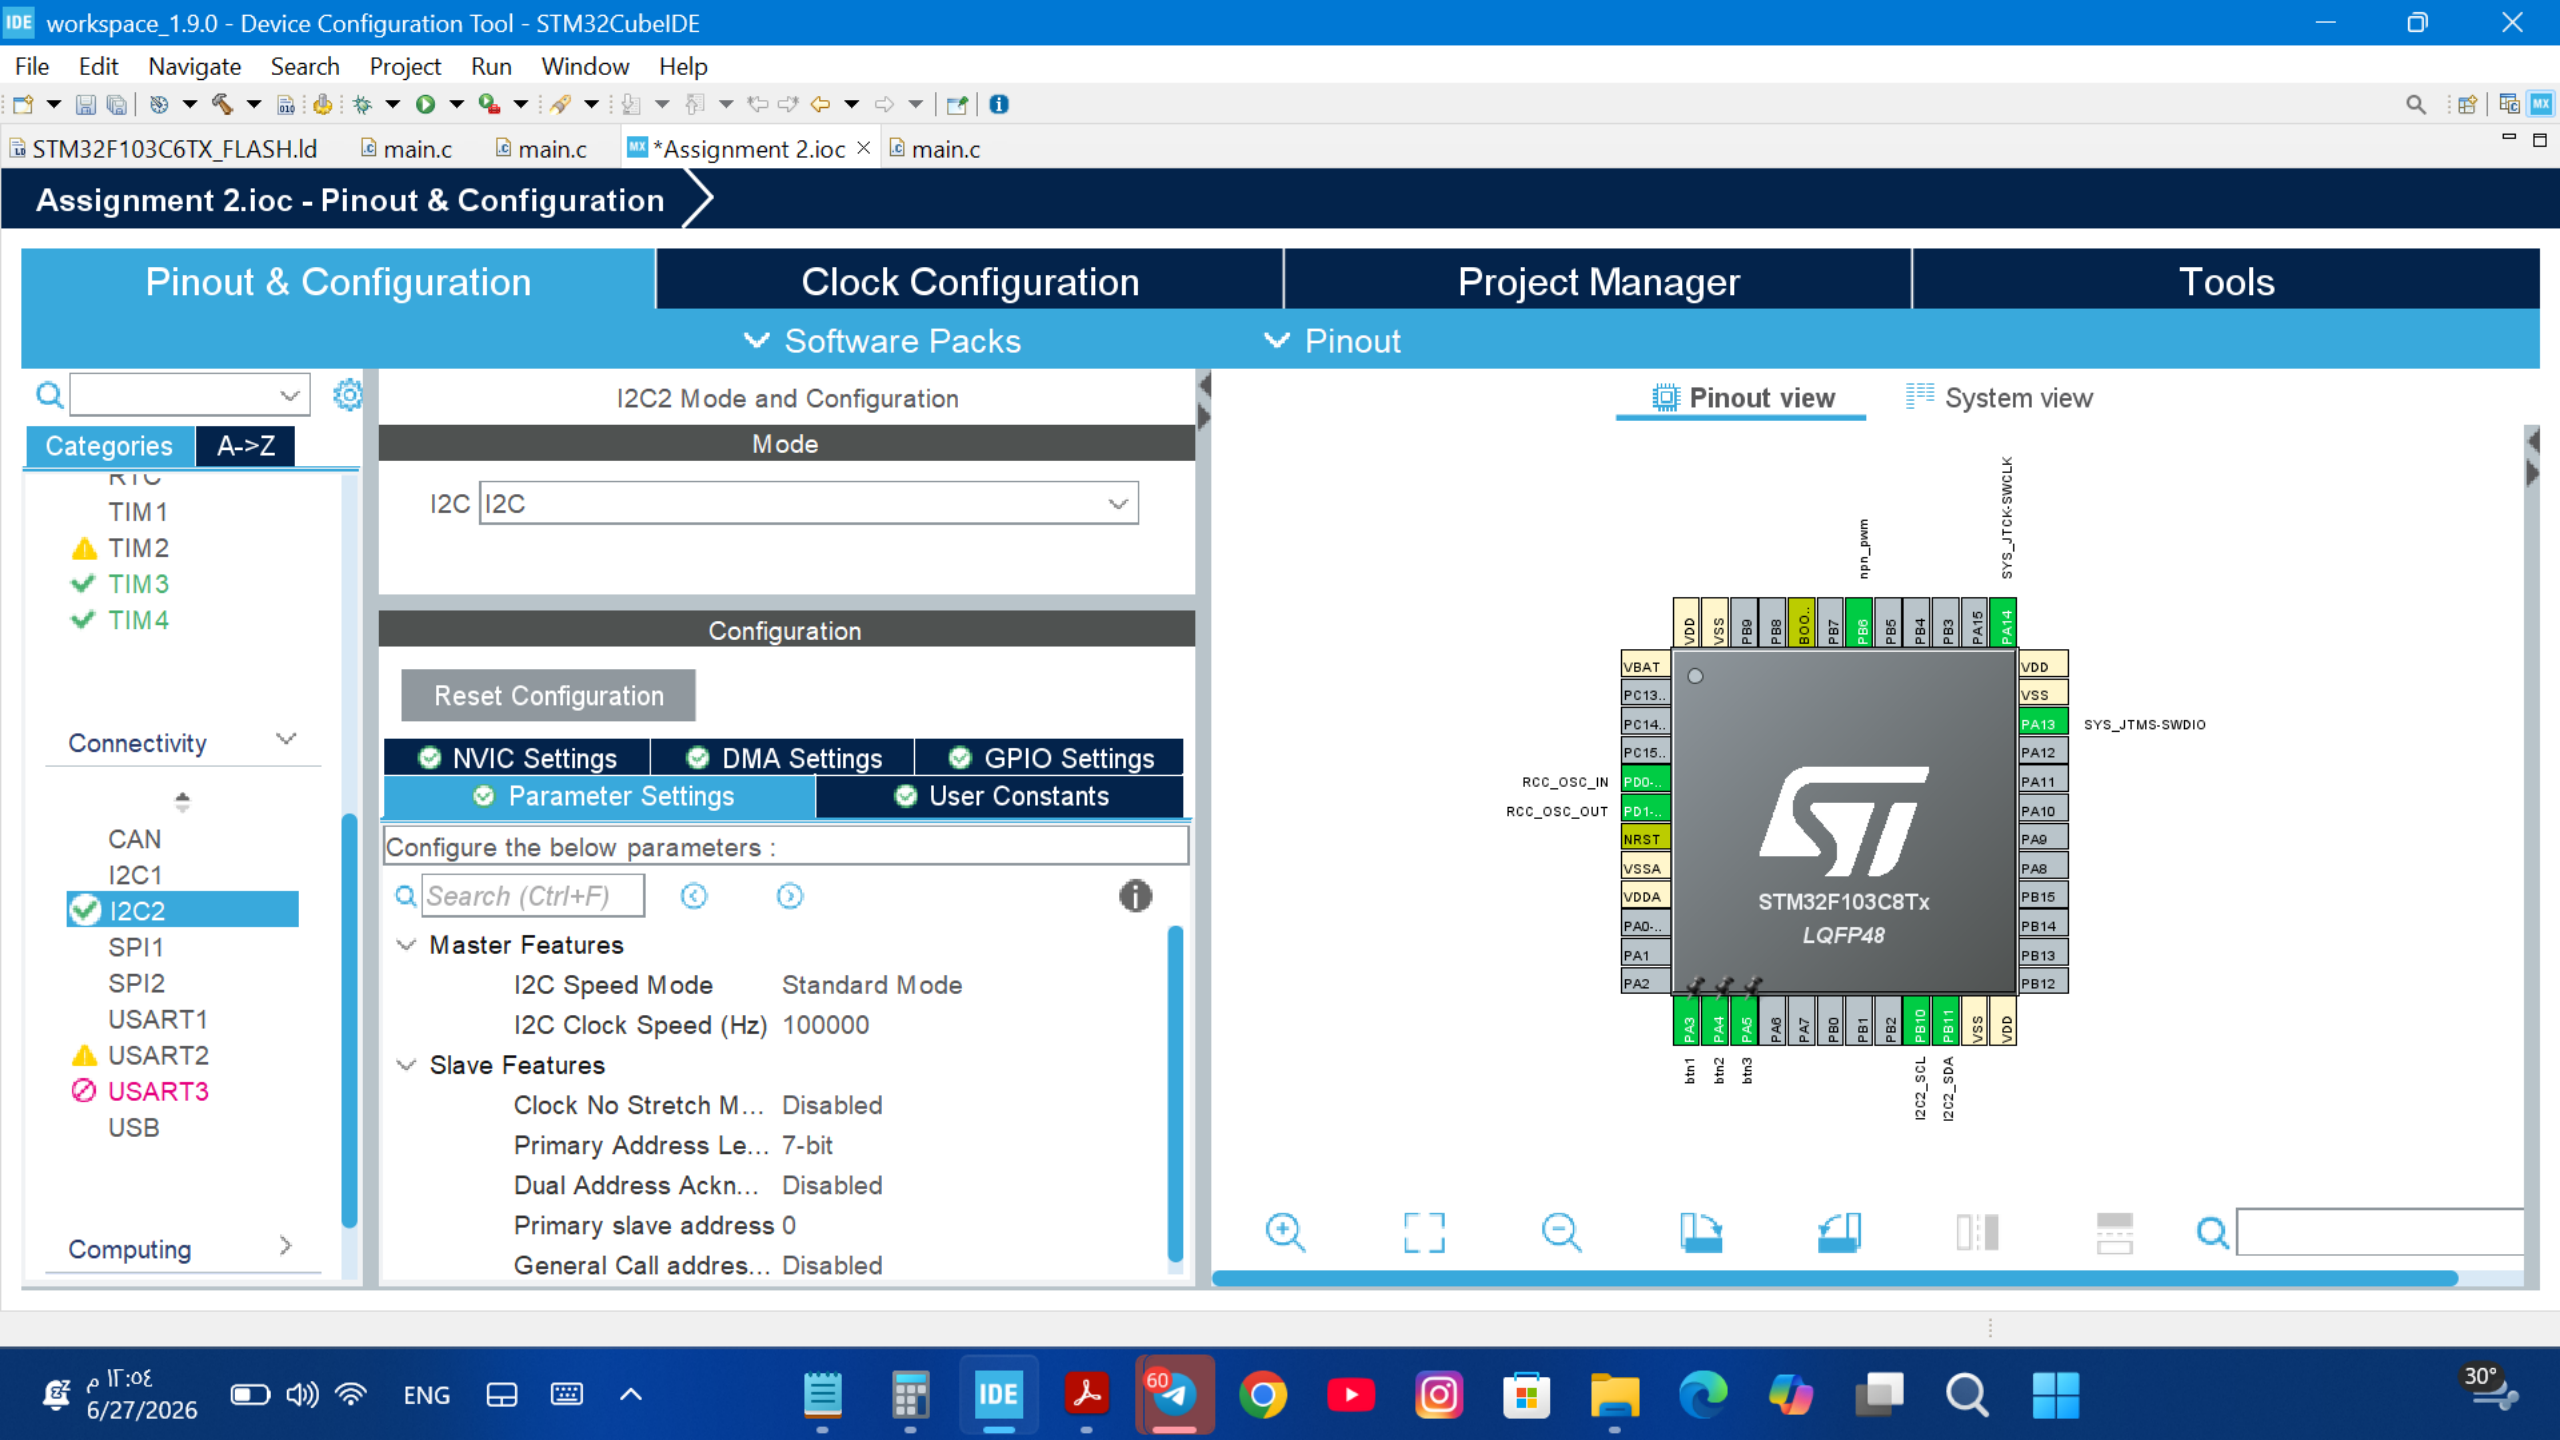

Tools

▼ Pinout

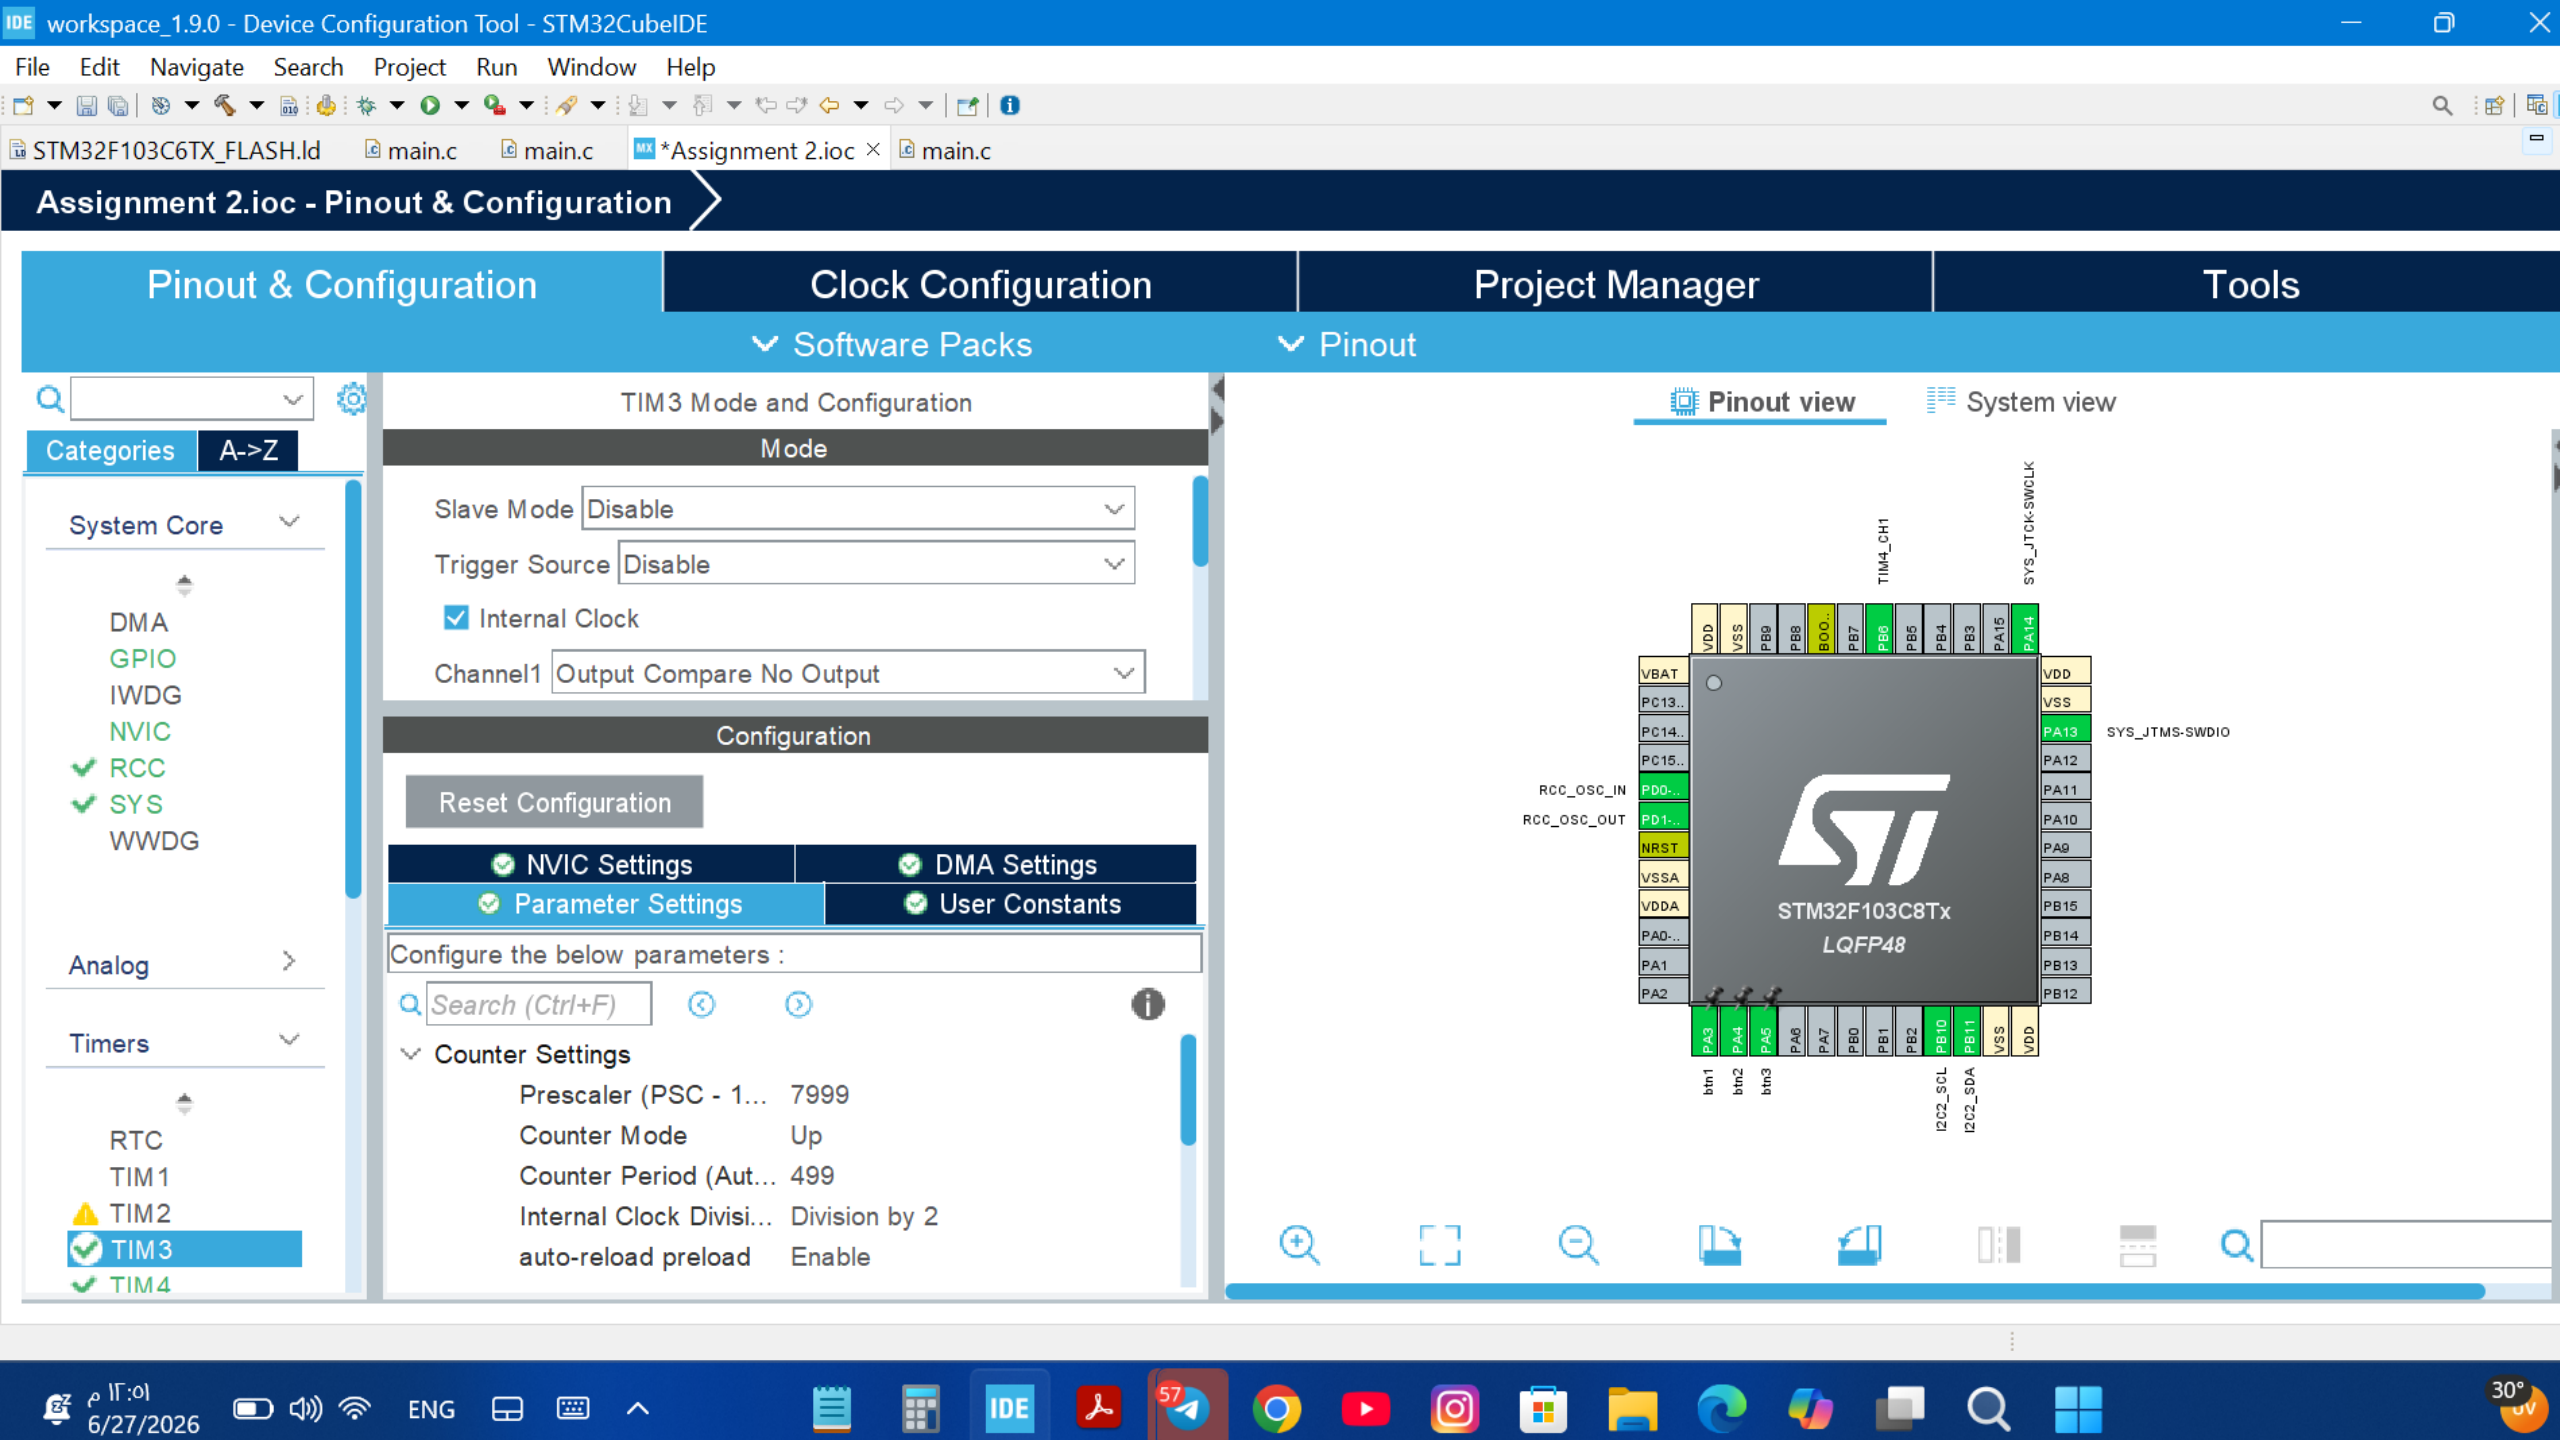

Tools

▼ Pinout

SYS Mode and Configuration

Mode

Debug

Serial Wire

▼

☐ System Wake-Up


Timebase Source

SysTick

▼

Configuration

 Warning: This peripheral has no parameters to be configured

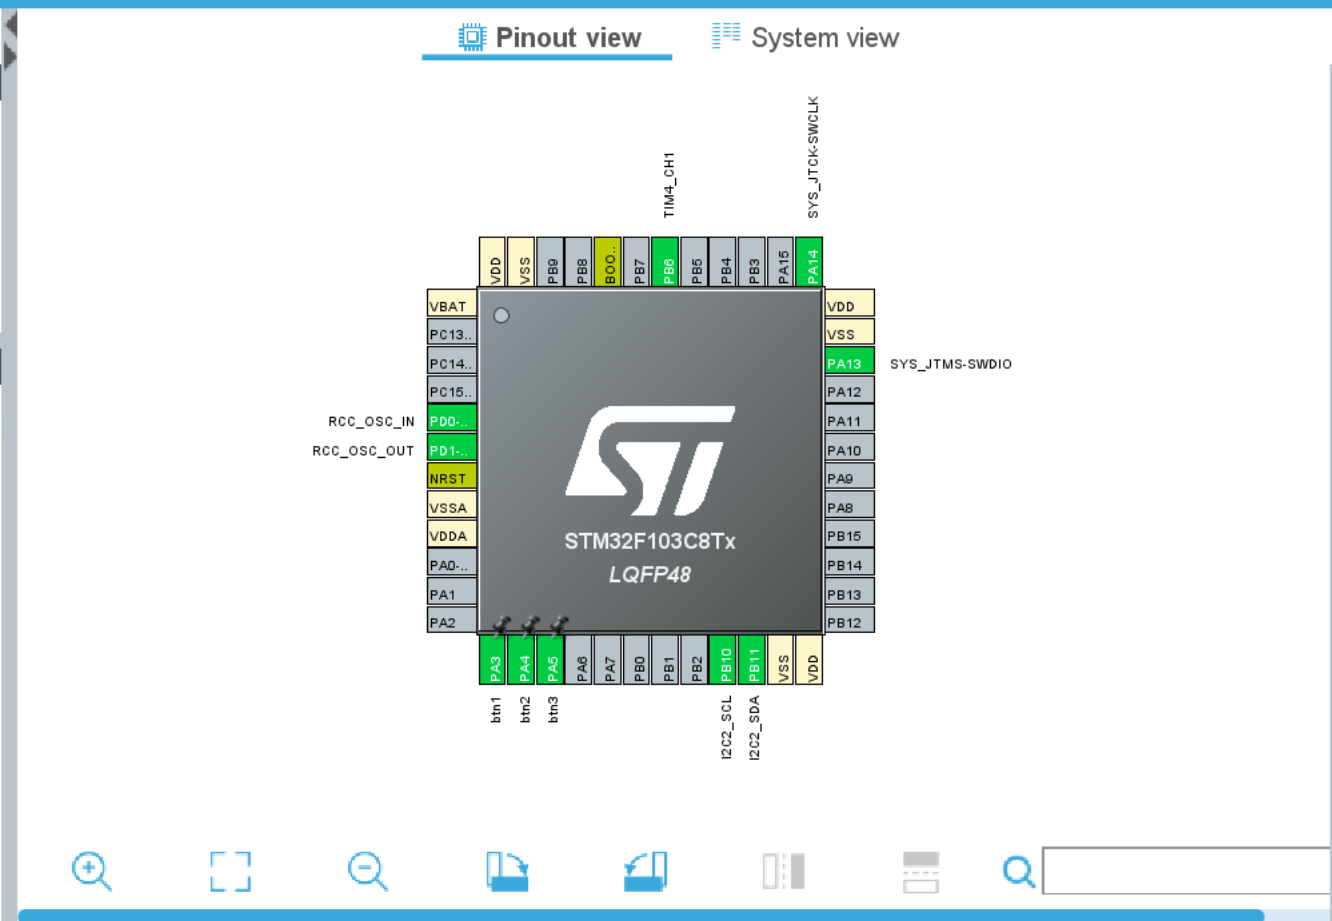

Tools

▼ Pinout

Mode

Low Speed Clock (LSE)	Disable
-----------------------	---------

☐ Master Clock Output

Configuration

Reset Configuration

📌 NVIC Settings

Parameter Settings

GPIO Settings

👤 User Constants

Configure the below parameters :

 Search (Ctrl+F)

System Parameters

VDD voltage (V) 3.3 V


Prefetch Buffer	Enabled
-----------------	---------

Flash Latency(WS) 0 WS (1 CPU cycle)

▼ RCC Parameters

HSI Calibration Value 16

System view

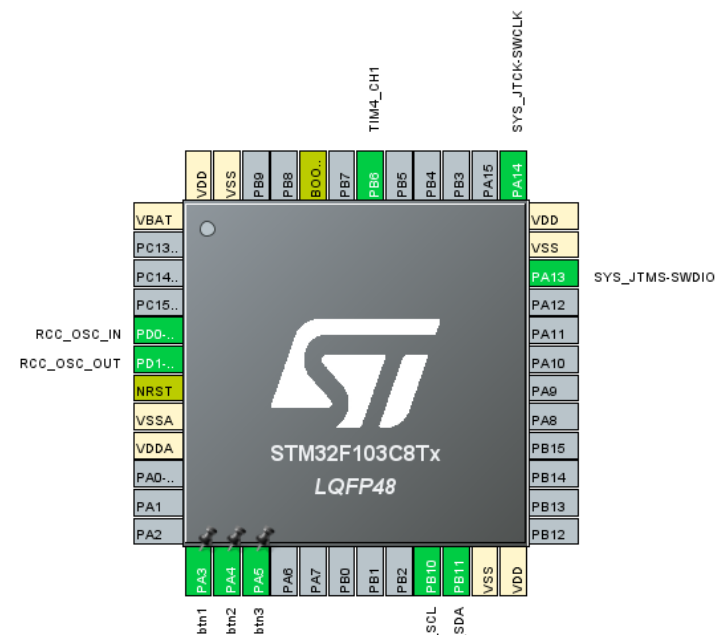

Tools

▼ Pinout

GPIO Mode and Configuration

Configuration

Group By Peripherals ▼

GPIO

I2C

RCC

SYS

TIM

Search Signals ☐ Show only Modified Pins

Search (Ctrl+F)

Pi...	Signal...	GPIO...	GPIO...	GPIO...	Maxi...	User ...	Modifi...
PA3	n/a	n/a	Input ...	Pull-up	n/a	btn1	
PA4	n/a	n/a	Input ...	Pull-up	n/a	btn2	
PA5	n/a	n/a	Input ...	Pull-up	n/a	btn3	

GPIO mode


GPIO Pull-up/Pull-down

User Label

Input mode ▼

Pull-up ▼

btn3

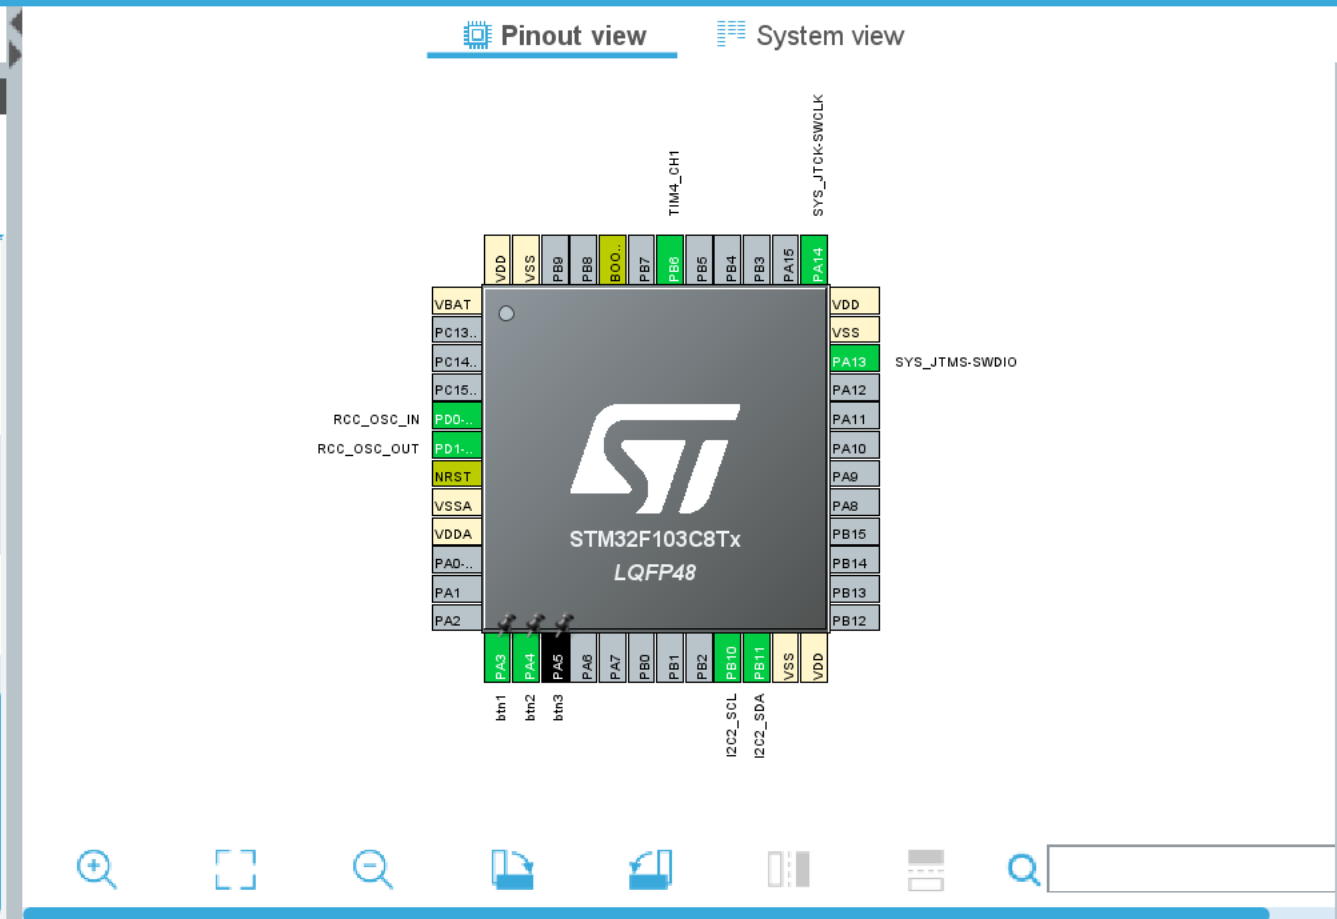

Tools

▼ Pinout

A->Z

✓

WWDG

 γ

✓

✓ TIM4

User Label	btn2
------------	------

Q

Tools

▼ Pinout

GPIO Mode and Configuration

Configuration

Group By Peripherals

GPIO

I2C

RCC

SYS

TIM

Search Signals

☐ Show only Modified Pins

Pi...	Signal...	GPIO...	GPIO...	GPIO...	Maxi...	User ...	Modifi...
PA3	n/a	n/a	Input ...	Pull-up	n/a	btn1	☒
PA4	n/a	n/a	Input ...	Pull-up	n/a	btn2	☒
PA5	n/a	n/a	Input ...	Pull-up	n/a	btn3	☒

GPIO mode

Input mode

GPIO Pull-up/Pull-down

Pull-up

User Label

btn1

