



S A F E T Y W E A R

2021 CATALOGUE - VOL 1



E N G I N E E R E D W I T H P U R P O S E





E N G I N E E R E D W I T H P U R P O S E

BOVA cemented their reputation in Africa by delivering high quality engineering through their range of safety footwear. 21 years after producing their first safety boot, BOVA extended their portfolio to include work wear and fall arrest systems.

When designing new products, we explore the varied dangers inherent in an industry and then engineer the product purposed with protecting employees within those environments. For procurement and those we protect, this means utilising our category ranges to ensure that the required safety needs are met. Different employees within the same industry often require very different levels of protection. Through an understanding of the varied dangers faced by an employee in their work environment and applying the correct product, clients can ensure that they do not under-spec for some employees, thereby compromising on safety or over-spec for others - and compromise on cost-effectiveness.

All Bova products are manufactured in ISO 9001 accredited facilities, utilising cutting-edge technology and innovations. In this way, we can ensure that what we release into the market performs with the purpose for which it was engineered.

BOVA EPITOMISES ENGINEERED EXCELLENCE, WITH A CLEAR PURPOSE.

CONTENTS

FOOTWEAR	PG 6-13
LIGHTWEAR RANGE	PG 6
• EXECUTIVE	PG 6
• UTILITY	PG 6
HEAVYWEAR RANGE	PG 6-9
• CORE	PG 6-7
• TRAX	PG 8
• AKTIV	PG 9
• CUT RANGE	PG 9
EXTREMEWEAR RANGE	PG 9-12
• PU/RUBBER	PG 9-10
• PU VIBRAM RANGE	PG 10-11
• RUBBER/RUBBER	PG 11-12
PARAMILITARY RANGE	PG 12-13
• LEATHER	PG 12
• CANVAS	PG 13
WORK AT HEIGHTS	PG 14-22
GENERAL HARNESS RANGE	PG 14-17
• CORE	PG 15-16
• CORE+	PG 16-17
HEAVYWEAR RANGE	PG 17-18
• UNDERGROUND MINING	PG 17
• MULTI-PURPOSE	PG 17
• ROPE ACCESS & RESCUE	PG 18
SPECIALISED RANGE	PG 18-19
• MINING	PG 18
• ELECTRIC	PG 18
• WELDING	PG 19
LANYARD RANGE	PG 19-21
• STANDARD LANYARDS	PG 19-20
• SPECIALISED LANYARDS	PG 21
BELT RANGE	PG 22
• MINERS	PG 22
• LINESMAN	PG 22
LIFELINES	PG 22
• TEMPORARY HORIZONTAL LIFELINE	PG 22
• TEMPORARY VERTICAL LIFELINE	PG 22
WORKWEAR	PG 23-27
CONTI SUIT RANGE	PG 24-26
• 65/35 POLY COTTON	PG 24
• POLY VISCOSE	PG 25
• J54 100% COTTON	PG 25
• DENIM CONTI SUITS	PG 26
• D59 100% COTTON	PG 26
• HIGH VIZ	PG 26
BOILER SUIT RANGE	PG 27
• J54 100% COTTON	PG 27
• D59 100% COTTON	PG 27
DUST COAT RANGE	PG 27
• 65/35 POLY COTTON	PG 27
• ACID RESISTANT	PG 27
HIGH VISIBILITY SHIRTS RANGE	PG 27
• SHIRTS	PG 27
SIZE CHART	PG 28
CHEMICAL RESISTANCE TABLE	PG 29



INNOVATIVE SOLING TECHNOLOGIES



E N G I N E E R E D W I T H P U R P O S E



LIGHTWEAR RANGE

Durable safety solutions for everyday light business hazards

EXECUTIVE RANGE

CAMBRIDGE: 70004 ♂



ANTI-STATIC

SABBS APPROVED



Sizes
5-12

Colour
Black

SPECIFIC FEATURES:

TOE CAP: Steel
SOLE: Single Density PU (Heat resistant up to 95°C)
MIDSOLE: Shank reinforcement for arch support

SANS / ISO 20345



LIGHTWEAR RANGE

Durable safety solutions for everyday light business hazards

EXECUTIVE RANGE

OXFORD: 70006 ♂



ANTI-STATIC

SABBS APPROVED



Sizes
5-12

Colour
Black

SPECIFIC FEATURES:

TOE CAP: Steel
SOLE: Single Density PU (Heat resistant up to 95°C)
MIDSOLE: Shank reinforcement for arch support

SANS / ISO 20345



LIGHTWEAR RANGE

Durable safety solutions for everyday light business hazards

UTILITY RANGE

ADAPT: 71442 ♂



ANTI-STATIC

SABBS APPROVED



Sizes
5-13

Colour
Black

SPECIFIC FEATURES:

TOE CAP: Steel
SOLE: Single Density PU (Heat resistant up to 95°C)
MIDSOLE: Shank reinforcement for arch support

SANS / ISO 20345 NRCS/9002/287766/0119



LIGHTWEAR RANGE

Durable safety solutions for everyday light business hazards

EXECUTIVE RANGE

JARMAN: 70003 ♂



ANTI-STATIC

SABBS APPROVED



CE

Sizes
5-12

Colour
Black

SPECIFIC FEATURES:

TOE CAP: Steel
SOLE: Single Density PU (Heat resistant up to 95°C)
MIDSOLE: Shank reinforcement for arch support

EN/ISO 20345 SANS/ISO20345



LIGHTWEAR RANGE

Durable safety solutions for everyday light business hazards

UTILITY RANGE

MULTI: 71441 ♂



ANTI-STATIC

SABBS APPROVED



Sizes
5-13

Colour
Black

SPECIFIC FEATURES:

TOE CAP: Steel
SOLE: Single Density PU (Heat resistant up to 95°C)
MIDSOLE: Shank reinforcement for arch support

SANS / ISO 20345 NRCS/9002/287766/0120



HEAVYWEAR RANGE

Durable safety solutions for everyday light business hazards

CORE RANGE

TRAINER: 60012 ♂



ANTI-STATIC

SABBS APPROVED



Sizes
4-12

Colour
Black

SPECIFIC FEATURES:

TOE CAP: Steel
SOLE: Dual Density PU/PU (Heat-resistant up to 95°C)
MIDSOLE: Shank reinforcement for arch support

SANS / ISO 20345 NRCS/9002/287766/0171



HEAVYWEAR RANGE

Hard-working protection for heavy industry demands

CORE RANGE

MAVERICK: 60002 ♂



ANTI-STATIC

CE



Sizes

4-13

Colour

Black

SPECIFIC FEATURES:

TOE CAP: Steel

SOLE: Dual Density PU/PU (Heat resistant up to 95°C)

MIDSOLE: SMS available (60702)

EN / ISO 20345

NRCS/9002/287766/0169



HEAVYWEAR RANGE

Hard-working protection for heavy industry demands

CORE RANGE

NEOFLEX: 90004 ♂



ANTI-STATIC

EXTENDED SIZE RANGE

CE



Sizes

3-15

Colour

Black & Richmond (MTO)

SPECIFIC FEATURES:

TOE CAP: Steel / Available without toe cap in (90504 / Black only)

SOLE: Dual Density PU/PU (Heat resistant up to 95°C)

MIDSOLE: SMS available (90704 / Black only)

EN / ISO 20345

NRCS/9002/287766/0055



HEAVYWEAR RANGE

Hard-working protection for heavy industry demands

CORE RANGE

CHELSEA: 90006 ♂



ANTI-STATIC

CE



Sizes

3-13

Colour

Black & Brown

SPECIFIC FEATURES:

TOE CAP: Steel / Available without toe cap (90506 / MTO)

SOLE: Dual Density PU/PU (Heat resistant up to 95°C)

MIDSOLE: APT midsole available (90606)

EN / ISO 20345

NRCS/9002/287766/0170



HEAVYWEAR RANGE

Hard-working protection for heavy industry demands

CORE RANGE

RADICAL: 60001 ♂



ANTI-STATIC

CE



Sizes

4-13

Colour

Black

SPECIFIC FEATURES:

TOE CAP: Steel

SOLE: Dual Density PU/PU (Heat resistant up to 95°C)

MIDSOLE: Shank reinforcement for arch support

EN / ISO 20345

NRCS/9002/287766/0165



HEAVYWEAR RANGE

Hard-working protection for heavy industry demands

CORE RANGE

NEOGRIP: 90005 ♂



ANTI-STATIC

CE



Sizes

5-13

Colour

Black & Richmond (MTO)

SPECIFIC FEATURES:

TOE CAP: Steel

SOLE: Dual Density PU/PU (Heat resistant up to 95°C)

MIDSOLE: SMS available (90705 / Black only / MTO)

EN / ISO 20345

NRCS/9002/287766/0117



HEAVYWEAR RANGE

Hard-working protection for heavy industry demands

CORE RANGE

HAMBURG: 90008 ♂



ANTI-STATIC

SABBS APPROVED



Sizes

4-12

Colour

Grey

SPECIFIC FEATURES:

TOE CAP: Steel

SOLE: Dual Density PU/PU (Heat resistant up to 95°C)

MIDSOLE: Shank reinforcement for arch support

SANS / ISO 20345

NRCS/9002/287766/0116



HEAVYWEAR RANGE

Hard-working protection for heavy industry demands

TRAX RANGE

MUNICH 2.0: 21002 ♂



SRC SLIP
RESISTANCE
RATING

ANTI-
STATIC



Sizes

5-13

Colour

Black

SPECIFIC FEATURES:

TOE CAP: Steel - Extra-wide fitting

SOLE: Dual Density PU/PU (Heat resistant up to 95°C)

MIDSOLE: SMS available (21702)

EN / ISO 20345



HEAVYWEAR RANGE

Hard-working protection for heavy industry demands

TRAX RANGE

HIKER 2.0: 21013 ♂



SRC SLIP
RESISTANCE
RATING

ANTI-
STATIC



Sizes

3-13

Colour

Black

Brown

SPECIFIC FEATURES:

TOE CAP: Steel - Extra-wide fitting. Available without toe cap (21513 / Brown only / MTO)

SOLE: Dual Density PU/PU (Heat resistant up to 95°C)

MIDSOLE: Shank reinforcement for arch support

EN / ISO 20345



HEAVYWEAR RANGE

Hard-working protection for heavy industry demands

TRAX RANGE

ALPINE: 21019 ♂



SRC SLIP
RESISTANCE
RATING

ANTI-
STATIC



Sizes

5-13

Colour

Black with silver
stripes
Black with green
stripes

SPECIFIC FEATURES:

TOE CAP: Steel-Extra-wide fitting

SOLE: Dual Density PU/PU (Heat resistant up to 95°C)

MIDSOLE: Shank reinforcement for arch support

EN / ISO 20345



HEAVYWEAR RANGE

Hard-working protection for heavy industry demands

TRAX RANGE

BREMEN 2.0: 21001 ♂



SRC SLIP
RESISTANCE
RATING

ANTI-
STATIC



Sizes

5-13

Colour

Black

SPECIFIC FEATURES:

TOE CAP: Steel - Extra-wide fitting

SOLE: Dual Density PU/PU (Heat resistant up to 95°C)

MIDSOLE: SMS available (21701)

EN / ISO 20345



HEAVYWEAR RANGE

Hard-working protection for heavy industry demands

TRAX RANGE

TAHOE: 21021 ♂



SRC SLIP
RESISTANCE
RATING

ANTI-
STATIC



Sizes

5-13

Colour

Black

SPECIFIC FEATURES:

TOE CAP: Steel - Extra-wide fitting

SOLE: Dual Density PU/PU (Heat resistant up to 95°C)

MIDSOLE: Shank reinforcement for arch support

EN / ISO 20345



HEAVYWEAR RANGE

Hard-working protection for heavy industry demands

TRAX RANGE

AMATHOLE: 21018 ♂



SRC SLIP
RESISTANCE
RATING

ANTI-
STATIC



Sizes

5-13

Colour

Black with silver
stripes
Black with green
stripes

SPECIFIC FEATURES:

TOE CAP: Steel - Extra-wide fitting

SOLE: Dual Density PU/PU (Heat resistant up to 95°C)

MIDSOLE: Shank reinforcement for arch support

EN / ISO 20345



HEAVYWEAR RANGE

Hard-working protection for heavy industry demands

AKTIV RANGE

COLUMBIA: 30005 ♂



ANTI-STATIC

METAL FREE



Sizes

5-12

Colour

Black

SPECIFIC FEATURES:

TOE CAP: Composite

SOLE: Dual Density PU/PU (Heat resistant up to 95°C)

MIDSOLE: Shank reinforcement for arch support

EN / ISO 20345



HEAVYWEAR RANGE

Hard-working protection for heavy industry demands

CUT RANGE

DAKOTA: 40002 ♂



ANTI-STATIC



Sizes

5-12

Colour

Black

SPECIFIC FEATURES:

TOE CAP: Steel

SOLE: Dual Density PU/TPU (Heat resistant up to 95°C)

MIDSOLE: Shank reinforcement for arch support

SANS / ISO 20345



EXTREMEWEAR RANGE

Superior protection for the harshest work environments

PU RUBBER RANGE

FIREWALK: 42003 ♂



ELECTRICAL
RESISTANCE TO 20
KVA FOR 60 SECONDS
(ESKOM SPEC 34-232)



NON
CONDUCTIVE

Sizes

4-13

Colour

Black

SPECIFIC FEATURES:

TOE CAP: Steel

SOLE: Dual Density PU/Rubber (Heat resistant up to 300°C)

MIDSOLE: APT midsole available (44603)

SANS / ISO 20345 **NRCS/9002/287766/0134**



HEAVYWEAR RANGE

Hard-working protection for heavy industry demands

AKTIV RANGE

ATLANTIS: 30006 ♂



ANTI-STATIC

METAL FREE



Sizes

5-12

Colour

Black

SPECIFIC FEATURES:

TOE CAP: Composite

SOLE: Dual Density PU/PU (Heat resistant up to 95°C)

MIDSOLE: Shank reinforcement for arch support

SANS / ISO 20345



EXTREMEWEAR RANGE

Superior protection for the harshest work environments

PU RUBBER RANGE

METAGUARD: 42005 ♂



NON
CONDUCTIVE

WITH
METATARSAL
PROTECTION
ENGINEERING



Sizes

4-13

Colour

Black

SPECIFIC FEATURES:

TOE CAP: Steel

SOLE: Dual Density PU/Rubber (Heat resistant up to 300°C)

MIDSOLE: Shank reinforcement for arch support

SANS / ISO 20345



EXTREMEWEAR RANGE

Superior protection for the harshest work environments

PU RUBBER RANGE

WELDERS: 42004 ♂



NON
CONDUCTIVE

WITH SPAT
COVERING



Sizes

4-13

Colour

Black

SPECIFIC FEATURES:

TOE CAP: Steel

SOLE: Dual Density PU/Rubber (Heat resistant up to 300°C)

MIDSOLE: Shank reinforcement for arch support

SANS / ISO 20345



EXTREMEWEAR RANGE

Superior protection for the harshest work environments

PU/RUBBER RANGE

RIGGER: 42770 ♂



NON
CONDUCTIVE

ENGINEERED
FOR THE OIL
INDUSTRY



Sizes

5-13

Colour

Black

SPECIFIC FEATURES:

TOE CAP: Steel

SOLE: Dual Density PU/Rubber (Heat resistant up to 300°C)

MIDSOLE: Standard with SMS

SANS / ISO 20345



EXTREMEWEAR RANGE

Superior protection for the harshest work environments

PU/RUBBER RANGE

SMELTERS BUCKLE: 42007 ♂



NON
CONDUCTIVE

WITH
KEVLAR
FEATURES



Sizes

4-13

Colour

Black

SPECIFIC FEATURES:

TOE CAP: Aluminium

SOLE: Dual Density PU/Rubber (Heat resistant up to 300°C)

MIDSOLE: APT midsole available (42607 / MTO)

EN / ISO 20345

NRC5/9002/287766/0327



EXTREMEWEAR RANGE

Superior protection for the harshest work environments

PU/RUBBER RANGE

SMELTERS METAGUARD: 42008 ♂



NON
CONDUCTIVE

WITH
KEVLAR
FEATURES



WITH
METATARSAL
PROTECTION
ENGINEERING

Sizes

4-13

Colour

Black

SPECIFIC FEATURES:

TOE CAP: Aluminium

SOLE: Dual Density PU/Rubber (Heat resistant up to 300°C)

MIDSOLE: Shank reinforcement for arch support

SANS / ISO 20345



EXTREMEWEAR RANGE

Superior protection for the harshest work environments

PU/RUBBER RANGE

FREEZER: 42018 ♂



NON
CONDUCTIVE

3M
THINSULATE
MATERIAL



Sizes

5-13

Colour

Black

SPECIFIC FEATURES:

TOE CAP: Steel

SOLE: Dual Density PU/Rubber (Cold resistant down to -25°C)

MIDSOLE: APT midsole available (42618 / MTO)

SANS / ISO 20345



EXTREMEWEAR RANGE

Superior protection for the harshest work environments

PU/RUBBER RANGE

SMELTERS VELCRO: 42006 ♂



NON
CONDUCTIVE

WITH
KEVLAR
FEATURES



Sizes

4-13

Colour

Black

SPECIFIC FEATURES:

TOE CAP: Aluminium

SOLE: Dual Density PU/Rubber (Heat resistant up to 300°C)

MIDSOLE: APT midsole available (42606 / MTO)

EN / ISO 20345

NRC5/9002/287766/0326



EXTREMEWEAR RANGE

Superior protection for the harshest work environments

PU/VIBRAM ARANGE

NEBULA: 43603 ♂



NON
CONDUCTIVE

SRC SLIP
RESISTANCE
RATING



ELECTRICAL
RESISTANCE TO 20
KVA FOR 60 SECONDS
(ESKOM SPEC 34-232)

Sizes

4-13

Colour

Brown

SPECIFIC FEATURES:

TOE CAP: Steel - Extra-wide Fitting

SOLE: Dual Density PU/Vibram Rubber
(Heat resistant up to 300°C)

MIDSOLE: Standard with APT

SANS / ISO 20345



EXTREMEWEAR RANGE

Superior protection for the harshest work environments

PU/VIBRAM RANGE

SIERRA: 43604 ♂



NON
CONDUCTIVE

SRC SLIP
RESISTANCE
RATING

ELECTRICAL
RESISTANCE TO 20
KVA FOR 60 SECONDS
(ESKOM SPEC 34-232)



Sizes

4-13

Colour

Tan

SPECIFIC FEATURES:

TOE CAP: Steel - Extra-wide Fitting

SOLE: Dual Density PU/Vibram Rubber
(Heat resistant up to 300°C)

MIDSOLE: Standard with APT

SANS / ISO 20345



EXTREMEWEAR RANGE

Superior protection for the harshest work environments

PU/VIBRAM RANGE

ROCNA: 43601 ♂



NON
CONDUCTIVE

SRC SLIP
RESISTANCE
RATING

ELECTRICAL
RESISTANCE TO 20
KVA FOR 60 SECONDS
(ESKOM SPEC 34-232)



Sizes

4-13

Colour

Black

SPECIFIC FEATURES:

TOE CAP: Steel - Extra-wide Fitting

SOLE: Dual Density PU/Vibram Rubber
(Heat resistant up to 300°C)

MIDSOLE: Standard with APT

SANS / ISO 20345



EXTREMEWEAR RANGE

Superior protection in extreme conditions

RUBBER/RUBBER RANGE

GABBRO: 7140 ♂



ANTI-
STATIC

SUPERIOR HEAT
RESISTANT

SRC SLIP
RESISTANCE
RATING

100%
WATERPROOF
SOLE



Sizes

4-14

Colour

Black

SPECIFIC FEATURES:

TOE CAP: Steel

SOLE: Dual Compound Rubber / Rubber
(Heat resistant up to 300°C)

EN / ISO 20345



EXTREMEWEAR RANGE

Superior protection for the harshest work environments

PU/VIBRAM RANGE

DROGUE: 43602 ♂



NON
CONDUCTIVE

SRC SLIP
RESISTANCE
RATING

ELECTRICAL
RESISTANCE TO 20
KVA FOR 60 SECONDS
(ESKOM SPEC 34-232)



Sizes

4-13

Colour

Black

SPECIFIC FEATURES:

TOE CAP: Steel - Extra-wide Fitting

SOLE: Dual Density PU/Vibram Rubber
(Heat resistant up to 300°C)

MIDSOLE: Standard with APT

SANS / ISO 20345



EXTREMEWEAR RANGE

Superior protection in extreme conditions

RUBBER/RUBBER RANGE

SLATE: 7144 ♂



ANTI-
STATIC

SUPERIOR HEAT
RESISTANT

SRC SLIP
RESISTANCE
RATING

100%
WATERPROOF
SOLE



Sizes

4-14

Colour

Black

SPECIFIC FEATURES:

TOE CAP: Aluminium

SOLE: Dual Compound Rubber (Heat resistant up to 300°C)

EN/ISO 20345



EXTREMEWEAR RANGE

Superior protection in extreme conditions

RUBBER/RUBBER RANGE

BASALT: 7142 ♂



ANTI-
STATIC

SUPERIOR HEAT
RESISTANT

SRC SLIP
RESISTANCE
RATING

100%
WATERPROOF
SOLE



Sizes

4-14

Colour

Black

SPECIFIC FEATURES:

TOE CAP: Steel

SOLE: Dual Compound Rubber / Rubber
(Heat resistant up to 300°C)

EN / ISO 20345



EXTREMEWEAR RANGE

Superior protection in extreme conditions

RUBBER/RUBBER RANGE

IGNEOUS: 7150 ♂



ANTI-STATIC

SUPERIOR HEAT RESISTANT

SRC SLIP RESISTANCE RATING

100% WATERPROOF SOLE

Sizes
4-14

Colour
Black



SPECIFIC FEATURES:

TOE CAP: Steel

SOLE: Dual Compound Rubber / Rubber
(Heat resistant up to 300°C)

EN / ISO 20345



PARAMILITARY RANGE

Purpose-engineered safety boots for security, paramilitary and policing operations

LEATHER RANGE

PATRIOT: 7010 ♂



100% WATERPROOF SOLE

ANTI-STATIC

SABBS APPROVED



Sizes
4-13

Colour
Black

SPECIFIC FEATURES:

TOE CAP: No toe cap

SOLE: Dual Compound Rubber / Rubber
(Heat resistant up to 300°C)

SANS / ISO 20345



PARAMILITARY RANGE

Purpose-engineered safety boots for security, paramilitary and policing operations

LEATHER RANGE

POLICE: 90498 ♂



ANTI-STATIC

CE



Sizes
3-13

Colour
Black

SPECIFIC FEATURES:

TOE CAP: Steel / Available without toe cap (90598 / MTO)

SOLE: Double Density PU/PU (Heat resistant up to 95°C)

EN / ISO 20345 NRCS/9002/287766/0179



PARAMILITARY RANGE

Purpose-engineered safety boots for security, paramilitary and policing operations

LEATHER RANGE

GRANITE: 7900 ♂



100% WATERPROOF SOLE

ANTI-STATIC

SABBS APPROVED



Sizes
4-13

Colour
Black

SPECIFIC FEATURES:

TOE CAP: No toe cap

SOLE: Dual Compound Rubber / Rubber
(Heat resistant up to 300°C)

SANS / ISO 20345



PARAMILITARY RANGE

Purpose-engineered safety boots for security, paramilitary and policing operations

LEATHER RANGE

PATROL: 90443 ♂



ANTI-STATIC

SABBS APPROVED



Sizes
3-13

Colour
Black

MTO

SPECIFIC FEATURES:

TOE CAP: Steel / Available without toe cap (90543)

SOLE: Double Density PU/Rubber
(Heat resistant up to 95°C)

SANS / ISO 20345



PARAMILITARY RANGE

Purpose-engineered safety boots for security, paramilitary and policing operations

LEATHER RANGE

SWAT: 90561 ♂



ANTI-STATIC

SABBS APPROVED



Sizes
3-13

Colour
Black & Walnut

SPECIFIC FEATURES:

TOE CAP: No toe cap

SOLE: Double Density PU/PU (Heat resistant up to 95°C)
Available with Single Density PU/PU (71561)

MIDSOLE: Shank reinforcement for arch support

SANS / ISO 20345



PARAMILITARY RANGE

Purpose-engineered safety boots for security, paramilitary and policing operations

CANVAS RANGE

RANGER: 83029 ♂



ANTI-STATIC



Sizes

4-13

Colour

Black

Nutria, Navy,
Green (MOQ)

SPECIFIC FEATURES:

TOE CAP: No toe cap

SOLE: Single Density PU (Heat resistant up to 95°C)

SANS / ISO 20345



PARAMILITARY RANGE

Purpose-engineered safety boots for security, paramilitary and policing operations

CANVAS RANGE

GUARD: 83006 ♂



ANTI-STATIC



4-13

Colour

Black

Nutria, Navy,
Green (MOQ)

SPECIFIC FEATURES:

TOE CAP: No toe cap

SOLE: Single Density PU (Heat resistant up to 95°C)

SANS / ISO 20345



For more information about our locally manufactured range of Footwear, Workwear and Fall Arrest Equipment, contact your regional sales manager today:

KWAZULU NATAL:

Derick Els

Derick.Els@bbfsafety.com | +27 83 704 3126

WESTERN CAPE | EASTERN CAPE

Bradley Adams

Bradley.Adams@bbfsafety.com | +27 72 842 0127

MPUMALANGA | LIMPOPO

NORTH GAUTENG

Desmond Tilly

Desmond.Tilly@bbfsafety.com | +27 81 510 8335

FREE STATE | NORTH WEST

NORTHERN CAPE | GAUTENG

Pieter Botha

Pieter.Botha@bbfsafety.com | +27 64 755 7099

INTERNATIONAL ENQUIRIES:

Tven Heyer

Tven.Heyer@bbfsafety.com | +27 83 790 0400



BOVA

FALL ARREST



E N G I N E E R E D W I T H P U R P O S E

GENERAL RANGE - CORE

CODE: HARN01000

FULL BODY HARNESS

WITH STANDING STEP



SPECIFIC FEATURES:

- SIZING:** • ONE SIZE FITS ALL
- STANDARDS:** • SANS 50361 | EN 361
- FEATURES:** • Adjustable leg & chest straps

MATERIALS:



- Harness Webbing:** • 45mm UV-resistant polyester webbing with a minimum breaking load of 2,6 tonnes
- Buckles:** • Interlocking, corrosion-resistant steel buckles with a minimum breaking force of 18kN

GENERAL RANGE - CORE

CODE: HARN02000

2 POINT HARNESS



SPECIFIC FEATURES:

- SIZING:** • ONE SIZE FITS ALL
- STANDARDS:** • SANS 50361 | EN 361
- FEATURES:** • 2 attachment points: Chest & dorsal D-ring
• Adjustable leg & chest straps

MATERIALS:



- Harness Webbing:** • 45mm UV-resistant polyester webbing with a minimum breaking load of 2,6 tonnes
- Buckles:** • Interlocking, corrosion-resistant steel buckles with a minimum breaking force of 18kN
- D-ring:** • Corrosion-resistant steel D-rings with a minimum breaking force of 22kN

GENERAL RANGE - CORE

CODE: HARN01260

STANDARD HARNESS DOUBLE LEG LANYARD WITH SCAFF HOOKS

WITH STANDING STEP



SPECIFIC FEATURES:

- SIZING:** • ONE SIZE FITS ALL
- STANDARDS:** • SANS 50354 | EN 354
SANS 50355 | EN 355
SANS 50361 | EN 361
EN 362
- FEATURES:** • Adjustable leg & chest straps
• Shock absorbing lanyard

MATERIALS:



- Harness Webbing:** • 45mm UV-resistant polyester webbing with a minimum breaking load of 2,6 tonnes
- Lanyard Webbing:** • 45mm UV-resistant polyester webbing with a minimum breaking load of 2,6 tonnes
- Lanyard length:** • 1 750mm when shock absorber is intact
- 3 450mm when shock absorber is fully deployed
- Buckles:** • Interlocking, corrosion-resistant steel buckles with a minimum breaking force of 18kN
- Hooks:** • Corrosion-resistant steel scaffolding hooks with 50mm gate opening

GENERAL RANGE - CORE

CODE: HARN01220

STANDARD HARNESS DOUBLE LEG LANYARD WITH SCAFF HOOKS



SPECIFIC FEATURES:

- SIZING:** • ONE SIZE FITS ALL
- STANDARDS:** • SANS 50354 | EN 354
SANS 50355 | EN 355
SANS 50361 | EN 361
EN 362
- FEATURES:** • Adjustable leg & chest straps
• Shock absorbing lanyard

MATERIALS:



- Harness Webbing:** • 45mm UV-resistant polyester webbing with a minimum breaking load of 2,6 tonnes
- Lanyard Webbing:** • 45mm UV-resistant polyester webbing with a minimum breaking load of 2,6 tonnes
- Lanyard length:** • 1 750mm when shock absorber is intact
- 3 450mm when shock absorber is fully deployed
- Buckles:** • Interlocking, corrosion-resistant steel buckles with a minimum breaking force of 18kN
- Hooks:** • Corrosion-resistant steel scaffolding hooks with 50mm gate opening

GENERAL RANGE - CORE

CODE: HARN01250

STANDARD HARNESS DOUBLE LEG LANYARD WITH SNAP HOOKS

WITH STANDING STEP



SPECIFIC FEATURES:

- SIZING:** • **ONE SIZE FITS ALL**
- STANDARDS:** • SANS 50354 | EN 354
SANS 50355 | EN 355
SANS 50361 | EN 361
EN 362
- FEATURES:** • Adjustable leg & chest straps
• Shock absorbing lanyard

MATERIALS:



- Harness Webbing:** • 45mm UV-resistant polyester webbing with a minimum breaking load of 2,6 tonnes
- Lanyard Webbing:** • 45mm UV-resistant polyester webbing with a minimum breaking load of 2,6 tonnes
- Lanyard length:** • 1 750mm when shock absorber is intact
- 3 450mm when shock absorber is fully deployed
- Buckles:** • Interlocking, corrosion-resistant steel buckles with a minimum breaking force of 18kN
- Hooks:** • Corrosion-resistant steel snap hooks with 20mm gate opening that can withstand a force of 22Kn

GENERAL RANGE - CORE

CODE: HARN01110

NON BELTED HARNESS SINGLE LEG LANYARD WITH SNAP HOOK



SPECIFIC FEATURES:

- SIZING:** • **ONE SIZE FITS ALL**
- STANDARDS:** • SANS 50354 | EN 354
SANS 50355 | EN 355
SANS 50361 | EN 361
EN 362
- FEATURES:** • Adjustable leg & chest straps
• Shock absorbing lanyard

MATERIALS:



- Harness Webbing:** • 45mm UV-resistant polyester webbing with a minimum breaking load of 2,6 tonnes
- Lanyard Webbing:** • 45mm UV-resistant polyester webbing with a minimum breaking load of 2,6 tonnes
- Lanyard length:** • 1 750mm when shock absorber is intact
- 3 450mm when shock absorber is fully deployed
- Buckles:** • Interlocking, corrosion-resistant steel buckles with a minimum breaking force of 18kN
- Hooks:** • Corrosion-resistant steel snap hooks with 20mm gate opening that can withstand a force of 22Kn

GENERAL RANGE - CORE

CODE: HARN01210

STANDARD HARNESS DOUBLE LEG LANYARD WITH SNAP HOOKS



SPECIFIC FEATURES:

- SIZING:** • **ONE SIZE FITS ALL**
- STANDARDS:** • SANS 50354 | EN 354
SANS 50355 | EN 355
SANS 50361 | EN 361
EN 362
- FEATURES:** • Adjustable leg & chest straps
• Shock absorbing lanyard

MATERIALS:



- Harness Webbing:** • 45mm UV-resistant polyester webbing with a minimum breaking load of 2,6 tonnes
- Lanyard Webbing:** • 45mm UV-resistant polyester webbing with a minimum breaking load of 2,6 tonnes
- Lanyard length:** • 1 750mm when shock absorber is intact
- 3 450mm when shock absorber is fully deployed
- Buckles:** • Interlocking, corrosion-resistant steel buckles with a minimum breaking force of 18kN
- Hooks:** • Corrosion-resistant steel snap hooks with 20mm gate opening that can withstand a force of 22Kn

GENERAL RANGE - CORE+

CODE: HARN02210

BELTED HARNESS DOUBLE LEG LANYARD WITH SNAP HOOKS



SPECIFIC FEATURES:

- SIZING:** • **ONE SIZE FITS ALL**
- STANDARDS:** • SANS 50354 | EN 354
SANS 50355 | EN 355
SANS 50361 | EN 361
EN 362
- FEATURES:** • Adjustable shoulder, leg, waist & chest straps
• Shock absorbing lanyard

MATERIALS:



- Harness Webbing:** • 45mm UV-resistant polyester webbing with a minimum breaking load of 2,6 tonnes
- Lanyard Webbing:** • 45mm UV-resistant polyester webbing with a minimum breaking load of 2,6 tonnes
- Lanyard length:** • 1 750mm when shock absorber is intact
- 3 450mm when shock absorber is fully deployed
- Buckles:** • Interlocking, corrosion-resistant steel buckle with a minimum breaking force of 18kN
- Hooks:** • Corrosion-resistant steel snap hooks with 20mm gate opening that can withstand a force of 22Kn

GENERAL RANGE - CORE⁺

CODE: HARN02260

BELTED HARNESS DOUBLE LEG LANYARD WITH SCAFF HOOKS

WITH STANDING STEP



SPECIFIC FEATURES:

- SIZING:** • **ONE SIZE FITS ALL**
- STANDARDS:** • SANS 50354 | EN 354
SANS 50355 | EN 355
SANS 50361 | EN 361
EN 362
- FEATURES:** • Adjustable shoulder, leg, waist & chest straps
• Shock absorbing lanyard

MATERIALS:



- Harness Webbing:** • 45mm UV-resistant polyester webbing with a minimum breaking load of 2,6 tonnes
- Lanyard Webbing:** • 45mm UV-resistant polyester webbing with a minimum breaking load of 2,6 tonnes
- Lanyard length:** • 1 750mm when shock absorber is intact
- 3 450mm when shock absorber is fully deployed
- Buckles:** • Interlocking, corrosion-resistant steel buckles with a minimum breaking force of 18kN
- Hooks:** • Corrosion-resistant steel scaffolding hooks with 50mm gate opening

GENERAL RANGE - CORE⁺

CODE: HARN02220

BELTED HARNESS DOUBLE LEG LANYARD WITH SCAFF HOOKS



SPECIFIC FEATURES:

- SIZING:** • **ONE SIZE FITS ALL**
- STANDARDS:** • SANS 50354 | EN 354
SANS 50355 | EN 355
SANS 50361 | EN 361
EN 362
- FEATURES:** • Adjustable shoulder, leg, waist & chest straps
• Shock absorbing lanyard

MATERIALS:



- Harness Webbing:** • 45mm UV-resistant polyester webbing with a minimum breaking load of 2,6 tonnes
- Lanyard Webbing:** • 45mm UV-resistant polyester webbing with a minimum breaking load of 2,6 tonnes
- Lanyard length:** • 1 750mm when shock absorber is intact
- 3 450mm when shock absorber is fully deployed
- Buckles:** • Interlocking, corrosion-resistant steel buckles with a minimum breaking force of 18kN
- Hooks:** • Corrosion-resistant steel scaffolding hooks with 50mm gate opening

HEAVYWEAR RANGE - UNDERGROUND MINING

EXCAVO - HARN30000

MINING HARNESS



SPECIFIC FEATURES:

- SIZING:** • **S | M | L | XL**
- STANDARDS:** • SANS 50361 | EN 361
- FEATURES:** • Rescue pack & battery straps
• 3 attachment points: Dorsal D-ring & 2 frontal attachment points
• Adjustable leg, shoulder, chest & waist straps
• Padded waist & shoulder straps
• Standing step

MATERIALS:



- Harness Webbing:** • 45mm UV-Resistant polyester webbing with a minimum breaking load of 2,6tonnes
- Padding:** • 5mm laminated foam to spread pressure over a larger area
- Buckles:** • Interlocking, corrosion-resistant steel buckles with a minimum breaking force of 18kN

HEAVYWEAR RANGE - MULTI-PURPOSE

AGILIS - HARN40000

MULTI-PURPOSE HARNESS



SPECIFIC FEATURES:

- SIZING:** • **S | M | L | XL**
- STANDARDS:** • SANS 50361 | EN 361
SANS 50358 | EN 358
- FEATURES:** • 4 attachment points: Chest & dorsal D-ring attachment points with work positioning D-rings
• Adjustable leg, waist, shoulder & chest straps
• Padded waist
• Standing step

MATERIALS:



- Harness Webbing:** • 45mm UV-Resistant polyester webbing with a minimum breaking load of 2,6 tonnes
- Padding:** • 5mm laminated foam to spread pressure over a larger area
- Buckles:** • Interlocking, corrosion-resistant steel buckles with a minimum breaking force of 18kN

HEAVYWEAR RANGE - ROPE ACCESS & RESCUE

GORDIAN - HARN50000

ROPE ACCESS & RESCUE HARNESS



SPECIFIC FEATURES:

- SIZING:** • S | M | L | XL
- STANDARDS:** • SANS 50361 | EN 361
SANS 50358 | EN 358
SANS 50813 | EN 813
- FEATURES:** • 5 attachment points: Front waist, chest & dorsal D-ring attachment points with work positioning D-rings & Gear loops
• Adjustable leg, shoulder, back, chest & waiststraps
• Padding in the leg & waist areas

MATERIALS:



- Harness Webbing:** • 45mm UV-Resistant polyester webbing with a minimum breaking load of 2,6 tonnes
- Padding:** • 5mm laminated foam to spread pressure over a larger area
- Buckles:** • Interlocking, corrosion-resistant steel buckles with a minimum breaking force of 18kN
- Front Connector:** • Steel screw gate carabiner with a minimum breaking strength of 25kN

SPECIALIST RANGE - MINING

KHUMBA - HARN51212

ROPE ACCESS & RESCUE HARNESS



SPECIFIC FEATURES:

- SIZING:** • S | M | L | XL
- STANDARDS:** • SANS 50361 | EN 361
SANS 50358 | EN 358
SANS 50813 | EN 813
- FEATURES:** • 5 Aluminium attachment points
• Adjustable Aluminium quick-release buckles on the leg & waist area with adjustable Aluminium buckles on the shoulder and back strap
• Padding in the leg, waist & shoulder areas
• Standing step
• Flame retardant webbing

MATERIALS:



- Harness Webbing:** • 45mm UV-Resistant & Flame retardant webbing with a minimum breaking load of 3,2 tonnes
- Padding:** • 5mm laminated foam encased in a Cordura flame retardant nylon/cotton blend fabric
- Buckles:** • Aluminium corrosion-resistant quick-release buckles with a minimum breaking force of 18kN
- Front Connector:** • Steel screw gate carabiner with a min. breaking strength of 25kN

HEAVYWEAR RANGE - ROPE ACCESS & RESCUE

GORDIAN PRO - HARN50303

ROPE ACCESS & RESCUE HARNESS



SPECIFIC FEATURES:

- SIZING:** • S | M | L | XL
- STANDARDS:** • SANS 50361 | EN 361
SANS 50358 | EN 358
SANS 50813 | EN 813
- FEATURES:** • 5 attachment points: Front waist, chest & Dorsal
• D-ring with work positioning D-rings & Gear loops
• Adjustable leg, back leg, waist, shoulder & back straps with interlocking quick-release buckles
• Padding in the leg, waist and shoulder areas

MATERIALS:



- Harness Webbing:** • 45mm UV-resistant polyester webbing with a minimum breaking load of 2,6 tonnes
- Padding:** • 5mm laminated foam to spread pressure over a large area
- Buckles:** • Corrosion-resistant steel quick-release buckles with a minimum breaking force of 18kN. Interlocking, corrosion-resistant steel buckles with a minimum breaking force of 18kN
- Front Connector:** • Steel screw gate carabiner with a minimum breaking strength of 25kN

SPECIALIST RANGE - ELECTRIC

ARC - HARN70000

MULTI PURPOSE HARNESS



SPECIFIC FEATURES:

- SIZING:** • S | M | L | XL
- STANDARDS:** • SANS 50358 | EN 358
SANS 50361 | EN 361
ASDM F887-13 | ATPV 40Cal/cm²
- FEATURES:** • 4 Aluminium attachment points: Chest & dorsal D-ring with work positioning D-rings

- Adjustable Aluminium quick-release buckles on the leg, waist and abdominal area with adjustable Aluminium buckles on the shoulder and back straps
- Padding in the leg, waist, & shoulder areas
- All attachment points, adjustments & padding are covered in full grain leather

MATERIALS:



- Harness Webbing:** • Fire retardant & ARC flash rated, 45 mm Para-aramid/Meta-aramid blending webbing
- Padding:** • 5 mm laminated foam encased in full grain leather
- Buckles:** • Aluminium corrosion-resistant quick-release buckles with a minimum breaking force of 18kN
- D-Ring:** • Corrosion-resistant Aluminium D-rings with a min. breaking strength of 22kN

SPECIALIST RANGE - WELDING

SPARK - HARN60000

WELDING HARNESS

SPECIFIC FEATURES:



- SIZING:** • One size fits all
- STANDARDS:** • SANS 50361 | EN 361
- FEATURES:** • 2 Aluminium attachment points: Chest & dorsal D-ring
• Adjustable Aluminium quick-release buckles on the leg & chest straps

MATERIALS:



- Harness Webbing:** • Flame resistant, 45mm Para-aramid / Meta-aramid blended webbing
- Buckles:** • Aluminium corrosion-resistant quick-release buckles with a minimum breaking force of 18kN

LANYARD RANGE - EXTENSIO RANGE

CODE: WPSR01010

WORK POSITIONING LANYARD

SPECIFIC FEATURES:



- SIZING:** • MAX 2000MM
- STANDARDS:** • SANS 50358 | EN 358
EN 362
- FEATURES:** • Two snap hooks
• Adjustable webbing with PVC protector

MATERIALS:



- Webbing:** • 45mm UV-resistant polyester webbing with a minimum breaking load of 2,6 tonnes
- Lanyard Adjustment:** • 800mm - 2 000mm utilising a floating buckle
- Buckle:** • Corrosion-resistant steel buckle with a minimum breaking force of 18kN
- Protective Sleeve:** • PVC material for enhanced durability
- Hooks:** • Corrosion-resistant steel snap hooks with 20mm gate opening that can withstand a force of 22kN

LANYARD RANGE - EXTENSIO RANGE

CODE: ERCS01000

ENDLESS ROUND SLING



SPECIFIC FEATURES:

- SIZING:** • 1500mm
- STANDARDS:** • SANS 50795 | EN 795
- FEATURES:** • 38mm seatbelt webbing encased into 50mm tubular webbing
• Supplied as a set of two

MATERIALS:



- Webbing:** • 45mm UV-resistant polyester webbing with a minimum breaking strength of
- Straight - 25k
- Basket - 50kN
- Backlash - 20kN
- Length:** • 1 500mm per sling

LANYARD RANGE - EXTENSIO RANGE

CODE: LANY01210

DOUBLE LEG LANYARD



SPECIFIC FEATURES:

- SIZING:** • 1750MM
- STANDARDS:** • SANS 50354 | EN 354
SANS 50355 | EN 355
EN 362
- FEATURES:** • Double leg with snap hooks
• Single leg with snap hook
• Shock absorber

MATERIALS:



- Webbing:** • 45mm UV-resistant polyester webbing with a minimum breaking load of 2,6 tonnes
- Lanyard Length:** • 1 750mm when shock absorber is intact
- 3 450mm when shock absorber is fully deployed
- Hooks:** • Corrosion-resistant steel snap hooks with 20mm gate opening that can withstand a force of 22kN

LANYARD RANGE - EXTENSIO RANGE

CODE: LANY01220

DOUBLE LEG LANYARD



SPECIFIC FEATURES:

- SIZING:** • 1750mm
- STANDARDS:** • SANS 50354 | EN 354
SANS 50355 | EN 355
EN 362
- FEATURES:** • Double leg with scaff hooks
• Single leg with snap hook
• Shock absorber

MATERIALS:



- Webbing:** • 45mm UV-resistant polyester webbing with a minimum breaking load of 2,6 tonnes
- Lanyard Length:** • 1 750mm when shock absorber is intact
- 3 450mm when shock absorber is fully deployed
- Hooks:** • Corrosion-resistant steel hooks:
- Scaffolding hooks: 50mm gate opening that can withstand a force of 23kN
- Snap hook: 20mm gate opening that can withstand a force of 22kN

LANYARD RANGE - EXTENSIO RANGE

CODE: LANY01610

ELASTICATED SINGLE LEG LANYARD



SPECIFIC FEATURES:

- SIZING:** • 1750MM
- STANDARDS:** • SANS 50354 | EN 354
SANS 50355 | EN 355
EN 362
- FEATURES:** • Elasticated single leg with scaff hook
• Single leg with snap hook
• Shock absorber

MATERIALS:



- Webbing:** • 25mm UV-resistant polyester webbing with a minimum breaking load of 2,6tonnes
- Lanyard Length:** • 1 750mm when shock absorber is intact
- 3 450mm when shock absorber is fully deployed
- Hooks:** • Corrosion-resistant steel hooks:
- Scaffolding hook: 50mm gate opening that can withstand a force of 23kN
- Snap hook: 20mm gate opening that can withstand a force of 22kN

LANYARD RANGE - EXTENSIO RANGE

CODE: LANY01420

ADJUSTABLE DOUBLE LEG LANYARD



SPECIFIC FEATURES:

- SIZING:** • 1750MM
- STANDARDS:** • SANS 50354 | EN 354
SANS 50355 | EN 355
EN 362
- FEATURES:** • Adjustable with double leg scaff hooks
• Single leg with screw gate carabiner
• Shock absorber

MATERIALS:



- Webbing:** • 25mm UV-resistant polyester webbing with a minimum breaking load of 2,6 tonnes
- Lanyard Length:** • 1 400mm - 1 750mm when shock absorber is intact
- 3 450mm when shock absorber is fully deployed
- Buckles:** • Corrosion-resistant steel buckles with minimum breaking force of 18kN
- Hooks:** • Corrosion-resistant steel scaffolding hooks: 50mm gate opening that can withstand a force of 23kN
- Carabiner:** • Corrosion-resistant steel screw gate carabiner: 23mm gate opening that can withstand a force of 23kN

LANYARD RANGE - EXTENSIO RANGE

CODE: LANY01620

ELASTICATED DOUBLE LEG LANYARD



SPECIFIC FEATURES:

- SIZING:** • 1750MM
- STANDARDS:** • SANS 50354 | EN 354
SANS 50355 | EN 355
EN 362
- FEATURES:** • Elasticated double leg with scaff hooks
• Single leg with snap hook
• Shock absorber

MATERIALS:



- Webbing:** • 25mm UV-resistant polyester webbing with a minimum breaking load of 2,6tonnes
- Lanyard Length:** • 1 750mm when shock absorber is intact
- 3 450mm when shock absorber is fully deployed
- Hooks:** • Corrosion-resistant steel hooks:
- Scaffolding hooks: 50mm gate opening that can withstand a force of 23kN
- Snap hook: 20mm gate opening that can withstand a force of 22kN

LANYARD RANGE - SPECIALISED

KHUMBA LANYARD - LANY05420

FIRE RETARDANT LANYARD



SPECIFIC FEATURES:

- SIZING:** • 1750MM
- STANDARDS:** • SANS 50354 | EN354
SANS 50355 | EN355
EN362
- FEATURES:** • Double leg with Aluminum pylon hooks
• Single leg with auto-lock carabiner
• Shock absorber
• Fire retardant webbing

MATERIALS:



- Webbing:** • Fire retardant, 25mm Para-aramid/Meta-aramid blended webbing with a minimum breaking load of 2,6 tonnes
- Lanyard Length:** • 1 400mm - 1 750mm (when shock absorber is intact)
- 3 450mm when shock absorber is fully deployed
- Buckles:** • Corrosion-resistant steel buckles with minimum breaking force of 18kN
- Hooks:** • Aluminum pylon hooks: 60mm gate opening that can withstand a force of 23kN
- Carabiner:** • Auto-Lock Carabiner: 20mm gate opening that can withstand a force of 22kN

LANYARD RANGE - SPECIALISED

CODE: LANY04220

WIRE ROPE LANYARD



SPECIFIC FEATURES:

- SIZING:** • 1750MM
- STANDARDS:** • SANS 50354 | EN 354
SANS 50355 | EN 355
EN 362
- FEATURES:** • Double leg with scaffolding hooks
• Single leg with snap hook
• Shock absorber

MATERIALS:



- Steel wire rope:** • 1.2m eye to eye, thimble eye, 6mm to 8mm corrosion resistant feral cover wire ends. (This is not lifting equipment) >15kN
- Lanyard Length:** • 1 750mm when shock absorber is intact
- 3 450mm when shock absorber is fully deployed
- Hooks:** • Corrosion-resistant steel hooks:
- Scaffolding hooks: 50mm gate opening that can withstand a force of 23kN
- Snap hooks: 20mm gate opening that can withstand a force of 22kN

LANYARD RANGE - SPECIALISED

SPARK - LANY05220

ARC / WELDING LANYARD



SPECIFIC FEATURES:

- SIZING:** • 1750MM
- STANDARDS:** • SANS 50354 | EN 354
SANS 50355 | EN 355
EN 362
ASDM F887-13 | ATPV 40Cal/cm²
- FEATURES:** • Double leg with Aluminium pylon hooks
• Single leg with Aluminium auto-lock carabiner
• Shock absorber
• Fire retardant & ARC flash rated webbing

MATERIALS:



- Webbing:** • Fire retardant & ARC flash rated webbing, 25mm Para-aramid/Meta-aramid blended webbing with a minimum breaking load of 2,6 tonnes
- Shock cover:** • Full grain leather sock to protect shock absorber from burns created by an ARC flash or sparks
- Lanyard Length:** • 1 750mm when shock absorber is intact
- 3 450mm when shock absorber is fully deployed
- Hooks:** • Aluminum pylon hooks: 60mm gate opening that can withstand a force of 23kN
- Carabiner:** • Auto-Lock Carabiner: 20mm gate opening that can withstand a force of 22kN

BELT RANGE - PADDED

MINING - CLB01010

MINERS BELT



SPECIFIC FEATURES:

- SIZING:** • **ONE SIZE FITS ALL**
- FEATURES:**
- Rescue Pack and battery strap
 - Padded waist area
 - Adjustable strap

MATERIALS:



- Padding:** • 5mm laminated foam to spread pressure over a larger area
- Buckles:** • Interlocking, corrosion-resistant steel buckles

RANGE - LIFELINES

CODE: TLLH01020

TEMPORARY HORIZONTAL LIFELINE



SPECIFIC FEATURES:



- SIZING:** • **20M LIFELINE**
- STANDARDS:** • SANS 50795 | EN 795 / EN 362
- FEATURES:**
- 1x Ratchet tensioning system
 - 2x Anchor straps
 - 2x Carabineers
 - 1x Equipment carry bag

MATERIALS:

- Webbing:** • 50mm UV-Resistant polyester webbing with a minimum breaking load of 40kN
- Hooks:** • Corrosion-resistant steel Snap Hooks with a 20mm gate opening that can withstand a force of 22kN
- Carabiners:** • Corrosion-resistant steel carabiners with a minimum breaking of 26kN
- Ratchet:** • Corrosion-resistant steel ratchet
- Anchor Straps:** • 45mm UV-Resistant polyester webbing with a minimum breaking load of 2.6 tonnes
- PVC protective sleeve
 - Corrosion-resistant steel D-rings with a minimum breaking load of 25kN

BELT RANGE - LINESMAN

MINING - LMB02070

LINESMAN BELT



SPECIFIC FEATURES:

- SIZING:** • **ONE SIZE FITS ALL**
- STANDARDS:** • SANS 50358
- FEATURES:**
- Full grain, adjustable leather with webbing
 - Padded waist area
 - Work positioning D-rings
 - 7 steel attachment points and 8 leather loops for tools and accessories

MATERIALS



- Webbing:** • 45mm UV-Resistant polyester webbing with a minimum breaking load of 2,6 tonnes
- Leather:** • Full Grain Leather
- Padding:** • 5mm laminated foam to spread pressure over a larger area
- D-Rings:** • Corrosion-resistant steel D-rings that can withstand a force of 18kN

RANGE - LIFELINES

CODE: TLLV01020

TEMPORARY VERTICAL LIFELINE



SPECIFIC FEATURES:



- SIZING:** • **20M LIFELINE**
- STANDARDS:** • EN353-2
- FEATURES:**
- 1 x 20m Kernmantle rope
 - 1 x Plastic rope thimble
 - 1 x Mobile fall arrestor
 - 2 x Carabiners
 - 1 x Anchor strap
 - 1 x Equipment carry bag

MATERIALS:

- Rope:** • 11mm Kernmantle rope with a minimum breaking load of 28kN
- Mobile Fall Arrestor:** • Aluminium rope grab with a minimum breaking load of 15kN.
- Carabiners:** • Aluminium screw gate carabiners with a minimum breaking load of 22kN
- Anchor Strap:** • 45mm UV-Resistant polyester webbing with a minimum breaking load of 2.6 tonnes
- PVC protective sleeve
 - Corrosion-resistant steel D-rings with a minimum breaking load of 25kN



WORKWEAR

QUALITY ENGINEERING THAT FITS



E N G I N E E R E D W I T H P U R P O S E

CONTI SUIT RANGE - 65/35 POLY COTTON

CODE: OJ12927



SPECIFIC FEATURES:

- FABRIC:** • 65/35 POLY COTTON
COLOURS: • Black | Grey | Navy | Royal Blue
SIZES: • 32 - 60

CONTI SUIT RANGE - 65/35 POLY COTTON

CODE: OJ12928



SPECIFIC FEATURES:

- FABRIC:** • 65/35 POLY COTTON
REFLECTIVE: • 19mm VizLite™ reflective tape - Lime/Silver/Lime
COLOURS: • Black | Grey | Navy | Royal Blue
SIZES: • 32 - 60

CONTI SUIT RANGE - 65/35 POLY COTTON

CODE: OJ13070



MT0

SPECIFIC FEATURES:

- FABRIC:** • 65/35 POLY COTTON
COLOUR: • Bottle Green & Khaki | Navy & Khaki | Stone & Khaki
SIZES: • 32 - 60

CONTI SUIT RANGE - 65/35 POLY COTTON

CODE: OT12935



SPECIFIC FEATURES:

- FABRIC:** • 65/35 POLY COTTON
COLOURS: • Black | Grey | Navy | Royal Blue
SIZES: • 28 - 56

CONTI SUIT RANGE - 65/35 POLY COTTON

CODE: OT12936



SPECIFIC FEATURES:

- FABRIC:** • 65/35 POLY COTTON
REFLECTIVE: • 19mm VizLite™ reflective tape - Lime/Silver/Lime
COLOURS: • Black | Grey | Navy | Royal Blue
SIZES: • 28 - 56

CONTI SUIT RANGE - 65/35 POLY COTTON

CODE: OT13071



MT0

SPECIFIC FEATURES:

- FABRIC:** • 65/35 POLY COTTON
COLOUR: • Bottle Green & Khaki | Navy & Khaki | Stone & Khaki
SIZES: • 28 - 56

CONTI SUIT RANGE - POLYVISCOSE

CODE: OJ12926



SPECIFIC FEATURES:

- FABRIC:** • POLY VISCOSE ACID RESISTANT
COLOUR: • Bottle Green
SIZES: • 32 - 60

CONTI SUIT RANGE - POLYVISCOSE

CODE: OT12934



SPECIFIC FEATURES:

- FABRIC:** • POLY VISCOSE ACID RESISTANT
COLOUR: • Bottle Green
SIZES: • 28 - 56

CONTI SUIT RANGE - J54 100% COTTON

CODE: OJ12931



SPECIFIC FEATURES:

- FABRIC:** • J54 100% COTTON
COLOUR: • Navy | Royal Blue
SIZES: • 32 - 60



CONTI SUIT RANGE - J54 100% COTTON

CODE: OT12940



SPECIFIC FEATURES:

- FABRIC:** • J54 100% COTTON
COLOUR: • Navy | Royal Blue
SIZES: • 28 - 56



CONTI SUIT RANGE - J54 100% COTTON

CODE: OJ12932



SPECIFIC FEATURES:

- FABRIC:** • J54 100% COTTON
REFLECTIVE: • 19mm VizLite™ reflective tape - Lime/Silver/Lime
COLOUR: • Navy | Royal Blue
SIZES: • 32 - 60



CONTI SUIT RANGE - J54 100% COTTON

CODE: OT12939



SPECIFIC FEATURES:

- FABRIC:** • J54 100% COTTON
REFLECTIVE: • 19mm VizLite™ reflective tape - Lime/Silver/Lime
COLOUR: • Navy | Royal Blue
SIZES: • 28 - 56



CONTI SUIT RANGE - DENIM 100% COTTON

CODE: OJ12925



100%
COTTON

SPECIFIC FEATURES:

- FABRIC:** • 100% COTTON
REFLECTIVE: • 19mm VizLite™ reflective tape - Lime/Silver/Lime
COLOUR: • Denim
SIZES: • 32 - 60

CONTI SUIT RANGE - D59 100% COTTON

CODE: OJ12930



SPECIFIC FEATURES:

- FABRIC:** • D59 100% COTTON FLAME RETARDANT & ACID RESISTANT
REFLECTIVE: • 48mm VizLite™ reflective tape
COLOURS: • Navy
SIZES: • 32 - 60

CONTI SUIT RANGE - HIGH VIZ

CODE: OJ13072



SPECIFIC FEATURES:

- FABRIC:** • LUMINOUS FABRIC - 50/50 POLY COTTON
 • BASE FABRIC - 65/35 POLY COTTON
REFLECTIVE: • 50mm VizLite™ reflective tape
COLOURS: • Navy & Lime | Navy & Orange
SIZES: • 32 - 60

CONTI SUIT RANGE - DENIM 100% COTTON

CODE: OT12933



100%
COTTON

SPECIFIC FEATURES:

- FABRIC:** • 100% COTTON
REFLECTIVE: • 19mm VizLite™ reflective tape - Lime/Silver/Lime
COLOUR: • Denim
SIZES: • 28 - 56

CONTI SUIT RANGE - D59 100% COTTON

CODE: OT12938



SPECIFIC FEATURES:

- FABRIC:** • D59 100% COTTON FLAME RETARDANT & ACID RESISTANT
REFLECTIVE: • 48mm VizLite™ reflective tape
COLOURS: • Navy
SIZES: • 28 - 56

CONTI SUIT RANGE - HIGH VIZ

CODE: OT13075



SPECIFIC FEATURES:

- FABRIC:** • LUMINOUS FABRIC - 50/50 POLY COTTON
 • BASE FABRIC - 65/35 POLY COTTON
REFLECTIVE: • 50mm VizLite™ reflective tape
COLOURS: • Navy & Lime | Navy & Orange
SIZES: • 28 - 56

BOILER SUIT RANGE - J54 100% COTTON



SPECIFIC FEATURES:

- FABRIC:** • J54 100% COTTON
- REFLECTIVE:** • 19mm VizLite™ reflective tape
- COLOUR:** • Navy
- SIZES:** • 32 - 60

DUST COAT RANGE - 65/35 POLY COTTON

CODE: OD13069



SPECIFIC FEATURES:

- FABRIC:** • 65/35 POLY COTTON
- COLOUR:** • Grey | Navy | Royal Blue | White
- SIZES:** • 32 - 60

HIGH VISIBILITY SHIRTS RANGE

CODE: OS13077



SPECIFIC FEATURES:

- FABRIC:** • LUMINOUS FABRIC - 50/50 POLY COTTON
• BASE FABRIC - 100% COTTON
- REFLECTIVE:** • 48mm VizLite™ reflective tape
- COLOURS:** • Navy & High VIZ Yellow | Navy & High VIZ Orange
- SIZES:** • 32 - 60

BOILER SUIT RANGE - D59 100% COTTON

CODE: OB12921



SPECIFIC FEATURES:

- FABRIC:** • VD59 100% COTTON FLAME RETARDANT & ACID RESISTANT
- REFLECTIVE:** • 48mm VizLite™ reflective tape
- COLOUR:** • Navy
- SIZES:** • 32 - 60

DUST COAT RANGE - 65/35 POLY COTTON

CODE: OD13068



SPECIFIC FEATURES:

- FABRIC:** • 65/35 POLY COTTON ACID RESISTANT
- COLOUR:** • White
- SIZES:** • 32 - 60

65/35 POLY COTTON:

This fabric comprises 35% cotton and 65% polyester. Cotton is a natural fibre that is known for its breathability, while polyester is a man-made fibre that is known for its resilience and washability. When polyester is blended with cotton, the resultant fabric offers better crease resistance.

J54:

This fabric is made from 100% cotton and is SABS approved. As a natural fibre, cotton is soft, highly breathable and acts as an insulator. The benefit of this fabric is that the wearer will remain cool in the summer months and warm in winter.

D59:

This fabric is made from 100% cotton and is SABS approved. The fabric is treated with either an acid resistant or flame retardant or both acid resistant and flame retardant finish, depending on the wearer's requirements.

POLY VISCOSE:

This fabric is made from a combination of polyester and viscose. Similar to cotton in its feel, the material is man-made and absorbs perspiration quickly, making it skin-friendly, but with little thermal properties.

HIGH VIZ:

The luminous fabric used in our High VIZ range comprises 50% polyester and 50% cotton. This is a highly visible fabric that offers extreme visibility in low to no light conditions. This fabric is applied to one or two types of base fabrics; either 65/35 poly cotton or 100% cotton.

SIZE CHART

JACKETS

CHEST MEASUREMENTS

INCHES	32	34	36	38	40	42	44
CM	82	87	92	97	102	107	112
SIZE	XS	S		M		L	

INCHES	46	48	50	52	54	56	58	60
CM	117	122	127	132	137	142	147	152
SIZE	XL		XXL		XXXL		XXXXL	

NOTE: Jackets are to be ordered by chest size and trousers to be ordered by waist size.
Use trouser's waist measurement and increase by two sizes to determine corresponding jacket chest size.

TROUSERS

WAIST MEASUREMENTS

INCHES	28	30	32	34	36	38	40
CM	72	77	82	87	92	97	102

INCHES	42	44	46	48	50	52	54	56
CM	107	112	117	122	127	132	137	142

NOTE: Trousers to be ordered by waist size and jackets to be ordered by chest size. Use trouser's waist measurement and increase by two sizes to determine corresponding jacket chest size.

BOILER SUITS

CHEST MEASUREMENTS

INCHES	30	32	34	36	38	40	42
CM	77	82	87	92	97	102	107
SIZE	XS	S		M		L	

INCHES	44	46	48	50	52	54	56	58	60	62
CM	112	117	122	127	132	137	142	147	152	157
SIZE	XL		XXL		XXXL		XXXXL		XXXXXL	

CORRELATING WAIST MEASUREMENT:

INCHES	28	30	32	34	36	38	40
CM	72	77	82	87	92	97	102

INCHES	42	44	46	48	50	52	54	56	58
CM	107	112	117	122	127	132	137	142	147

NOTE: Boiler suits to be ordered by chest measurement. Check chest measurement table for corresponding waist size. Use trouser's waist measurement and increase by two sizes to determine corresponding jacket chest size.



CHEMICAL RESISTANCE TABLE

THIS TABLE IS ONLY RELEVANT TO POLYURETHANE (PU) SOLES



O/A DISSOLVES



O/A POOR
more than 30% change



O/A FAIR
16 - 30% change



O/A GOOD
4 - 15% change




O/A EXCELLENT
0.3% change

Acetic Acid 3 n	3	Diesel Oil	5	Methyl Glycol	2
Acetone	2	Dimethyl Acetamide	1	Methyl Glycol Acetate	2
Aluminium Chloride 10% Sol.	4	Dimethyl Formamide	1	Methylene Chloride	2
Ammonia 3 n	5	Distilled Water	5	Mineral Oil	5
Ammonium Chloride 10% Sol.	5	Ethanol	3	Nitric Acid 3 n	1
Aniline	2	Ether	3	N-Methyl Pyrrolidone	1
ASTM-Fuel A	5	Ethyl Acetate	2	Ozone	5
ASTM-Fuel B	4	Ethylene Chloride	3	Paraffin Oil	5
ASTM-Fuel C	3	Ferric Chloride 10% Sol.	4	Perchlorethylene	2
ASTM-Oil 1	5	Formic Acid 3 n	2	Petroleum	5
ASTM-Oil 2	5	Freon 12	3	Petroleum Ether	5
ASTM-Oil 3	5	Freon 22	3	Phosphoric Acid 3 n	3
Benzene	2	Gear Box Oil SAE 90	5	Potassium Chloride 10% & 40% Sol.	5
Benzyl Alcohol	1	Glycerine	5	Potassium Dichromate 10% Sol.	5
Bleach	5	Glycol	5	Potassium Hydroxide 3 n	5
Brake Fluid ATE	5	Hydrochloric Acid 3 n	5	Potassium Nitrate	4
Brake Fluid ATS	5	Hydrogen Peroxide 3%	5	Potassium Permanganate 5% Sol.	2
Butane	4	Iso-Octane Fuel 1	5	Propane	4
Butyl Acetate	2	Iso-Octane 70% : 30% Toluene = Fuel 2	4	Pyridine	1
Butyl Alcohol	3	Iso-Octane 50% : 50% Toluene = Fuel 3	3	Sea Water (Technical)	5
Calcium Chloride 10% & 40% Sol.	5	Iso-Propanol	4	Sodium Bisulphate 10% Sol.	4
Carbon Disulphide	3	Kerosine	5	Sodium Chloride 10% Sol.	5
Carbon Tetrachloride	2	Lactic Acid 3 n	1	Sodium Hypochlorite Sol. PH 13	3
Caustic Soda Sol. 10%	5	Lubricating Grease: Calcium based	5	Sodium Sulphite	4
Chlorobenzene	2	: Lithium based	5	Sulphuric Acid 3 n	1
Chloroform	2	: Sodium based	5	Terpentine (Pine Oil)	4
Chromic Acid 3 n	2	Magnesium Chloride 10% & 30% Sol.	5	Tetrachlorethylene	2
Citronic Acid 3 n	4	Methane	4	Tetrahydrofuran	2
Cyclohexane	4	Methanol	4	Toluene	2
Cyclohexanon	2	Methyl Acetate	2	Trichloroethylene	2
Decalin	3	Methyl Ethyl Ketone	2	Xylene	2

If you are exposed to any of the acids, oils or chemicals that rate 1, 2 or 3 on the table we recommend a rubber sole shoe/boot. Please consult the Extremewear section.

The above table should be used as a general guide only. Performance in the actual working environment will depend upon the following: temperature of chemicals, concentrations of chemicals and duration of exposure.

NOTES

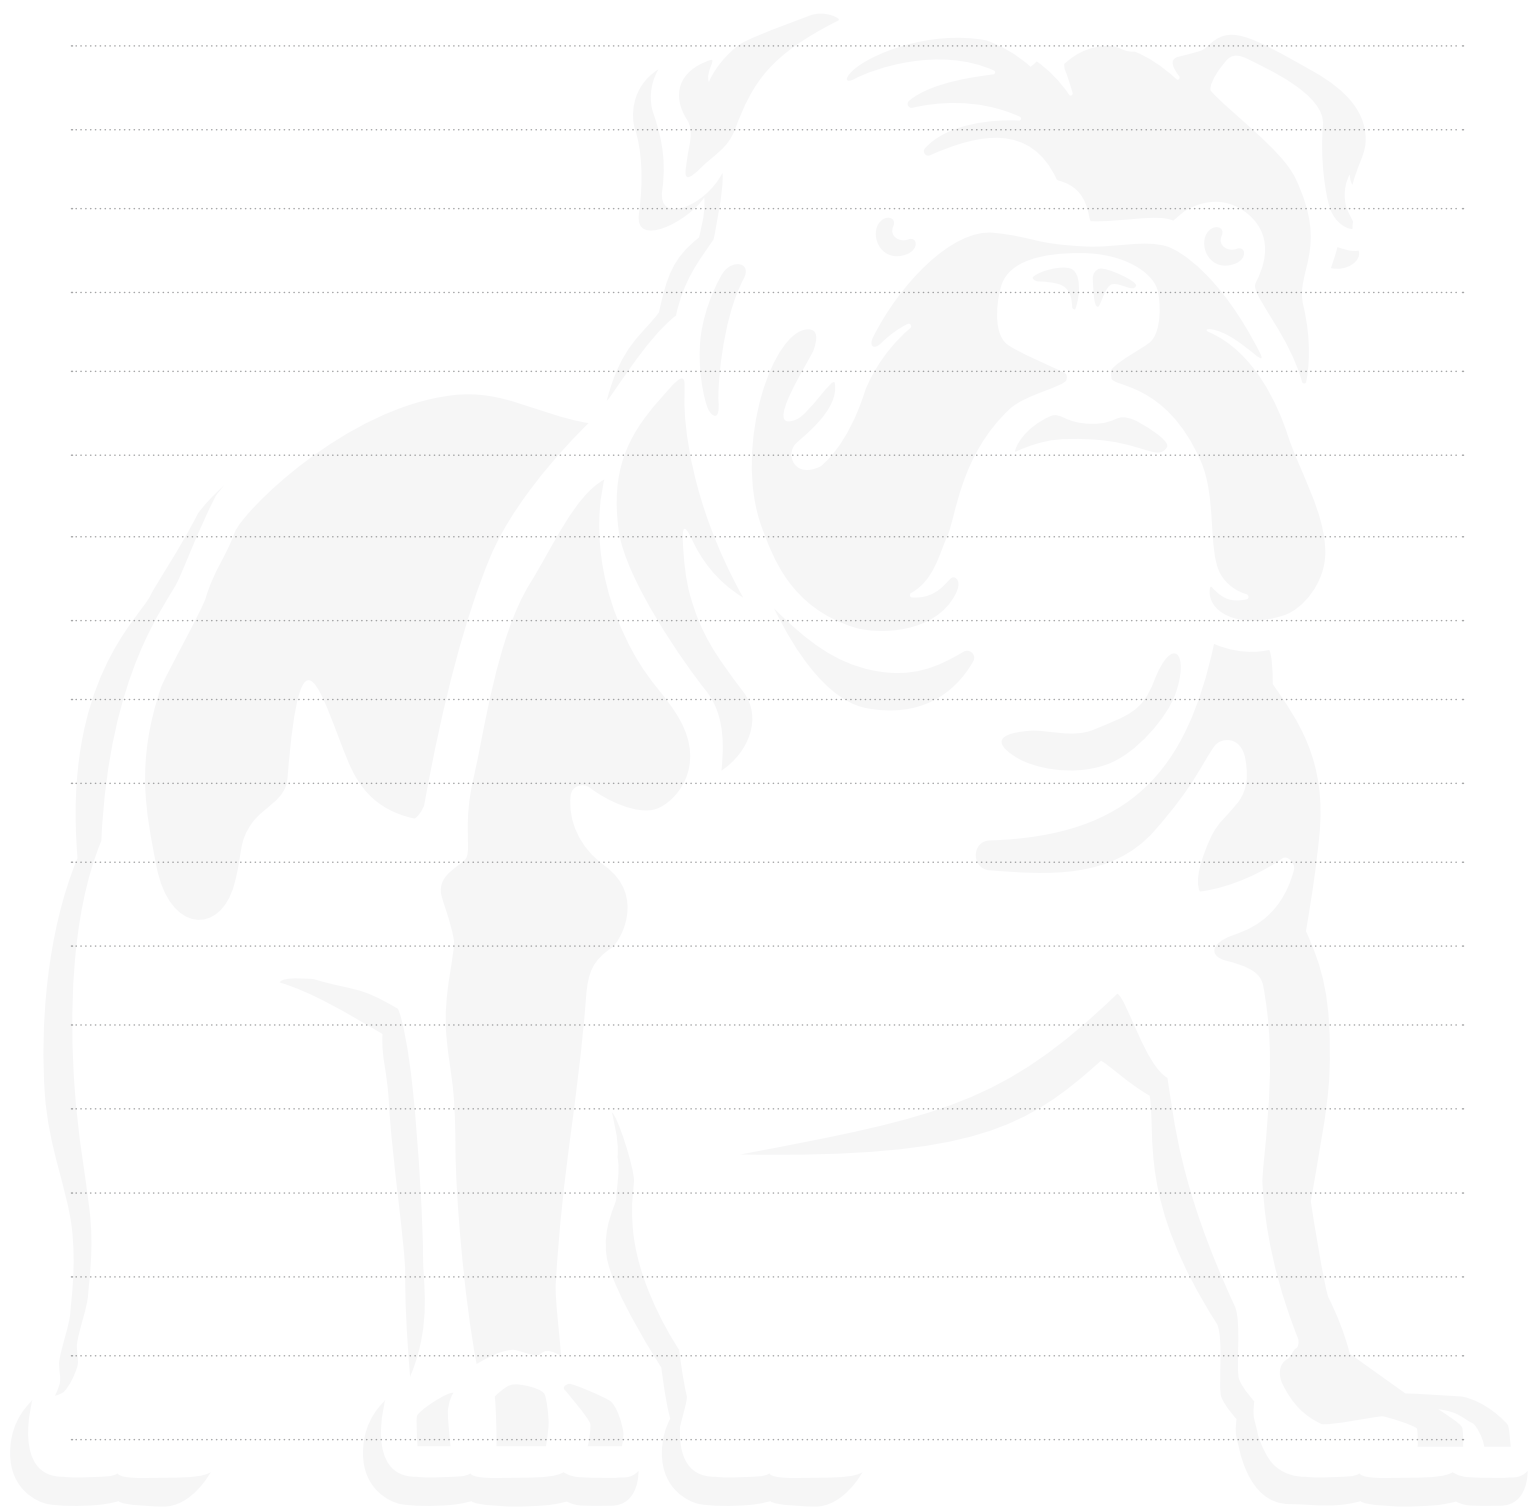

NOTES





W W W . B O V A . C O . Z A



A product of



OFFICE AND FACTORY

PO Box 121, Pinetown, 3600, South Africa
40 Gillitts Road, Pinetown, 3610, South Africa

Tel: +27 31 710 0400 | Fax: +27 31 700 2607