

HIKOKI

HIGH PERFORMANCE POWER TOOLS
SINCE 1948

Power tools
catalogue

EDITION 3



PROUDLY JAPANESE BRAND

Innovation never stops

Ever since 1948 we've been designing and developing high performance power tools. For over 70 years our Japanese engineers have utilized their technological knowledge, skills and experience to constantly improve our power tools. Guided by Japanese design principles, every element of our products is chosen to improve performance, balance, usability, longevity and control. Attention to details ensures the professional in finishing every single job as easy as possible. That's what drives us and keeps us one step ahead.

HIKOKI
UNLEASH the NEXT

Content

Cordless Impact Drill Drivers

DV36DA
DV18DF
DV18DD
DV18DBL2

Pages 14 - 15

Page 14
Page 14
Page 15
Page 15

Cordless Rotary Hammers

DH36DPA
DH18DPB
DH36DPE

pages 16 - 17

Page 15
Page 16
Page 17

Cordless Impact Drivers

WH36DC
WH18DBL2
WH18DA

Page 18 - 19

Page 18
Page 19
Page 19

Cordless Impact Wrenches

WR36DE
WR36DA
WR36DB
WR18DBDL2

Pages 20 - 22

Page 20
Page 21
Page 21
Page 22

Cordless Angle Grinders

G3623DA
G18DSL2
G3613DB
G3613DA

Page 23

Page 23
Page 24
Page 24
Page 24

Cordless Circular Saw

C 3603DA
C 18DSL

Page 25

Page 25
Page 25

Cordless Mitre Saw / ACDC Adaptor

CJ3610DRA
ET36A

Page 26

Page 26
Page 26

Cordless Jigsaw

CJ 36DA
CJ 36DB

Page 27

Page 27
Page 27

Cordless Reciprocating Saws

CR 36DA
CR 18DSL

Page 28

Page 28
Page 28

Cordless Blower & Planer

RB 18DC
P 18DSL

Page 29

Page 29
Page 29

Cordless Router

M 3612DA

Page 30

Page 30

Cordless Laminate Trimmer

M 1808DA

Page 31

Page 31

Cordless Chain Saw & Batteries

CS 3630DA
BSL 1815
BSL 1830

Page 32

Page 32
Page 32
Page 32

Cordless Batteries

BSL 1850
BSL 36A18
BSL 36B18
UC 18YFSL
UC 18YSL3

Page 33 - 34

Page 33
Page 33
Page 33
Page 34
Page 34

Corded Impact Drills

DV 13VST
DV 13SS
DV 13VSS
DV 18V
DV 20VB2
DV 20VD

Pages 36 - 38

Page 36
Page 36
Page 36
Page 37
Page 37
Page 37

Corded Rotary Hammers

DH 26PC2
DH 26PB2
DH 28PCY2
DH 28PBY2
DH 40MC
DH 45ME

pages 39 - 40

Page 39
Page 39
Page 39
Page 40
Page 40
Page 40

Corded Rotary & Demolition Hammers

H 41MB2
H 45ME
H 60MC

Page 41

Page 41
Page 41
Page 41

Corded Demolition Hammers

H 60MEY
H 65SC
H 90SG

Pages 42 - 43

Page 42
Page 42
Page 43

Corded Impact Wrenches

WR 22SE
WR 16SE
WR 25SE

Page 44 - 45

Page 44
Page 44
Page 45

Corded Disc Grinders

G12SS2
G12SR4
G12SN2
G12SQ2
G13SS2
G12SE3
G 13VE
G 23ST

Page 46 - 48

Page 46
Page 46
Page 46
Page 47
Page 47
Page 47
Page 48
Page 48

Corded Disc Grinders & Die Grinder

G 23 SW2
G 23MR
GP5V

Page 49

Page 49
Page 49
Page 49

Corded Cut-off & Die Grinder

GP2S2
GP3V
CC 14ST

Page 50

Page 50
Page 50
Page 50

Corded Sanders

SP 18VA
SV 12SD
SV 13YA

Page 51

Page 51
Page 51
Page 51

Corded Sander / Router

SB8V2
SB10S2
M12VE

Page 52

Page 52
Page 52
Page 52

Corded Miter Saws

C10FCE2
C10FCH2

Page 53

Page 53
Page 53

Corded Circular Saws

C6SS
C7SS
C9U3

Page 54

Page 54
Page 54
Page 54

Corded Planer / Jigsaw

FCJ65V3
P20SF
P20ST

Page 55

Page 55
Page 55
Page 55

Corded Blower/ Heat Gun

RH650V
RH600T
RB40VA

Page 56

Page 56
Page 56
Page 56

Safety

Double-Insulation power tool, indicated by the double square mark (□), can be operated without external grounding. All HiKOKI power tools are designed and manufactured considering safety and usability. HiKOKI power tools are provided with various safety features like brakes, covers and clutches.

Power input

HiKOKI power tools employ series motors whose modern design is based on our many years of experience. Unless otherwise indicated in the catalogue, power input (Watt) is based on 110V to 240V.

General precautions

1. Read and follow handling instructions provided with the power tool and comply with all the operating instructions and warnings.
2. Never let children use the power tool.
3. Keep others, especially children, away from the tool.
4. Wear eye protector to protect the eyes.
5. Never touch blades or cutters during operation.
6. Avoid unintentional contact with the power switch when the tool is connected to a power source.
7. To ensure proper function of the tool, DO NOT remove installed covers or screws. DO NOT modify components and parts.
8. Prior to operation, carefully inspect the tool to ensure all the parts properly functioning.
9. Immediately stop operation if abnormalities are noted.
10. Ensure that motor ventilation opening is kept fully open.
11. Always keep the blades and cutters sharp and clean.
12. Have the power tool inspected at a proper regular interval by an authorized Service Center.
13. Maintain the proper care and cleanliness of the power tool.
14. Consult an authorised Service Center for repair and/or part replacement.
15. DO NOT use the power tool for any other application than those specified in the handling instructions.
16. DO NOT use the tool for work beyond its prescribed capability.
17. To avoid possible electric shock, DO NOT use the power tool in wet areas.
18. Ensure that the applied voltage is the same as that specified on the nameplate.
19. Ensure that electric plug is plugged into a matching receptacle that is properly installed and grounded in accordance with the instruction manual, all applicable local codes, and ordinances, except for double insulated tools.
20. Ensure that the power supply is disconnected after operation.
21. DO NOT lift the power tool with the cord or remove the plug from the receptacle by pulling the cord.
22. Always handle the power tool with care.
23. Proper posture is essential for safe operation.
24. Dress properly and work in proper clothing and shoes.
25. Always keep the work area in good order.
26. When not in use, store the power tool.
27. DO NOT stare into LASER beam.

Guarantee

The primary concern of Koki Holdings is the convenience and satisfaction of the customer. To this end, each HiKOKI power tool is carefully tested and inspected, and is guaranteed against any defects in workmanship and materials. Defects in workmanship and materials – not attributable to wear and tear, overloading, abusive treatment, unauthorised modification or careless handling — will be repaired or replaced without charge.

Notes for the international catalogue

1. Koki Holdings reserves the right to change specifications of parts and accessories of HiKOKI power tools without notice.
2. Specifications, features, accessories and parts such as power input, maximum torque, cutting capacity, length, weight brake, hook, spindle thread, chuck, blade, bore and handle, may vary from country to country.
3. Figures of battery capacity are nominal values.
4. Standard accessories such as battery, charger, grinding wheel, sanding paper, blade, washer, collet chuck, chuck sleeve, side handle, dust collection adapter, protective items, wrench and carrying case, sometimes may vary from country to country. Some of standard accessories may be excluded from country to country.
5. Please state required voltage and specifications when you order.
6. Orders are subject to product-availability in each country.
7. Some models in this catalog are shown with optional accessories and fasteners such as screw, nail, bit, socket, blade, battery and grinding wheel.
8. Actual colours of products may differ from those in printed photos of this catalog.

Icons

	Double Insulation		Brake
	Electronic Constant Speed Control		Brake
	Electronic Soft Start Control		Shock-Absorbing Handle Type
	Variable Speed		Blower Function
	2-speed Gear		Dust Extracting Type
	Multi-Speed Settings		Deep Cut
	Reversible		White LED Lamp
	Slip Clutch		Battery Capacity
	Orbital Cutting Action		SDS max Shank
	Random Orbit Action		SDS-plus Shank
	Spindle Lock		Hex Shank
			Hex Shank

At HiKOKI we believe that not only the design and overall look and feel of each power tool contributes to an increased comfort and ease of use. It's the technology inside that makes the next power tool and job for the professional even better than before.



Due to the more compact design compared to brushed motors, the brushless motor permits a reduction in size and weight of tools for easier handling. Even under heavy use, the brushless motor significantly extends the product life cycle without causing troubles such as armature burnout, layer short or commutator wear. Plus, it does not require the regular replacement of carbon brushes.



UVP (User Vibration Protection) combines internal vibration absorbers and shock absorbing handles for reduced vibration, and improved operating efficiency.



LVH (Low Vibration Handle) consists of the upper unit with rubber dampers and the lower unit with a hinge to reduce vibration and user fatigue.



International Protection (IP) is a standard developed by the International Electrotechnical Commission (IEC) to indicate the degrees of protection provided by enclosures of electrical equipment against access to hazardous parts, ingress of solid foreign objects and ingress of water.



One battery pack, two volt classes - the new and innovative MULTI VOLT battery packs. The 36V Li-ion battery packs are compatible with 18V class cordless tools. Intelligent connecting technology make it possible. Depending on the tool, the voltage automatically switches to 18V volt or 36V.

Li-ion

A built in electronic control circuit for Li-ion battery pack is unique. This circuit provides the protection system available to protect and enhance the performance of these batteries. By always keeping the batteries within safe operating conditions, this electronic control ensures that batteries accept more charges than conventional batteries.

Fan-cooled smart battery chargers for 14V, 18V and 36V feature a built-in fan-cooling system. When a Li-ion battery is being charged, cool air is forced up into the battery pack and circulates around the cells. Ensuring that the cells stay cool allows the charger to replenish the battery to a high capacity without causing damage.



The internal double-insulation construction with an aluminum die-cast body and a plastic stator holder.



When the tool bit is suddenly overburdened during operation, RFC (Reactive Force Control) stops the motor to reduce twisting of the main unit.



The triple hammer has three anvils, making three impacts per rotation instead of the conventional two. This results in reduced vibration and greater comfort with less screw head slippage (cam-out).



MULTI VOLT battery System

AC POWER.

DC FREEDOM.

A new generation battery system (BSL36A18), with almost the same size and weight as our 18V 5.0Ah/6.0Ah battery, but it's the technology inside that provides you with the great improvements you need. Doubling voltage provides the optimal power for the MULTI VOLT 36V tools, without the hassle of cords. The MULTI VOLT batteries are compatible with a wide range of 18V cordless tools, which means you can easily switch from one power tool to another. So you're just a simple click away from maximum performance.

HIKOKI




MULTI VOLT GREAT FEATURES

1 COMPATIBILITY

- ✓ One Battery Two Voltages (36V / 18V)
- ✓ Backward Compatible with HIKOKI 18V tools

The MV battery platform is compatible with both 36V and 18V tools, and it automatically changes between the two voltages according to the tool used. Having to use different batteries and chargers for different tools can be very cumbersome and inconvenient. MV users need only one battery to use both 18V and 36V tools, which saves all the hassle.

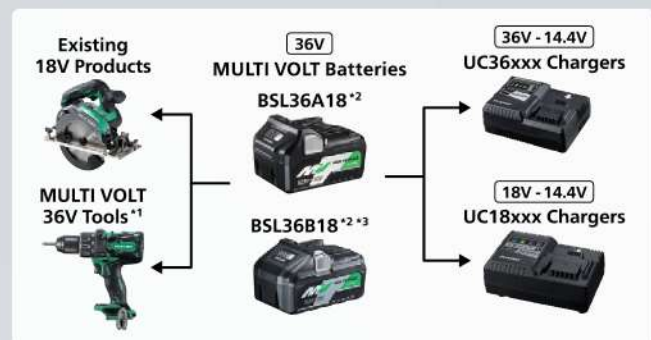

2 OUTSTANDING POWER

- ✓ 36V Nominal Voltage. Up to 41V after Charging.

The MULTI VOLT 36V battery platform boasts a high power output, with the maximum voltage reaching as high as 41V right after charging. The MULTI VOLT batteries deliver the power to increase productivity and efficiency.

3 ALL DAY RUNTIME

MULTI VOLT gives you the choice to operate MULTI VOLT tools either cordless with a MULTI VOLT 36V battery or corded with the MULTI VOLT AC Adapter. When a power outlet is available, you can choose to use the AC adapter for unlimited runtime.



4 GREAT PERFORMANCE IN COLD WEATHER

The MULTI VOLT batteries are guaranteed to work at a temperature as low as -10°C, providing you with peace of mind when you work in cold weather.



BSL36A18 / BSL36B18 MULTI VOLT Battery

Model	BSL36A18	BSL36B18
Voltage & Capacity	36V - 2.5Ah / 18V - 5.0Ah (dual voltage)	36V - 4.0Ah / 18V - 8.0Ah (dual voltage)
Cooling System	Yes	
Dimensions (L x H x W)	116 x 69 x 76mm	134 x 75 x 83mm
Charging Time	Approx. 32min. ^{*4} (when using the UC18YSL3 charger)	Approx. 52min. ^{*4} (when using the UC18YSL3 charger)
Compatible Products	18V 36V	Existing 18V slide-type tools ^{*3} MULTI VOLT 36V tools
Compatible Chargers	All chargers compatible with 14.4 - 36V slide-type Lithium-ion batteries	

BRUSHLESS

AC Brushless Motor series

Long-lasting efficiency.

The professional no longer has to worry about losing voltage and power when using an extension cord. Our AC Brushless Motor series feature electronic control that offers continuous and constant power output. This technology brings a whole new level of performance and durability to our heavy duty range of power tools. With the innovative AC Brushless Motor you'll experience more power and less energy consumption.

We have also eliminated some major wearing parts, which means a compact and lightweight power tool, less wear and tear and less maintenance. This also contributes to the fact that the motor lasts longer and operates far more efficiently than conventional brushed motors.



HIKOKI

UNLEASH the NEXT

ET36A AC/DC adapter

Specifications

Power Input	1,010W (120V:1,050W)
Operating Temperature Range	-10°C to 40°C
Tool Compatibility	36V MULTI VOLT tools
Weight:	
Adapter	0.8kg without cord
Box	1.2kg without cord

**CONVERTS ALL HIKOKI
36V CORDLESS MACHINES
INTO 230V CORDED**

Error Lamp

AC Cable

Box

DC Cable

Indicator Lamps

Adapter



Power Tools and Accessories



MULTI VOLT 36V + 18V LITHIUM-ION CORDLESS RANGE





HIKOKI
HIGH PERFORMANCE POWER TOOLS

International Range
"Not all models are available in SA"



18V



BSL 1860 (6.0Ah)*2 *3



BSL 1850C (5.0Ah)*2
BSL 1850 (5.0Ah)*2



BSL 1830C (3.0Ah)*2
BSL 1820M (2.0Ah)*2
BSL 1815 (1.5Ah)*2

SOLO - MACHINE ONLY
SET INCLUDES BATTERY + CHARGER

*1. Not compatible with some 18V tools.
*2. Not compatible with MULTI VOLT 36V tools.
*3. Discontinued battery.

NEW

DV 36DA

MULTI VOLT 36V Cordless Impact Driver Drill

MV
MULTI VOLT
Li-ion
BRUSHLESS
RFC
REACTIVE FORCE CONTROL

Features

- 30% faster drilling speed
- Feedback speed control for more stable handling
- Robust aluminium gear case
- 22-stage adjustable clutch
- Large double-molded clutch dial is easy to grip and read



DV36DA - LG - SET
DV36DA - W2 - SOLO

Specifications

Drill Chuck	1.5 - 13mm Keyless
Capacity: Brick	20mm
Mild Steel	16mm
Soft Wood	102mm
Wood Screw	12 x 100mm
Machine Screw	6mm
Battery Voltage	36V
No Load Speed: High	0 - 2,100/min
Low	0 - 500/min
Impact Rate: High	0 - 31,500/min
Low	0 - 7,500/min
Max Torque: Hard	138Nm
Soft	64Nm
Overall Length	204mm
Weight	2.7 - 3.0kg
Standard Accessories	2 Batteries BSL36A18 (2.5AH), Fast Charger (UC18YSL3), Side Handle, Driver Bit, Battery Cover, Carrying Case



NEW

DV 18DF

18V Cordless Impact Driver Drill

Li-ion

Features

- Powerful with a max torque of 55Nm
- High capacity battery with battery level Large indicator



DV18DF - WC - SET

Specifications

Drill Chuck	1.5 - 13mm Keyless
Capacity: Brick	13mm
Mild Steel	13mm
Soft Wood	38mm
Wood Screw	8 x 75mm
Machine Screw	6mm
Battery Voltage	18V
No Load Speed: High	0 - 1,400/min.
Low	0 - 350/min.
Impact Rate: High	0 - 19,600/min.
Low	0 - 4,900/min.
Max Torque: Hard	55Nm
Soft	23Nm
Overall Length	218mm
Weight	1.7 - 2.3kg
Standard Accessories	2 Batteries BSL1820M 1.5AH, Charger (UC18YKSL), Driver Bit, Battery Cover, Carrying Case



Cordless Impact Driver Drills

HiKOKI

HIGH PERFORMANCE POWER TOOLS

DV 18DD

18V Cordless Impact Driver Drill



DV18DD - WP - SET
DV18DD - W4 - SOLO

Li-ion
BRUSHLESS

Features

- Extremely compact and lightweight
- Fast and powerful with highly efficient brushless motor

Specifications

Capacity: Machine Screw	6mm
Wood Screw	6mm dia. x 75mm
Mild Steel (1.6mm thick)	13mm
Wood (18mm thick)	36mm
Brick	13mm
Torque: Hard	55Nm
Soft	26Nm
Chuck Capacity	2 to 13mm
No Load Speed: High	0 - 1,700/min
Low	0 - 440/min
Impact Rate: High	0 - 25,500/min
Low	0 - 6,600/min
Overall Length	170mm
Weight	1.3kg (with BSL1815 / BSL1830C) 1.4kg (with BSL1850C)
Standard Accessories	2 batteries BSL1830C 3AH, Charger U18YFSL Battery cover, carrying case



DV 18DBL2

18V Cordless Impact Driver Drill



DV18DBL2 - WJ - SET
DV18DBL2 - W4 - SOLO

Li-ion
BRUSHLESS
RFC

Features

- Feedback speed control for more stable handling
- Adjustable clutch: 22-stage torque
- Double-molded, large clutch dial
- Longer side handle
- Slim and soft grip handle

Specifications

Drill Chuck	1.5 - 13mm Keyless
Capacity: Brick	16mm
Mild Steel	13mm
Soft Wood	76mm
Wood Screw	10 x 90mm
Machine Screw	6mm
Battery: Voltage	18V
Power Output	90W for BSL1850 (5.0Ah) 54W for BSL1830 (3.0Ah) 45W for BSL1825 (2.5Ah)
No Load Speed: High	0 - 2,100/min
Low	0 - 500/min
Impact Rate: High	0 - 31,500/min
Low	0 - 7,500/min
Max Torque Hard	136Nm
Max Torque Soft	62Nm
Torque Setting	2 - 8Nm
Overall Length	204mm
Weight	2.5kg (with BSL1850)
Standard Accessories	2 batteries BSL1850 5AH, Charger UC18yFSL Side handle, driver bit, battery cover carrying case



DH 36DPA

MULTI VOLT 36V Cordless
Rotary Hammer



NEW
MULTI VOLT
Li-ion
BRUSHLESS
RFC
REACTIVE FORCE CONTROL

Features

- Faster drilling speed like an electric model
- Ergonomic design for improved handling
- Multiple bit-angle settings
- Compatible with optional dust extractor system

*IMAGES USED FOR
ILLUSTRATION PURPOSES

DH36DPA - WG - SET
DH36DPA - W2 - SOLO

Specifications

Capacity: Concrete
Steel
Wood

Bit Shank

Battery Voltage

No Load Speed

Impact Rate

Overall Length

Weight

Standard Accessories

28mm

13mm

32mm

SDS-plus

36V

0 - 1,100/min

0 - 4,300/min

351mm

3.9kg

2 Batteries BSL36A18 2.5AH,

Fast Charger (UC18YSL3),

Side Handle, Depth Gauge, Terminal Cover,

Battery Cover, Carrying Case



DH 36DPA FITTED WITH 402933

Optional Accessories for DH36DPA
Dust Extraction System



Code No.	Compatible with
402933	DH36DPA



Features

- Brush cap and nozzle seal mounted to minimize the escape of dust
- Auto stop function
- Drilling depth stop adjustable up to 85mm
- Detachable dust box allows easy dust disposal
- Delayed stop function ensures dust extraction through the hose
- Carrying case can store the hammer with the dust extraction system attached to it

DH 18DPB
18V Cordless
Rotary Hammer

NEW



DH18DPB - WP - SET
DH18DPB - W4 - SOLO

Li-ion
BRUSHLESS
RFC
REACTIVE FORCE CONTROL

Features

- Compact and lightweight pistol grip design
- 2 Step rotation speed
- Auto stop function
- LED light

Specifications

Capacity: Concrete
Steel
Wood

Bit Shank

Battery Voltage

Impact Energy

No Load Speed: Normal

Low

Full Load Impact Rate: Normal

Low

Overall Length

Weight

Standard Accessories

18mm

13mm

18mm

SDS-plus

18V

1.3J

0 - 1,080/min

0 - 800/min

0 - 5,500/min

0 - 4,100/min

235mm

2.0 - 2.6kg

2.1kg with BSL1830

2 Batteries BSL1830 3AH,

Charger UC18YFSL, Side Handle,

Depth Gauge, Battery Cover,

Carrying Case



NEW

DH 36DPE
MULTI VOLT 36V Cordless
Rotary Hammer



- Features
- Compact and lightweight pistol-grip design
 - Auto stop function
 - 2-step rotation speed
 - LED light
 - Optional dust extractor system

DV36DPE - WR - SET
DV36DPE - W2 - SOLO



Specifications
Dust Extractor System

Capacity: Concrete
Steel
Wood

Bit Shank
Battery Voltage

Impact Energy
No Load Speed: Normal
Low
Full Load Impact Rate: Normal
Low

Overall Length
Weight

Standard Accessories

Not Included
28mm
13mm
32mm
SDS-plus
36V
3.2J
0 - 950/min
0 - 700/min
0 - 4,300/min
0 - 3,170/min
368mm
3.6kg with BSL36A18

2 Batteries BSL36A18 2.5AH,
Fast Charger UC18YSL3,
Side Handle, Depth Gauge, Battery Cover, Carrying Case, Cap

Optional Accessories for DH36DPE
Dust Extraction System



Code No.	Carry Case
376971	Not included
376972	Included

Features

- Brush cap and nozzle seal mounted to minimize the escape of dust
- Auto stop function
- Drilling depth stop adjustable up to 85mm
- Detachable dust box allows easy dust disposal
- Delayed stop function ensures dust extraction through the hose
- Carrying case can store the hammer with the dust extraction system attached to it

NEW

WH 36DC
MULTI VOLT 36V
Cordless Impact Driver

MV **Li-ion BRUSHLESS**
TRIPLE HAMMER IP56

Features

- Compact head and lightweight design
- 5 tightening modes for various applications
- Triple LED lights for superior visibility

Specifications

Capacity: Small Screw	4 - 10mm
Ordinary Bolt	5 - 18mm
High Tension Bolt	5 - 14mm
Self Drilling Screw	φ3.5 - φ6mm
Drive	6.35mm
Max. Tightening Torque	215Nm
Battery Voltage	36V
No Load Speed: Soft Mode	0 - 900/min
Power Mode	0 - 3,400/min
Bolt Mode	0 - 2,900/min
Bolt Single Mode	0 - 2,900/min
Self Drilling Screw Mode	0 - 3,700/min
Impact Rate: Soft Mode	0 - 2,000/min
Power Mode	0 - 4,100/min
Bolt Mode	0 - 4,100/min
Bolt Single Mode	0 - 4,100/min
Self Drilling Screw Mode	0 - 2,200/min
Overall Head Length	114mm
Weight	1.6 - 1.9kg
Standard Accessories	2 Batteries BSL36A18 2.5AH, Fast Charger UC18YSL3, Battery Cover, Carrying Case

WH36DC - WH - SET
WH36DC - W4 - SOLO



WH 18DBDL2 18V Cordless Impact Driver

Li-ion
BRUSHLESS
TRIPLE
HAMMER
IP56

Features

- Triple Hammer mechanism reduces vibration and cam-out
- 4-step tightening mode selector
- Newly designed airflow system cools down the motor and hammer case for more durability
- Well-balanced weight distribution for better work efficiency
- Remaining battery indicator



WH18DBDL2 - WJ - SET
WH18DBDL2 - W4 - SOLO

Specifications

Capacity: Bolt	5 - 18mm
High Tension Bolt	5 - 14mm
Machine Screw	4 - 10mm
Self Drilling Screw	3.5 - 6mm
Drive	6.35mm Hex Bit Shank
Tightening Torque	207Nm
Battery Voltage	18V
No Load Speed:	
Power Mode	0 - 2,900/min
Normal Mode	0 - 2,900/min
Soft Mode	0 - 900/min
Self Drilling Screw Mode	0 - 2,900/min
Full Load Impact Rate:	
Power Mode	0 - 4,000/min
Normal Mode	0 - 4,000/min
Soft Mode	0 - 1,900/min
Self Drilling Screw Mode	0 - 2,100/min
Overall Length	127mm
Weight	1.4kg
Standard Accessories	2 Batteries BSL1850 5AH Charger UC18YFSL Battery Cover, Carrying Case



WH 18DA 18V Cordless Impact Driver

NEW

Li-ion

Features

- Compact and lightweight
- High capacity battery with battery level indicator



WH18DA - WC - SET
WH18DA - W4 - SOLO

Specifications

Capacity: Machine Screw	4 - 8mm
Bolt	M5 - M14
High Tension Bolt	M5 - M12
Tightening Torque	140Nm
Battery Voltage	18V
No Load Speed	0 - 2,700/min
Impact Rate	0 - 3,600/min
Overall Length	150mm
Weight	1.3 - 1.9kg
Standard Accessories	2 Batteries BSL1820 2.0(2AMP) CHARGER UC18YKSE CARRYING CASE



NEW

WR 36DE
MULTI VOLT 36V
Cordless Impact Wrench

MULTI VOLT
Li-ion
BRUSHLESS
IP56

Sq
12.7mm

Features

- 1,050Nm nut busting torque
- Compact and lightweight design
- Auto Stop Modes prevent over-tightening
- Smooth socket changes with a friction ring anvil

WR36DE - WR - SET
WR36DE - W2 - SOLO



1/2" DRIVE

Specifications

Capacity: Ordinary Bolt	M10 - M24
High Tension Bolt	M10 - M20
Squire Drive	12.7mm
Tightening Torque	770Nm
Battery Voltage	36V
No Load Speed: Mode 4	0 - 2,400/min
Mode 3	0 - 2,100/min
Mode 2	0 - 1,800/min
Mode 1	0 - 1,500/min
Impact Rate: Mode 4	0 - 3,400/min
Mode 3	0 - 3,000/min
Mode 2	0 - 2,600/min
Mode 1	0 - 2,200/min
Overall Length	169mm
Weight	2.6 - 2.9kg
Standard Accessories	2 Batteries BSL36A18 2.5AH Fast Charger (UC18YSL3), Carrying Case, Battery Cover



Electric (AC) Power in a Compact Design
with a Tightening Torque of 1,100Nm

WR 36DA MULTI VOLT 36V Cordless Impact Wrench

MV
MULTI VOLT
Li-ion
BRUSHLESS
IP56



Features

- 1,800Nm nut busting torque
- 4 step tightening mode selector for a variety of applications
- Smooth socket changes with a friction ring anvil

Specifications

Capacity: Bolt	M12 - M30
High Tension Bolt	M10 - M24
Squire Drive	19mm
Tightening Torque	1,100Nm
Battery Voltage	36V
No Load Speed:	
High Mode	0 - 1,500/min
Medium Mode	0 - 1,200/min
Low 2 Mode	0 - 900/min
Low 1 Mode	0 - 600/min
Impact Rate:	
High Mode	0 - 2,900/min
Medium Mode	0 - 2,300/min
Low 2 Mode	0 - 1,800/min
Low 1 Mode	0 - 1,200/min
Overall Length	221mm
Weight	3.7 - 4.0kg
Standard Accessories	2 Batteries BSL36A18 2.5AH Fast Charger (UC18YSL3), Battery Cover, Carrying Case



WR36DA - WR - SET
WR36DA - W2 - SOLO

3/4" // DRIVE



WR 36DB MULTI VOLT 36V Cordless Impact Wrench

MV
MULTI VOLT
Li-ion
BRUSHLESS
IP56



Features

- 1,650Nm nut busting torque
- Tightening mode selector for a variety of applications
- Smooth socket changes with a friction ring anvil



WR36DB - WR- SET
WR36DB - W2 - SOLO

1/2" // DRIVE

Specifications

Capacity: Bolt	M12 - M30
High Tension Bolt	M10 - M24
Squire Drive	12.7mm
Tightening Torque	1,050Nm
Battery Voltage	36V
No Load Speed:	
High Mode	0 - 1,500/min
Medium Mode	0 - 1,200/min
Low 2 Mode	0 - 900/min
Low 1 Mode	0 - 600/min
Impact Rate:	
High Mode	0 - 2,800/min
Medium Mode	0 - 2,300/min
Low 2 Mode	0 - 1,800/min
Low 1 Mode	0 - 1,200/min
Overall Length	221mm
Weight	3.7 - 4.0kg
Standard Accessories	2 Batteries BSL36A18 2.5AH, Fast Charger UC18YSL3, Battery Cover, Carrying Case





WR 18DBDL2
18V Cordless Impact Wrench

Li-ion
BRUSHLESS
IP56



12.7mm

Features

- Tightening mode selector for a variety of applications
- Smooth socket changes with a friction ring anvil
- Smooth control electronic switch
- Remaining battery indicator



WR18DBDL2 - WJ - SET
WR18DBDL2 - WA - SOLO

Specifications

Capacity: Bolt	M10 - M20
High Tension Bolt	M10 - M16
Squire Drive	12.7mm
Tightening Torque	305Nm
Battery Voltage	18V
No Load Speed:	
High Mode	0 - 2,700/min
Medium Mode	0 - 2,000/min
Low Mode	0 - 1,000/min
Single Mode	0 - 2,700/min
Full Load Impact Rate	0 - 3,600/min
Overall Length	145mm
Weight	1.5 - 2.1kg
Standard Accessories	2 Batteries BSL1830 3AH Charger UC18YFSL Battery Cover, Carrying Case



1/2" DRIVE

NEW

G 3623DA
MULTI VOLT 36V
Disc Grinder

G3623DA - WG - SET
G3623DA - W4 - SOLO

MV
MULTI VOLT

Li-ion
BRUSHLESS

Features

- Brake system for safety
- Lightweight at 4.9kg
- Auto Mode adjusts the speed automatically depending on the load
- Over-load protection
- Anti-restart protection
- Soft start
- Lock-on/off trigger switch
- Dust and water resistant construction



Specifications

Capacity: Wheel Diameter	230mm
Hole Diameter	22.23mm
Spindle Thread	M14 x 2
Battery Voltage	36V
No Load Speed:	5,300/min
	3,200/min (AUTO Mode)
Overall Length	531mm
Weight	4.9kg with BSL36B18
Standard Accessories	2 Batteries BSL36B18 4AH Fast Charger UC18YSL3, Carrying Case, Battery Cover, Side Handle and Wrench



G 18DSL2

18V Cordless Disc Grinder



Li-ion

Features

- High overload durability
- Lightweight for easy operation
- Compact body and small grip perimeter (182mm)

G18DSL2 - KL - SET G18DSL2 - NK - SOLO

Specifications

Capacity: Wheel Dia.	100 / 115 / 125mm
Hole Dia.	16mm / 22.23mm / 22.23mm
Spindle Thread	M10 x 1.5 / M14 x 2 / M14 x 2
Voltage	18V
No Load Speed	9,000/min
Overall Length	306mm
Weight	1.8kg with BSL1830C
Standard Accessories	2 Batteries BSL1830C 3AH, Charger U18YFSL, Depressed Center Wheel, Side Handle, Wrench, Battery Cover



G 3613DA

MULTI VOLT 36V Cordless
Disc Grinder with Slide Switch



MV
MULTI VOLT
Li-ion
BRUSHLESS

Features

- 1,270W max output
- 146mm grip circumference
- Auto Mode adjusts the speed automatically between high and low speeds depending on the load
- Electronic brake stops the wheel in less than 2 seconds
- Kickback protection system
- Anti-restart protection

G3613DA - WG - SET CR3613DA - W4 - SOLO

Specifications

Capacity: Wheel Dia.	125mm
Hole Dia.	22.23mm
Spindle Thread	M14 x 2
Voltage	36V
No Load Speed:	
Transmission Mode	3,000 - 9,500/min
AUTO Mode	5,500/min
Overall Length	358mm
Weight	2.8kg
Standard Accessories	2 Batteries BSL36A18, Charger UC18YSL3, Depressed Center Wheel (125mm dia.), Side Handle, Wrench, Hex Bar Wrench, 2 Battery Covers, Carrying Case



G 3613DB

MULTI VOLT 36V Cordless
Disc Grinder with Paddle Switch



MV
MULTI VOLT
Li-ion
BRUSHLESS

Features

- 1,270W max output
- 146mm grip circumference
- Auto Mode adjusts the speed automatically between high and low speeds depending on the load
- Electronic brake stops the wheel in less than 2 seconds
- Kickback protection system
- Anti-restart protection

G3613DB - WR - SET G3613DB - W2 - SOLO

Specifications

Capacity: Wheel Dia.	125mm
Hole Dia.	22.23mm
Spindle Thread	M14 x 2
Battery Voltage	36V
No Load Speed:	
Transmission Mode	3,000 - 9,500/min
AUTO Mode	5,500/min
Overall Length	358mm
Weight	2.8kg
Standard Accessories	2 Batteries BSL36A18 2.5AH, Fast Charger UC18YSL3 Depressed Center Wheel (125mm dia.), Side Handle, Wrench, Hex Bar Wrench, 2 Battery Covers, Carrying Case





C 3606DA

MULTI VOLT 36V Cordless Circular Saw

MV
MULTI VOLT
Li-ion
BRUSHLESS

Features

- Faster cutting speed
- More overload capacity
- Flat motor housing design increases stability when changing blades
- Silent Mode improves motor efficiency and results in approx. 5dB less noise than Power Mode
- Overload protection
- Cutting depth adjustment system
- Parallelism adjustment system
- -5° bevel setting
- Rear saw dust exhaust (connectable to a dust extractor)



C3606DA - WR - SET C3606DA - W2 - SOLO

Specifications

Capacity: Blade Dia.	165mm
Max Cut Depth :90°	66mm
45°	45mm
-5°	57mm

Voltage	36V
No Load Speed:Power Mode	4,300/min
Silent Mode	2,000/min

Overall Length	292mm
Weight	3.5kg

Standard Accessories

2 Batteries BSL36A18 2.5AH,
Fast Charger UC18YSL3
Blade, Wrench, Guide
Battery Cover, Carrying Case



C 18DSL

18V Cordless Circular Saw



Li-ion

Features

- Suitable for cutting a 2 x 4 piece
- Fine cutting adjustment at 90° by screw
- Magnesium saw cover

C18DSL (LL) - SET C18DSL (LN1) - SOLO

Specifications

Capacity: Blade Dia.	165mm
Max Cut Depth :90°	57mm
45°	40mm

Voltage	18V
No Load Speed	3,400/min
Overall Length	365mm
Weight*1	3.1 - 3.7kg

Standard Accessories*

2 Batteries BSL1830 3AH
Charger UC18YFSL,
Blade, Wrench, Guide,
Carrying Case



C 3610DRA

255mm MULTI VOLT 36V Cordless
Slide Compound Miter Saw

CR3610DRA- SOLO

Double Barrel

MULTI VOLT *Li-ion BRUSHLESS*

Features

- Accepts ET36A AC/DC Adapter for continuous operation
- Compact slide system
- Laser Marker: Guide system on cut line
- LED light



- Do not stare into LASER beam.

Specifications

Blade Dia	255mm
Capacity (H x W):	
0°(Right Angle): with anchor plate	89 x 292mm
without anchor plate	64 x 318mm
Miter Left/Right 45°: with anchor plate	89 x 204mm
without anchor plate	64 x 222mm
Bevel Left 45°: with anchor plate	45 x 292mm
without anchor plate	41 x 318mm
Bevel Right 45°: with anchor plate	25 x 292mm
without anchor plate	19 x 318mm
Miter Left/Right 45°+ Bevel Left 45°:	
with anchor plate	45 x 204mm
without anchor plate	41 x 222mm
Miter Left/Right 45°+ Bevel Right 45°:	
with anchor plate	25 x 204mm
without anchor plate	19 x 222mm
Voltage	36V
No Load Speed	4,000/min
Miter Angle:	Right: 0 - 60° Left: 0 - 55°
Bevel Angle:	Right: 0 - 48° Left: 0 - 48°
Positive Miter Angle Stop	0, Right and Left 15°, 22.5°, 31.6°, 45°
Dimensions	778 x 792 x 686mm
Weight*	20.6kg
Standard Accessories	Blade, Dust Bag, Vise Ass'y, Wrench, Support Rod Ass'y, Screws



ET36A

AC/DC adapter

Specifications

Power Input	1,010W (120V:1,050W)
Operating Temperature Range	-10°C to 40°C
Tool Compatibility	36V MULTI VOLT tools
Weight:	
Adapter	0.8kg without cord
Box	1.2kg without cord



CJ 36DA

MULTI VOLT 36V
Cordless Jig Saw

MV
MULTI VOLT
Li-ion
BRUSHLESS

Features

- Highest cutting performance in its class
- High thrust force and low vibration enable smooth cutting under heavy load
- Auto Mode: Low speed at startup makes it easy to align the blade with the cut line
- On-lock switch
- Tool-less blade change
- LED light
- Blower function
- 4-stage orbital operation



CJ36DA - WR - SET CJ36DA - W2 - SOLO

Specifications

Capacity: Wood	160mm
Mild Steel	10mm
Min. Cutting Radius	25mm
Max Cutting Angle	45° Right / Left
Voltage	36V
Stroke	26mm
No-Load Speed	800 - 3,500/min
Overall Length	277mm
Weight	2.7kg (with BSL36A18)

Standard Accessories

2 Batteries BSL36A18 2.5AH,
Fast Charger UC18YSL3
Blade, Splinter Guard, Chip Cover,
2 Battery Covers, Carrying Case



CJ 36DB

MULTI VOLT 36V
Cordless Jig Saw

MV
MULTI VOLT
Li-ion
BRUSHLESS

Features

- Highest cutting performance in its class*1
- High thrust force and low vibration*2 enable smooth cutting under heavy load
- Auto Mode: Low speed at startup makes it easy to align the blade with the cut line
- Switch on both sides
- LED light On/Off switch
- Tool-less blade change
- Blower function
- 4-stage orbital operation



CJ36DB - WR - SET CJ36DB - W2 - SOLO

Specifications

Capacity: Wood	160mm
Mild Steel	10mm
Min. Cutting Radius	25mm
Max Cutting Angle	45° Right / Left
Voltage	36V
Stroke	26mm
No-Load Speed	800 - 3,500/min
Overall Length	298mm
Weight	2.7kg with BSL36A18

Standard Accessories

2 Batteries BSL36A18 2.5AH,
Fast Charger UC18YSL3
Blade, Splinter Guard, Chip Cover,
2 Battery Covers, Carrying Case



CR 36DA
MULTI VOLT 36V Cordless
Reciprocating Saw

MULTI VOLT Li-ion BRUSHLESS

**Electric (AC) Speed with
Approx. 50% Less*¹ Vibration**

CR36DA - WA - SET
CR36DA (L1) - SOLO

Features

- Orbital Mode for maximum wood cutting efficiency: approx. 194% faster cutting speed
- HiKOKI Twin-counterweight System for significant vibration reduction
- Four-mode speed control for a variety of applications LED light
- Tool-less blade change
- Tool-less shoe adjustment
- Durable cylindrical housing
- Large pivoting hook



Specifications

Capacity: Mild Steel Pipe	130mm
Vinyl Chloride Pipe	130mm
Wood	300mm
Mild Steel Plate	19mm
Voltage	36V
Length of Stroke	32mm
No Load Speed	0 - 3,000/min
Overall Length	457mm
Weight	4.5kg (with BSL36A18)
Dimensions	
Weight	20.6kg
Standard Accessories	2 Batteries BSL36A18 2.5AH, Fast Charger UC18YSL3, Blade, Battery Cover, Carrying Case



CR 18DSL
18V Cordless
Reciprocating Saw



CR18DSL (L1) - SET
CR18DSL (L4) - SOLO

Specifications

Capacity: Pipe	90mm
Steel Plate	10mm
Wood	90mm
Battery Voltage	18V
Length of Stroke	28mm
No Load Speed	0 - 2,100/min
Overall Length	434mm
Weight	3.3kg
Standard Accessories	2 Batteries BSL1830 3AH, Charger UC18YFSL, Blade, Wrench, Carrying Case



Li-ion

Features

- Tool-less blade change provides quick and easy blade change
- Soft grip handle
- Remaining battery indicator lamp

NEW

RB 18DC 18V Cordless Blower

RB18DC - SOLO



Li-ion

Features

- 3 air volume settings allow the user to control the volume with ease to suit the application
- Lock-on button for continuous use
- Low vibration ensures less fatigue and comfort for the user
- Can be used as a vacuum with an optional dust bag
- Compatible with 14.4 Lithium-ion Batteries

Specifications

Voltage	18V
Air Volume Flow (without Nozzle)	0 - 3.5m³/min
Maximum Air Velocity (with Nozzle)	95m/s
Average Air Velocity (with Nozzle)	78m/s
Overall Length	490mm (with BSL36A18)
Weight	1.8kg (with BSL36A18) 2.1kg (with BSL36B18)
Standard Accessories	Nozzle



P 18DSL 18V Cordless Planer



Li-ion

Features

- Rebating depth: 9mm
- Built-in stand to prevent the blade damaging workpieces
- Remaining battery indicator lamp
- Optional adaptor to connect an optional dust bag or elbow

P18DSL (LL) - SET P18DSL (L4) - SOLO

Specifications

Capacity: Cutting Width	82mm
Max Cutting Depth	2mm
Battery Voltage	18V
No Load Speed	16,000/min
Overall Length	326mm (with BSL1830)
Weight	3.3kg (with BSL1850) 3.7kg (with BSL36B18)
Standard Accessories	2 Batteries BSL1830 3AH Charger UC18YFSL 2 Blades, Blade Setting Gauge, Guide (with set screw), Wrench, Gauge, Guide Battery Cover, Carrying Case

NEW

M 3612DA
MULTI VOLT 36V Cordless
Router

**WORLD'S 1ST
CORDLESS PLUNGE ROUTER**

M3612DA - WK - SET
M3612DA - W2 - SOLO



MV
MULTI VOLT
Li-ion
BRUSHLESS

Features

- Compact and lightweight
- Easy to access lock-on switch on a handle
- Locking lever for easier and more precise depth adjustment
- Spindle lock for easy bit change
- Speed control dial
- Dust collection adapter set
- Dual LED lights

Specifications

Collet Chuck Capacity	12, 8, 6mm or 1/2", 1/4"
Main Body Stroke	50mm
Battery Voltage	36V
No Load Speed	11,000 - 25,000/min
Dimensions (L x W x H)	148 x 275 x 280 mm (with BSL36A18)
Weight (with Dust Collector)	3.8kg (with BSL36A18)

Standard Accessories

2 Batteries BSL36A18 2.5AH,
Fast Charger UC18YSL3,
Collet Chucks, Chuck Sleeve,
Template Guide, Wrench,
Straight Guide Ass'y, Dust
Collection Adapter Set,
Battery Cover, Carrying Case



NEW

M 1808DA

18V Cordless Laminate Trimmer

M1808DA - WK - SET

M1808DA - WA - SOLO



Li-ion BRUSHLESS

Features

- One-handed power on/off
- Lightweight design
- Variable speed control dial
- Quick release lever for base adjustment
- Spindle lock for easy bit change
- Dust collection adapter set
- Dual LED lights

Specifications

Collet Cone Capacity	8 and 6mm or 1/4"
Main Body Stroke	40mm
Battery Voltage	18V
No Load Speed	10,000 – 30,000/min
Dimensions (L x D x H)	109 x 100 x 229mm (with BSL1850C)

Weight
(with Dust Collection Adapter Set)
Standard Accessories

1.7kg (with BSL1850C)

2 Batteries BSL1850C 5AH,
Fast Charger UC18YSL3, Collet
Cone, Trimmer Guide Set,
Template Guide, Dust
Collection Adapter Set,
Straight Guide Set, Wrench,
Battery Cover, Carrying Case



CS 3630DA MULTI VOLT 36V Cordless Chain Saw



Features

- Approx. 190 cuts per charge
- Oil sight glass (transparent oil tank window) with backlight to easily check the amount of remaining oil
- LED illuminates cutting area in dark conditions
- Toolless chain adjuster for easy chain adjustment
- Ergonomic shaped front handle and soft-grip rear handle for comfortable cutting in any working position



* PICTURE FOR ILLUSTRATION PURPOSES ONLY



Specifications

Battery Voltage	36V
Guide Bar Length	300mm
Chain Speed	8.3m/s
Type of Guide Bar	Sprocket Nose
Chain Pitch	3/8"
Chain Gauge	0.05"
Overall Length	599mm
Weight	4.3kg (with BSL36A18)
Standard Accessories	1 Battery BSL36A18 2.5AH, Fast Charger(UC18YSL3), Chain Cover, Chain Oil, Wrench, Battery Cover



BSL 1815 18V Li-ion Battery Slide Lithium-ion Battery



Features

- Compatible with all our 18V rapid chargers



Specifications

Voltage & Capacity	18V - 1.5Ah
Cooling System	Yes
Dimensions (L x H x W)	110 x 50 x 80mm
Weight	380g
Compatible Products	Existing 18V slide-type tools
Compatible Chargers	All chargers for 14.4V - 36V slide-type Lithium-ion batteries

* The actual charging time can be longer depending on the surrounding temperature and battery condition.

BSL 1830 18V Li-ion Battery Slide Lithium-ion Battery



Features

- Compact and lightweight (25% smaller and 42% lighter than BSL1830)
- Battery capacity the same as BSL1830
- Compatible with all our 18V rapid chargers



Specifications

Voltage & Capacity	18V - 3.0Ah
Cooling System	Yes
Dimensions (L x H x W)	116 x 49 x 74mm
Weight	380g
Compatible Products	Existing 18V slide-type tools
Compatible Chargers	All chargers for 14.4V - 36V slide-type Lithium-ion batteries

* The actual charging time can be longer depending on the surrounding temperature and battery condition.

BSL 1850

18V Li-ion Battery
Slide Lithium-ion Battery

Li-ion

Features

- Compact and lightweight (15% smaller and lighter than BSL1850)
- 720W high output (as powerful as BSL1850)
- Compatible with all our 18V rapid chargers



Specifications

Voltage & Capacity	18V - Typ 5.0Ah (Rate: 4.9)
Cooling System	Yes
Dimensions (L x H x W)	97 x 71 x 76mm
Weight	550g
Compatible Products 18V	Existing 18V slide-type tools*2
Compatible Chargers	All chargers*3 for 14.4V - 36V slide-type Lithium-ion batteries

*1. The actual charging time can be longer depending on the surrounding temperature and battery condition.

*2. Except for the following models: C 18DBL, C 18DSL2, C 18DYSL, C 18DY8L, CD 18DBL, CD 18DSL, UL 18DSL, C 18DBAL (Hitachi Brand only).

*3. Except for UC36YRSL.

BSL 36A18

36V / 18V MULTI VOLT
Slide Lithium-ion Battery



Features

- 1,080W high power output
- Automatic voltage change between 36V 2.5Ah and 18V 5.0Ah depending on the tool's voltage
- Remaining battery indicator
- Full compatibility with the existing 18V slide range and 14.4V-36V slide battery chargers



Specifications

Voltage & Capacity	36V - 2.5Ah / 18V - 5.0Ah
Cooling System	Yes
Dimensions (LxHxW)	116 x 69 x 76mm
Charging Time	Approx. 32 min* (when using the UC18YSL3)
Compatible Products: 18V	All existing 18V slide-type tools
36V	MULTI VOLT 36V tools
Compatible Chargers	All chargers for 14.4V - 36V slide-type Lithium-ion batteries

* The actual charging time can be longer depending on the surrounding temperature and battery condition.

BSL 36B18

36V / 18V MULTI VOLT
Slide Lithium-ion Battery



Features

- 1,440W high power output
- Automatic voltage change between 36V 4.0Ah and 18V 8.0Ah depending on the tool's voltage
- Remaining battery indicator
- Compatible with the existing 18V slide range*1 and 14.4V-36V slide battery chargers*2



Specifications

Voltage & Capacity	36V - 4.0Ah / 18V - 8.0Ah
Cooling System	Yes
Dimensions (LxHxW)	134 x 75 x 83mm
Charging Time	Approx. 52 min*2 (when using the UC18YSL3)
Compatible Products: 18V	Existing 18V slide-type tools*1
36V	MULTI VOLT 36V tools
Compatible Chargers	All chargers*2 for 14.4V - 36V slide-type Lithium-ion batteries

*1. Except the following models: AW18DBL/C18DBL/R18DSAL/UF18DSL/UF18DSAL/UR18DSL/UR18DSAL/UR18DSL/UR18DSML

*2. Except UC36YRSL.

*3. The actual charging time can be longer depending on the surrounding temperature and battery condition.

MULTI VOLT Batteries

BSL36A18*2



BSL36B18*2*3



MULTI VOLT 36V Tools*1

Existing 18V Products

36-14.4V
UC36xxx Chargers



18-14.4V
UC18xxx Chargers



UC 18YFSL 14.4V / 18V Charger

Li-ion

Features

- Rapid charging

Specifications

Charging Voltage	14.4V and 18V
Battery: Type	Slide
Assortment	Lithium-ion
Fan cooling	Yes



UC 18YSL3 14.4V / 18V Charger

Li-ion

Features

- Compatible with engine generators low-temperature charge (From -10°)
- High visibility large charge indicator, lamp & full-color LED lights
- USB port (5V, 2A)

Specifications

Charging Voltage	14.4 and 18V
Battery : Type	Slide
Assortment	Lithium-ion
Fan cooling	Yes





DV 13VST

13mm Impact Drill + 28 Piece Kit



Features

- Soft grip for easier handling



Specifications

Drill Chuck
Capacity: Concrete
Steel
Wood
Power Input
No Load Speed
Full Load Impact Rate
Overall Length
Weight
Standard Accessories

374185 (220V - 240V)

1.5 - 13mm Keyed
13mm
13mm
25mm
550W
0 - 3,000/min
48,000/min
295mm
1.8kg
Side Handle, Depth Stopper, Accessory Kit

DV 13SS

13mm Impact Drill



Features

- Cylindrical housing for durability
- Offset of chuck: 28mm



Specifications

Drill Chuck
Capacity: Concrete
Steel
Wood
Power Input
No Load Speed
Full Load Impact Rate
Overall Length
Weight
Standard Accessories

1.5 - 13mm Keyed
13mm
13mm
20mm
550W
2,900/min
29,000/min
270mm
1.4kg
Chuck Wrench

DV 13VSS

13mm Impact Drill



Features

- Cylindrical housing for durability
- Offset of chuck: 28mm

DV13VSS with keyless chuck



Specifications

Drill Chuck
Capacity: Concrete
Steel
Wood
Power Input
No Load Speed
Full Load Impact Rate
Overall Length
Weight
Standard Accessories

1.5 - 13mm Keyed / Keyless
13mm
13mm
20mm
550W
0 - 2,900/min
29,000/min
270mm
1.4kg
-

DV 18V

18mm Impact Drill Impact Drill



Features

- Offset of chuck: 23.5mm
- Soft grip handle

DV18V with keyless chuck



Specifications

Drill Chuck
Capacity: Concrete
Steel
Power Input
No Load Speed
Full Load Impact Rate
Overall Length
Weight
Standard Accessories

1.5 - 13mm Keyed / Keyless
Hi: 13mm Low: 18mm
Hi: 8mm Low: 13mm
690W
Hi: 0 - 3,000/min Low: 0 - 1,000/min
Hi: 27,300/min Low: 8,400/min
333mm
2.0kg
Side Handle, Depth Gauge,
Chuck Wrench, Carrying Case

999041

DV 20VB2

Impact Drill



Features

- Offset of chuck: 23.5mm
- Soft grip handle
- Slip clutch for some areas

DV20VB2 with keyless chuck



Specifications

Drill Chuck
Capacity: Concrete
Steel
Power Input
No Load Speed
Full Load Impact Rate
Overall Length
Weight
Standard Accessories

1.5 - 13mm Keyed / Keyless
Hi: 13mm Low: 20mm
Hi: 8mm Low: 13mm
790W
Hi: 0 - 3,000/min Lo: 0 - 1,000/min
Hi: 26,000/min Lo: 8,000/min
333mm
2.2kg
Side Handle, Depth Gauge,
Carrying Case, Chuck Wrench

999041

DV 20VD

Impact Drill



RHB
ALUMINUM BRUSH MOTOR

Features

- Carbon brush rotation system extends carbon brush lifetime
- Slide-type mode change lever
- Double-molded side handle
- Soft grip handle

DV20VD with keyless chuck



Specifications

Drill Chuck
Capacity: Concrete
Steel
Wood
Power Input
No Load Speed
Full Load Impact Rate
Overall Length
Weight*2
Standard Accessories

1.5 - 13mm Keyed / Keyless
Hi: 13mm Low: 20mm
Hi: 8mm Low: 13mm
Hi: 25mm Low: 40mm
860W
Hi: 0 - 3,000/min Low: 0 - 1,100/min
Hi: 22,000/min Low: 8,100/min
365mm (with Keyed Chuck)
363mm (with Keyless Chuck)
3.0kg
Chuck Wrench (Spec. only for keyed
chuck), Side Handle, Depth Gauge,
Carrying Case

*1. The DV20VD may not be equipped with slip clutch.

DV 22V Impact Drill



FHB
AL. 100% HIKOKI POWER TOOL

Features

- Carbon brush rotation system extends carbon brush lifetime
- Slide-type mode change lever
- Double-molded side handle
- Soft grip handle

DV22V with keyless chuck

*PICTURE FOR ILLUSTRATION PURPOSES ONLY

Specifications

Drill Chuck

Capacity: Concrete
Steel
Wood

Power Input

No Load Speed

Full Load Impact Rate

Overall Length

Weight*

Standard Accessories

1.5 - 13mm Keyed / Keyless

Hi: 13mm Low: 22mm

Hi: 8mm Low: 16mm

Hi: 25mm Low: 40mm

1,120W

Hi: 0 - 3,000/min Low: 0 - 1,100/min

Hi: 22,000/min Low: 8,100/min

365mm (with Keyed Chuck)

363mm (with Keyless Chuck)

3.0kg

Chuck Wrench (Spec. only for keyed chuck), Side Handle, Depth Gauge, Carrying Case



DH 26PC2

26mm Rotary Hammer
3.2 Jules
3 Mode



Features

- Highest drilling speed in its class
- Compact body for better handling
- 3-mode action: Rotation and Hammering mode, Rotation only mode and Hammering only mode
- Labyrinth ventilation windows
- Large change lever
- Elastomer-covered side handle

Specifications

Capacity:	
Concrete: Drill Bit	26mm
Core Bit	50mm
Mild Steel	13mm
Wood	32mm
Power Input	830W
Bit Shank	SDS-plus
No Load Speed	0 - 1,100/min
Full Load Impact Rate	0 - 4,300/min
Overall Length	349mm
Weight	2.8kg
Standard Accessories	Side Handle, Depth Gauge, Carrying Case



*1. As of July 2019. Among 26mm rotary hammers made by leading power tool manufacturers. (Survey by Koki Holdings)
*2. Vs. the existing model DH26PC.

999041

DH 26PB2

26mm Rotary Hammer
3.4 Jules
2 Mode



Features

- Highest drilling speed in its class
- Compact body for better handling
- 2-mode action: Rotation and Hammering mode and Rotation only mode
- Labyrinth ventilation windows
- Large change lever
- Elastomer-covered side handle

Specifications

Capacity:	
Concrete: Drill Bit	26mm
Core Bit	50mm
Mild Steel	13mm
Wood	32mm
Power Input	830W
Bit Shank	SDS-plus
No Load Speed	0 - 1,100/min
Full Load Impact Rate	0 - 4,300/min
Overall Length	349mm
Weight	2.8kg
Standard Accessories	Side Handle, Depth Gauge, Carrying Case



*1. As of July 2019. Among 26mm rotary hammers made by leading power tool manufacturers. (Survey by Koki Holdings)
*2. Vs. the existing model DH26PB.

999041

DH 28PCY2

28mm Rotary Hammer
3.4 Jules
3 mode



UVP
ULTRA VIBRATION PROTECTION

Features

- Lowest vibration in its class*1 through the UVP system using a dynamic damper
- Compact body*2 for better handling
- 3-mode action: Rotation and Hammering mode, Rotation only mode and Hammering only mode
- Labyrinth ventilation windows
- Large change lever
- Elastomer-covered side handle

Specifications

Capacity:	
Concrete: Drill Bit	28mm
Core Bit	50mm
Mild Steel	13mm
Wood	32mm
Power Input	850W
Bit Shank	SDS-plus
No Load Speed	0 - 1,100/min
Full Load Impact Rate	0 - 4,300/min
Overall Length	360mm
Weight	3.0kg
Standard Accessories	Side Handle, Depth Gauge, Carrying Case



*1. As of July 2019. Among 28mm rotary hammers excluding the DH28PEC made by leading power tool manufacturers. (Survey by Koki Holdings)
*2. Vs. the existing model DH28PCY.

999041

DH 28PBY2

28mm Rotary Hammer
3.4 Jules
2 Mode



UVP
ULTRA VIBRATION PROTECTION

Features

- Lowest vibration in its class through the UVP system using a dynamic damper
- Compact body for better handling
- 2-mode action: Rotation and Hammering mode and Rotation only mode
- Labyrinth ventilation windows
- Large change lever
- Elastomer-covered side handle

Specifications

Capacity:	
Concrete: Drill Bit	28mm
Core Bit	50mm
Mild Steel	13mm
Wood	32mm
Power Input	850W
Bit Shank	SDS-plus
No Load Speed	0 - 1,100/min
Full Load Impact Rate	0 - 4,300/min
Overall Length	360mm
Weight	3.0kg
Standard Accessories	Side Handle, Depth Gauge, Carrying Case



*1 As of July 2019. Among 28mm rotary hammers excluding the DH28PEC made by leading power tool manufacturers. (Survey by Koki Holdings)
*2 Vs. the existing model DH28PBY.

999041

DH 40MC

40mm Rotary Hammer
8.5 Jules



Features

- Large change lever for easy mode switching
- Large trigger switch for easy grip and control
- Multiple bit angle settings
- Main and side handles with soft grip offer less fatigue

Specifications

Capacity:	
Drill Bit	40mm
Core Bit	105mm
Power Input	1,100W
Bit Shank	SDS max
No Load Speed	620/min
Full Load Impact Rate	2,800/min
Overall Length	448mm
Weight	7.1kg
Standard Accessories	Side Handle, Stopper, Hammer Grease A, Carrying Case



999073
AUTO STOP

DH 45ME

45mm Rotary Hammer
13.5 Jules



if DESIGN AWARD 2016
BRUSHLESS
FHB
LVH

Features

- Maintains the speed and performance even at voltage drop
- Compatible with engine generators
- Power lamp lights up when the plug is inserted into an outlet
- Large mode change lever
- Large trigger switch
- Continuous operation function

Specifications

Capacity in Concrete:	
Drill Bit	45mm
Core Bit	125mm
Power Input	1,500W
Bit Shank	SDS max
No Load Speed:	
110V, 120V, 127V	120 - 270/min
220V, 230V, 240V	120 - 310/min
Full Load Impact Rate:	
110V, 120V, 127V	1,200 - 2,500/min
220V, 230V, 240V	1,200 - 2,950/min
Overall Length	535mm
Weight	9.0kg
Standard Accessories	Side Handle, Stopper, Hammer Grease A, Carrying Case



H 41MB2

Demolition Hammer



LVH
LOW VIBRATION HANDLE

Features

- Approx. 29% higher demolition performance
- Lightweight for less fatigue
- Resin cylinder case cover
- Multiple bit-angle settings



Specifications

Power Input	950W
Full Load Impact Rate	3,000/min
Bit Shank	SDS max
Overall Length	427mm
Weight	5.2kg
Standard Accessories	Side Handle, Carrying Case, Bull Point

999108

*1. Vs. the previous model H41MB.

H 45ME

Demolition Hammer

13.5 Jules



BRUSHLESS
FHB
ALUMINUM HOUSING BODY
LVH
LOW VIBRATION HANDLE

Features

- Maintains the speed and performance even at voltage drop
- Compatible with engine generators
- Power lamp lights up when the plug is inserted into an outlet
- One push action for quick bit mounting
- Tool bit angle adjustment
- Large trigger switch



Specifications

Power Input	1,150W
Full Load Impact Rate	1,430 - 2,850/min
Bit Shank	SDS max
Overall Length	480mm
Weight	7.0kg
Standard Accessories	Bull Point, Side Handle, Carrying Case

H 60MC

Demolition Hammer

22.5 Jules



999074
AUTO STOP

Features

- Easy to change tool by single-step holder
- Variable lock mechanism to adjust tool at 12-step angle
- Functional and robust design

Specifications

Power Input	1,250W
Full Load Impact Rate	1,600/min
Bit Shank	SDS max
Overall Length	570mm
Weight	10.2kg
Standard Accessories	Side Handle, Carrying Case, Bull Point(For Europe only)

H 60MEY

Demolition Hammer
22.6 Jules



BRUSHLESS
FHB
LVP
USER VIBRATION PROTECTION

Features

- Compatible with engine generators
- Power lamp lights up when the plug is inserted into an outlet
- One push action for quick bit mounting
- Tool bit angle adjustment
- Large trigger switch

Specifications

Power Input	1,500W
Full Load Impact Rate	1,500 - 2,100/min
Bit Shank	SDS max
Overall Length	585mm
Weight	12.2kg
Standard Accessories	Bull Point, Side Handle, Carrying Case



H 65SC

Demolition Hammer
39.5 Jules



Features

- Double-insulated construction with sturdy aluminum frame
- Auto-stop carbon brush

Specifications

Power Input	1,240W
Full Load Impact Rate	1,400/min
Bit Shank	30mm Hexagon
Overall Length	647mm
Weight	15.0kg
Standard Accessories	Bull Point, Side Handle, Wrenches, Oil Feeder, Carrying Case



999086
AUTO STOP



Corded Demolition Hammers

HiKOKI
HIGH PERFORMANCE POWER TOOLS

H 90SG

Demolition Hammer
70 Jules



AHB
ALUMINUM HOUSING BODY

UVP
USER VIBRATION PROTECTION



Specifications

Power Input	220V / 230V / 240V: 2,000W
Full Load Impact Rate	1,000/min
Bit Shank	28.5mm Hexagon
Overall Length	860mm
Weight	32.0kg
Standard Accessories	Hex. Bar Wrench

999086
AUTO STOP



Features

- High demolition performance
- Soft grip handles for more comfort
- Large switch lever for more control depending on the load
- Over-load protection
- Anti-restart protection
- Soft start
- Lock-on/off trigger switch
- Dust and water resistant construction



WR 22SE
22mm
Impact Wrench

3/4" DRIVE



BRUSHLESS
FHB
FLYING HAMMER TECHNOLOGY

Sq

19mm

Features

- Stable performance provided even at voltage drops
- Compatible with engine generators
- Bumper and Tail Bumper protect the tool body
- Soft grip handle
- Tumbler-type forward/reverse switch

Specifications

Capacity: Ordinary Bolt	14 - 24mm
High Tension Bolt	16 - 22mm
Tightening Torque	620Nm
Square Drive	19mm
Power Input	800W
No Load Speed	1,400/min
Impact Rate	2,000/min
Overall Length	280mm
Weight*	5.2kg
Standard Accessories	Side Handle, Carrying Case

* Weight according to EPTA-Procedure 01/2014.



WR 16SE
16mm Impact Wrench

1/2" DRIVE



BRUSHLESS

Sq

12.7mm

Features

- Adjustable impact rate (tightening torque) with tightening mode change switch
- Compatible with engine generators
- Bumper protects the hammer case
- Tumbler-type forward/reverse switch
- With soft start and braking
- Soft grip handle
- Comes with hook

Specifications

Capacity: Ordinary Bolt	12 - 22mm
High Tension Bolt	12 - 16mm
Tightening Torque	360Nm
Square Drive	12.7mm
Power Input	370W
No Load Speed: Max	1,600/min
High	1,400/min
Mid	1,300/min
Lo	1,100/min
Impact Rate: Max	1,900/min
High	1,700/min
Mid	1,500/min
Lo	1,300/min
Overall Length	228mm
Weight*	2.6kg
Standard Accessories	Hook, Carrying Case



* Weight according to EPTA-Procedure 01/2014.

WR 25SE 25mm Impact Wrench



1 // DRIVE



BRUSHLESS
AHB



25.4mm

Features

- Stable performance provided even at voltage drops
- Compatible with engine generators
- Bumper and Tail Bumper protect the tool body
- Soft grip handle
- Tumbler-type forward/reverse switch
- Hanger to hang on a rope

Specifications

Capacity: Ordinary Bolt	22 - 30mm
High Tension Bolt	22 - 24mm
Tightening Torque	1,000Nm
Square Drive	25.4mm
Power Input	900W
No Load Speed	1,100/min
Impact Rate	1,500/min
Overall Length	340mm
Weight*	8.4kg
Standard Accessories	Side Handle, Carrying Case



* Weight according to EPTA-Procedure 01/2014.



G12SS2 115mm (5") Disc Grinder Slide Switch



Features

- Power input 600W
- High power 600W motor provides more efficient work
- Smallest grip circumference in its class



Specifications

Capacity: Wheel Dia	115mm (5")
Capacity: Hole Dia	22.23mm (7/8")
Spindle Thread	M14 x 2
Power Input	600W
No Load Speed	12,000/min
Overall Length	254mm
Weight	1.8kg (4.0lbs.)
Standard Accessories	Side handle, Wrench



999067

G12SR4 115mm (4.5") Disc Grinder Slide Switch



Features

- Best in class durability
- Best in class grinding performance
- Most powerful 730W motor in its class
- Smallest grip circumference of 197mm
- Optimized air flow ensure efficient motor cooling for a long lifetime



Specifications

Capacity: Wheel Dia	115mm (4-1/2")
Capacity: Hole Dia	22.23mm (7/8")
Spindle Thread	M14 x 2
Power Input	730W
No Load Speed	10,000/min
Overall Length	258mm (10-1/8")
Weight	1.8kg (4.0lbs.)
Standard Accessories	Side handle, Wrench



999067

G12SN2 115mm (4.5") Disc Grinder Slide Switch



Features

- High power 900W motor provides more efficient work



Specifications

Capacity: Wheel Dia	115mm (4-1/2")
Hole Dia	22.23mm (7/8")
Spindle Thread	M14 x 2
Power Input	900W
No Load Speed	10,500/min
Overall Length	266mm (10-15/32")
Weight	2.0kg (4.4lbs.)
Standard Accessories	Side handle, Wrench, Depressed Center Wheel



999005

Corded Disc Grinders

HiKOKI
HIGH PERFORMANCE POWER TOOLS

G12SQ2 115mm (4.5") Disc Grinder



Features

- High power 900W motor
- Provides more efficient work
- Smallest grip circumference in its class

Specifications

Capacity: Wheel Dia	115mm (4.5")
Capacity: Hole Dia	22.23mm (7/8")
Spindle Thread	M14 x 2
Power Input	900W
No Load Speed	9,000/min
Overall Length	273mm
Weight	1.8kg
Standard Accessories	Side handle, Depressed Center Wheel, Wrench

999088

G13SS2 125mm (5") Disc Grinder Slide Switch



Features

- Newly-designed large fan
- Optimized air flow ensure efficient motor cooling for long lifespan
- Smallest grip circumference of 197mm
- Overload durability approx. 19%



Specifications

Capacity: Wheel Dia	125mm (5")
Capacity: Hole Dia	22.23mm (7/8")
Spindle Thread	M14 x 2
Power Input	600W
No Load Speed	11,500/min. : 220-240V 12,000/min. : 110-120V
Overall Length	254mm (10")
Weight	1.8kg (4.0lbs)
Standard Accessories	Side handle, Wrench

999067

G12SE3 115mm (4.5") Disc Grinder Paddle Switch



Features

- Powerful motor with input of 1400W (230V)
- Excellent overload durability
- Extra protection on armature for high wear resistance

Capacity:	
Wheel Dia	115mm (4-1/2")
Hole Dia	22.23mm (7/8")
Spindle Thread	M14 x 2
Power Input	230V: 1400W
No Load Speed	230V: 11000/min
Overall Length	321mm
Weight	2.2kg
Standard Accessories	Side handle, Abrasive Wheel, Wrench

999088

G 13VE
125mm (5")
Electronic Disc Grinder

AC BRUSHLESS
MOTOR



BRUSHLESS

Features

- World 1st brushless angle grinder
- 1320W powerful brushless motor
- Slimmest grip 176mm
- Small size, light weight
- Compatible with engine generator
- Kickback reducing system
- Increased grinding performance with less fluctuation in speed

Specifications

Capacity:	
Wheel Dia	115mm (4-1/2")
Hole Dia	22.23mm (7/8")
Spindle Thread	M14 x 2
Power Input	1320w
No Load Speed	10,000/min
Overall Length	258mm (10-1/8")
Weight	1.8kg (4.0lbs.)
Standard Accessories	Side handle, Wrench

Dial	No Load Speed (/min)	Use
1	2,800	Polishing, finishing
2	3,700	Removal of paint or coat
3	5,500	Removal of rust
4	7,500	Removal of burrs
5	9,000	Grinding
6	10,000	Rough grinding / Cutting

G23ST
230mm (9")
Disc Grinder



Features

- Halved stator coils for sufficient cooling efficiency increase motor durability
- Motor is protected from dust and debris through the labyrinth construction
- Large switch lever for more control

Specifications

Capacity: Wheel Dia	230mm (9")
Capacity: Hole Dia	22.23mm (7/8")
Spindle Thread	M14 x 2
Power Input	2,000W
No Load Speed	6,600/min
Overall Length	323mm (12-3/4")
Weight	5.1kg (11.2lbs.)
Standard Accessories	Side handle, Wrench

999059

Corded Disc & Die Grinders

HiKOKI
HIGH PERFORMANCE POWER TOOLS

G23SW2 230mm (9") Disc Grinder



Features

- Halved stator coils for sufficient cooling efficiency increase motor durability
- Motor is protected from dust and debris through the labyrinth construction
- Large switch lever for more control



999059

Specifications

Capacity: Wheel Dia	230mm (9")
Capacity: Hole Dia	22.23mm (7/8")
Spindle Thread	M14 x 2
Power Input	2,200W
No Load Speed	6,600/min
Overall Length	469mm (18-1/2")
Weight	5.1kg (11.2lbs.)
Standard Accessories	Side handle, Wrench

* Weight according to EPTA-Procedure 01/2003

G 23MR 230mm (9") Disc Grinder Trigger Switch

Features

- Double-insulated aluminum housing
- Power input 2,400W and max power output 4,600W
- Tool-less wheel guard
- Overload durability
- Vibration-absorbing side handle
- Increased service life of carbon brush
- Soft grip handle



999061

Specifications

Capacity: Wheel Dia	230mm (9")
Capacity: Hole Dia	22.23mm (7/8")
Spindle Thread	M14 x 2
Power Input	2,500W
No Load Speed	6,600/min
Overall Length	323mm (12-3/4")
Weight	2.0kg (4.4lbs.)
Standard Accessories	Side handle, Depressed Center Wheel, Wrench

GP5V 50mm (2") Electronic Hand Grinder



999076

Features

- Power input 760W
- Variable speed by dial: 2,000 - 8,300/min
- Electronic control: Soft start and constant speed
- Internal carbon brush
- 0 voltage re-start protection and kick back protection
- Easy-to-grip housing

Specifications

Capacity:	
Wheel Dia	6mm (or 1/4")
Max. Wheel Dia	50mm (2")
Power Input	760W
No Load Speed	2,000 - 8,300/min
Overall Length	406mm (16")
Weight	1.9kg (4.2lbs.)
Standard Accessories	Side Handle, Collet Chuck, Wrenches

* Specifications and standard accessories are subject to change by areas

GP2S2
25mm (1")
Hand Grinder



Features

- Power input 520W
- All ball bearing construction
- Easy-to-grip housing
- Internal carbon brush



Specifications

Capacity:	6mm (or 1/4")
Wheel Dia	25mm (1")
Max. Wheel Dia	25mm (1")
Power Input	600W
No Load Speed	29,000/min
Overall Length	359.4mm (14-5/32")
Weight	1.7kg (4.0lbs.)
Standard Accessories	Side handle, Wrench

999088

GP3V
25mm (1")
Electronic Hand Grinder



Features

- Power input 760W
- Variable speed by dial: 7,000 - 29,000/min
- Electronic control: Soft start and constant speed
- Internal carbon brush
- Easy-to-grip housing



Specifications

Capacity:	6mm (or 1/4")
Wheel Dia	25mm (1")
Max. Dia	25mm (1")
Power Input	760W
No Load Speed	7,000 - 29,000/min
Overall Length	406mm (16")
Weight	1.8kg (4.0lbs.)
Standard Accessories	Side Handle, Collet Chuck, Wrenches

999076

* Specifications and standard accessories are subject to change by areas

CC 14ST
355mm High-Speed
Cut-Off Machine

Features

- Quick lock vise
- Spark diversion guard



Specifications

Capacity: Cut-off Wheel Dia.	355mm
Power Input	2,200W
No Load Speed	3,800/min
Max Working Peripheral Speed	4,800m/min
Dimensions (L x W x H)	590 x 300 x 640mm
Weight	17.0kg
Standard Accessories	Cut-off Wheel, Wrench

SP 18VA
180mm(7")
Sander Polisher



999043

- Features**
- Power input 1,250W and max power output 2,560W
 - For sanding and polishing
 - Constant speed control
 - Soft start and overload protection
 - 2 ways of changing speed: Trigger and dial
- Durable bearing design

Specifications	
Capacity: Sanding Disc	180mm (7")
Capacity: Wool Bonnet	180mm (7")
Spindle Thread	M14 x 2 or U5/8-11
Power Input	1,250W
No Load Speed	0 - 3,400/min
Overall Length	415mm (16-19/36")
Weight	2.8kg (6.2 lbs.)
Standard Accessories	Loop Handle, Rubber Pad, Wool Bonnet, Sanding Disc, Wrench

SV 12SD
114mm (4-1/2")
Orbital Sander



999041

- Features**
- Power input 300W
 - Direct drive system for less vibration and smooth finishing
 - Lever-action, quick paper clamp system
 - All ball bearing construction
 - Efficient dust collecting by "Through the Base" dust collection
 - Flush sanding on 3 sides

Specifications	
Capacity: Pad Size	114 x 228mm (4-1/2 x 9")
Orbital Dia	2.4mm (0.09")
Power Input	300W
No Load Speed : Spindle	10,000/min
No Load Speed : Orbit	20,000/min
Overall Length	469mm (18-1/2")
Weight	2.8kg (6.2 lbs.)
Standard Accessories	Sanding Paper, Dust Bag

SV 13YA
125mm Random Orbit Sanders



999041

- Features**
- Random orbit sanding action
 - Large soft grip for comfort and control
 - Dust collection

Specifications	
Capacity: Sanding Pad	125mm
Power Input	230W
Orbit Dia.	3.2mm
No Load Speed: SV13YA	7,000 - 12,000/min
S V13YB	12,000/min
Overall Height	145mm
Weight	1.4kg
Standard Accessories	Sanding Paper, Dust Bag

* SV13YA only.

SB8V2 76mm (3") Belt Sander



Features

- Power input 1,020W
- Belt Size : 76 x 533mm (3 x 21")
- Sanding position visible through transparent cover
- Width 171mm
- Variable speed by dial, and large trigger switch
- Soft grip handle and sub handle
- Dust bag on the left of the tool body for sanding at corner

Specifications

Capacity: Belt Size	76 x 533mm (3 x 21")
Power Input	1,020W
Length of Stroke	26mm (1")
No Load Belt Speed	250 - 450m/min (820-1,475ft./min.)
Overall Length	318mm (12-33/64")
Weight	4.3kg (9.7 lbs.)
Standard Accessories	Sanding Belt, Dust Bag

SB10S2 100mm (4") Belt Sander



Features

- Power input 1,020W
- Belt Size : 100 x 610mm (4 x 24")
- Sanding position visible through transparent cover
- Width 189mm
- Single speed and large trigger switch
- Soft grip handle and sub handle
- Dust bag on the left of the tool body for sanding at corner

Capacity: Belt Size	100 x 610mm (4 x 24")
Power Input	1,020W
Length of Stroke	26mm (1")
No Load Belt Speed	420m/min. (1,375ft./min.)
Overall Length	363mm (14-19/64")
Weight	5.2kg (11.5 lbs.)
Standard Accessories	Sanding Belt, Dust Bag

M12VE 12mm (or 1/2") Router



Features

- Power input 2,000W
- Electronic Control: Soft start and constant speed
- 3-angle adjustable handle
- Lightweight: 1.5kg
- Soft Barrel- grip handle
- Easy to adjust routing depth

Specifications

Capacity:	12mm (or 1/2")
Collet Chuck	65mm (2-9/16")
Stroke	2,000W
Power Input	800 - 2,800/min
No Load Speed	5.3kg (11.7lbs.)
Weight	Parallel Guide, Template Guide, Wrench
Standard Accessories	

* Weight according to EPTA-Procedure 01/2003



999043

C10FCE2

255mm (10")

Compound Miter Saw



Specifications

Capacity:	255mm (10")
Blade Dia	59 x 144mm or 89 x 101mm
(H x W) Cross Cut 0°	(2-5/16 x 5-21/32 or 3-1/2 x 3-31/32")
(H x W) Miter Cut 45°	59 x 102mm or 89 x 70mm
	(2-5/16 x 4 or 3-1/2 x 2-3/4")
(H x W) Miter Cut 52°	59 x 89mm or 89 x 54mm
	(2-5/16 x 3-1/2 or 3-1/2 x 2-1/8")
(H x W) Bevel Cut 45°	41 x 144mm (1-5/8 x 5-21/32")
Compound Miter 45° and Beve 45°	41 x 102mm (1-5/8 x 4")
Power Input	1,520W
No Load Speed	5,000/min.
Miter Angle:	
Right	0 – 52°
Left	0 – 52°
Bevel Angle:	
Left	0 – 45°
Positive Angle Stop	0, 15, 22.5, 31.6 and 45°
Dimensions	460 x 628 x 561mm
	(18-1/8 x 24-3/4 x 22-3/32")
Weight	11.9kg (26.2 lbs.)
Standard Accessories	Blade, Dust Bag, Vise Assy, Sub Fence, Wrenches

999065 (220V - 240V)

C10FCH2

255mm (10")

Compound Miter Saw



Features

- **Laser Marker : Guide system on cut line**
- Lightweight: 11.9kg
- Thumb actuated positive miter stops for quick and easy adjustment
- Soft grip handle
- Equipped with chip deflector
- Pivoting Sub-Fence for supporting larger stock



Do not stare into LASER beam

Specifications

Capacity:	255mm (10")
Blade Dia	59 x 144mm or 89 x 101mm
(H x W) Cross Cut 0°	(2-5/16 x 5-21/32 or 3-1/2 x 3-31/32")
(H x W) Miter Cut 45°	59 x 102mm or 89 x 70mm
	(2-5/16 x 4 or 3-1/2 x 2-3/4")
(H x W) Miter Cut 52°	59 x 89mm or 89 x 54mm
	(2-5/16 x 3-1/2 or 3-1/2 x 2-1/8")
(H x W) Bevel Cut 45°	41 x 144mm (1-5/8 x 5-21/32")
Compound Miter 45° and Beve 45°	41 x 102mm (1-5/8 x 4")
Power Input	1,520W
No Load Speed	5,000/min.
Miter Angle:	
Right	0 – 52°
Left	0 – 52°
Bevel Angle:	
Left	0 – 45°
Positive Angle Stop	0, 15, 22.5, 31.6 and 45°
Dimensions	460 x 628 x 561mm
	(18-1/8 x 24-3/4 x 22-3/32")
Weight	12.0kg (26.5 lbs.)
Standard Accessories	Blade, Dust Bag, Vise Assy, Sub Fence, Wrenches

C6SS 165mm (6-1/2") Circular Saw



Features

- Rigid aluminium base for fine cut
- Complied for CE, European standard
- Side handle easy to grip
- Backward dust emission

Specifications

Capacity: Blade Dia	230mm (9")
Capacity: Max Cutting depth 90°	22.23mm (7/8")
Capacity: Max Cutting depth 45°	22.23mm (7/8")
Power Input	1,050W
No Load Speed	5,500/min
Overall Length	276mm (10-7/8")
Weight	3.2kg (7.0lbs.)
Standard Accessories	Blade, Guide, Wrench

* Specifications and standard accessories are subject to change by areas



999043

C7SS 190mm Circular Saw



Features

- Rigid aluminium base for fine cut
- Complied for CE, European standard
- Side handle easy to grip
- Backward dust emission

Specifications

Capacity: Blade Dia	190mm (7-1/2")
Capacity: Max Cutting depth 90°	68mm (2-11/16")
Capacity: Max Cutting depth 45°	46mm (1-7/8")
Power Input	1,050W
No Load Speed	5,500/min
Overall Length	291mm (11-15/32")
Weight	3.4kg (7.5lbs.)
Standard Accessories	Blade, Guide, Wrench

* Specifications and standard accessories are subject to change by areas



999043

C9U3 235mm Circular Saw



Features

- 4m cord
- Convenient cord holder
- Aluminium saw cover
- Soft grip handle
- Large knob easy to adjust cut depth

Specifications

Capacity:	235mm (9-1/4")
Blade Dia	86mm (3-3/8")
Max Cutting depth 90°	65mm (2-9/16")
Max Cutting depth 45°	2,000W (110V:1,670W)
Power Input	5,200/min
No Load Speed	397mm (15-5/8")
Overall Length	7.2kg (15.9lbs.)
Weight	Blade, Side Handle, Guide, Bolt, Wrench, Adapter for Dust Collector, Short Lever
Standard Accessories	

* Weight according to EPTA-Procedure 01/2003



999038

FCJ65V3 65mm (2-5/8") Jig Saw



Features

- Variable speed by dial and trigger
- Power input 400W
- Motor with two ball-bearings for longer life and efficient power transmission
- Lightweight: 1.5kg
- Soft grip handle
- Dust blowing for clear view over cut line
- Connectable directly with a dust collector without adapter

Specifications

Capacity:	
Wood	65mm (2-5/8")
Mild Steel Plate	6mm (1/4")
Mn. Cuttng Radus	25mm (1")
Base Tilt Angle	45° Right/Left
Power Input	400W
Length of Stroke	18mm (45/64")
No Load Speed (stroke)	0 - 3,000/min.
Overall Length	197mm (7-3/4")
Weight	1.5kg (4.2 lbs.)
Standard Accessories	Blade, Splinter Guard, Chip Cover, Wrench

999041

P20SF 82mm Planer



Features

- Max cutting depth: 2.6mm (3/32")
- Rabbeting depth: 9mm (11/32")
- Power input 620W
- No load speed 17,000/min.
- Compact and lightweight 2.5kg
- Easy to adjust cutting depth by knob
- Convenient cord holder
- Stand to prevent contact between the blade and a work piece
- Soft grip handle
- Optional dust bag or elbow can be connected

Specifications

Capacity:	
Cutting Width	82mm
Max Cutting Depth	2.6mm
Power Input	620W
No Load Speed	17,000/min.
Overall Length	296mm (11-21/32")
Weight	2.5kg (5.5lbs.)
Standard Accessories	Blade Setting Gauge, Guide, Wrench, Carrying Case

* Specifications and standard accessories are subject to change by areas

999021

P20ST 82mm Planer



Features

- Max Cutting Depth: 1.5mm (1/16")
- Rabbeting depth: 9mm (11/32")
- Power input 580W
- No load speed 17,000/min.
- Compact and lightweight 2.5kg
- Easy to adjust cutting depth by knob
- Optional dust bag or elbow can be connected

Specifications

Capacity:	
Cutting Width	82mm
Max Cutting Depth	1.5mm
Power Input	580W
No Load Speed	17,000/min.
Overall Length	296mm (11-21/32")
Weight	2.5kg (5.5lbs.)
Standard Accessories	Blades, Blade Setting Gauge, Guide, Wrench

* Specifications and standard accessories are subject to change by areas

999021

Corded Blower/ Heat Gun



RH650V Heat Gun



- Features**
- LCD display for showing temperature and wind power settings
 - Continuous adjustable temperature and variable air flow for different applications
 - Constant Heat Control for continuous work without overheating
 - High stability for stationary use
 - Soft grip handle for more control and comfort

Specifications

Power Input	2,000W
Capacity:	0.25/0.5m3/min(5-stage switch)
Wind Volume	C50 - 650°C (in increments of 10°C)
Wind Temperature	245mm (9-21/32")
Overall Length	0.97kg (1.74lbs.)
Weight	Nozzle (round), Nozzle (flat), Nozzle (curved surface), Nozzle (glass protector), Scraper (with grip), Carrying Case
Standard Accessories	

* Weight according to EPTA-Procedure 01/2003

Standard Accessories for RH600T and RH650V

Nozzle (round)	Nozzle (flat)	Nozzle (curved surface)	Nozzle (glass protector)	Nozzle (with grip)

RH600T Heat Gun



- Features**
- 2 Heat Settings
 - Cool air shot for quick cooling down
 - Hanging hook for easy storage and stationary use
 - Overheating protection
 - Soft grip handle for more control and comfort

Specifications

Capacity:	0.25/0.5m3/min (2-stage switch)
Wind Volume	250/500°C (2-stage switch)
Wind Temperature	1,375W
Power Input	17,000/min.
No Load Speed	296mm (11-21/32")
Overall Length	2.5kg (5.5lbs.)
Weight	110V
Voltage	50°C
Wind Temperature (when the cooling button is used)	Nozzle (round), Nozzle (flat), Nozzle (curved surface), Nozzle (glass protector), Scraper (with grip), Carrying Case
Standard Accessories	

* Weight according to EPTA-Procedure 01/2003

RB40VA Blower



- Features**
- Variable speed dial (RB40VA)
 - Soft grip handle
 - Stands alone

Specifications

Capacity:	5.5kPa
Air Pressure: RB40SA	0 - 5.5kPa
RB40VA	3.8m³/min
Air Volume Flow: RB40SA	0 - 3.8m3/min
RB40VA	550W
Power Input	16,000/min.
No Load Speed: RB40SA	0-16,000/min
RB40VA	447mm (17-19/32")
Overall Length	1.7kg (3.7lbs)
Weight	Nozzle, Dust Bag
Standard Accessories	



999021

Spares Quick Reference

Model No.	Armature	Stator	Switch	Brushes	Auto Stop Brush	Model No.	Armature	Stator	Switch	Brushes	Auto Stop Brush
HTC-C10FCE2	HTC360695E	HTC340687E	HTC326700	HTC999038		HTC-G12SR4	HTC361016E	HTC340016E	HTC338854	HTC999067	
HTC-C10FCH2	HTC360695E	HTC340687E	HTC326700	HTC999065		HTC-G12S5	HTC360802E	HTC340705E	HTC955509	HTC999021	HTC999070
HTC-C6S5	HTC360883E	HTC340756E	HTC331259	HTC999043	HTC999073	HTC-G12S52	HTC361007E	HTC340908E	HTC338854	HTC999067	
HTC-C7S5	HTC360883E	HTC340756E	HTC331259	HTC999043	HTC999073	HTC-G13SR3	HTC360799E	HTC340702E	HTC314603	HTC999005	
HTC-C7ST	HTC360907E	HTC340807E	HTC333554	HTC999043	--	HTC-G13SR4	HTC361016E	HTC340016E	HTC338854	HTC999067	
HTC-C7U2	HTC360727E	HTC340640E	HTC302470	HTC999043	HTC999073	HTC-G13S5	HTC360802E	HTC340705E	HTC955509	HTC999021	
HTC-C9BU2	HTC360778E	HTC340661E	HTC325357	HTC999038	HTC999071	HTC-G13S52	HTC361007E	HTC340908E	HTC338854	HTC999067	
HTC-C9U2	HTC360759E	HTC340660Q	HTC325357	HTC999038	HTC999071	HTC-G13YC2	HTC360869E	HTC340823E	HTC334273	HTC999088	HTC999076
HTC-CC145F	HTC360732F	HTC340643F	HTC976825	HTC999044	HTC999074	HTC-G15SA2	HTC360433E	HTC340383E	HTC313278	HTC999043	HTC999073
HTC-CE16SA	HTC360622E	HTC340567E	HTC314603	HTC999021	HTC999070	HTC-G15YC2	HTC360870E	HTC340823E	HTC334273	HTC999088	HTC999076
HTC-CJ110MV	HTC360741F	HTC340545E	HTC325805	HTC999041	HTC999072	HTC-G18SG2	HTC360594E	HTC340546E	HTC320238	HTC999061	HTC999089
HTC-CJ110MVA	HTC360764E	HTC340666E	HTC955509	HTC999041	HTC999072	HTC-G23MR	HTC360594E	HTC340546E	HTC320238	HTC999061	HTC999089
HTC-CJ160V	HTC361014E	HTC340915E	HTC339021	HTC999041		HTC-G23SR	HTC360762E	HTC340664E	HTC320239	HTC999044	
HTC-CJ160VA	HTC361014E	HTC340915E	HTC330698	HTC999041		HTC-G23S5	HTC360852E	HTC340737E	HTC320238	HTC999038	
HTC-CN16SA	HTC360622E	HTC340567E	HTC314603	HTC999021	HTC999070	HTC-G23ST	HTC360982E	HTC340888E	HTC320238	HTC999059	
HTC-CR13VBY	HTC360795E	HTC340698E	HTC320142	HTC999043	HTC999073	HTC-G23SW2	HTC360982E	HTC340888E	HTC320238	HTC999059	
HTC-CS40Y	HTC360957E	HTC340864E	HTC335453	HTC999065		HTC-GP2S2	HTC360879E	HTC340758E	HTC332805	HTC999088	
HTC-D10VC2	HTC360596E	HTC340547E	HTC321632	HTC999041	HTC999072	HTC-GP3V	HTC360911E	HTC340827E	HTC314603	HTC999088	HTC999076
HTC-D10VF	HTC360542E	HTC340504E	HTC320195	HTC999041	HTC999072	HTC-GP5V	HTC360914E	HTC340829E	HTC314603	HTC999088	HTC999076
HTC-D13	HTC981657E	HTC982797F	HTC671667Z	HTC999043	HTC999073	HTC-H41MB	HTC360903E	HTC340788E	HTC306143	HTC999043	HTC999073
HTC-D13VL	HTC361003D	HTC340906D	HTC338756	HTC999088		HTC-H41SD	HTC360946E	HTC340788H	HTC306143	HTC999043	HTC999073
HTC-D6SH	HTC360439E	HTC340391E	HTC994734			HTC-H45ME	HTC337758	HTC340885E	HTC337587		
HTC-DH24PG	HTC360962E	HTC340866E	HTC335796	HTC999041		HTC-H45MEY	HTC337578	HTC340885E	HTC337587		
HTC-DH24PH	HTC360962E	HTC340866E	HTC335796	HTC999041		HTC-H45MR	HTC360571E	HTC340519H	HTC306143	HTC999043	HTC999073
HTC-DH26PB	HTC360961E	HTC340850E	HTC335796	HTC999041		HTC-H60MC	HTC360899E	HTC340780E	HTC306143		HTC999074
HTC-DH26PC	HTC360961E	HTC340850E	HTC335796	HTC999041		HTC-H60MR	HTC360691E	HTC340608E	HTC306143		HTC999074
HTC-DH28PC	HTC360857E	HTC340739E	HTC331677	HTC999004		HTC-H65SB2	HTC360286E	HTC340259E	HTC306143		HTC999086
HTC-DH28PBY	HTC360961E	HTC340850	HTC335796	HTC999041		HTC-H65SC	HTC360286E	HTC340259E	HTC995398		HTC999086
HTC-DH28PCY	HTC360961E	HTC340850	HTC335796	HTC999041		HTC-H70SA	HTC360286E	HTC340259E	HTC992891		HTC999086
HTC-DH30PC2	HTC360768E	HTC340672E	HTC325675	--	HTC999073	HTC-M12SE	HTC360888E	HTC340668L	HTC331812	HTC999038	HTC999071
HTC-DH38MS	HTC360875E	HTC340753E	HTC313093	HTC999043		HTC-M12V2	HTC360748E	HTC340659E	HTC301821	HTC999044	HTC999074
HTC-DH40MR	HTC360591E	HTC340542E	HTC313093	--	HTC999073	HTC-M12VE	HTC360886E	HTC340659L	HTC331812	HTC999038	HTC999071
HTC-DH45ME	HTC360992	HTC340899	HTC337587	#N/A		HTC-H90SG1	HTC360974E	HTC340876E	HTC337051		HTC999086
HTC-DH50MR	HTC360819E	HTC340712E	HTC990941	--	HTC999074	HTC-P20SA2	HTC990652E	HTC990651E	HTC957747	HTC999041	HTC999072
HTC-DH52ME	HTC360992	HTC340899	HTC337587	#N/A		HTC-P20SF	HTC360963E	HTC340834E	HTC334474	HTC999021	HTC999070
HTC-DH52MEY	HTC360992	HTC340899	HTC337587	#N/A		HTC-P20ST	HTC360942E	HTC340834E	HTC334474	HTC999021	HTC999070
HTC-DV13S5	HTC360864E	HTC340745G	HTC313093	HTC999041		HTC-RB40VA	HTC360683E	HTC340602E	HTC323086	HTC999021	HTC999070
HTC-DV13VS5	HTC360864E	HTC340743E	HTC313093	HTC999041		HTC-SB10S2	HTC360797E	HTC340700E	HTC325085	HTC999043	HTC999073
HTC-DV16S5	HTC360863E	HTC340744F	HTC330727	HTC999041		HTC-SB8V2	HTC360797E	HTC340700G	HTC325085	HTC999043	HTC999073
HTC-DV16VS5	HTC360863E	HTC340742F	HTC330716	HTC999041		HTC-SP18VA	HTC360576E	HTC340526E	HTC321449	HTC999043	HTC999073
HTC-DV18V	HTC360655E	HTC340589E	HTC322854	HTC999041		HTC-SV12SD	HTC360124F	HTC340719E	HTC957747	HTC999041	
HTC-DV20VB2	HTC360652E	HTC340587E	HTC322854	HTC999041		HTC-SV12SG	HTC360637E	HTC340578E	HTC311948	HTC999041	
HTC-DV20VD	HTC361003D	HTC340906D	HTC338756	HTC999088		HTC-SV12SH	HTC360637E	HTC340578E	HTC311948	HTC999041	HTC999072
HTC-DV22V	HTC361002D	HTC340905D	HTC338756	HTC999088		HTC-SV13YA	HTC360696E	HTC340616E	HTC311948	HTC999041	HTC999072
HTC-FCJ65S3	HTC360724E	HTC340669E	HTC323575	HTC999041		HTC-W6V4	HTC360673E	HTC340599E	HTC323479		HTC999091
HTC-FCJ65V3	HTC360724E	HTC340631E	HTC323086	HTC999041		HTC-W6VA4	HTC360671E	HTC340599E	HTC323479		HTC999091
HTC-FSV10SA	HTC360681E	HTC987044E	HTC313093	HTC999041		HTC-W6VM	HTC360677E	HTC340599E	HTC323479		HTC999091
HTC-G12SN	HTC360891E	HTC340791D	HTC314603	HTC999005		HTC-WR16SA	HTC360687E	HTC340605E	HTC320528	HTC999021	HTC999070
HTC-G12SQ	HTC360891E	HTC340771E	HTC314603	HTC999005		HTC-WR16SE	HTC337203	HTC340882	HTC337202		
HTC-G12SR4	HTC361016E	HTC340016E	HTC338854	HTC999067		HTC-WR22SA	HTC360700E	HTC340620E	HTC320528		
HTC-G12SE2	HTC360603F	HTC340551E	HTC311739	HTC999088		HTC-WR22SE	HTC360990	HTC340897E	HTC337202		
HTC-G12SR3	HTC360799E	HTC340702E	HTC314603	HTC999005		HTC-WR25SE	HTC360989	HTC340895E	HTC337202		

EUROBOOR MAGNETIC BASE DRILLS

MODEL	ARMATURE	STATOR	BRUSHES
HTC-BM20YK	HTC981657E	HTC982797E	HTC999073
HTC-ECO32	HTC0320181	HTC0320151	HTC0320146
HTC-ECO50	HTC0500181	HTC0500276	HTC0500372
HTC-ECO100/4	HTC1004318	HTC1004383	HTC1000368

In October 2018, HIKOKI became the new brand name for Koki Holdings – formerly part of the Hitachi group. Same tools, only with a new name. For over 70 Years, Hitachi have been an innovator in the Power Tool Industry with favorites like the 16kg breaker H65, slide miter saw and the cordless impact driver. We produce durable power tools for professionals throughout the world.

Research and development has been a cornerstone of our company for 70 years, leading to a number of firsts in the power tool industry including:



PROUDLY JAPANESE





HiKOKI

HIGH PERFORMANCE POWER TOOLS

www.hikoki-sa.co.za

Distributed exclusively by Matus (PTY) Ltd

No 1, Randport Industrial Park 1 Suzuka Rd,

Gosforth Park Germiston, 1401

Tel: 011 681 9440

Email: info@hikoki-sa.co.za