

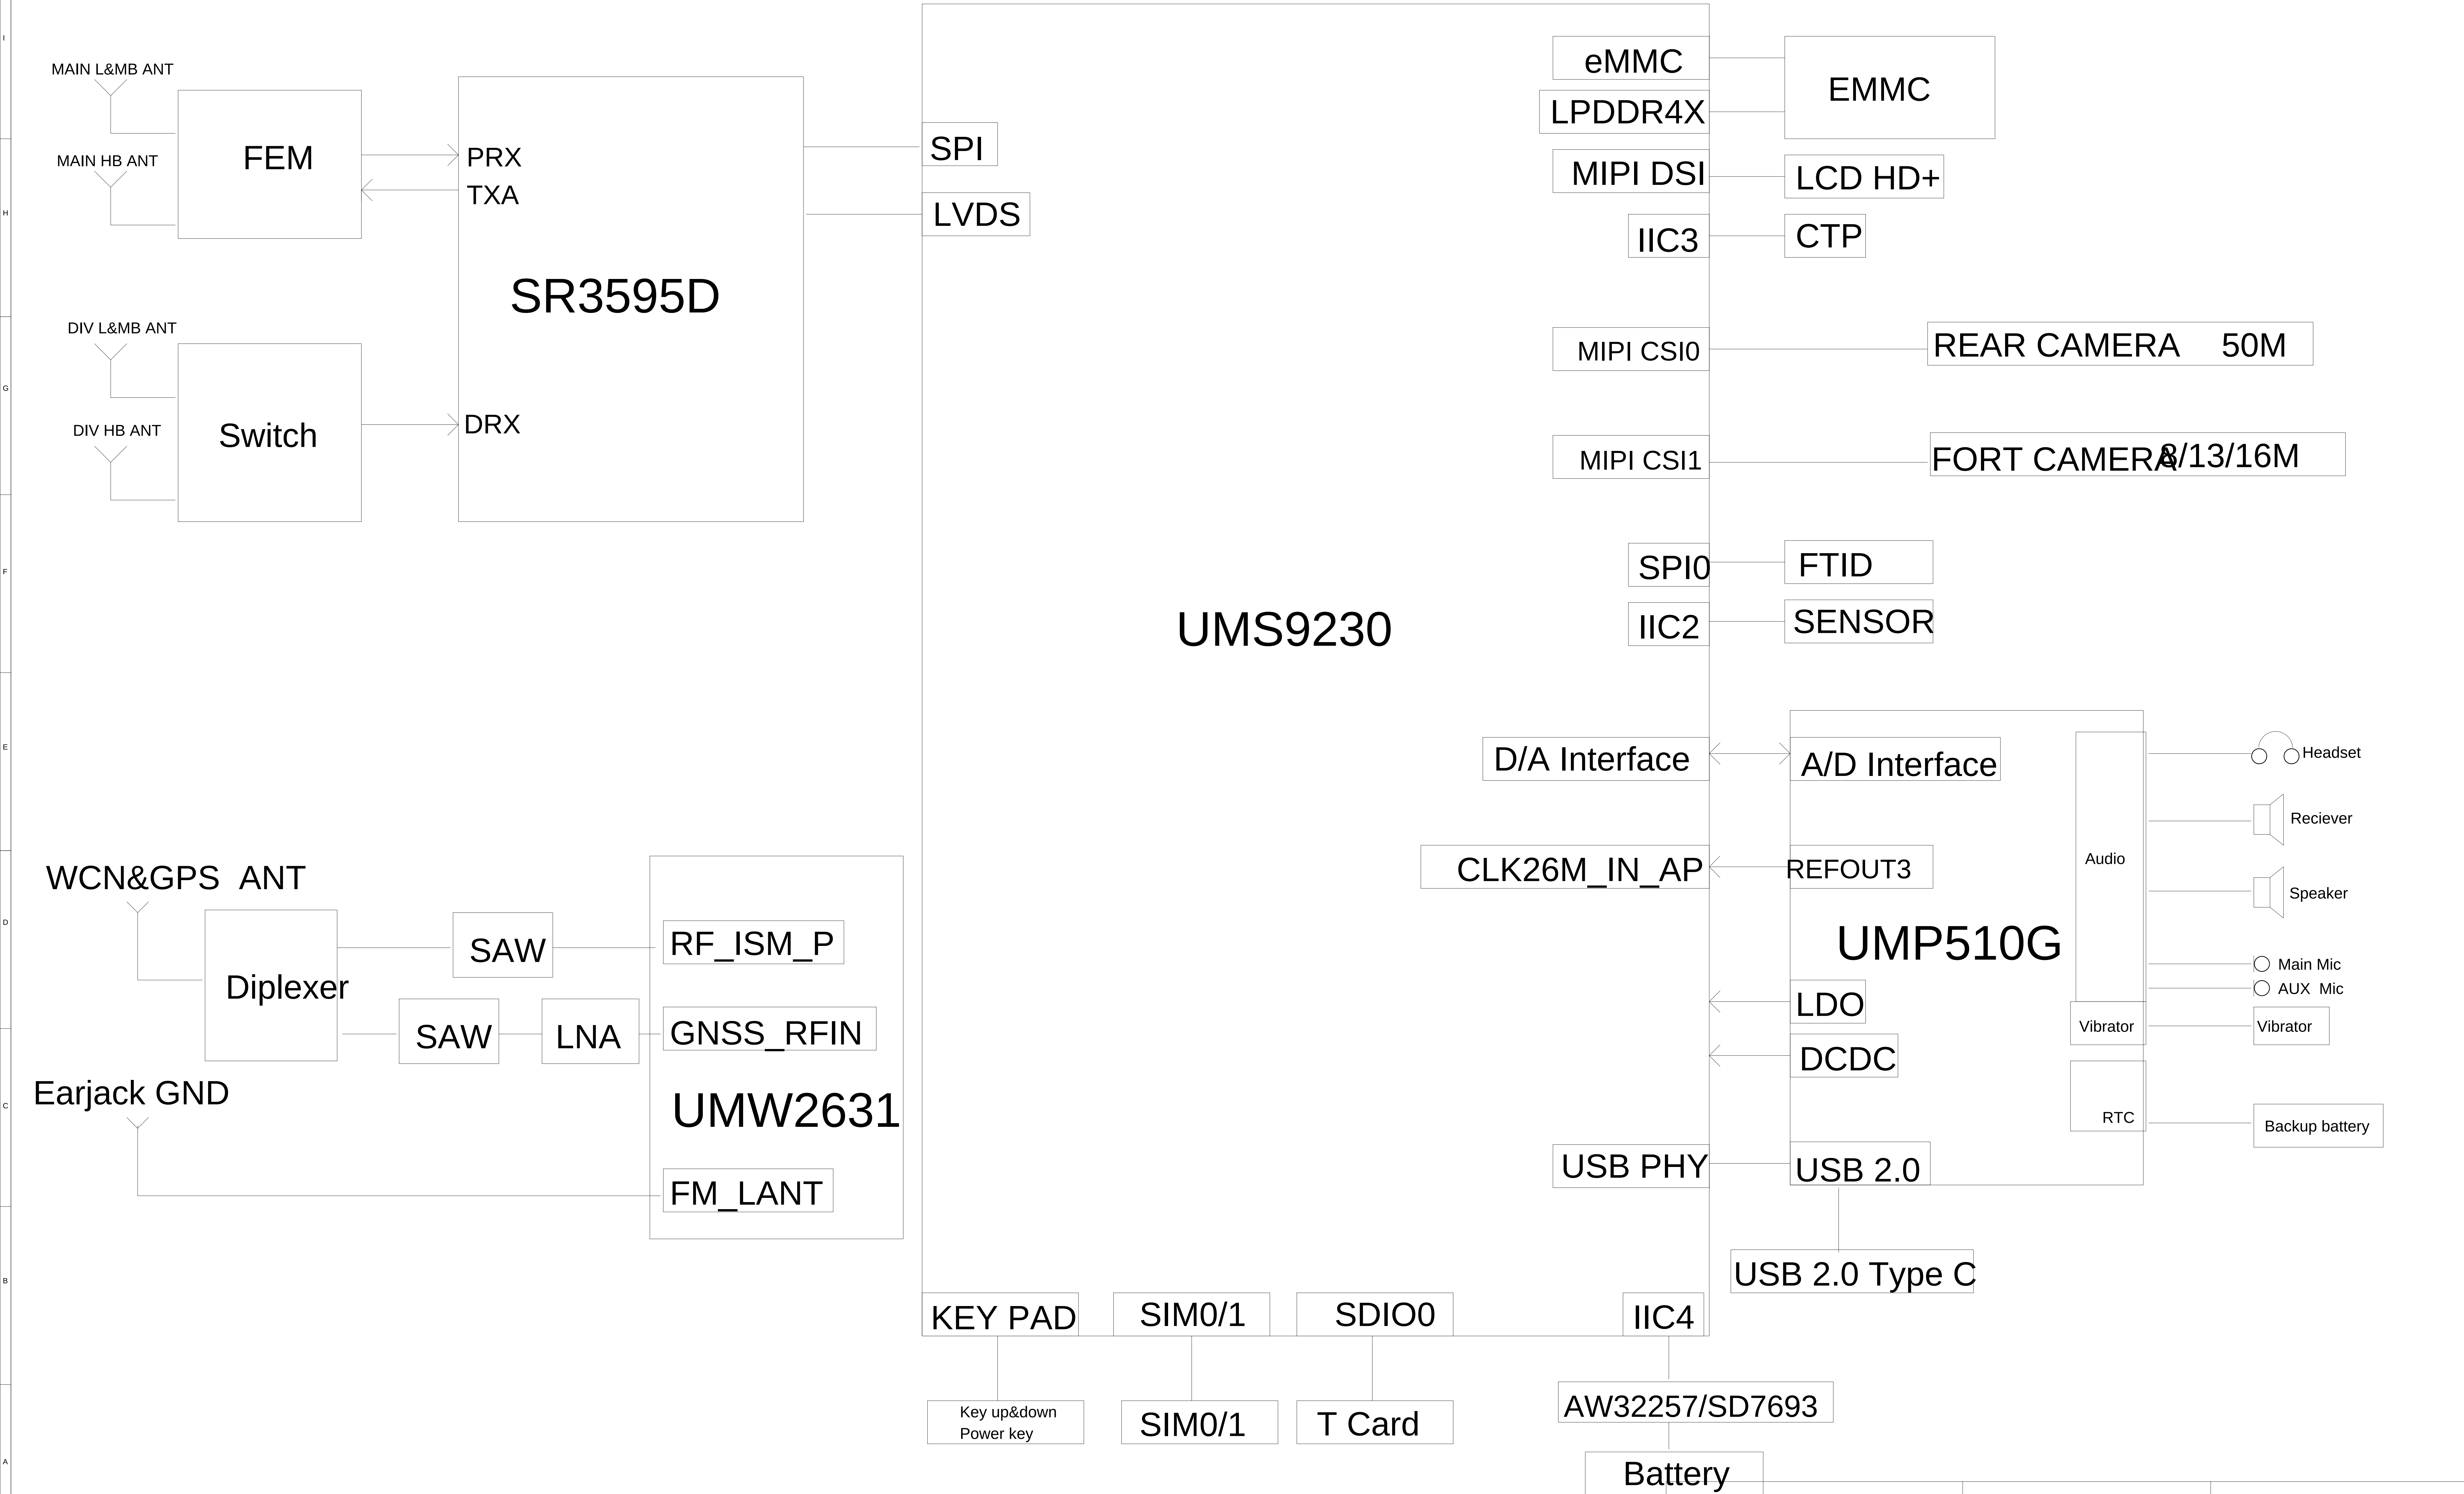
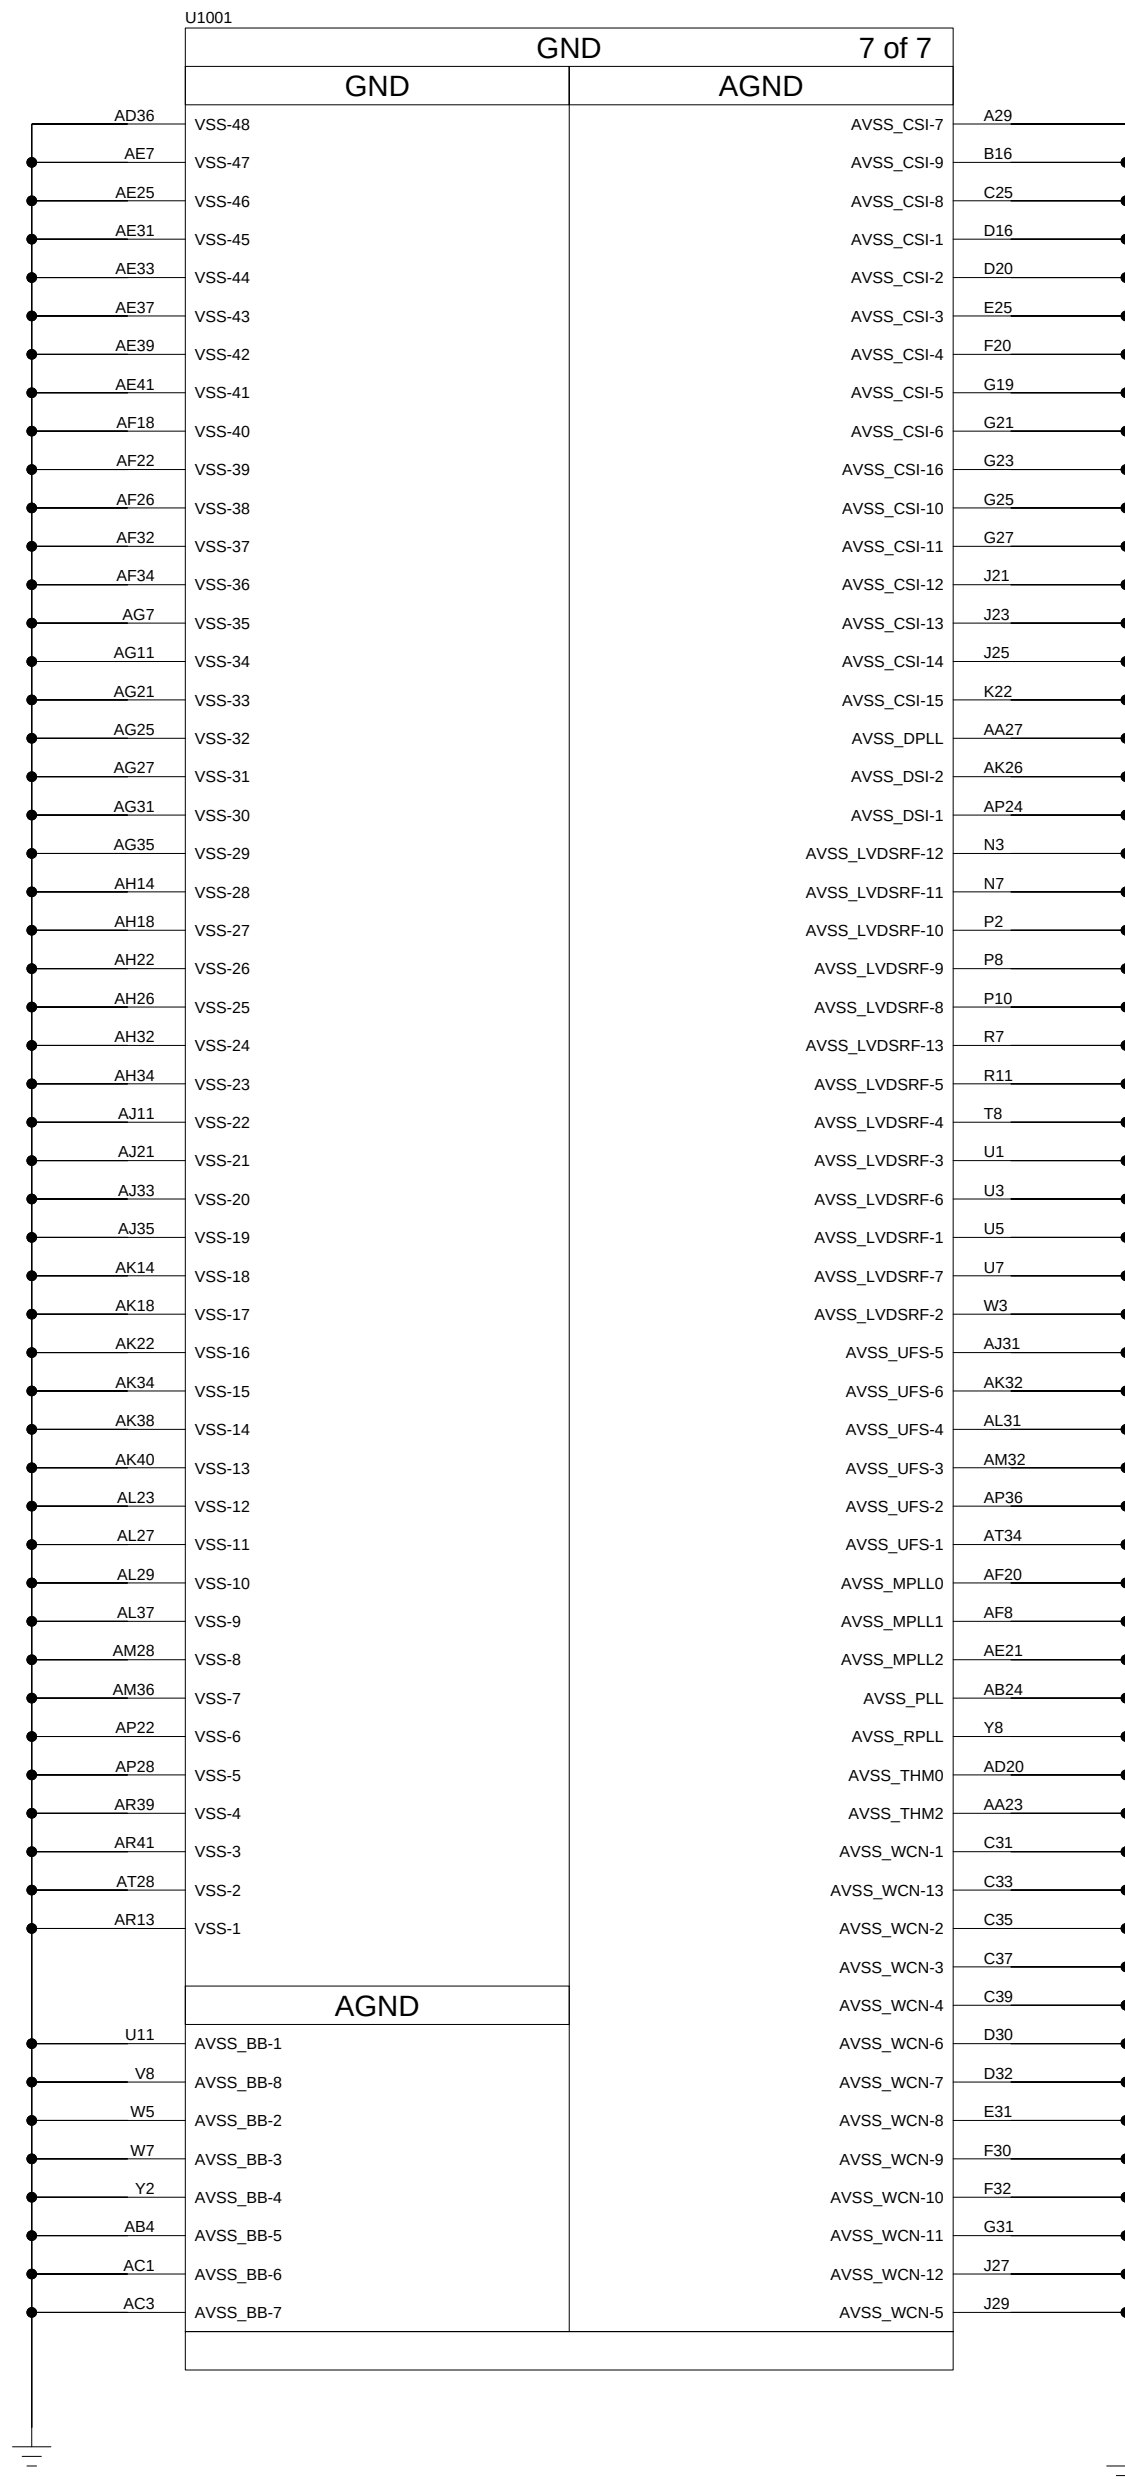
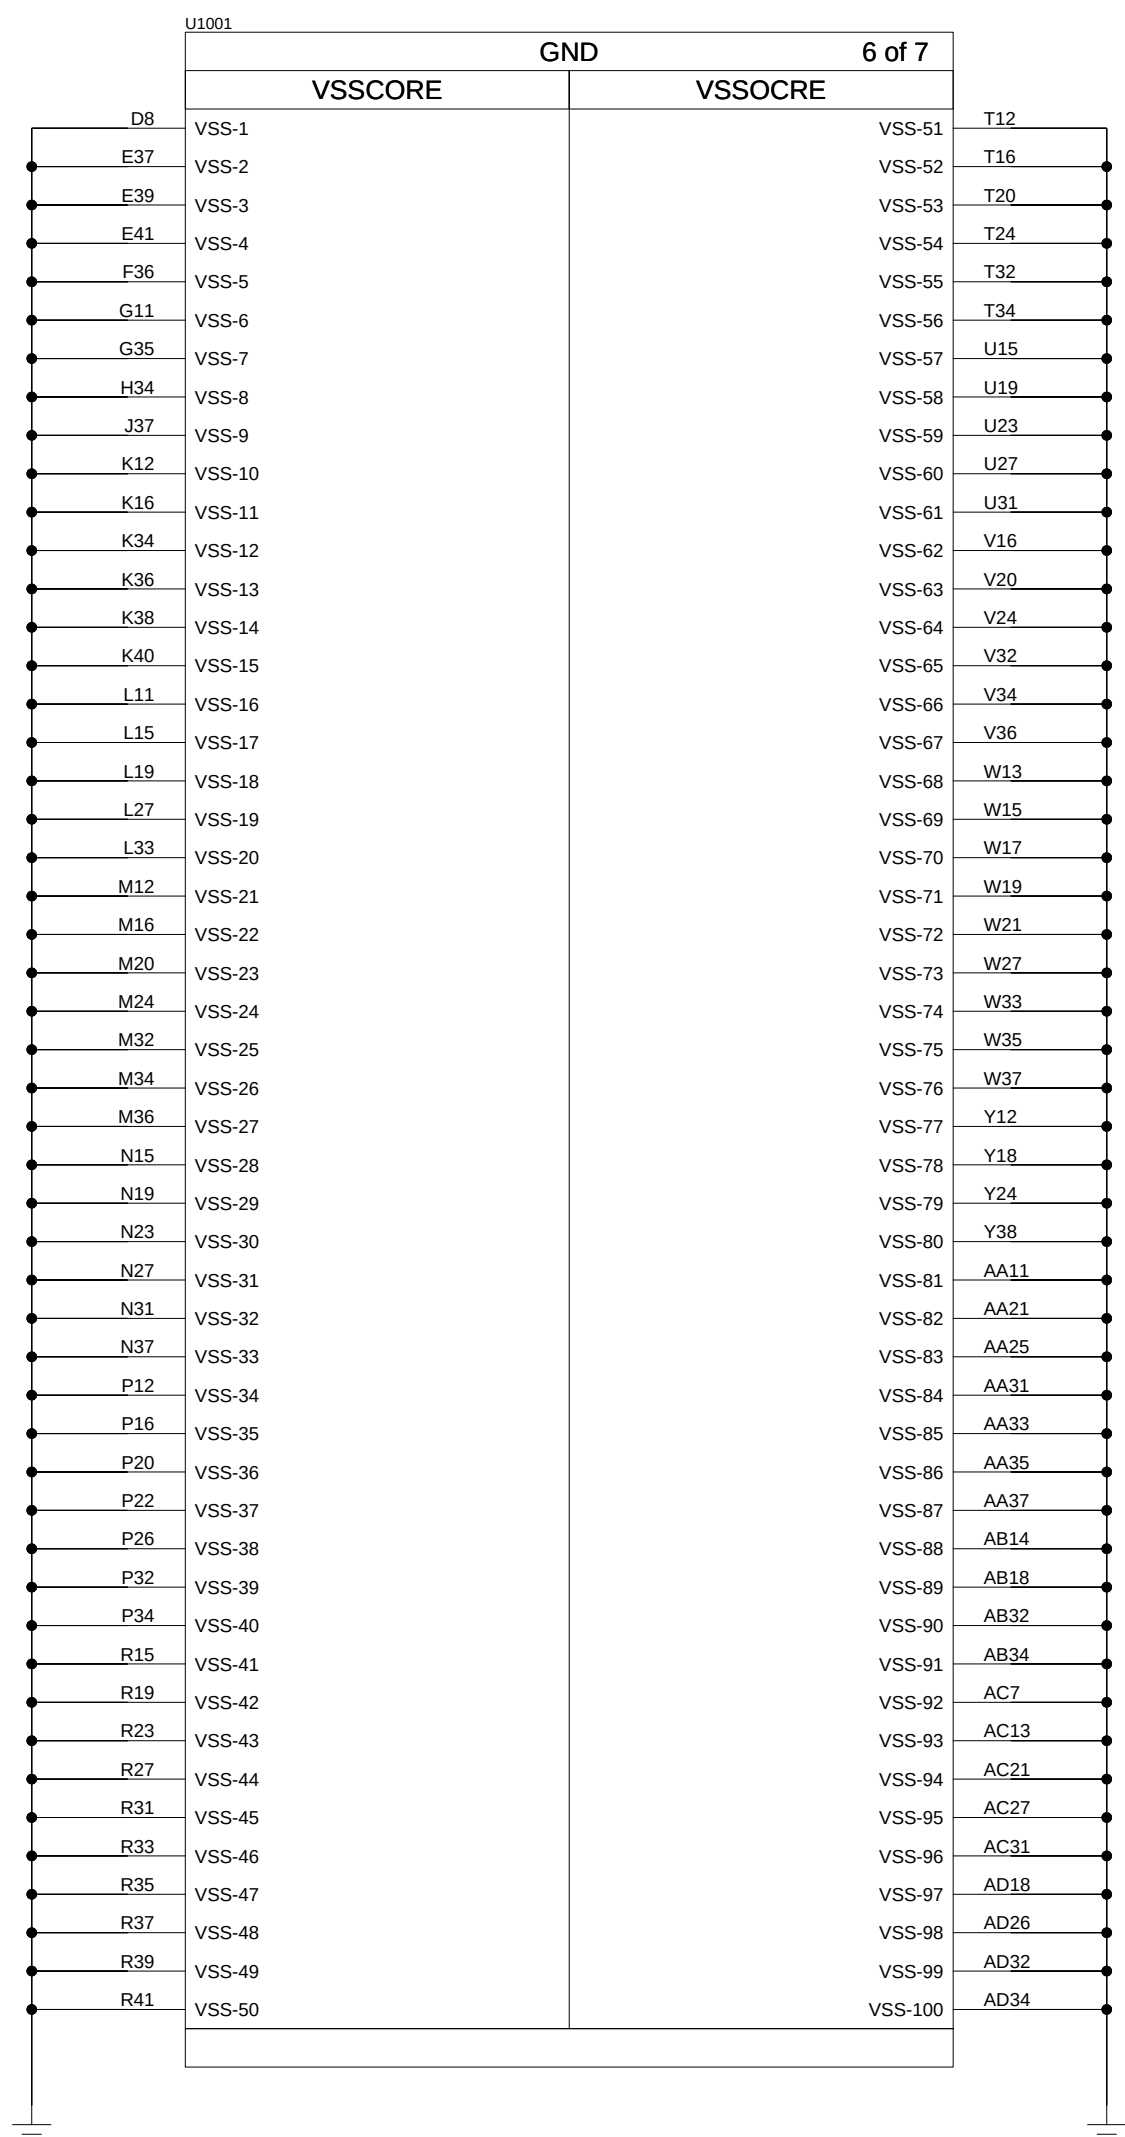


1 REVISION RECORD			
LTR	ECO NO:	APPROVED:	DATE:

BLOCK DIAGRAM

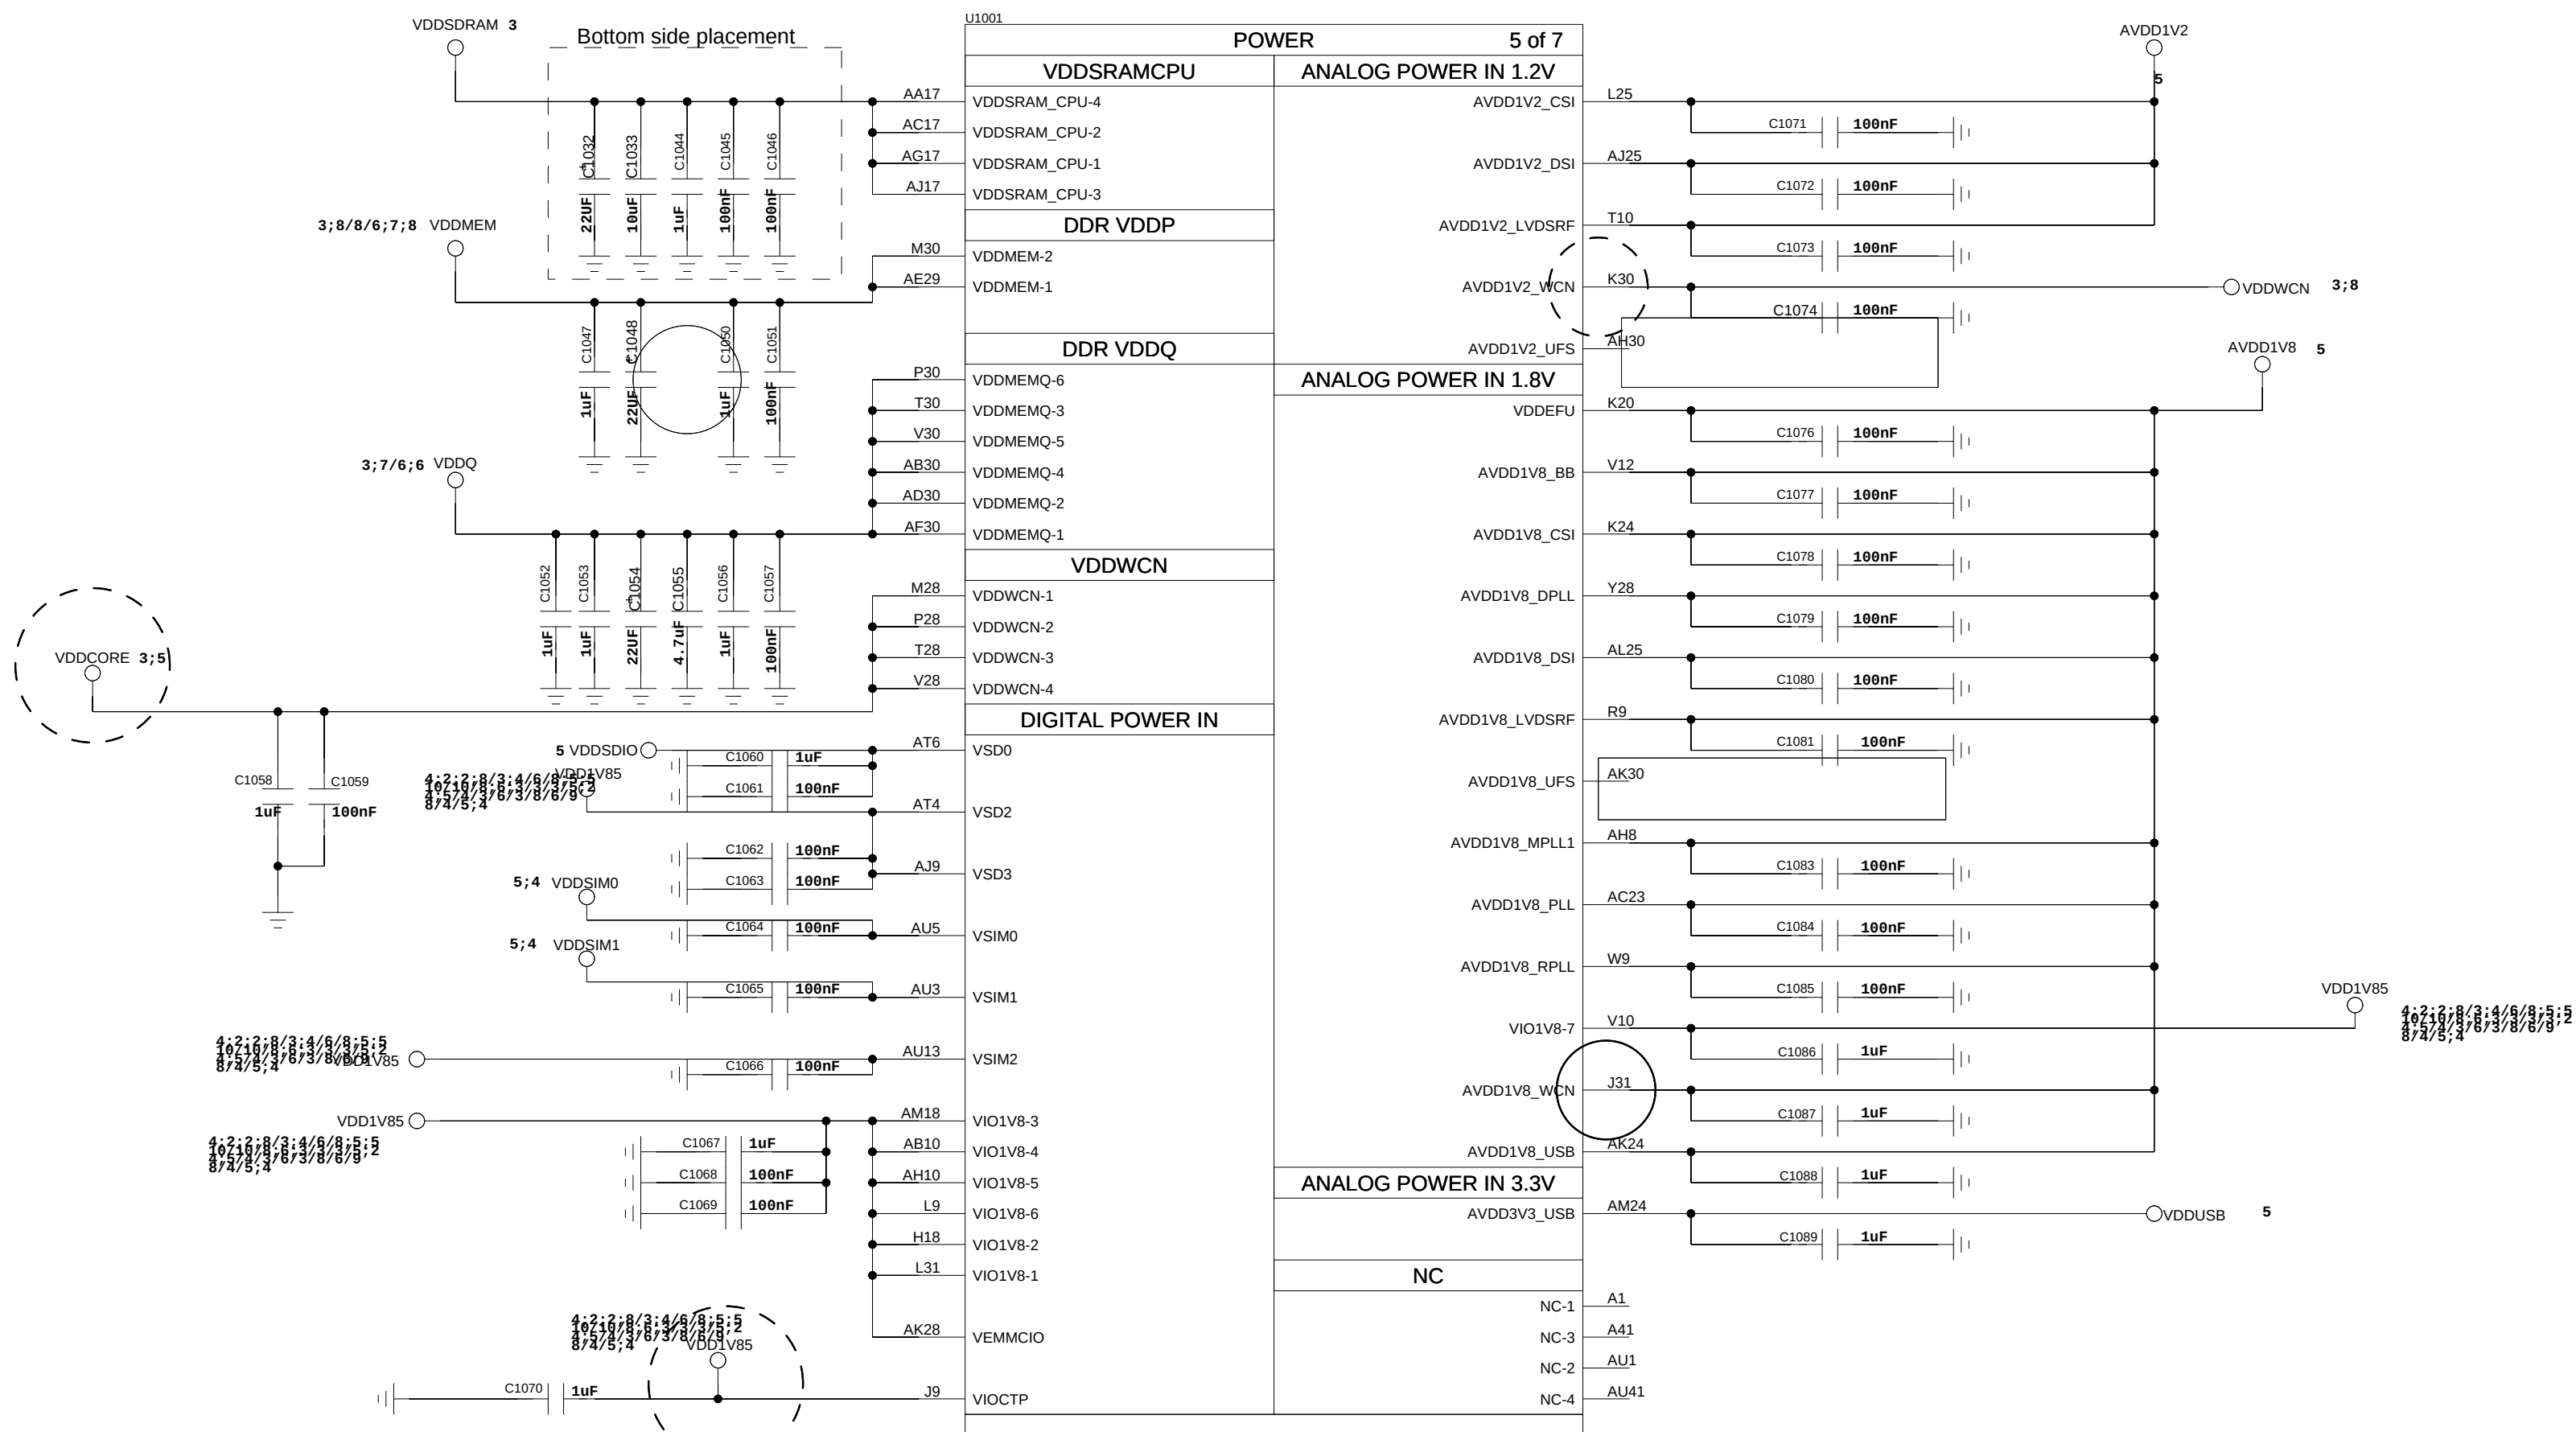


POWER

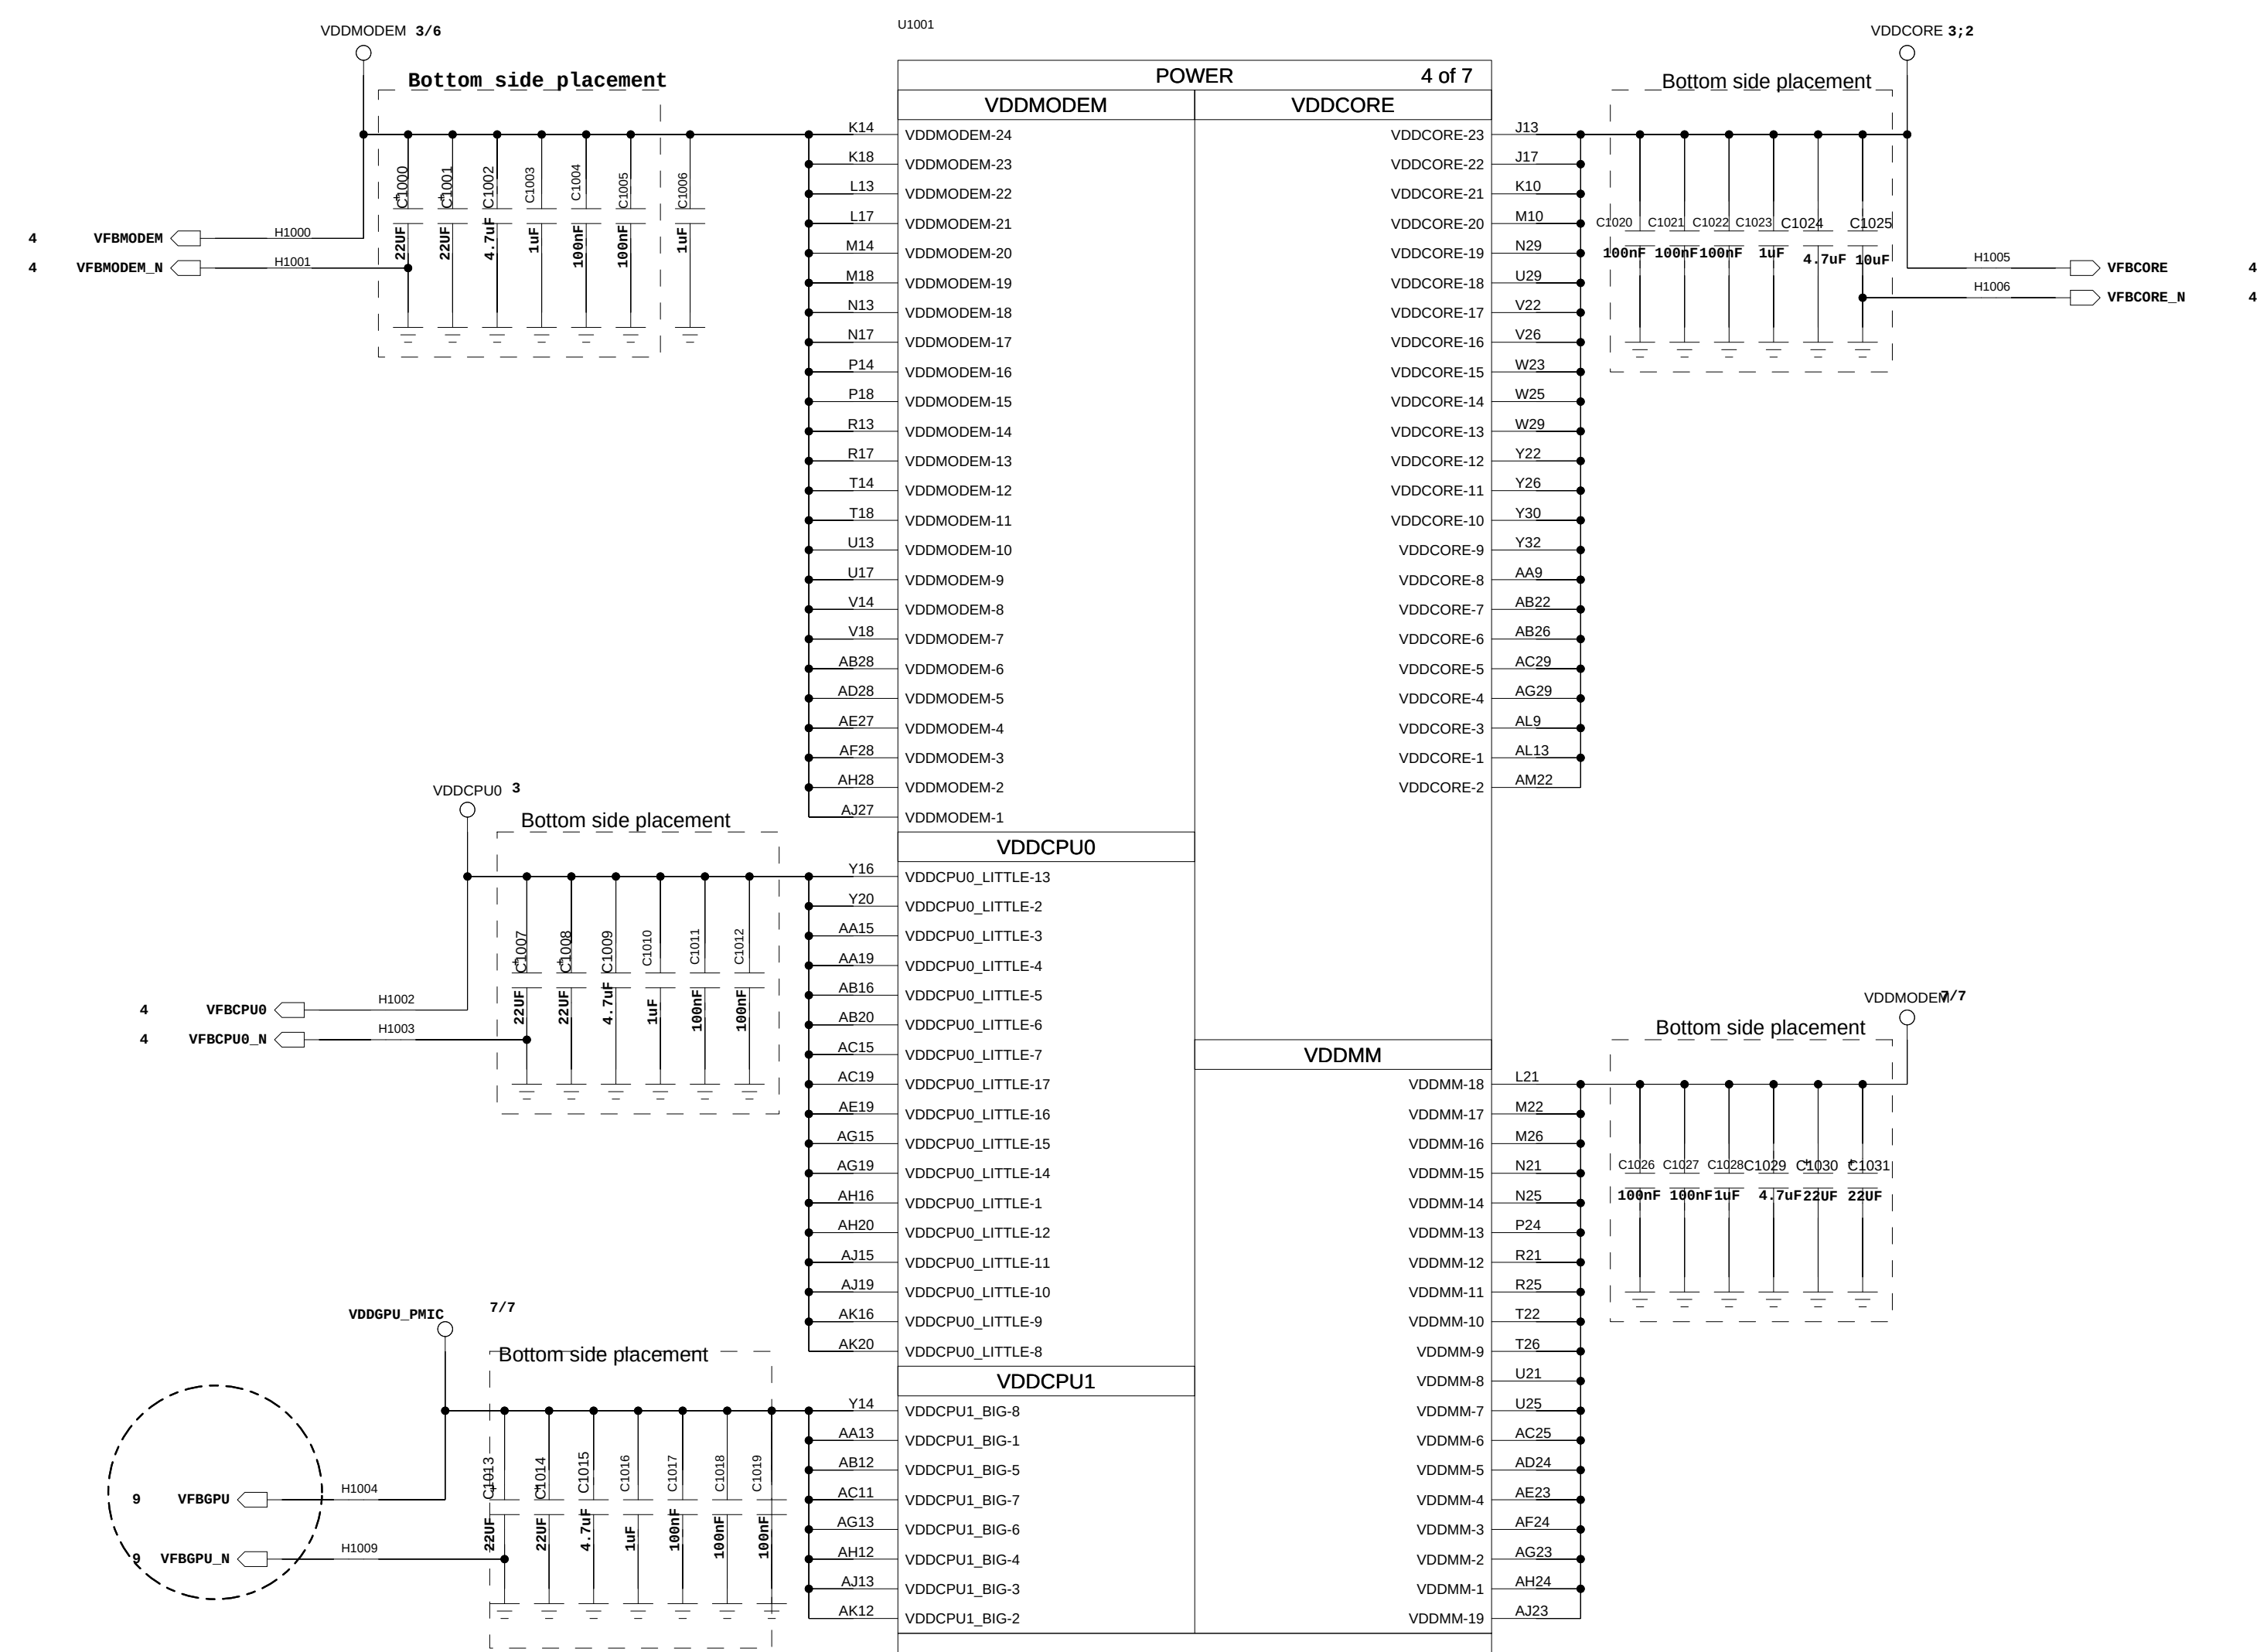

1			
REVISION RECORD			
LTR	ECO NO:	APPROVED:	DATE:

MEMORY

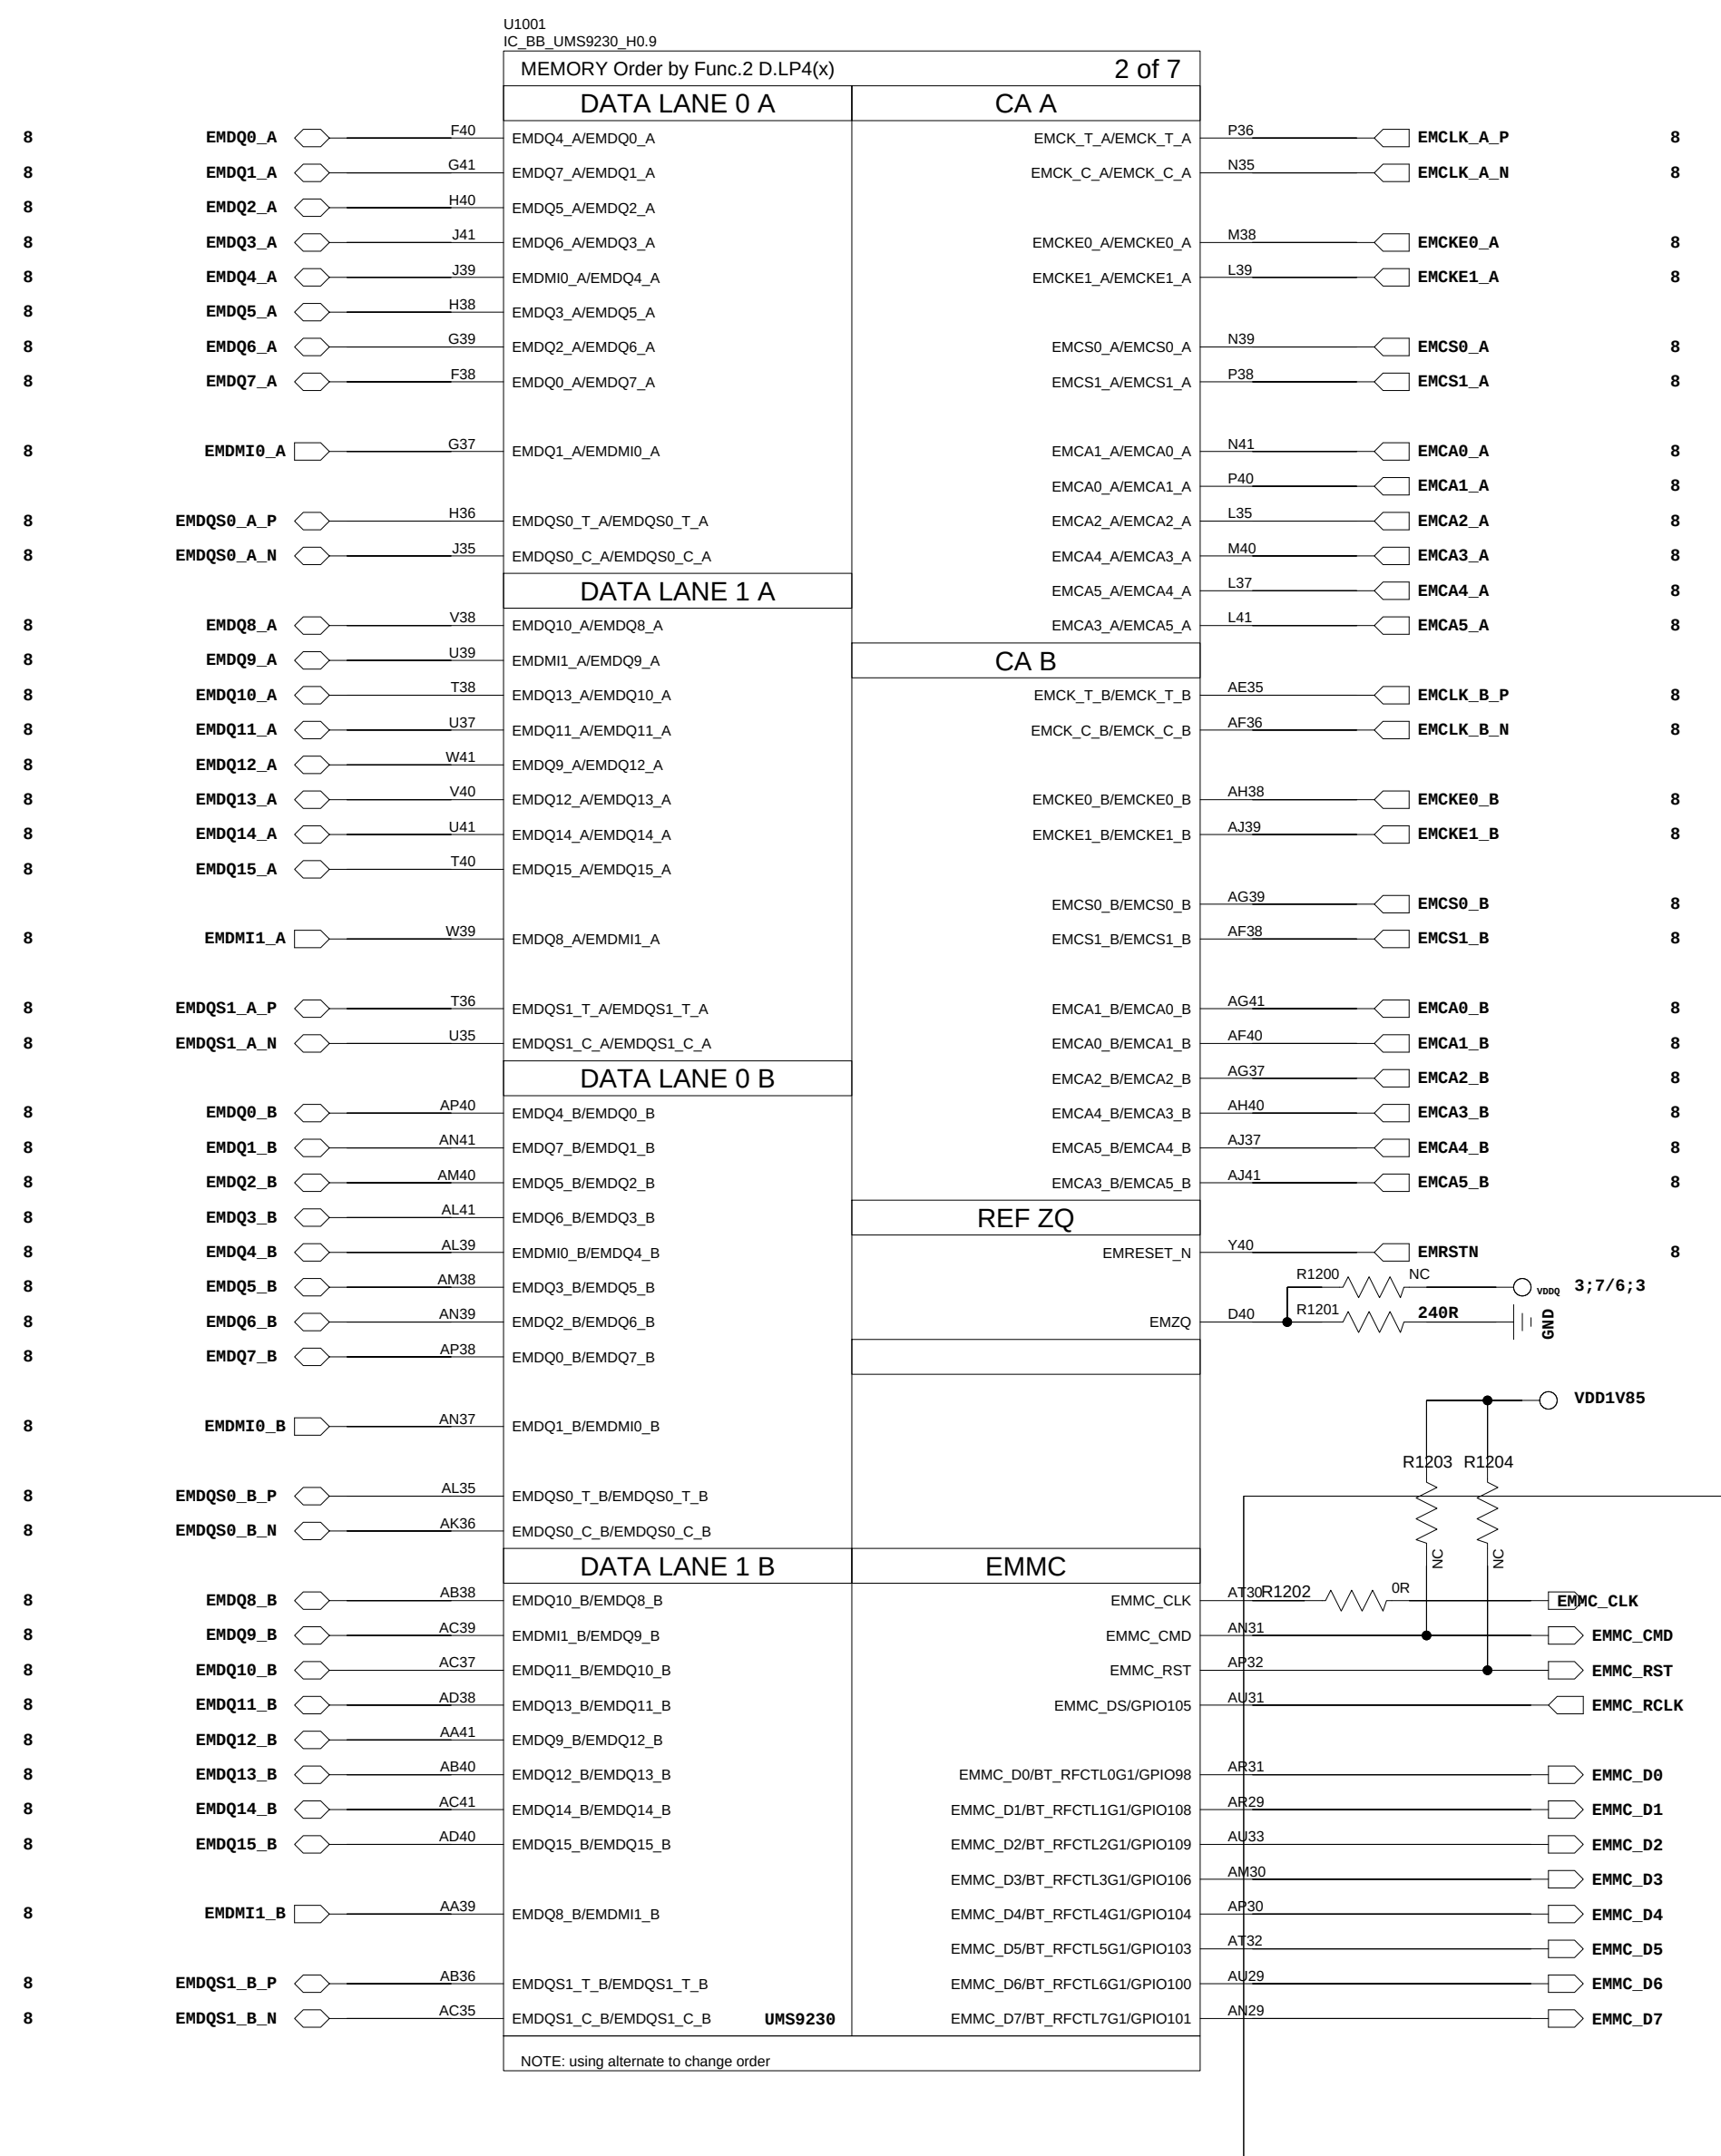

COMPANY: TRANSSION HOLDINGS				MODEL: J6563_F069_MAIN		Modified Date: 25/10/2023:14:58	
DRAWN		DATED		TITLE:		VERSION:	SHEET: 023
CHECKED		DATED	< >	Confidentiality	CONFIDENTIAL		


ÄÚíâÖÃÒôÆµ¹·Å¼æÈÝËµÃ÷

COMPANY: TRANSSION HOLDINGS				MODEL: J6563_F069_MAIN		Modified Date: 25/10/2023:14:59	
DRAWN		DATED		TITLE:		VERSION:	SHEET: 023
CHECKED		DATED	< >	Confidentiality	CONFIDENTIAL		




REVISION RECORD			
LTR	ECO NO.	APPROVED	DATE


PMU_ANALOG

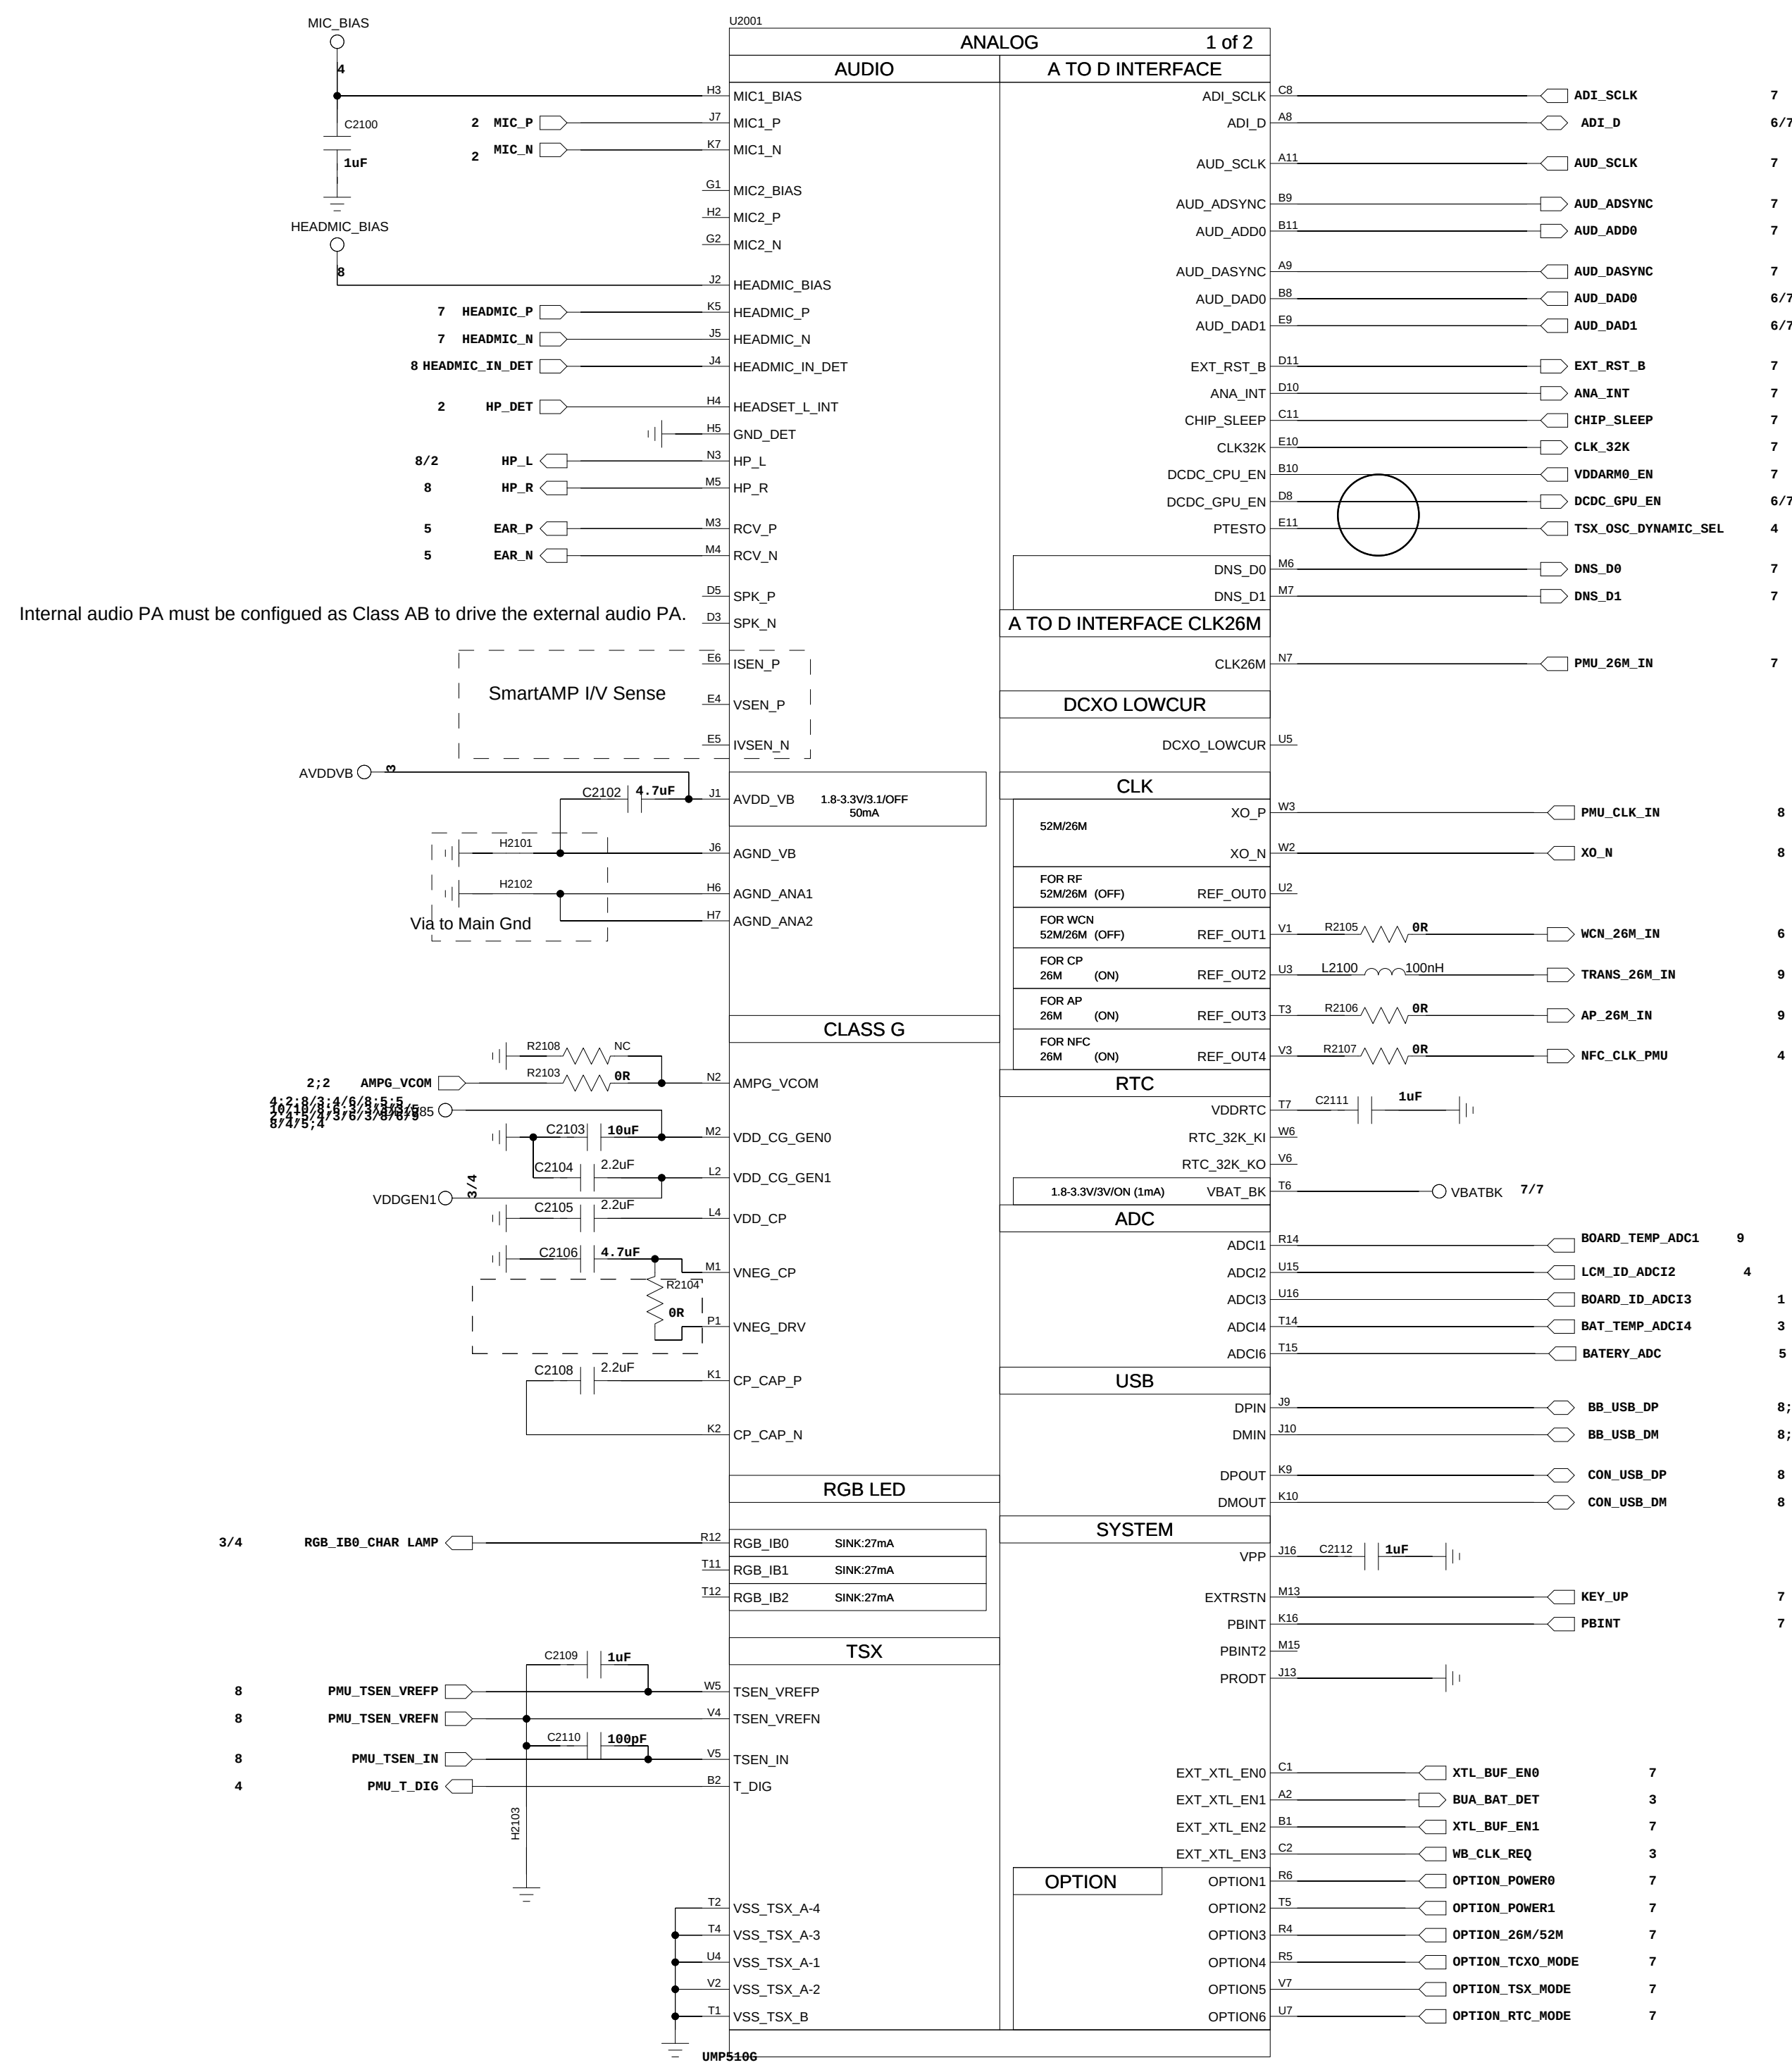


BKBT



TSX

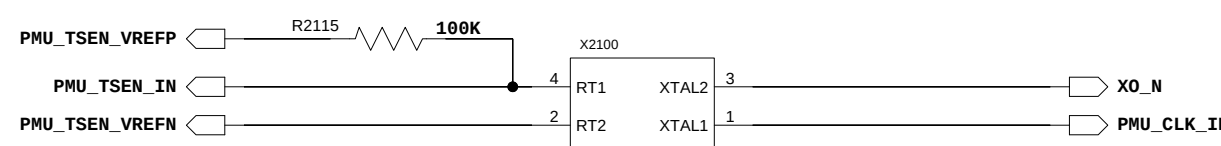

OPTION

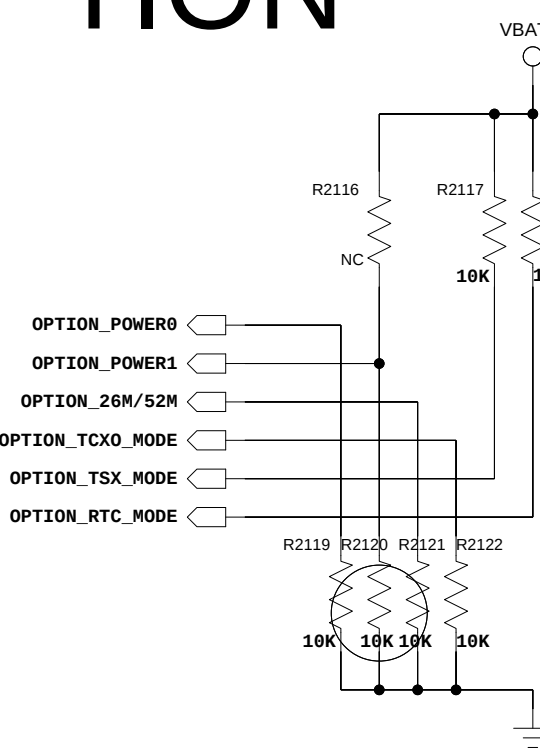




Item	Scenario	Option1	Option2
0	Qogir L6+UMP510G	0	0
1	Qogir L6+UMP510G+DCDC	0	1
2		1	0
3		1	1

Scenario	Option3(26M/32M)	Option4(TCXO_MODE)	Option5(TSX_MODE)	Option6(RTC_MODE)
26M TCXO+32K Crystal	0	1	0	0
26M TSX+32K Crystal	0	0	1	0
26M TSX+32K-less from PMIC internal	0	0	1	1
26M DCXO+32K-less from PMIC internal	0	1	1	1
26M DCXO+32K Crystal	0	1	1	0













COMPANY: TRANSSION HOLDINGS				MODEL:J6563_F069_MAIN		Modified Date: 25/10/2023:15:03	
DRAWN		DATED		TITLE:		VERSION:	SHEET: O23
CHECKED		DATED	< >	Confidentiality	CONFIDENTIAL		

REVISION RECORD			
LTR	ECO NO.	APPROVED	DATE

Primary Antenna

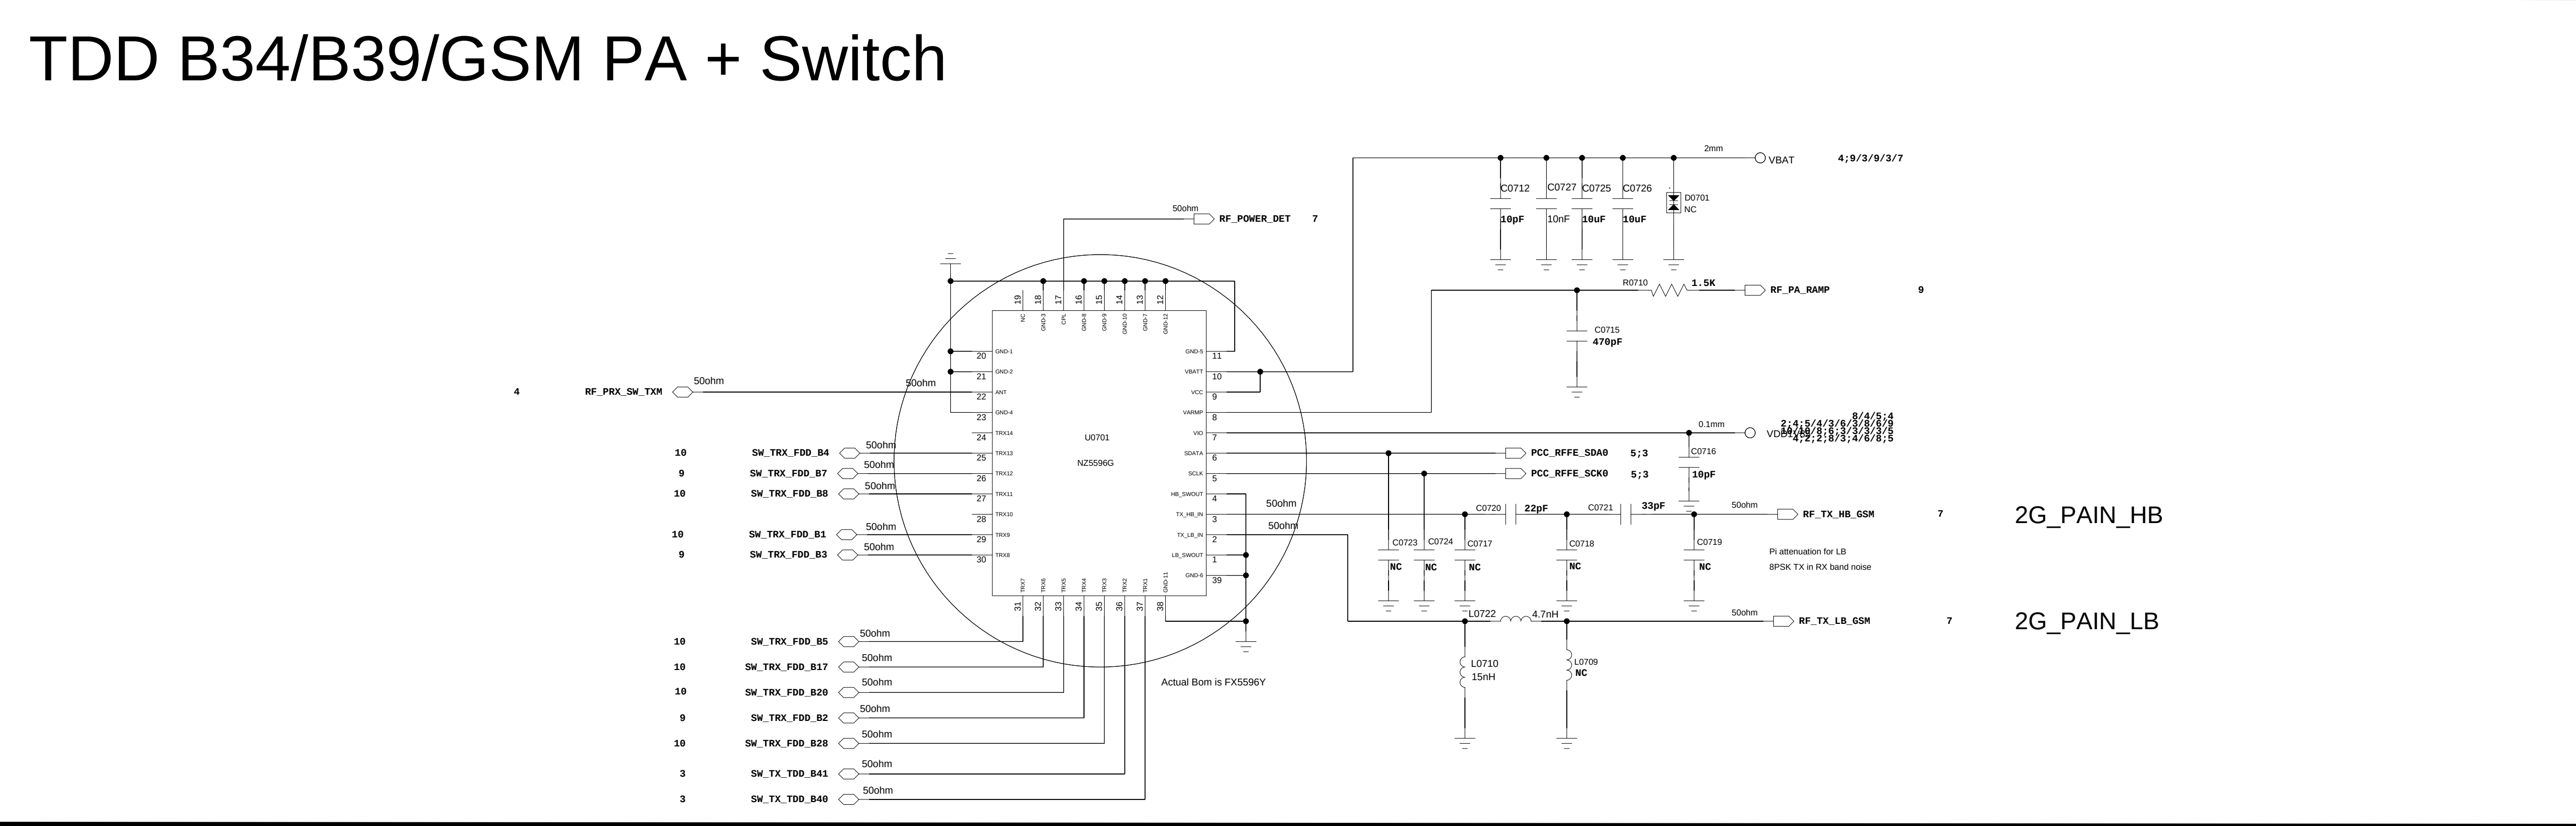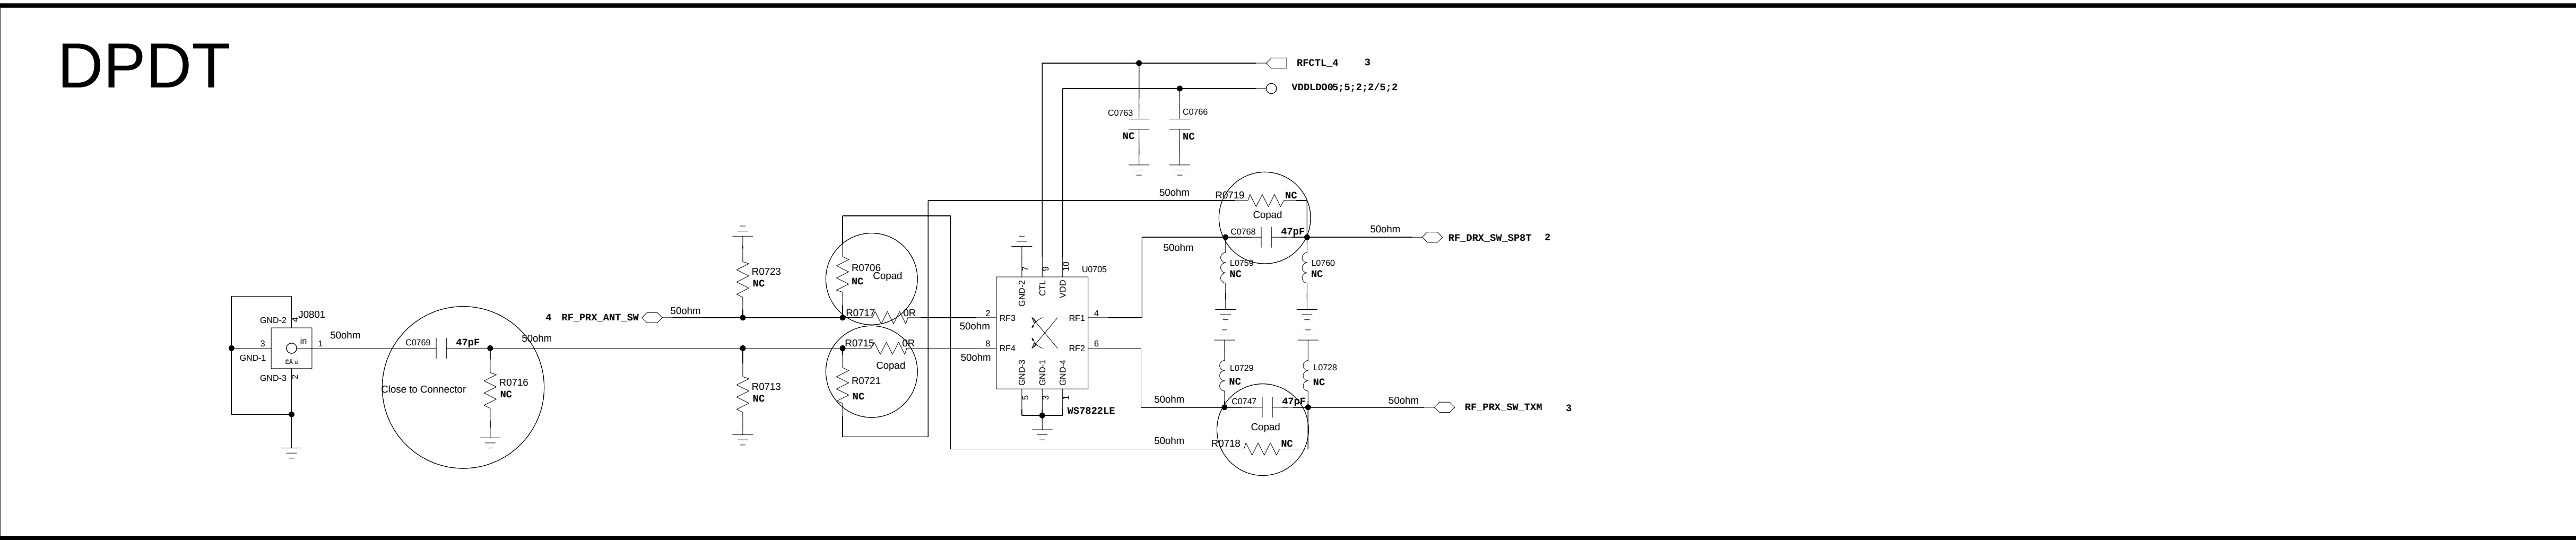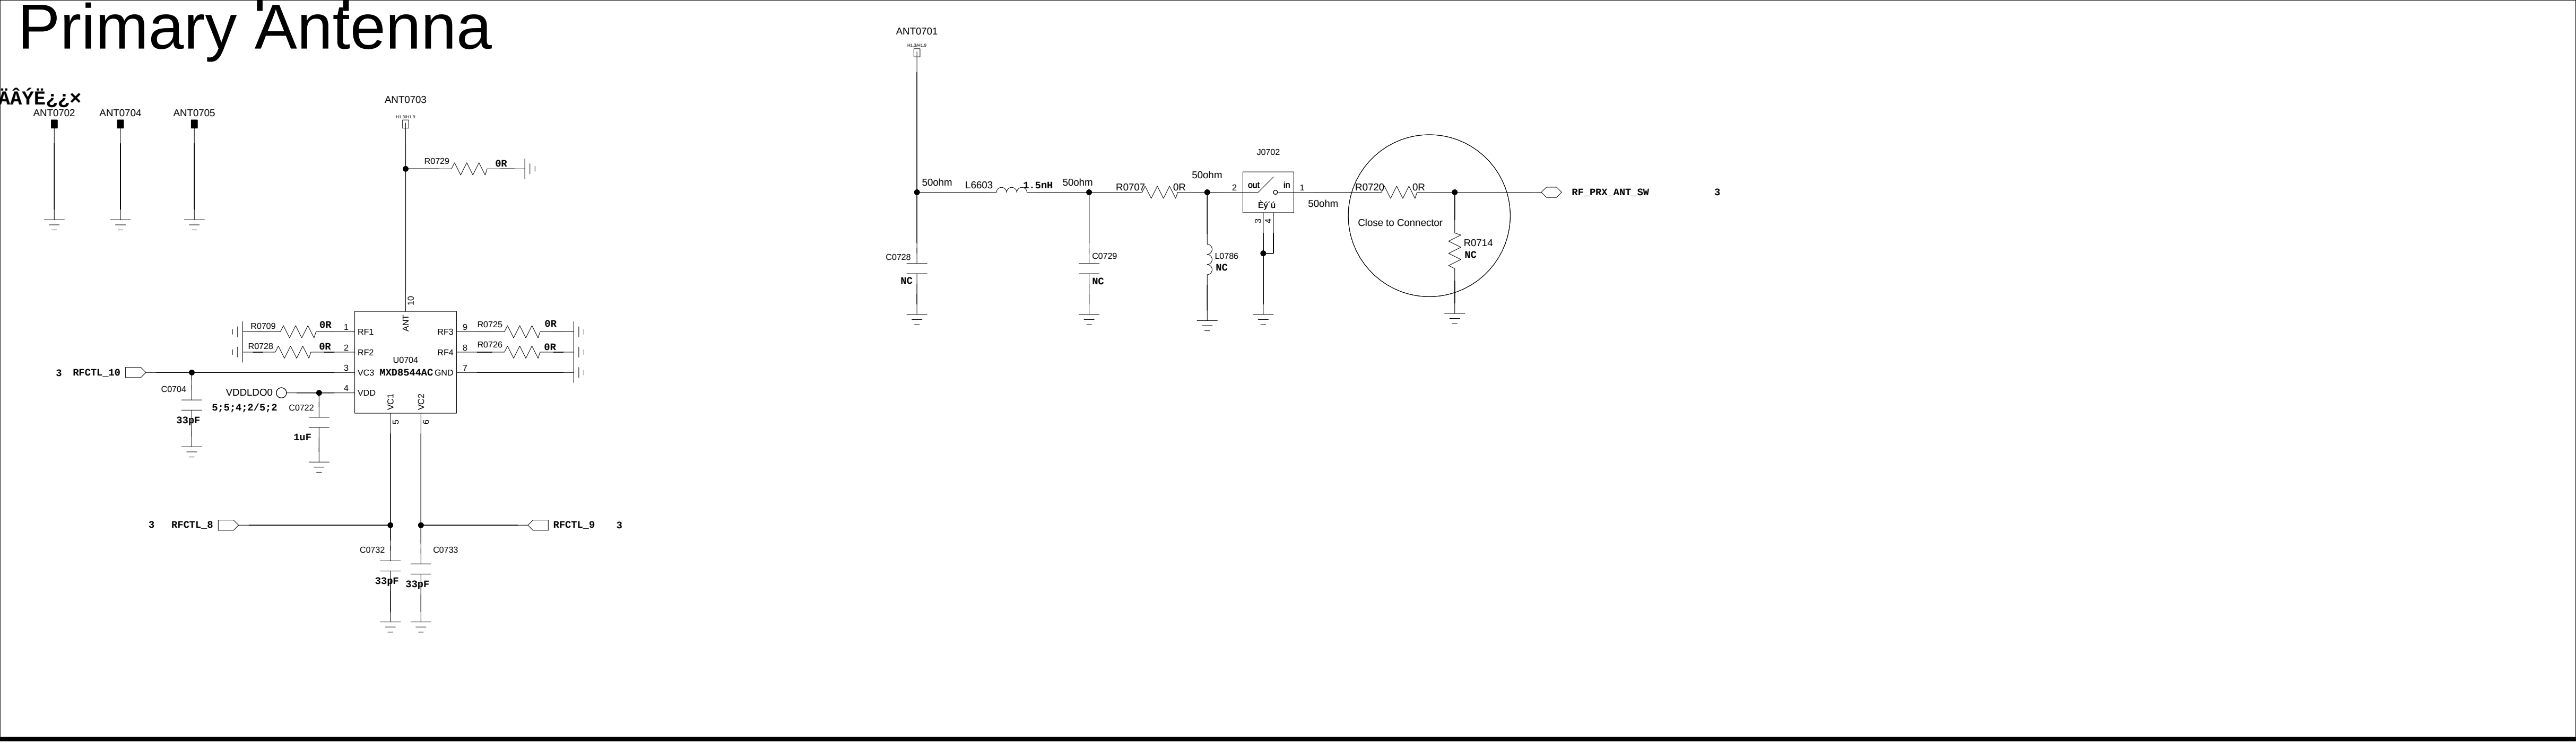


TDD LTE Parts

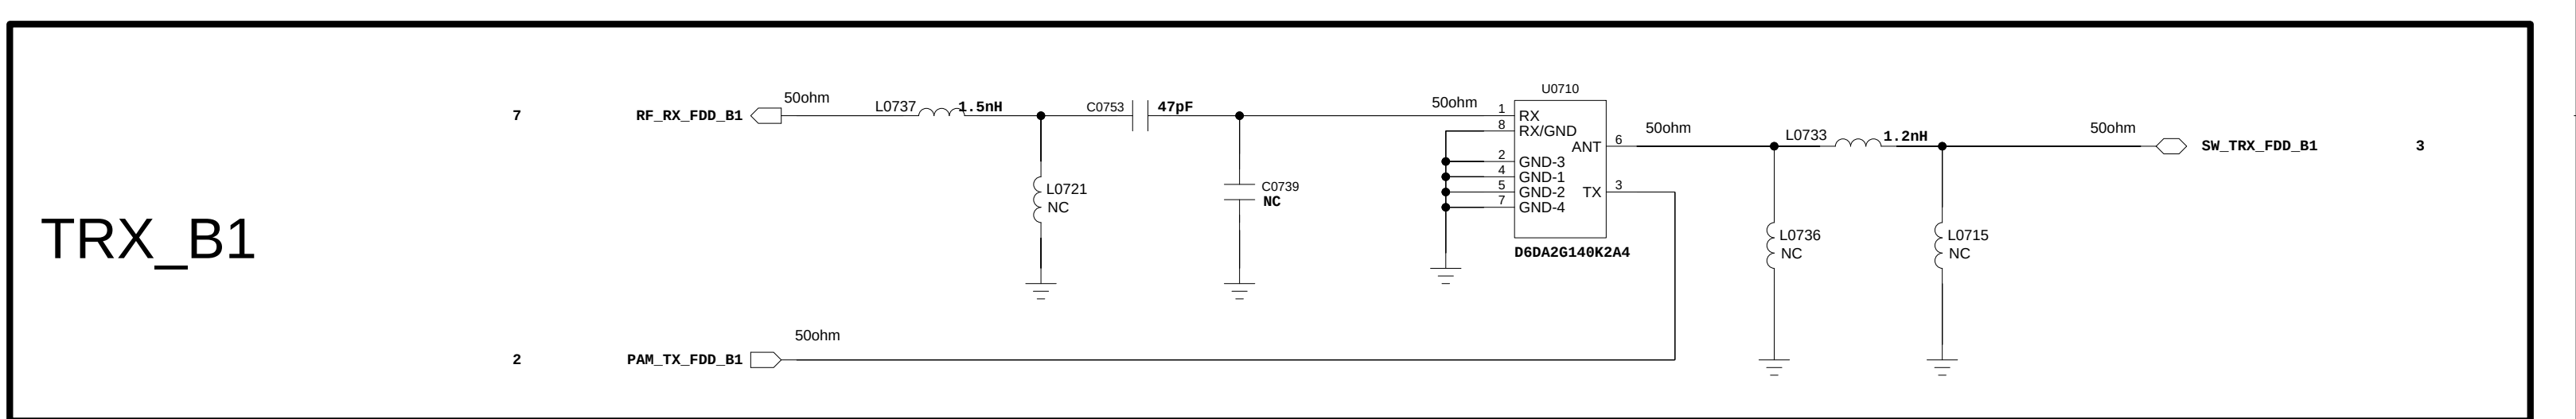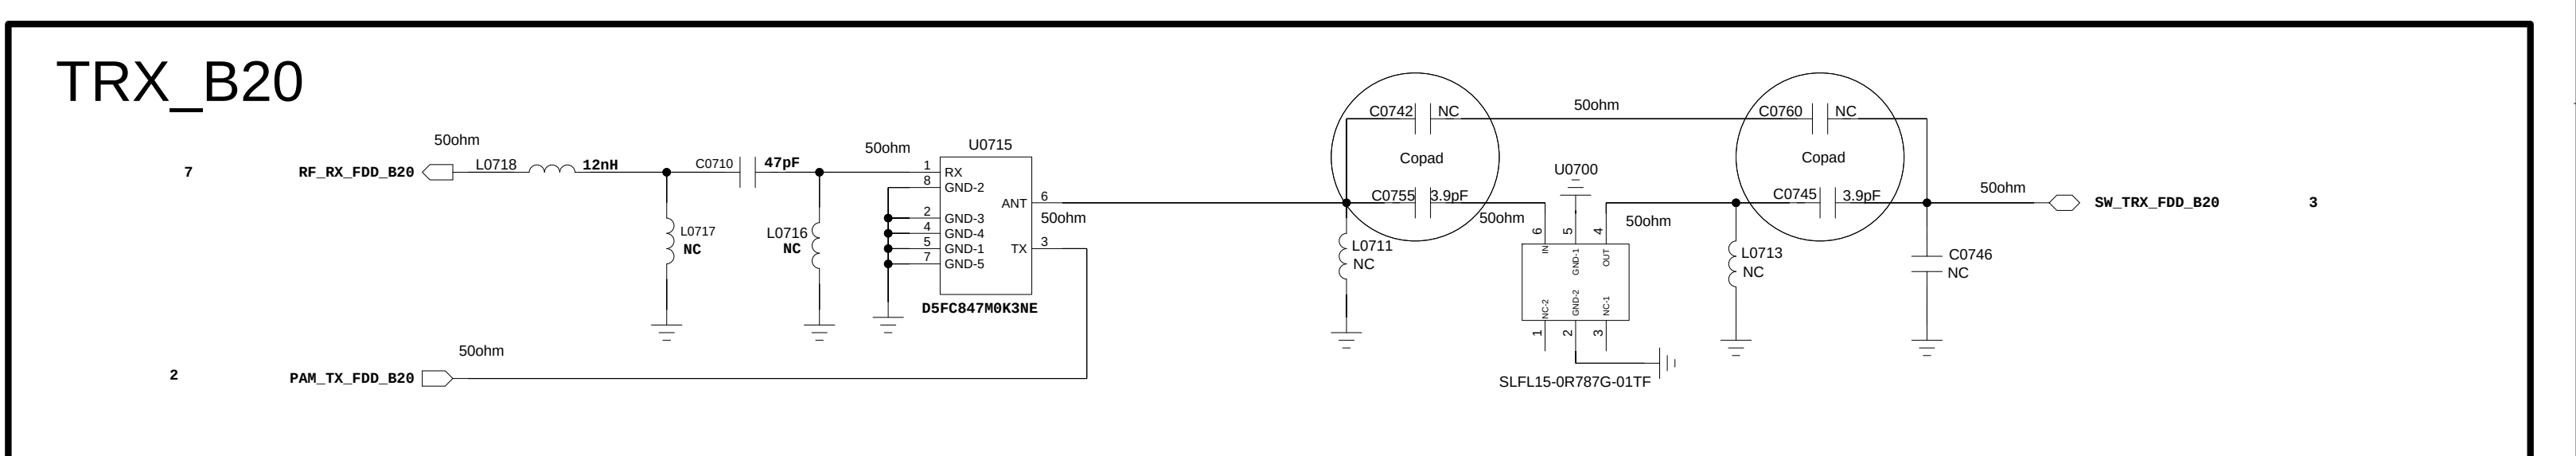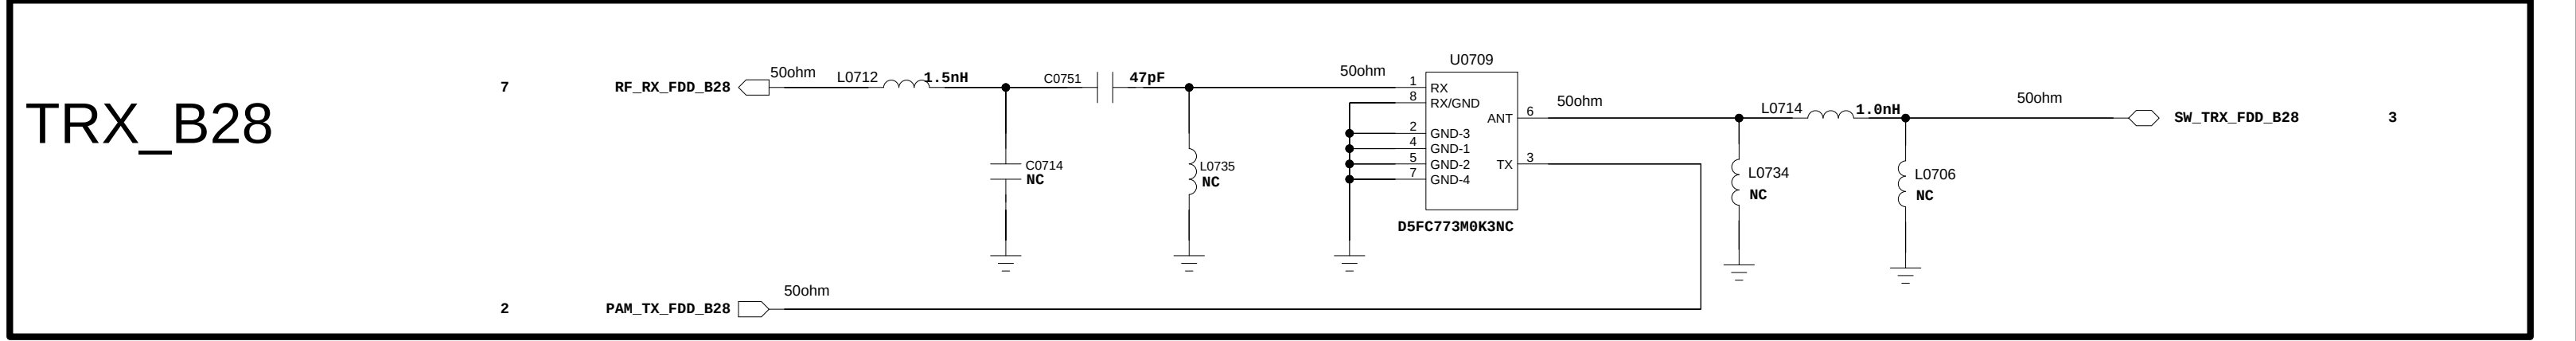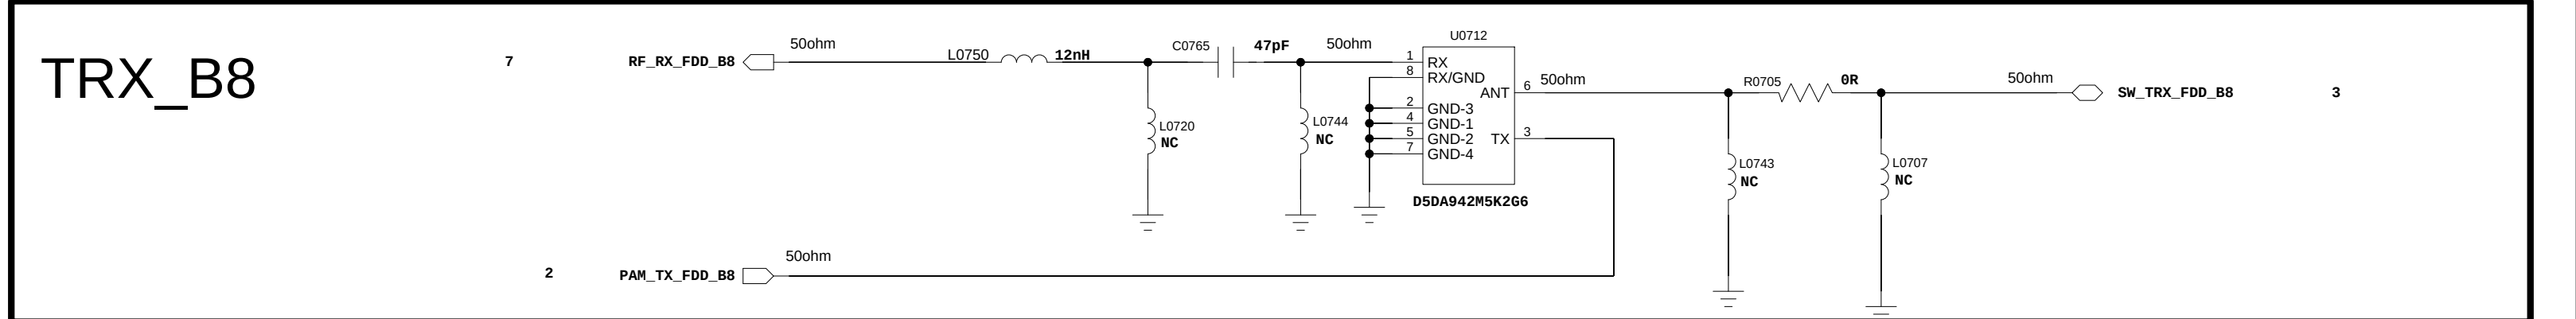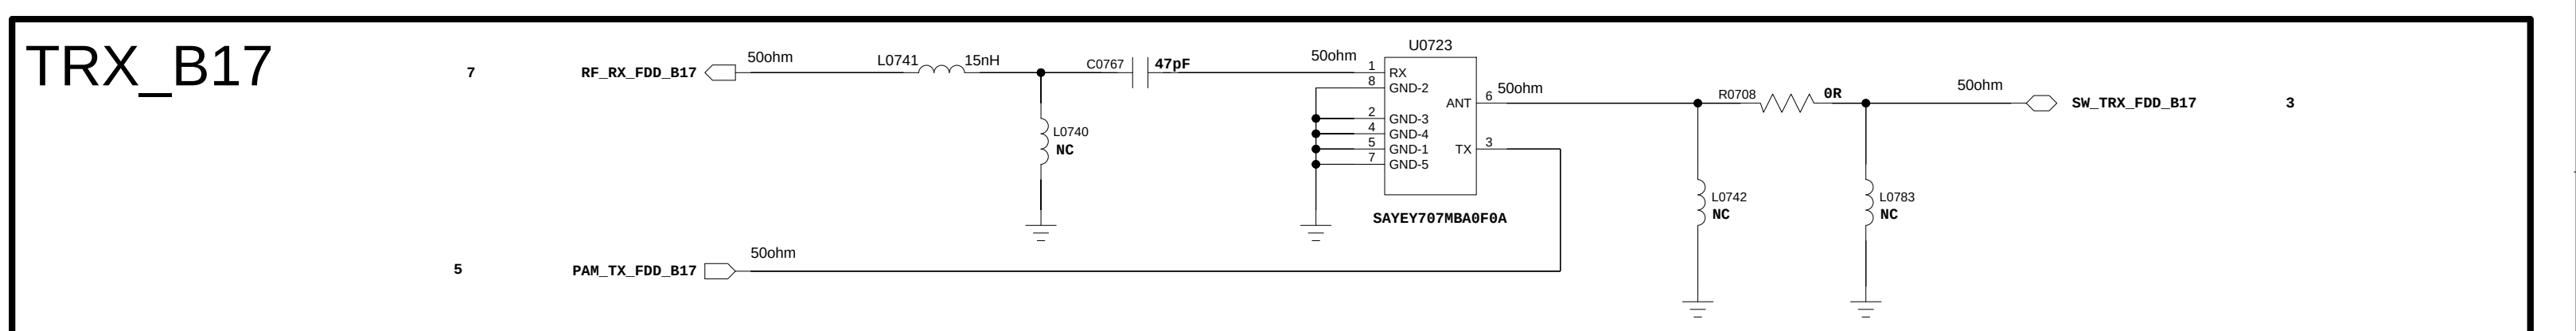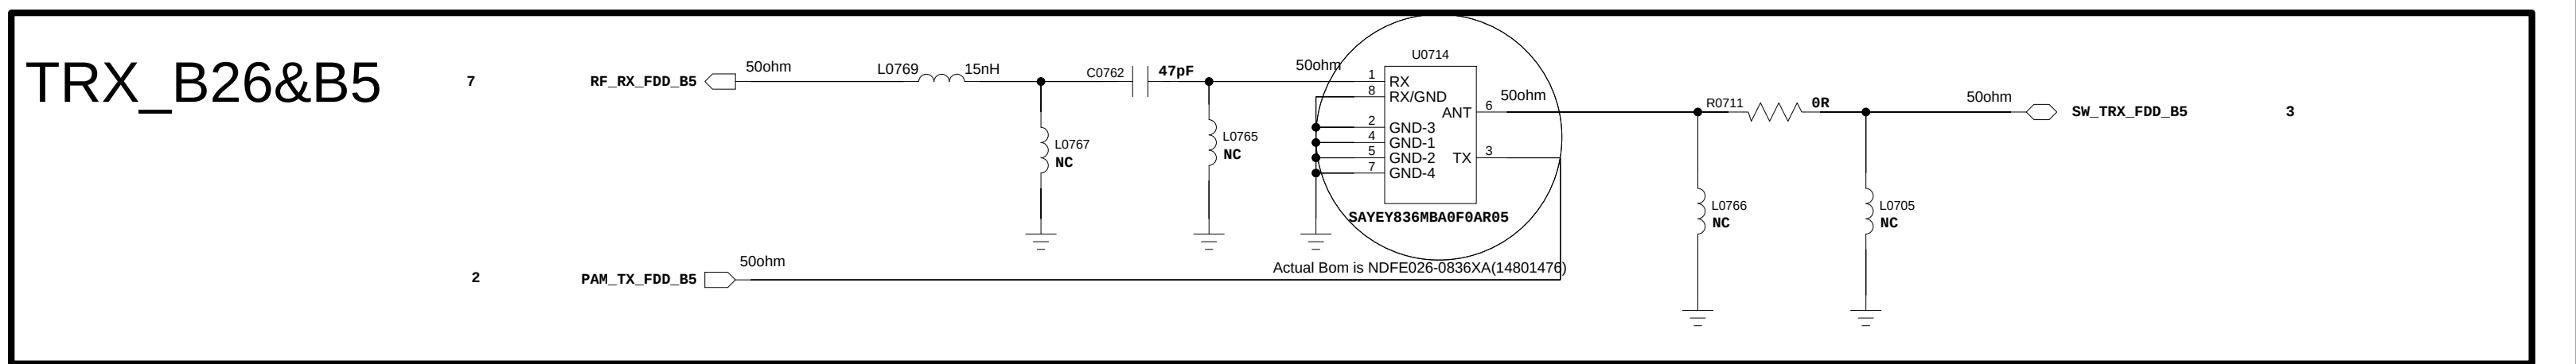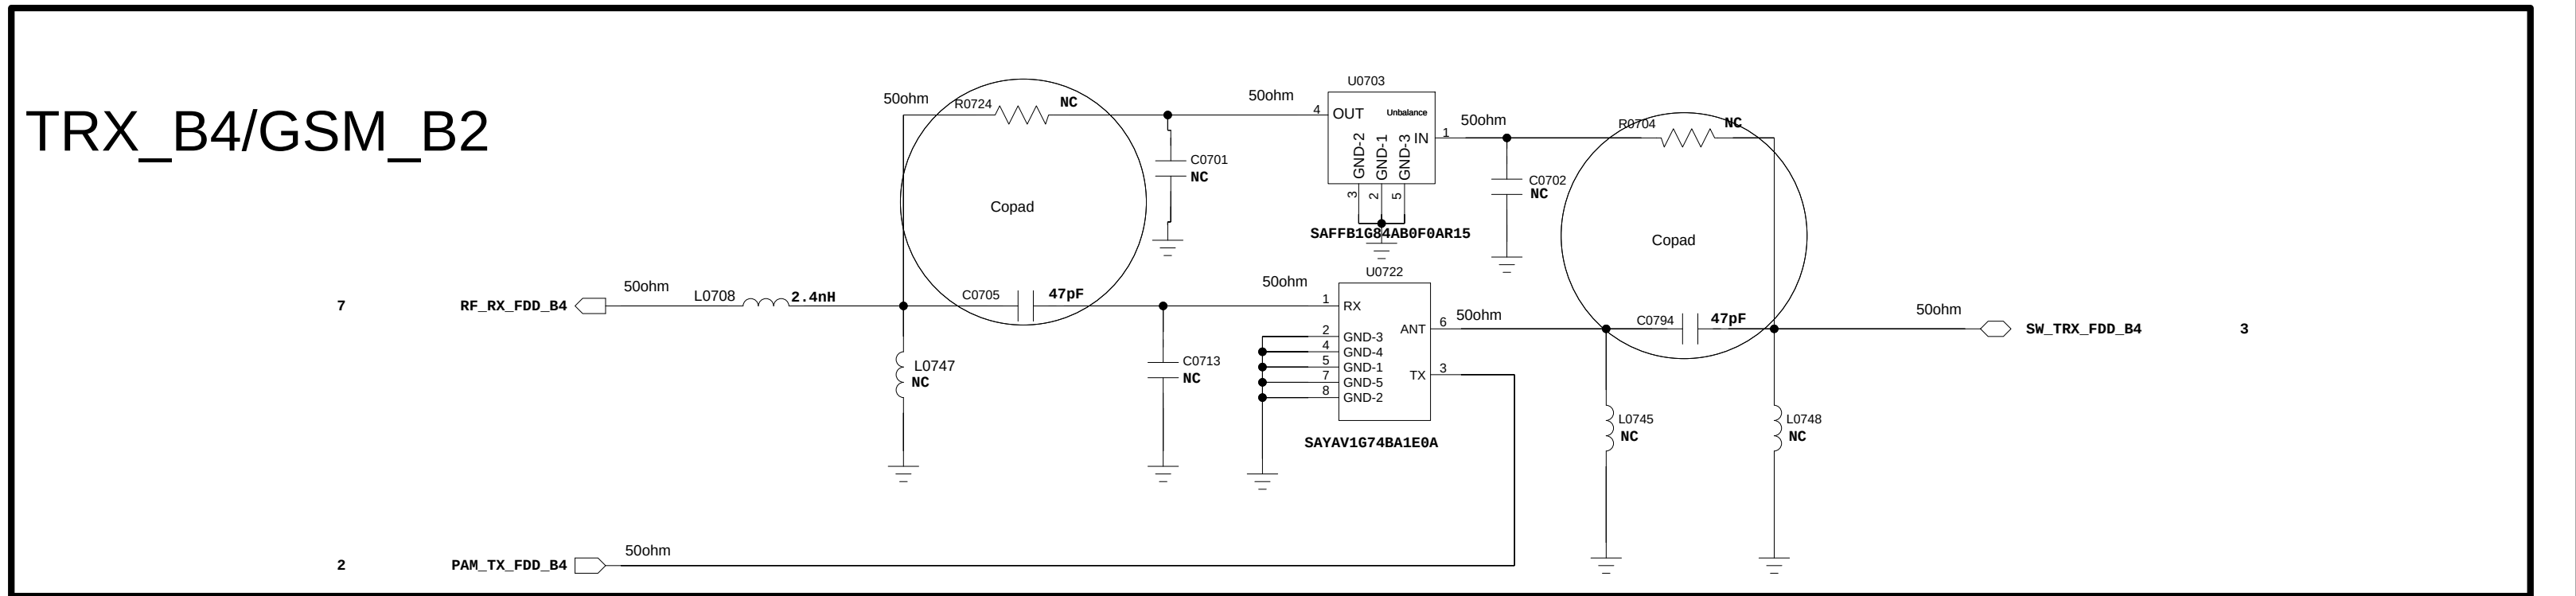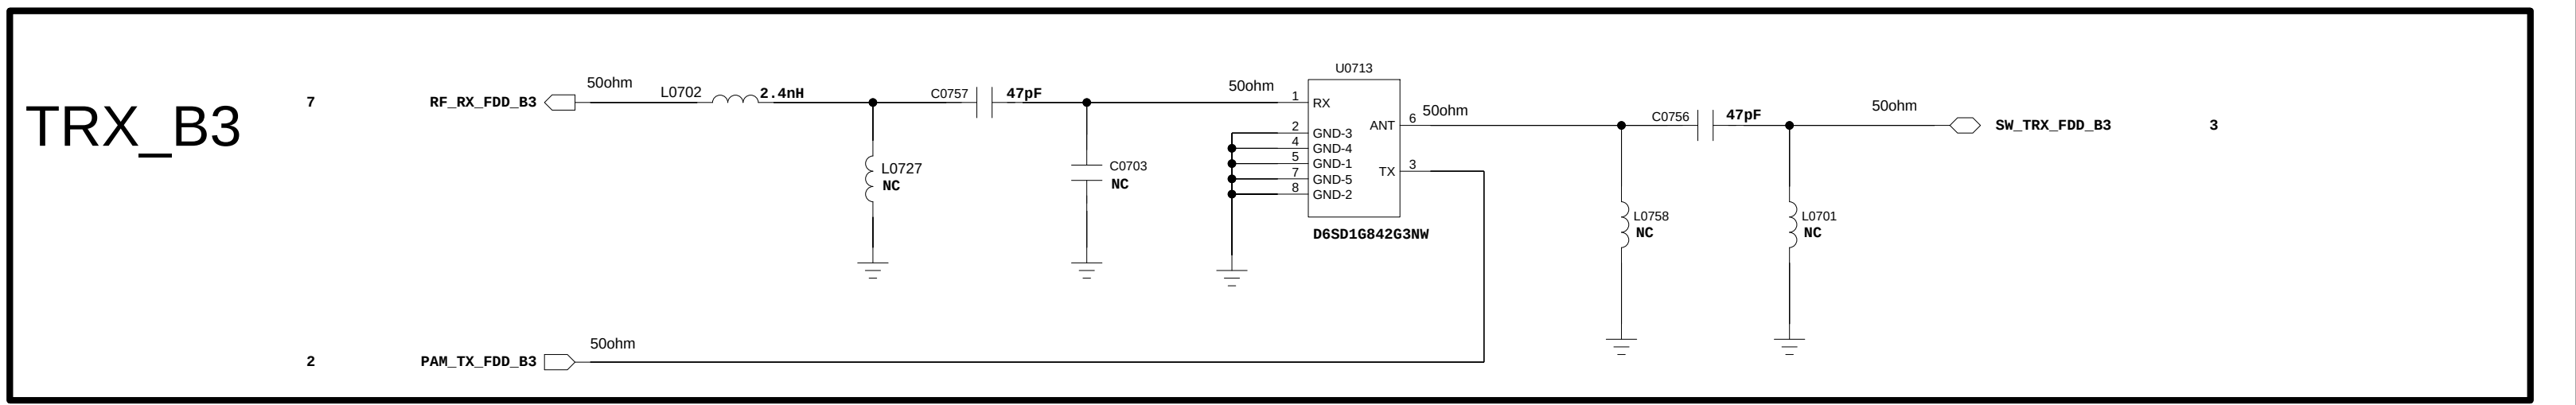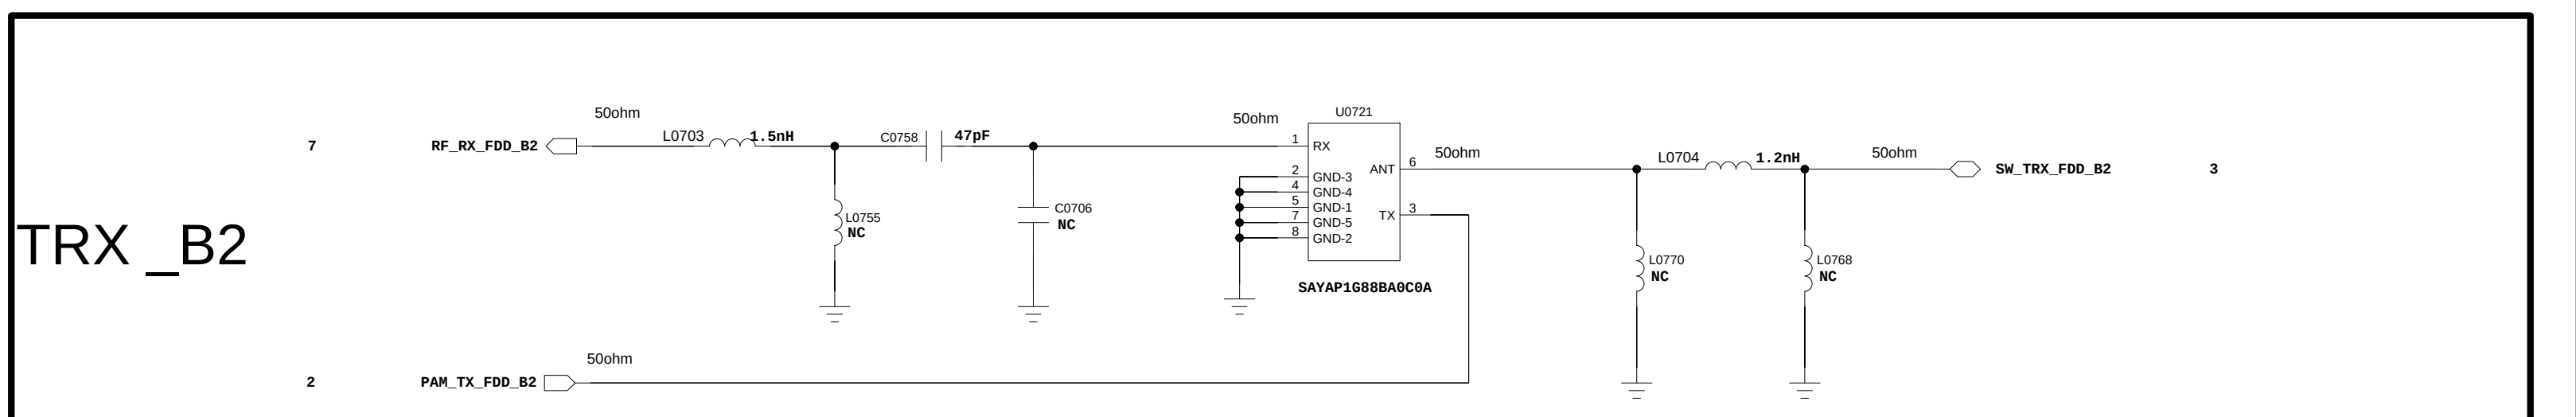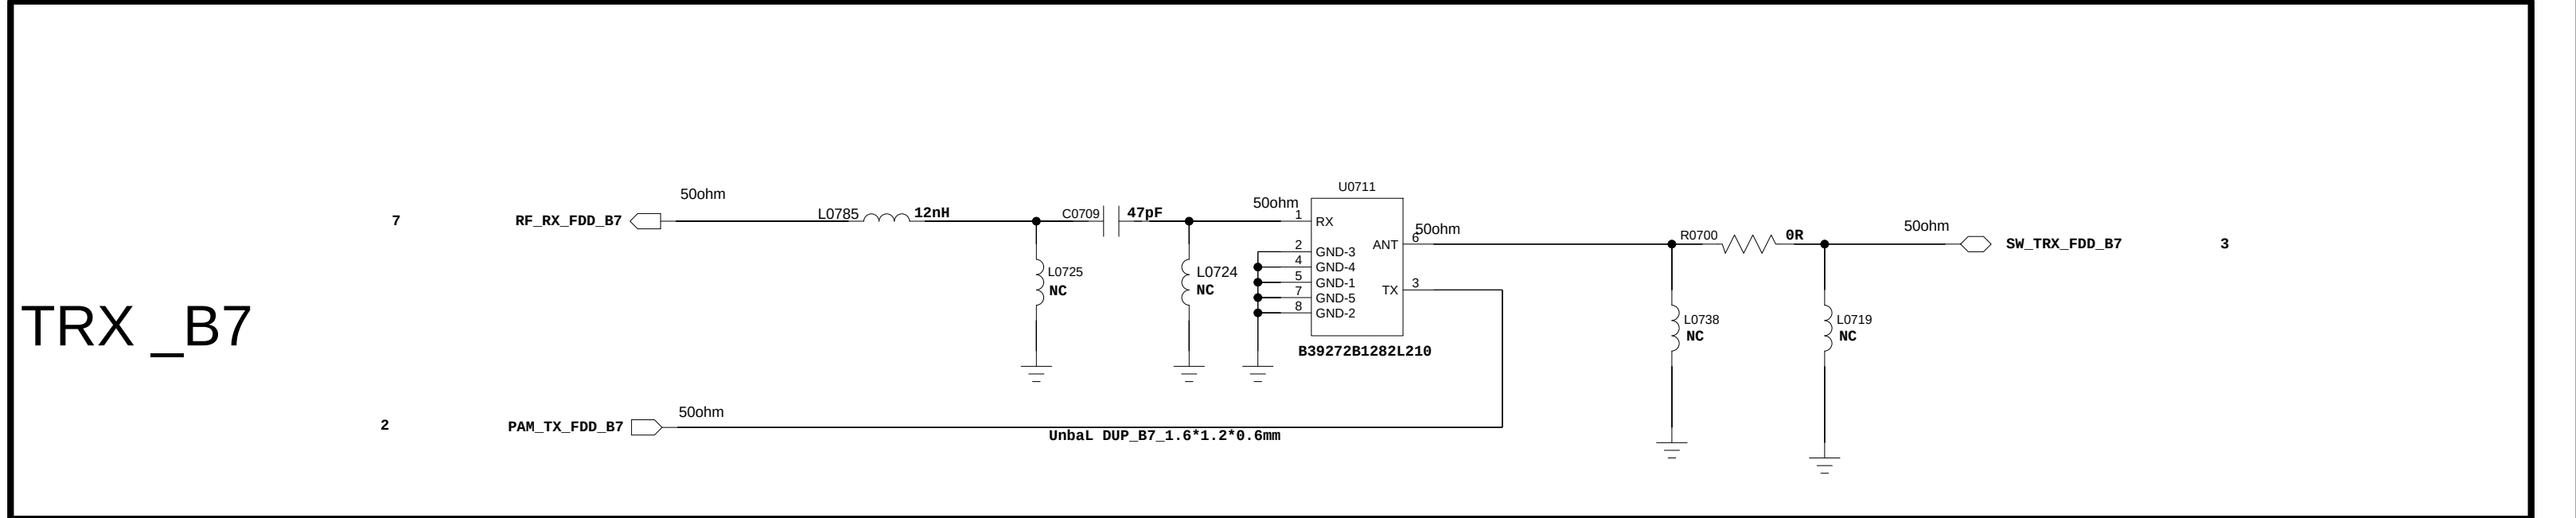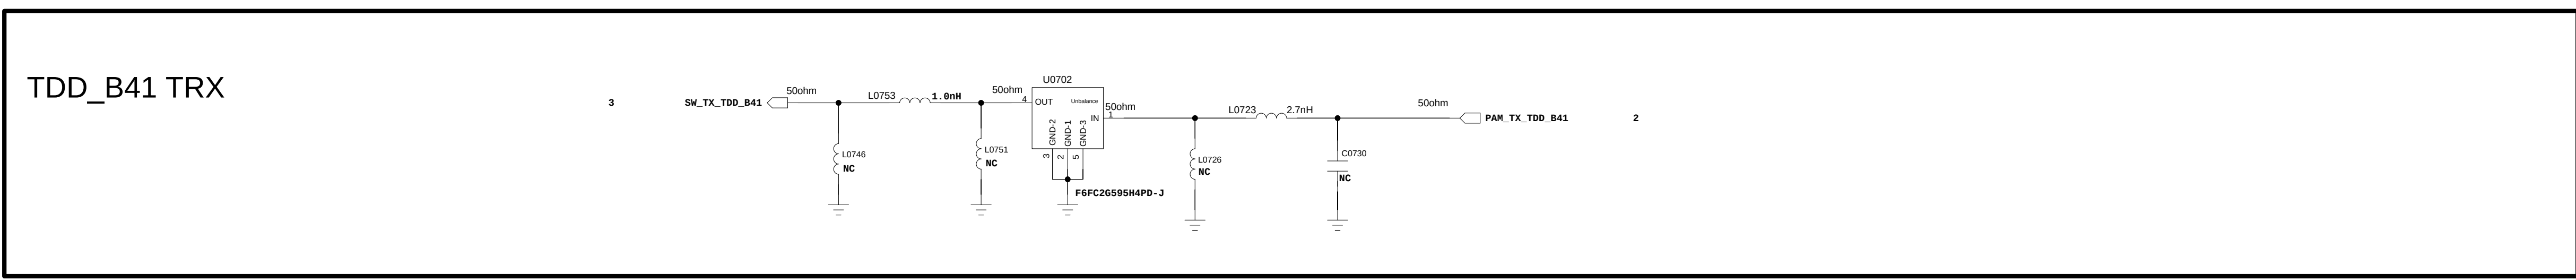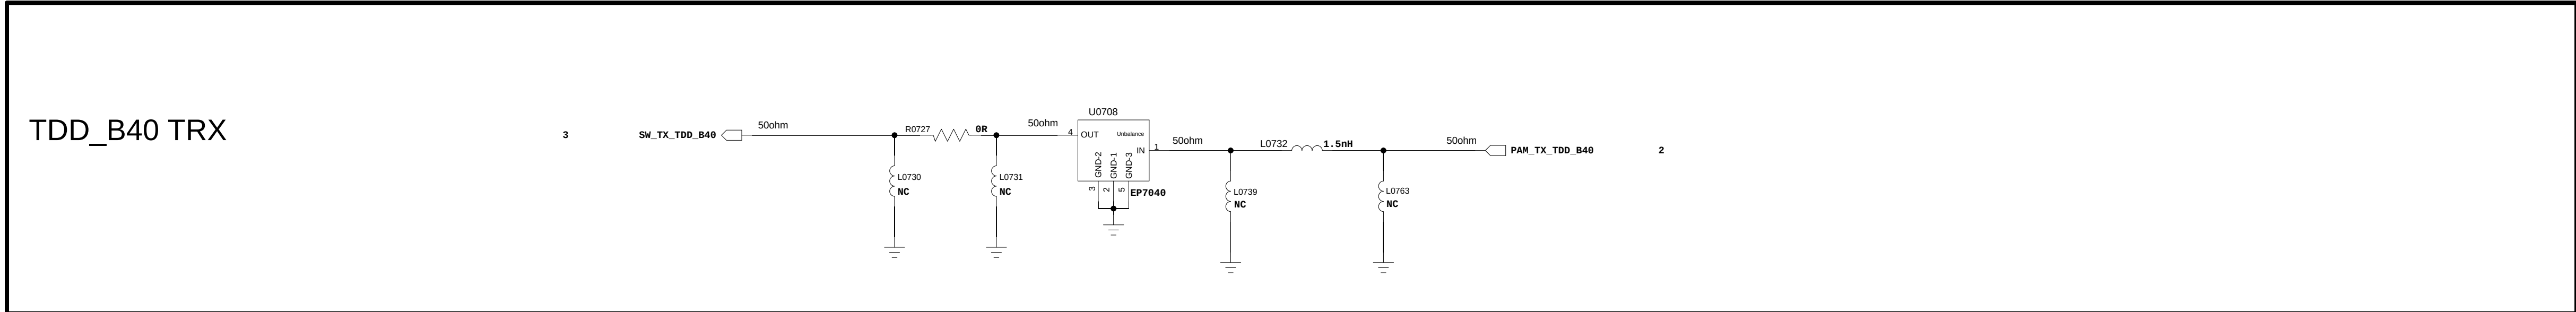


COMPANY: TRANSSION HOLDINGS		MODEL: J6563_F069_MAIN		Modified Date: 19/10/2023:16:33	
DRAWN		DATED		TITLE:	
CHECKED		DATED	< >	Confidentiality	CONFIDENTIAL
				VERSION:	SHEET: 0/23

RF_SR3595D_RF_DRX_SP8T

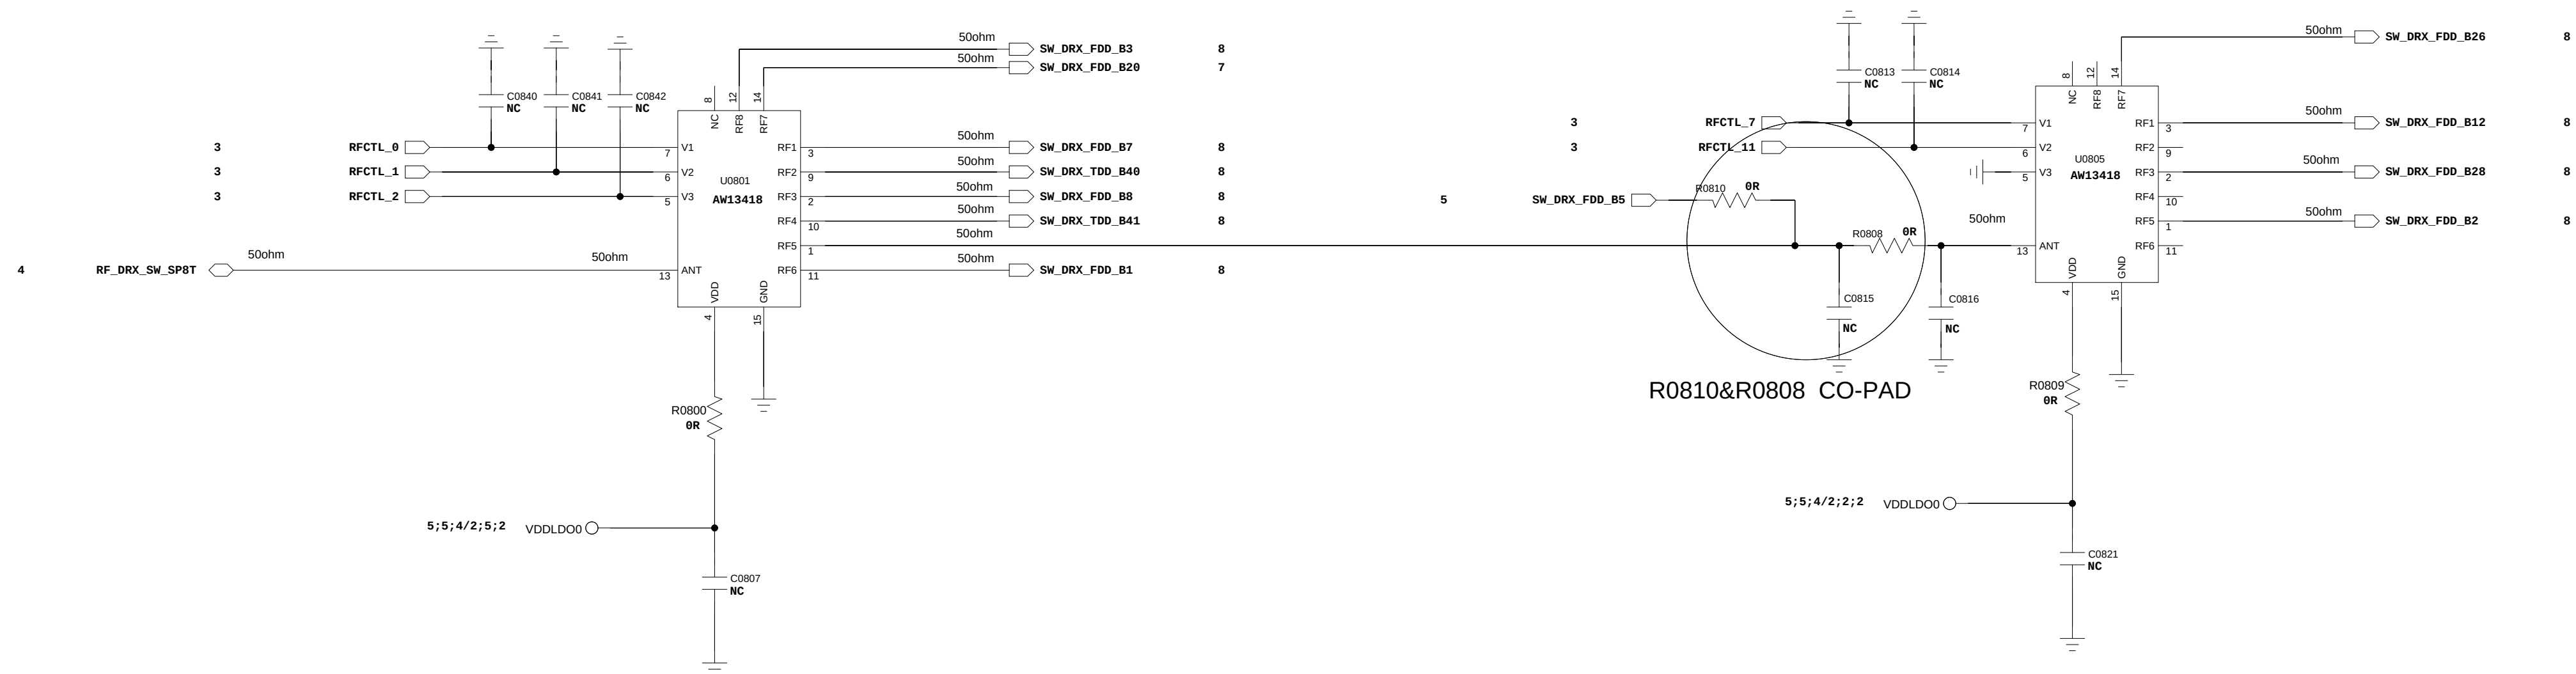


RF_SR3595D_RF_DRX_Path


B1&B3_DRX

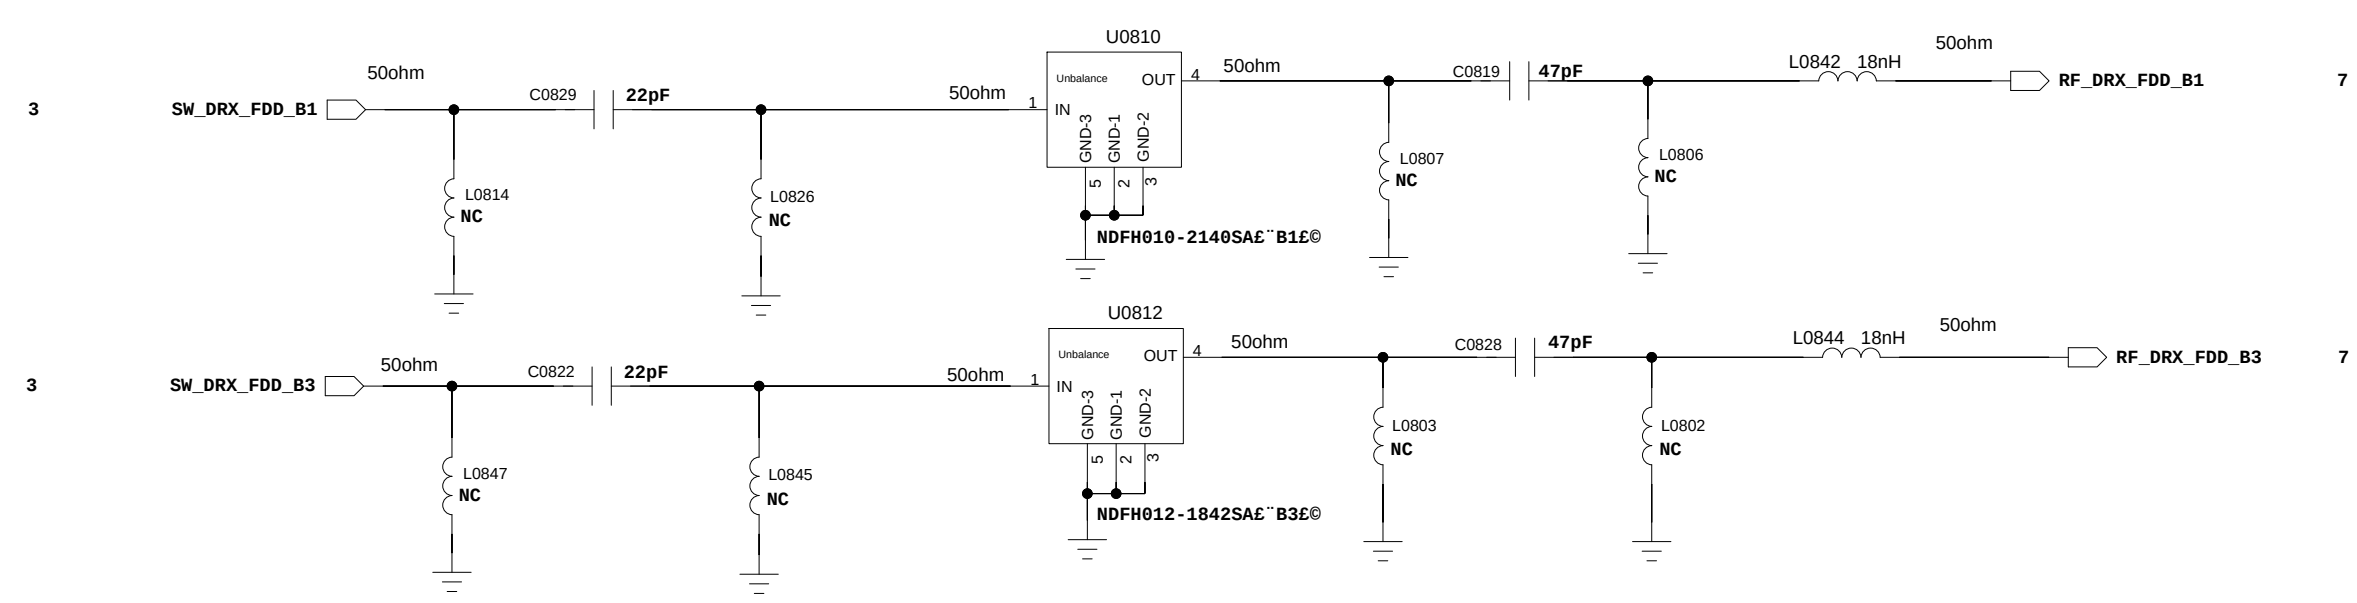


B20_DRX

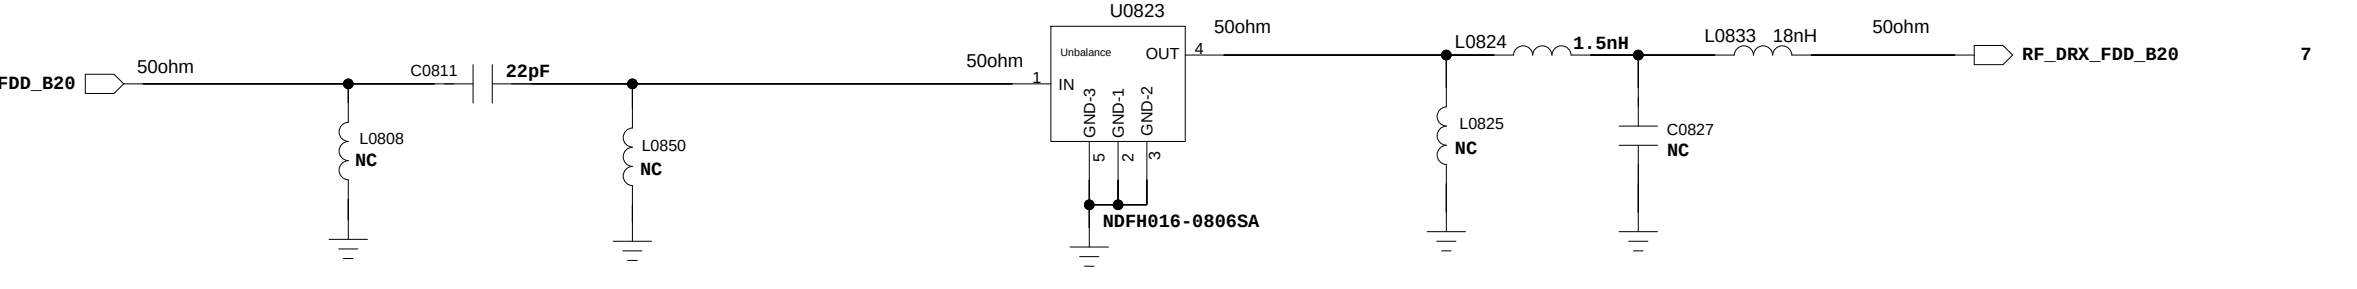


B7_DRX

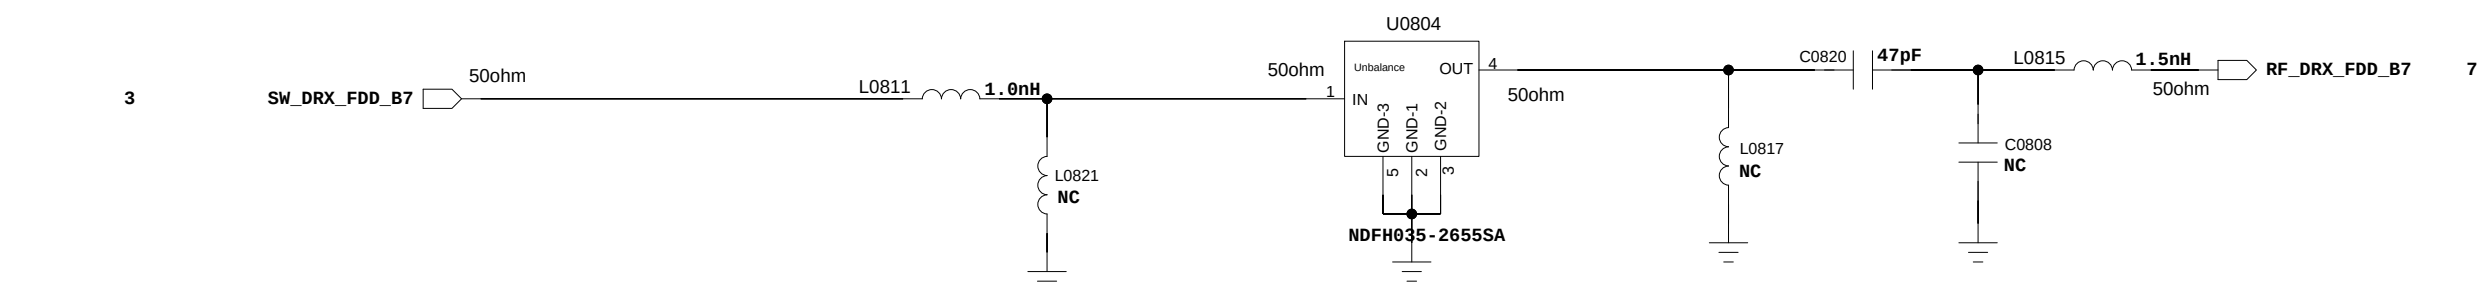


B8_DRX

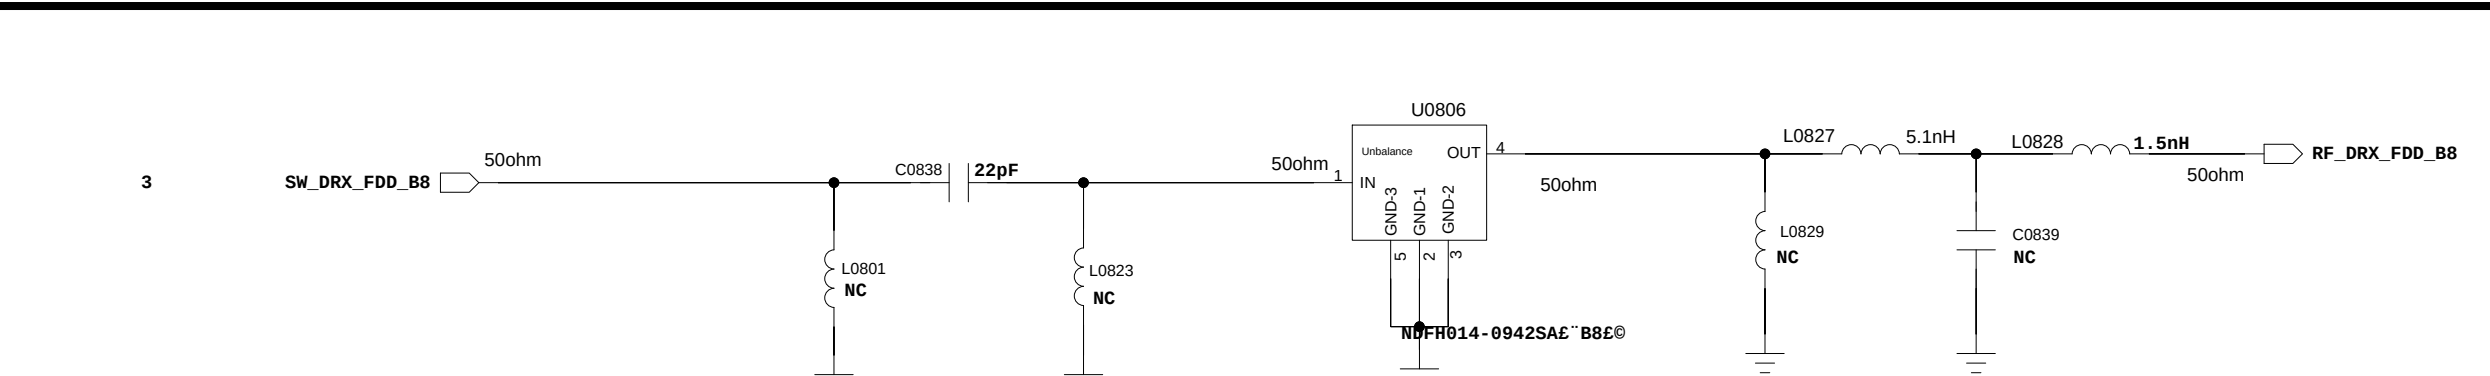


B26_DRX

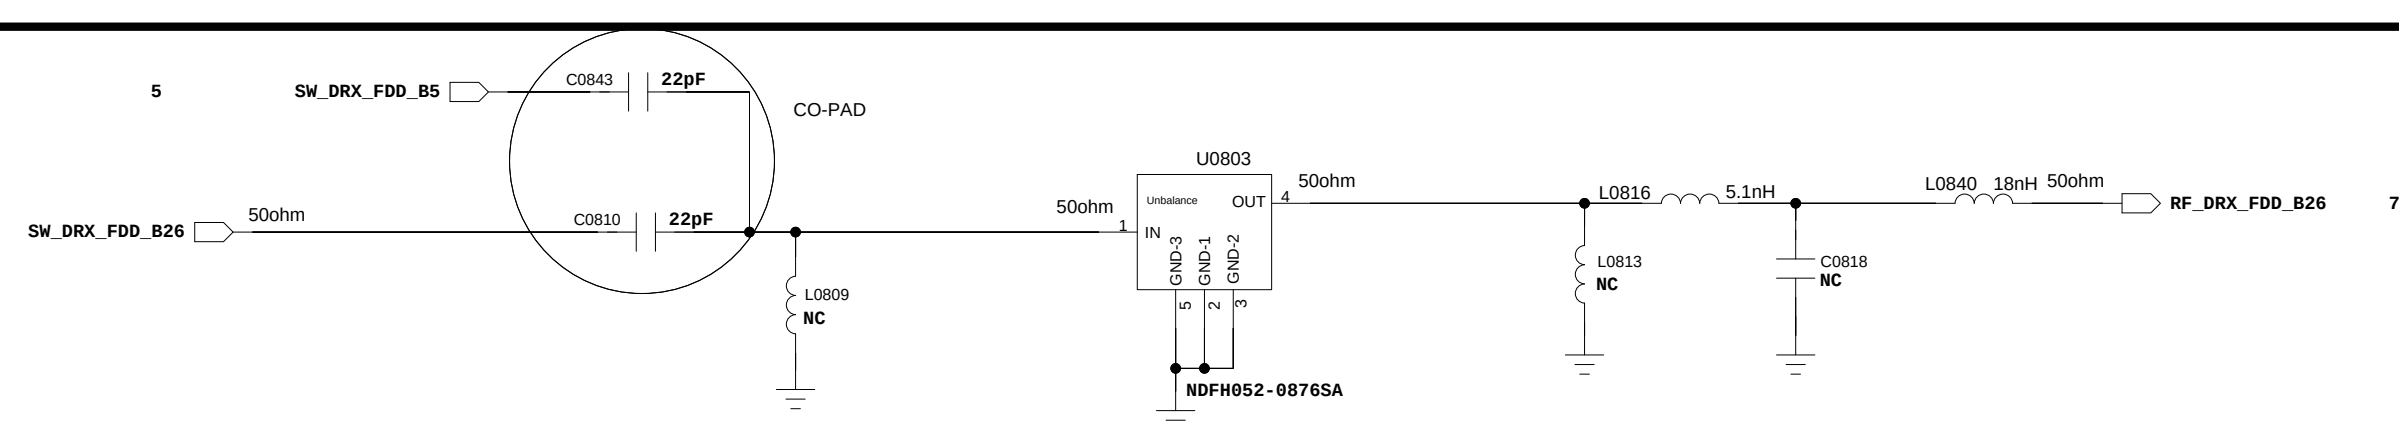


B2_DRX

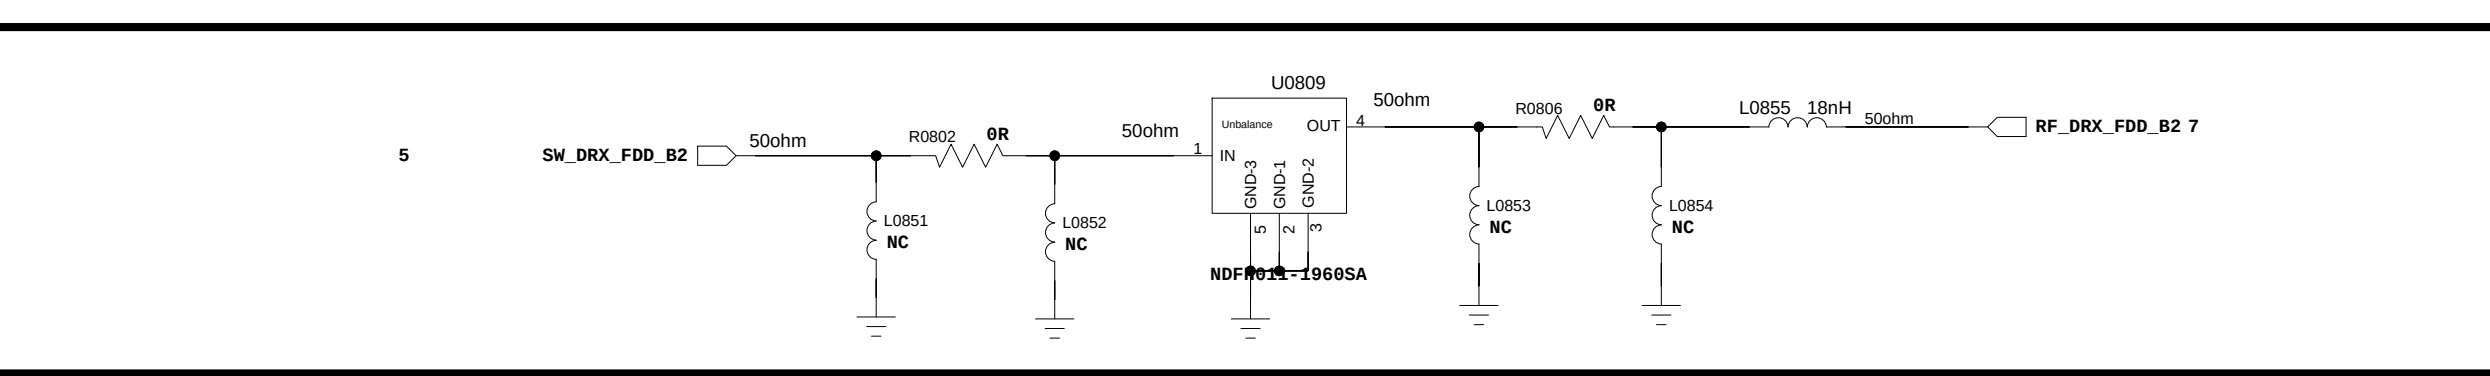


B12_DRX

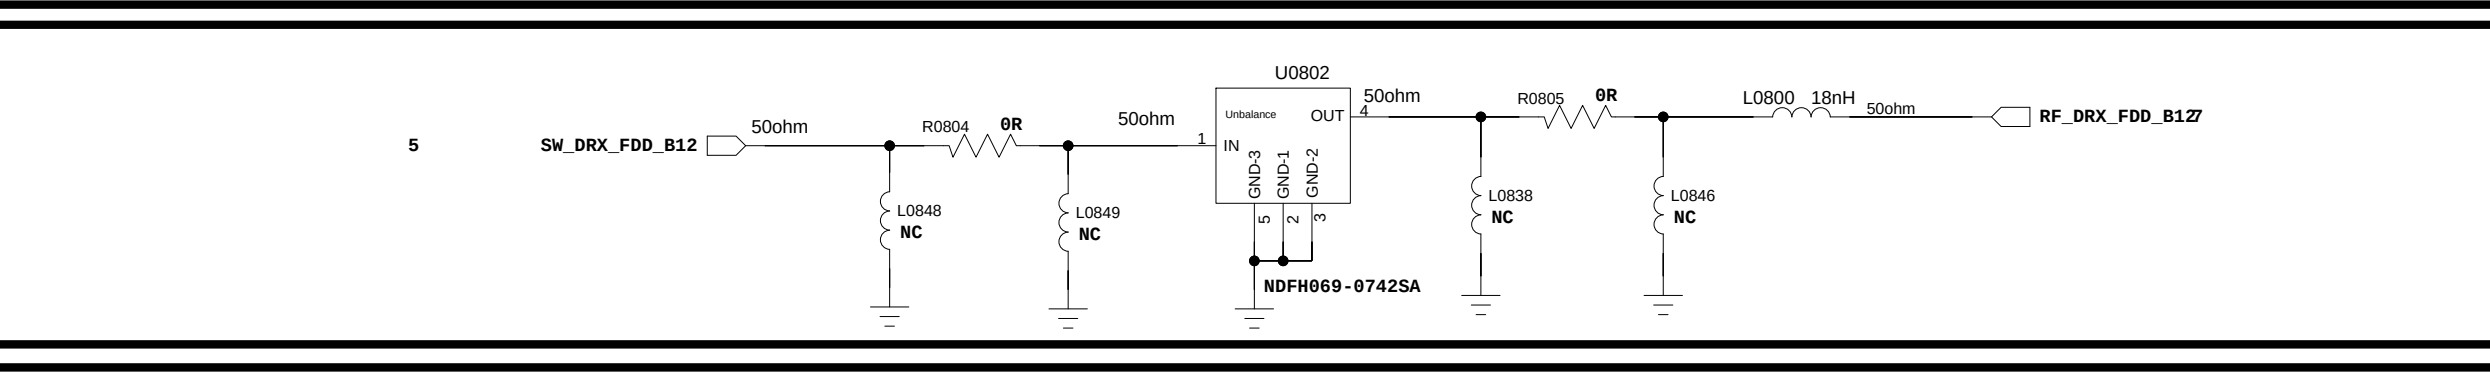


B28_DRX

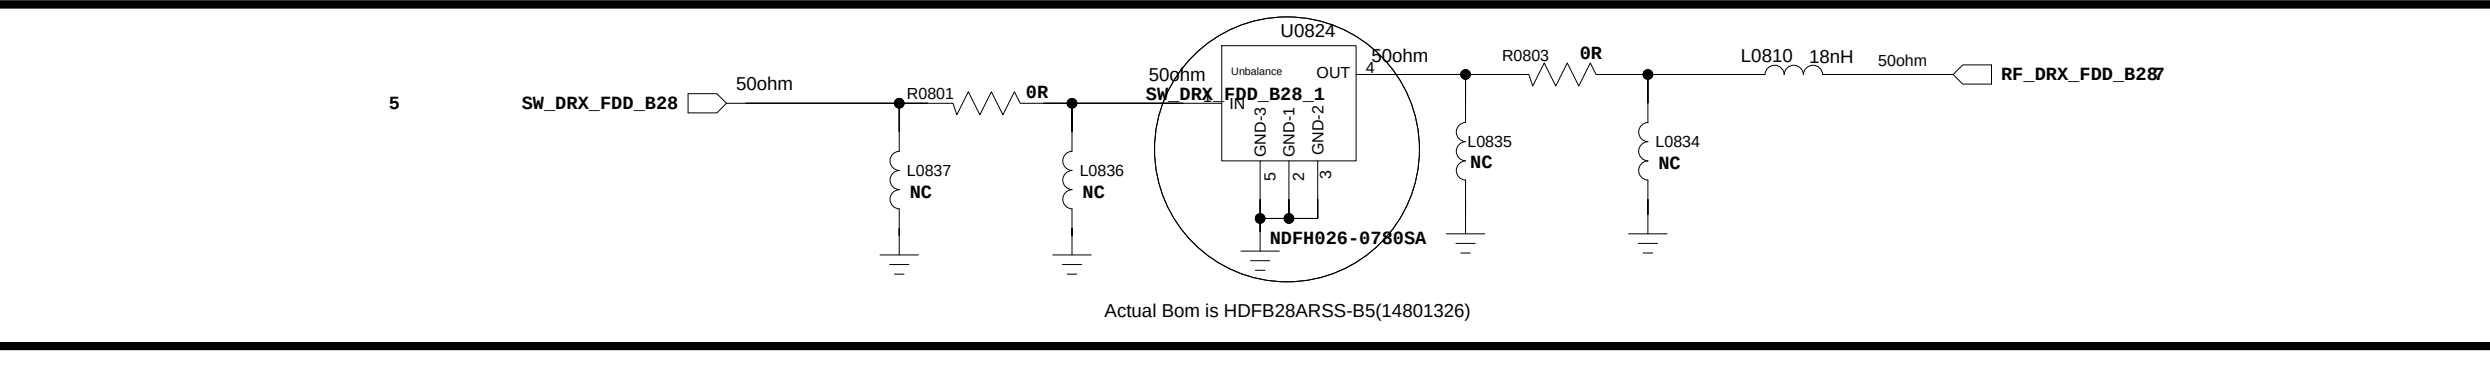

B41_DRX

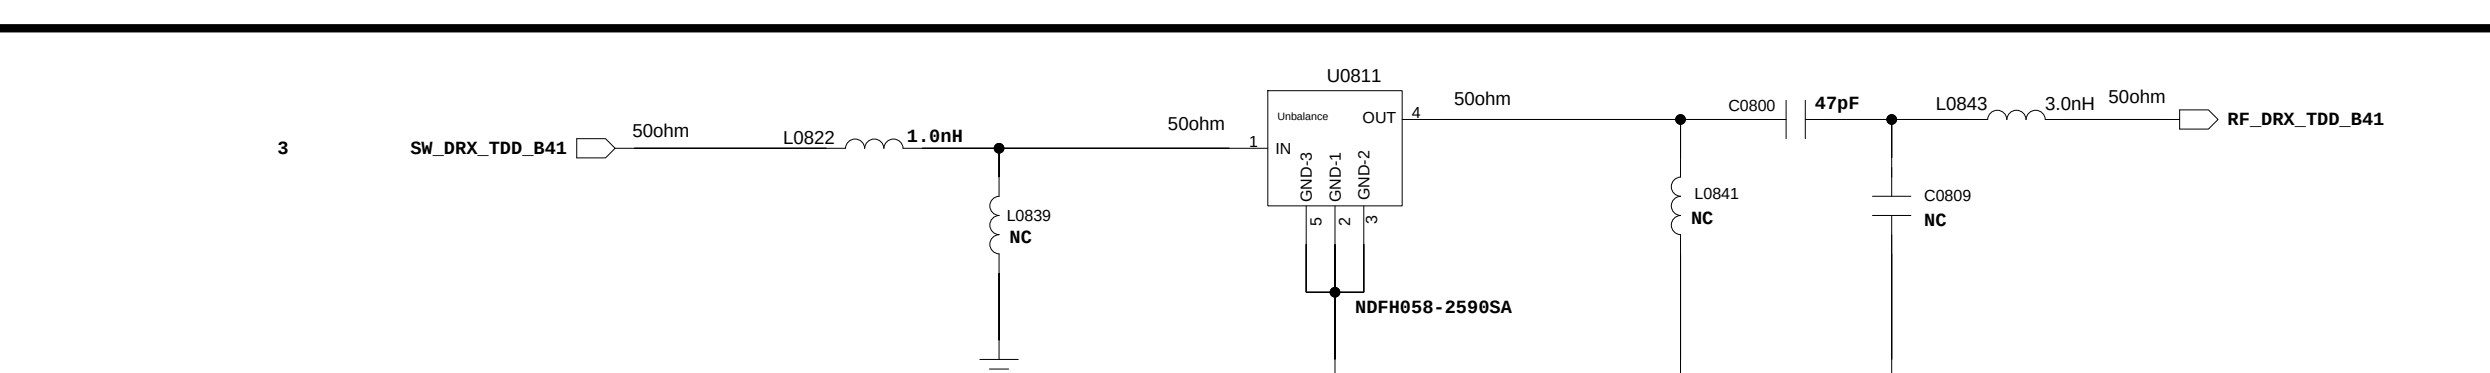


B40_DRX



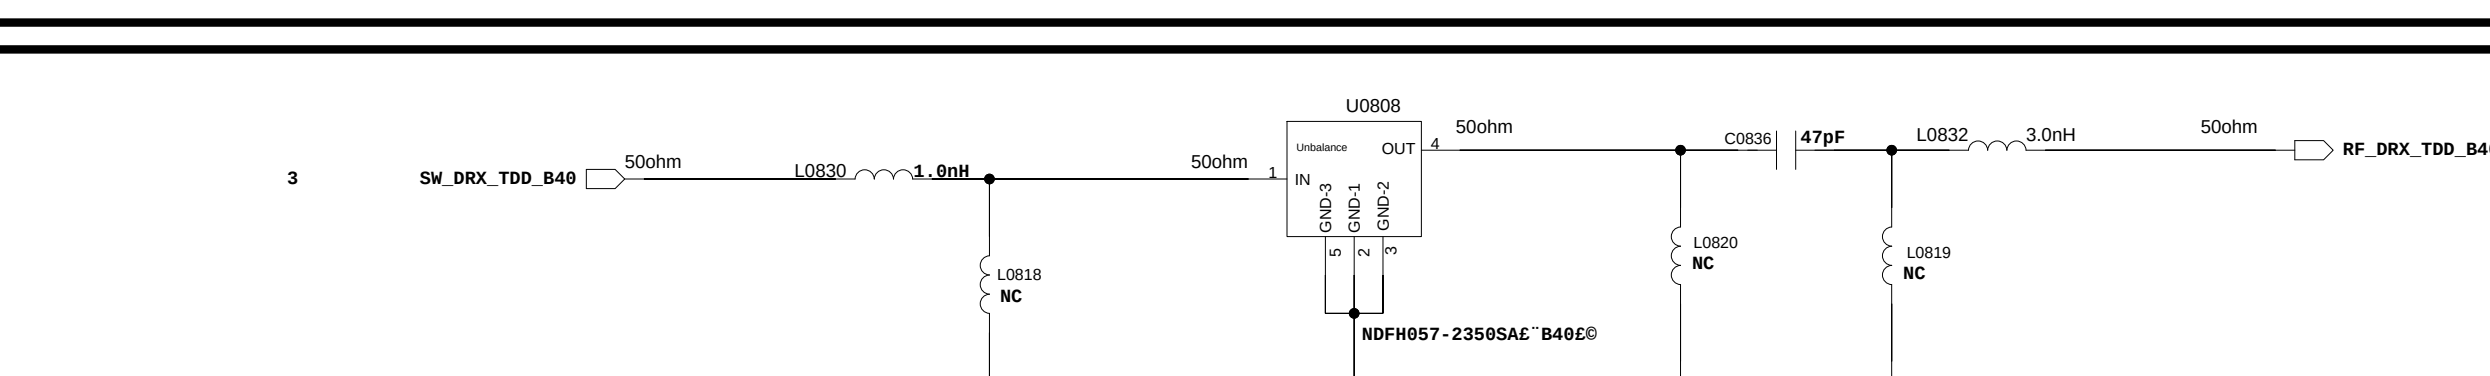


REVISION RECORD			
LTR	ECO NO.	APPROVED	DATE

EMMC

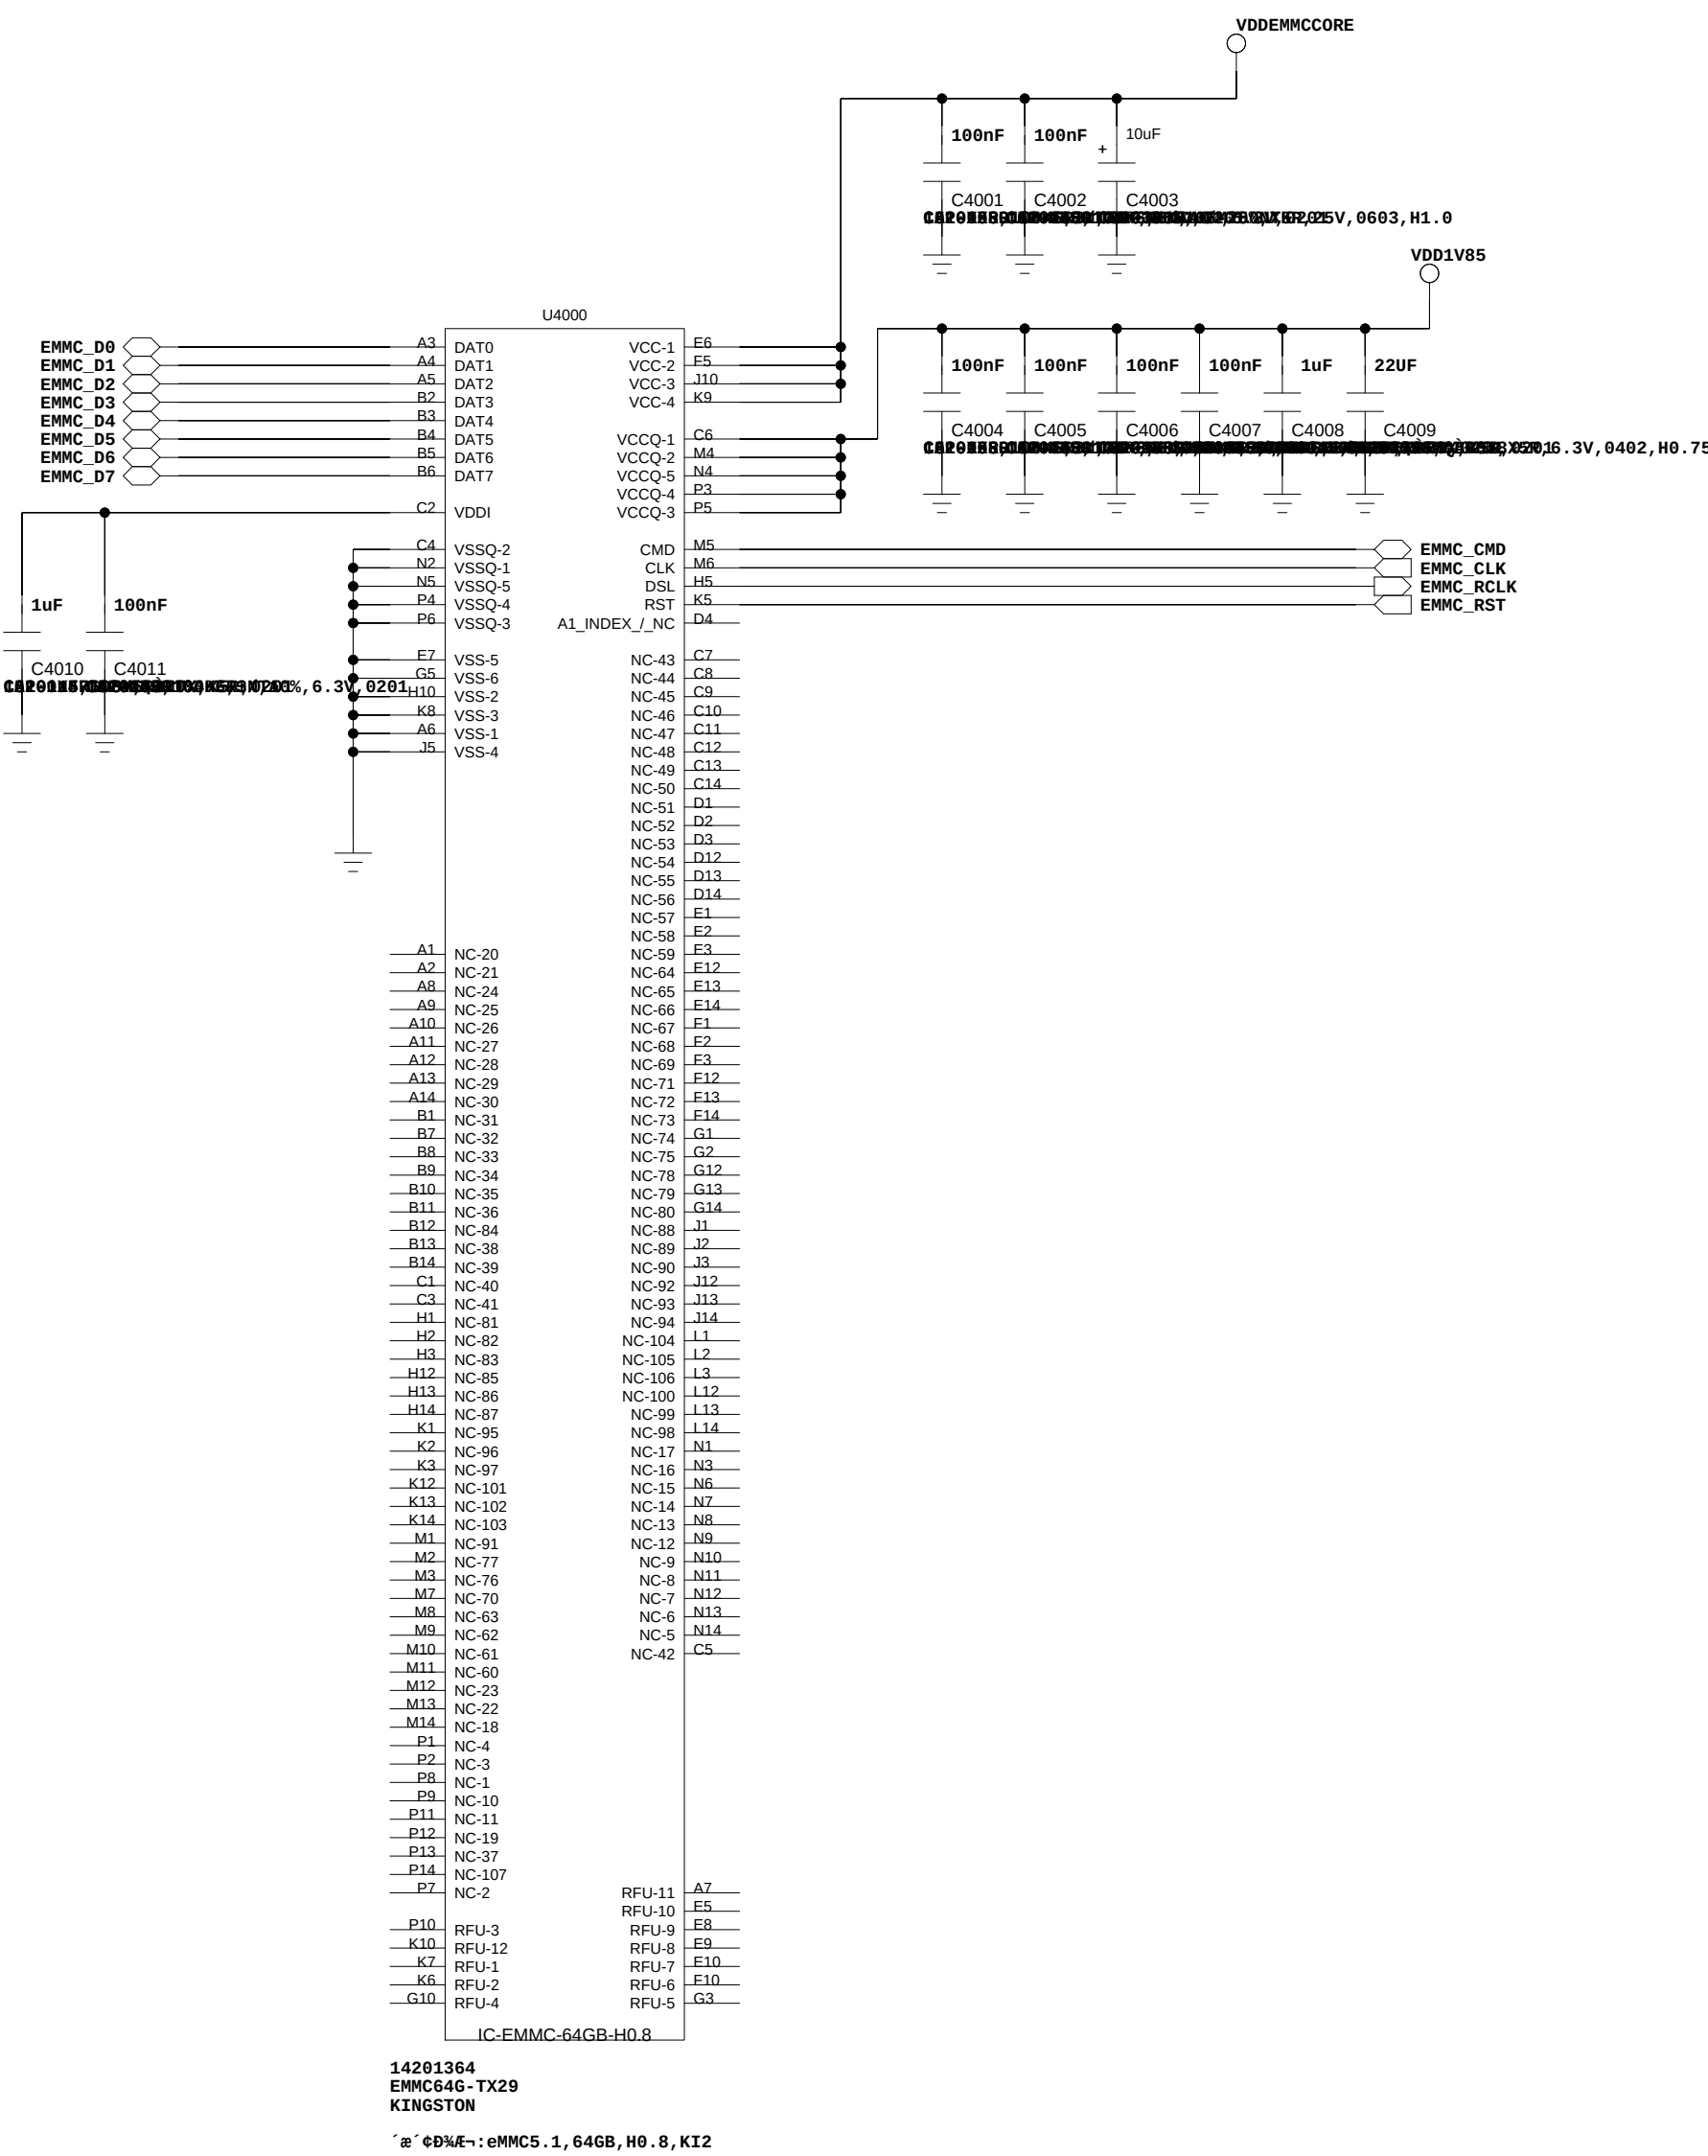


LPDDR4x

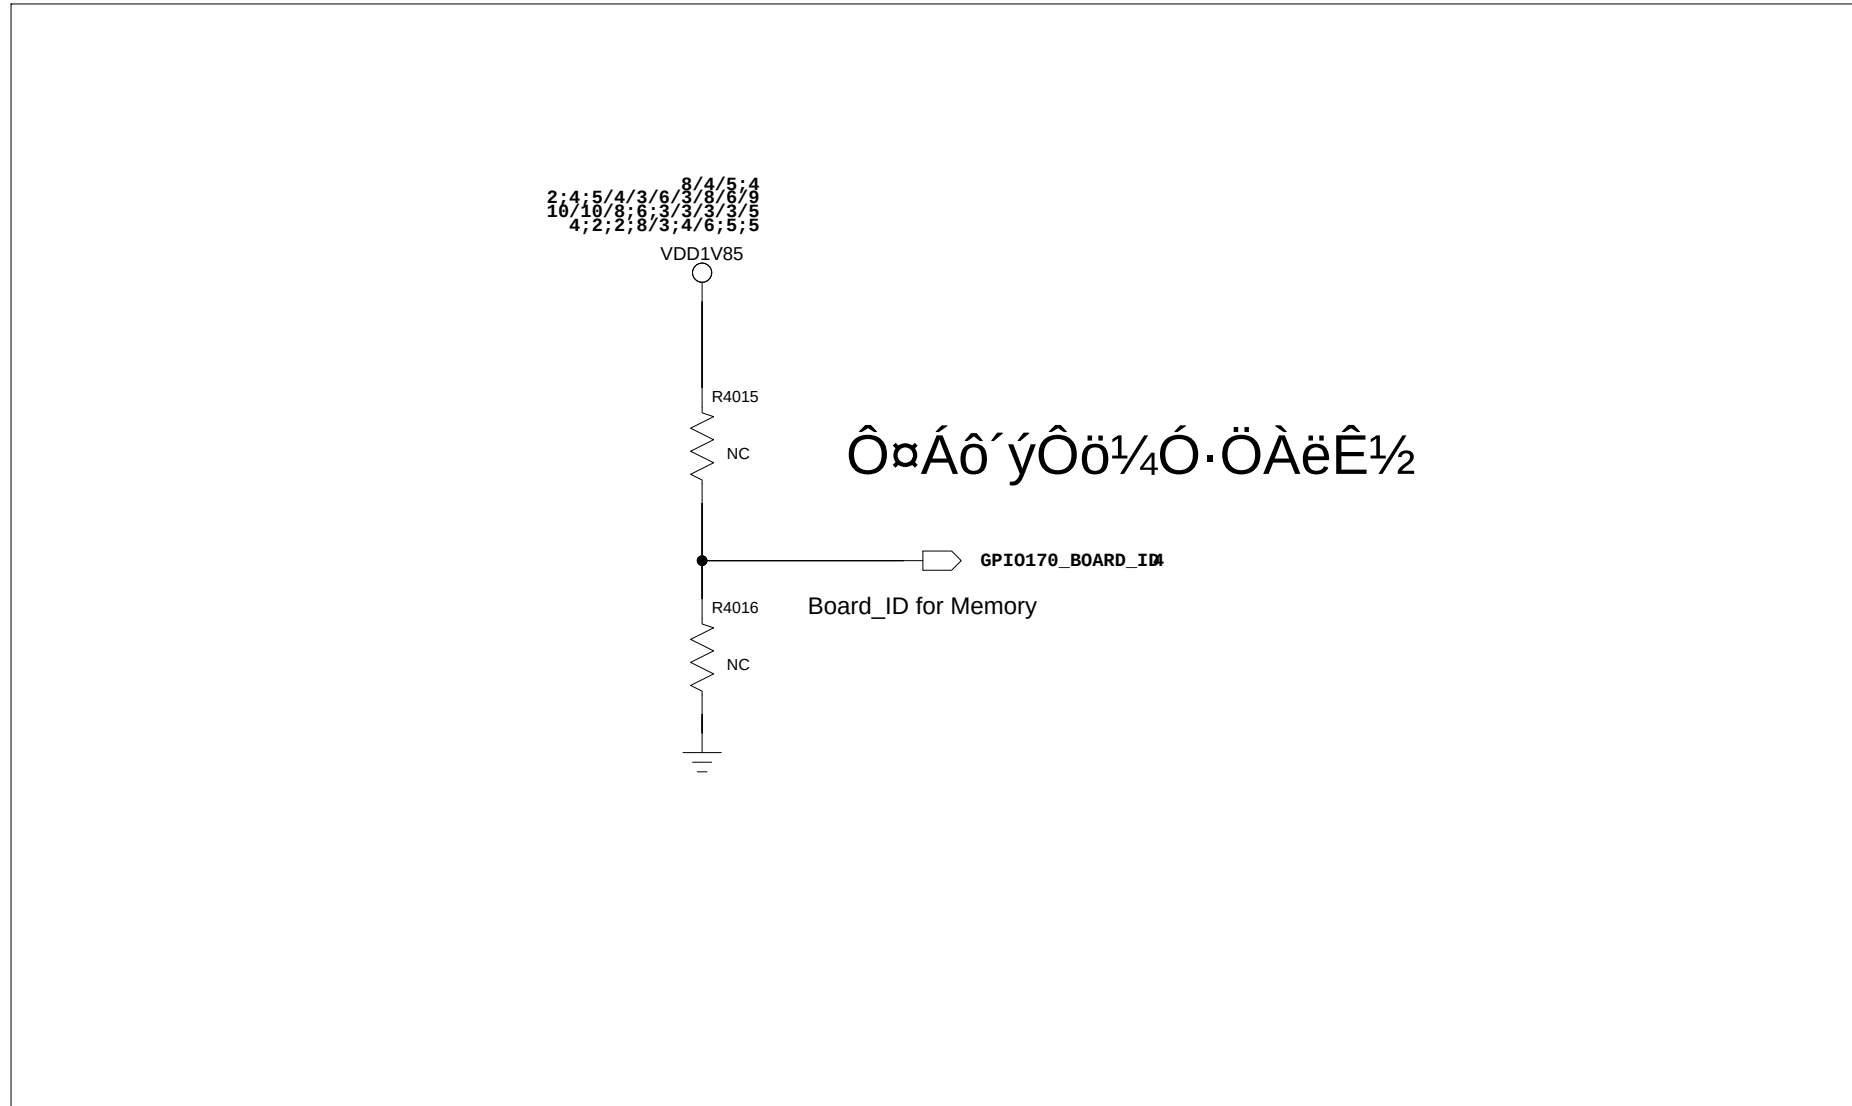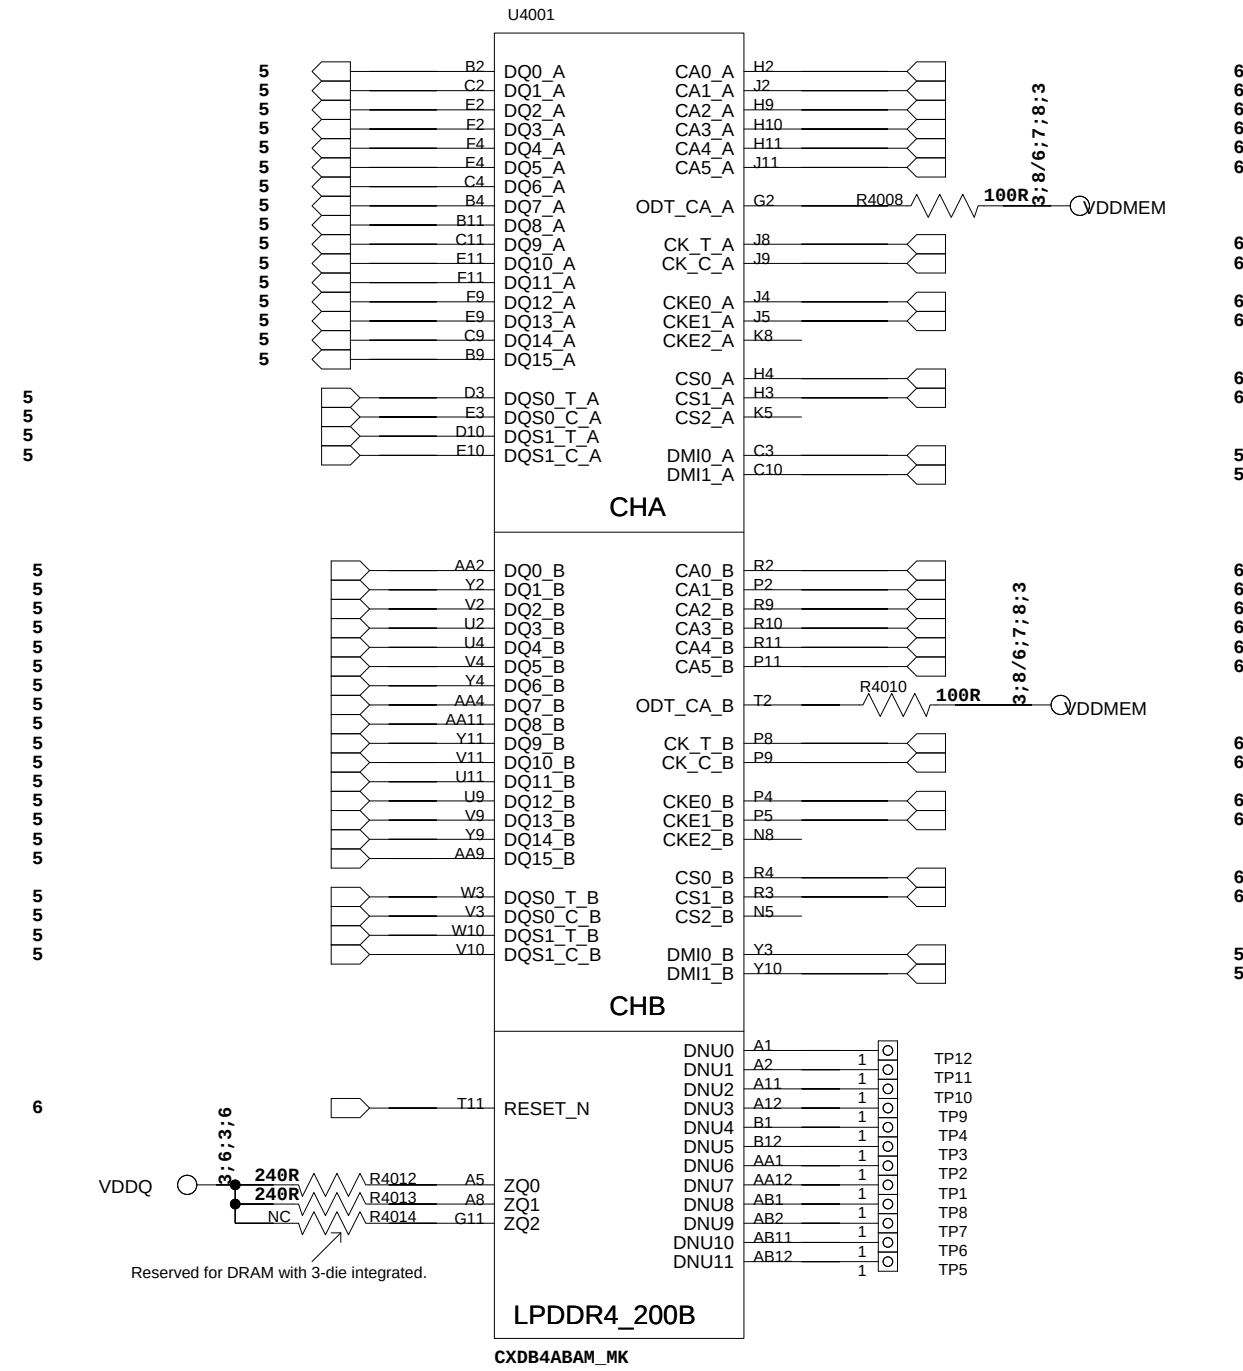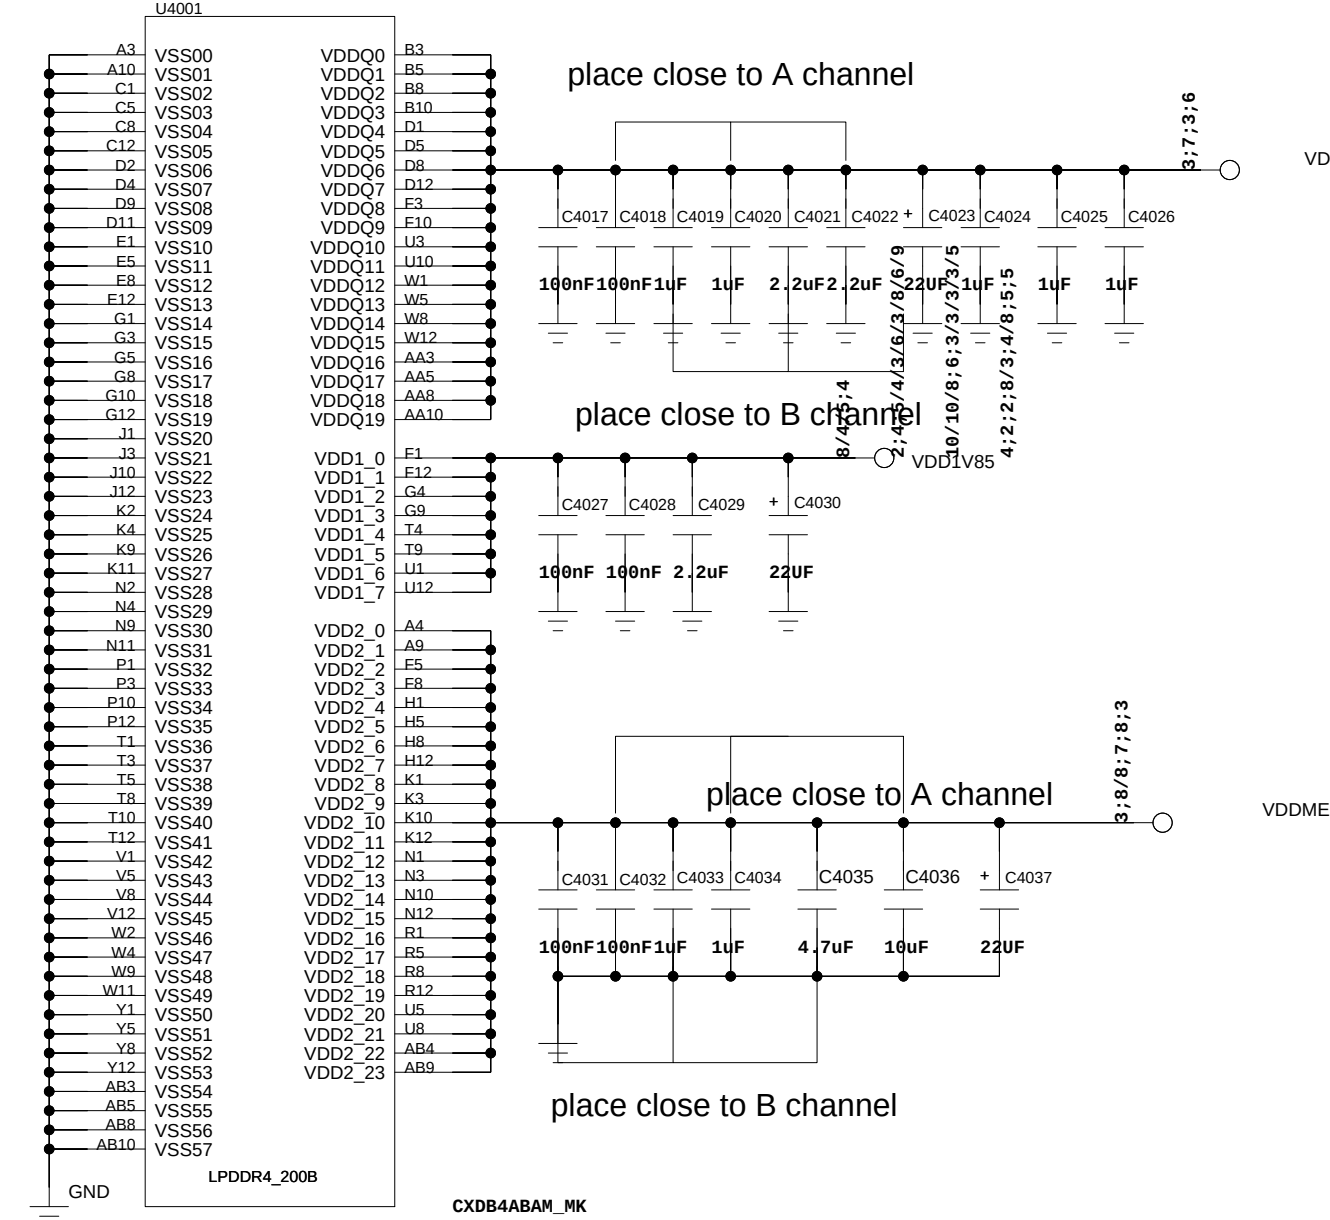


COMPANY: TRANSSION HOLDINGS			MODEL: J6563_F069_MAIN		Modified Date: 25/10/2023:15:08	
DRAWN	DATED	TITLE:	VERSION:		SHEET: 023	
CHECKED	DATED	Confidentiality	CONFIDENTIAL			


MAIN MIC

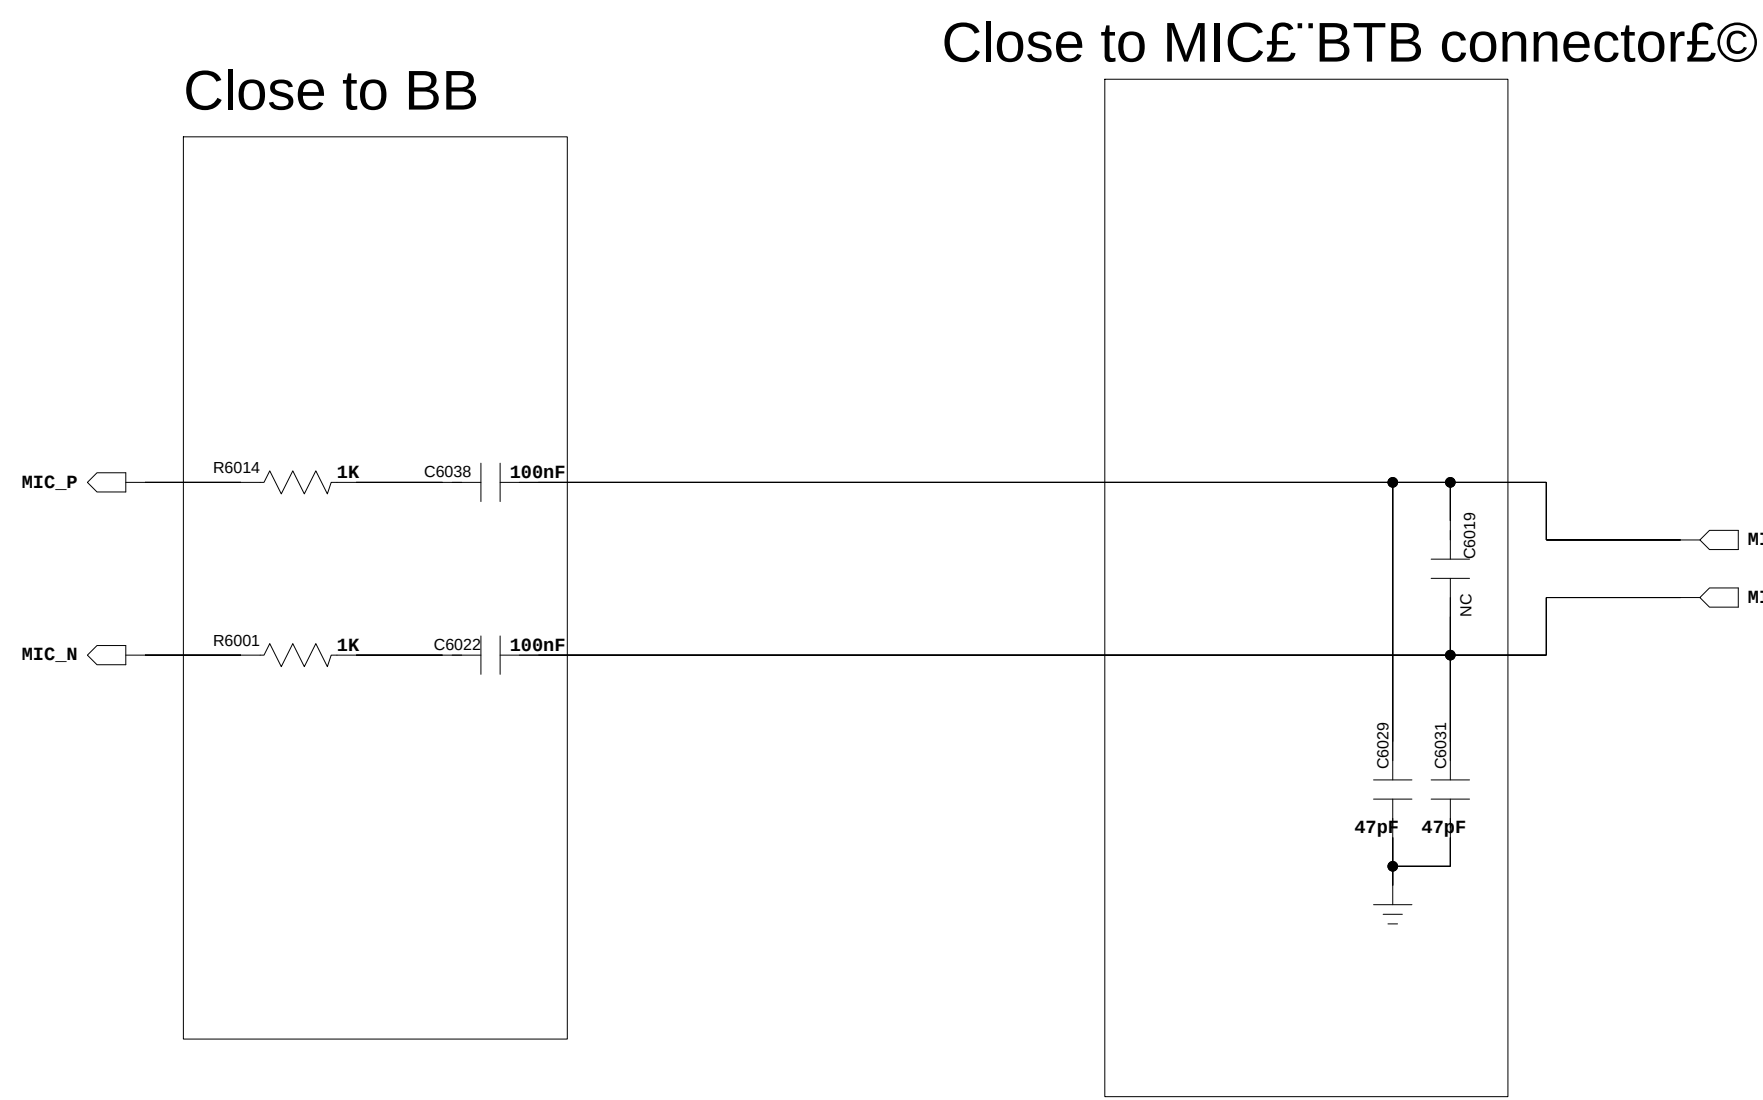


RECEIVER

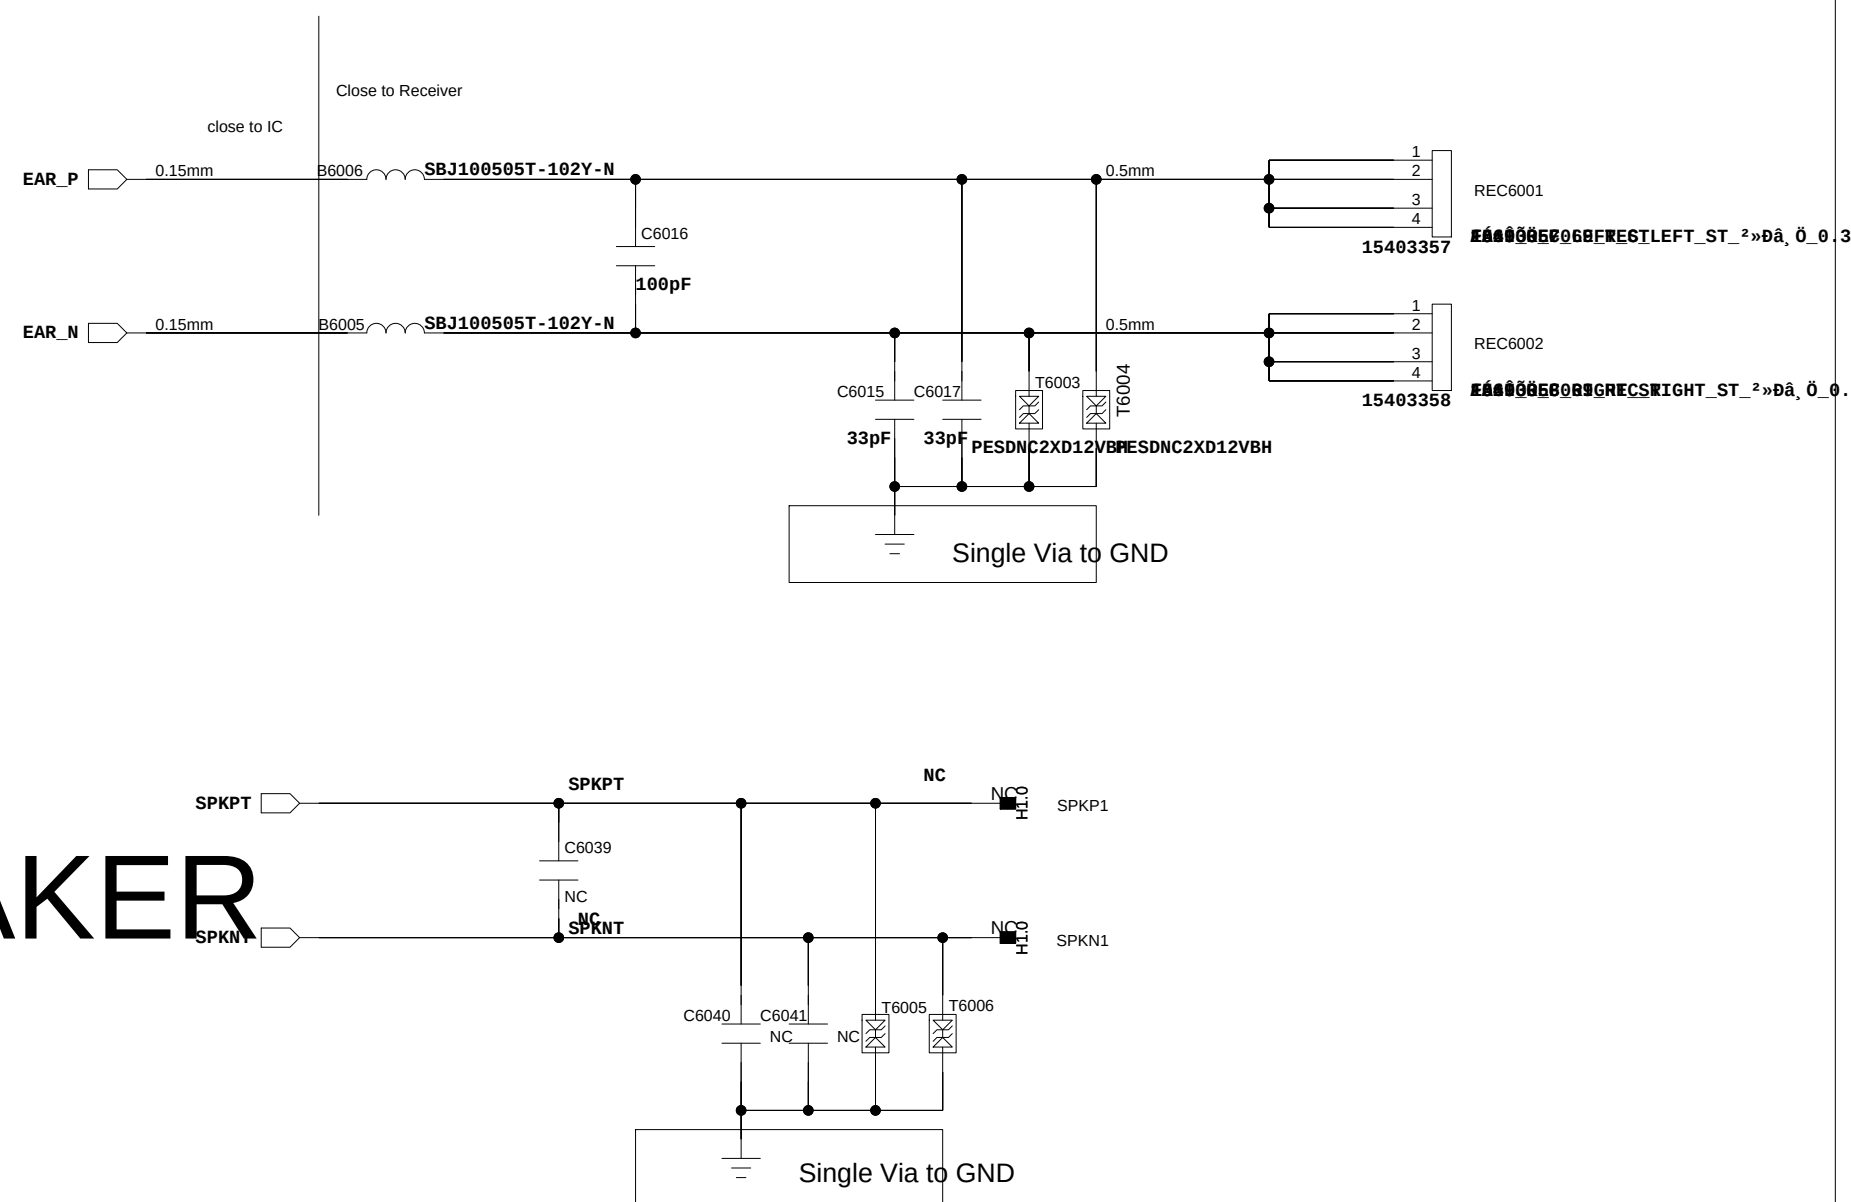

UP SPEAKER

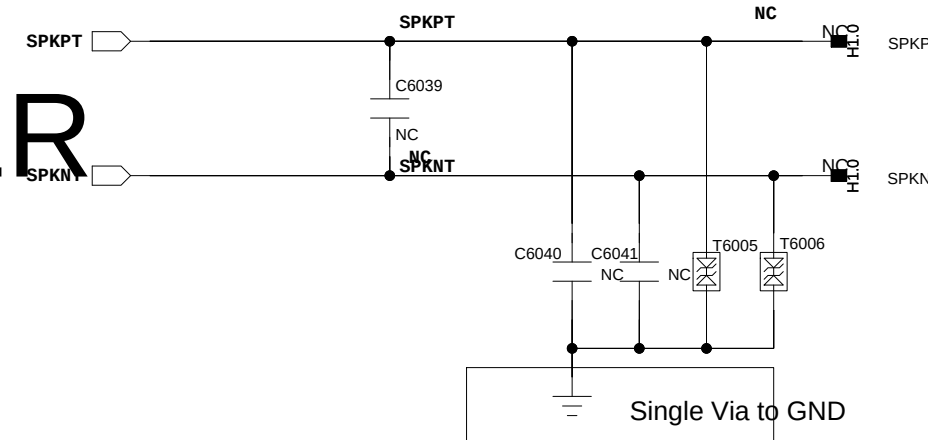


3.5mm Ear Jack

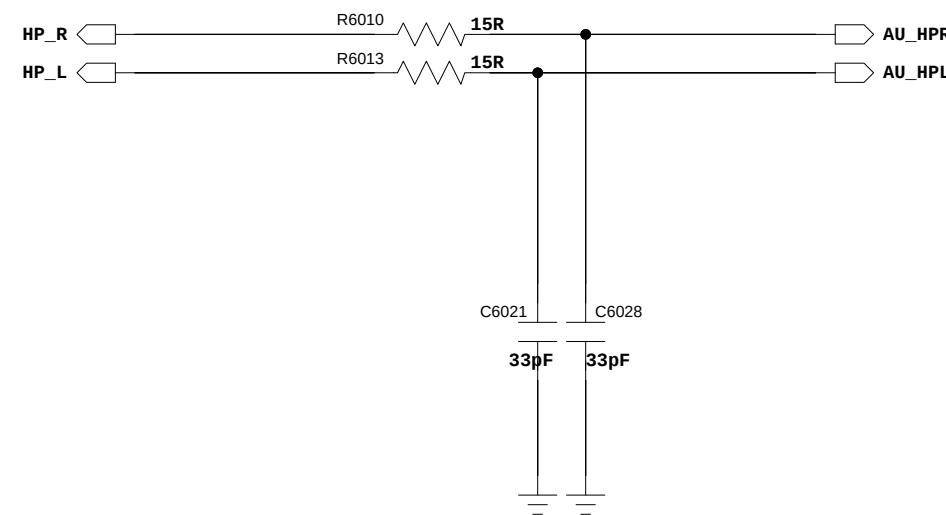

Ear Jack suggest support:	
Earphone	Pin 4 & Pin 5
Plug in	Connect
Pull out	Disconnect
L,R,GND,MIC CTIA	


T3125 is reserved for better ESD defense of FM_ANT IO

UP SPEAKER

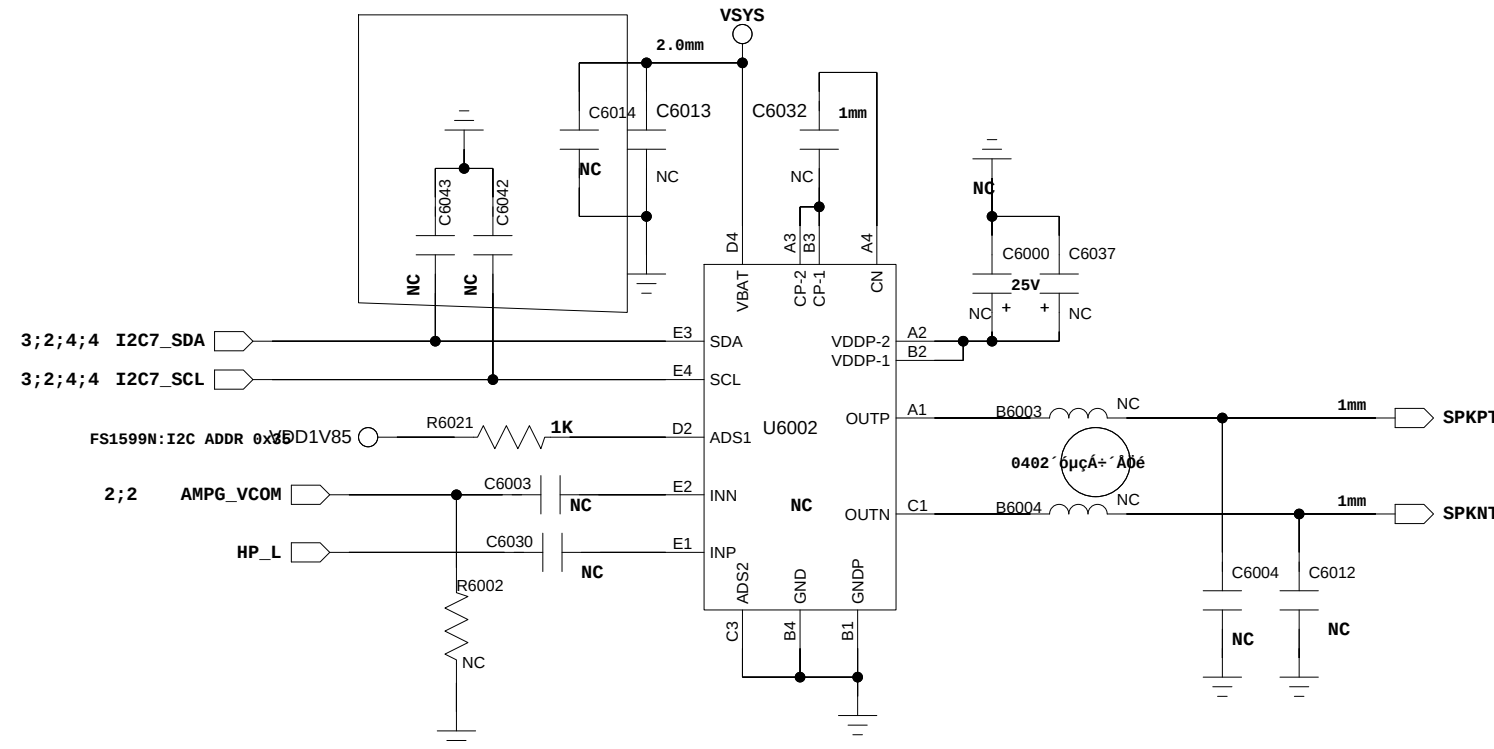


DWN SPEAKER
in SUB BOARD


HEAD MIC



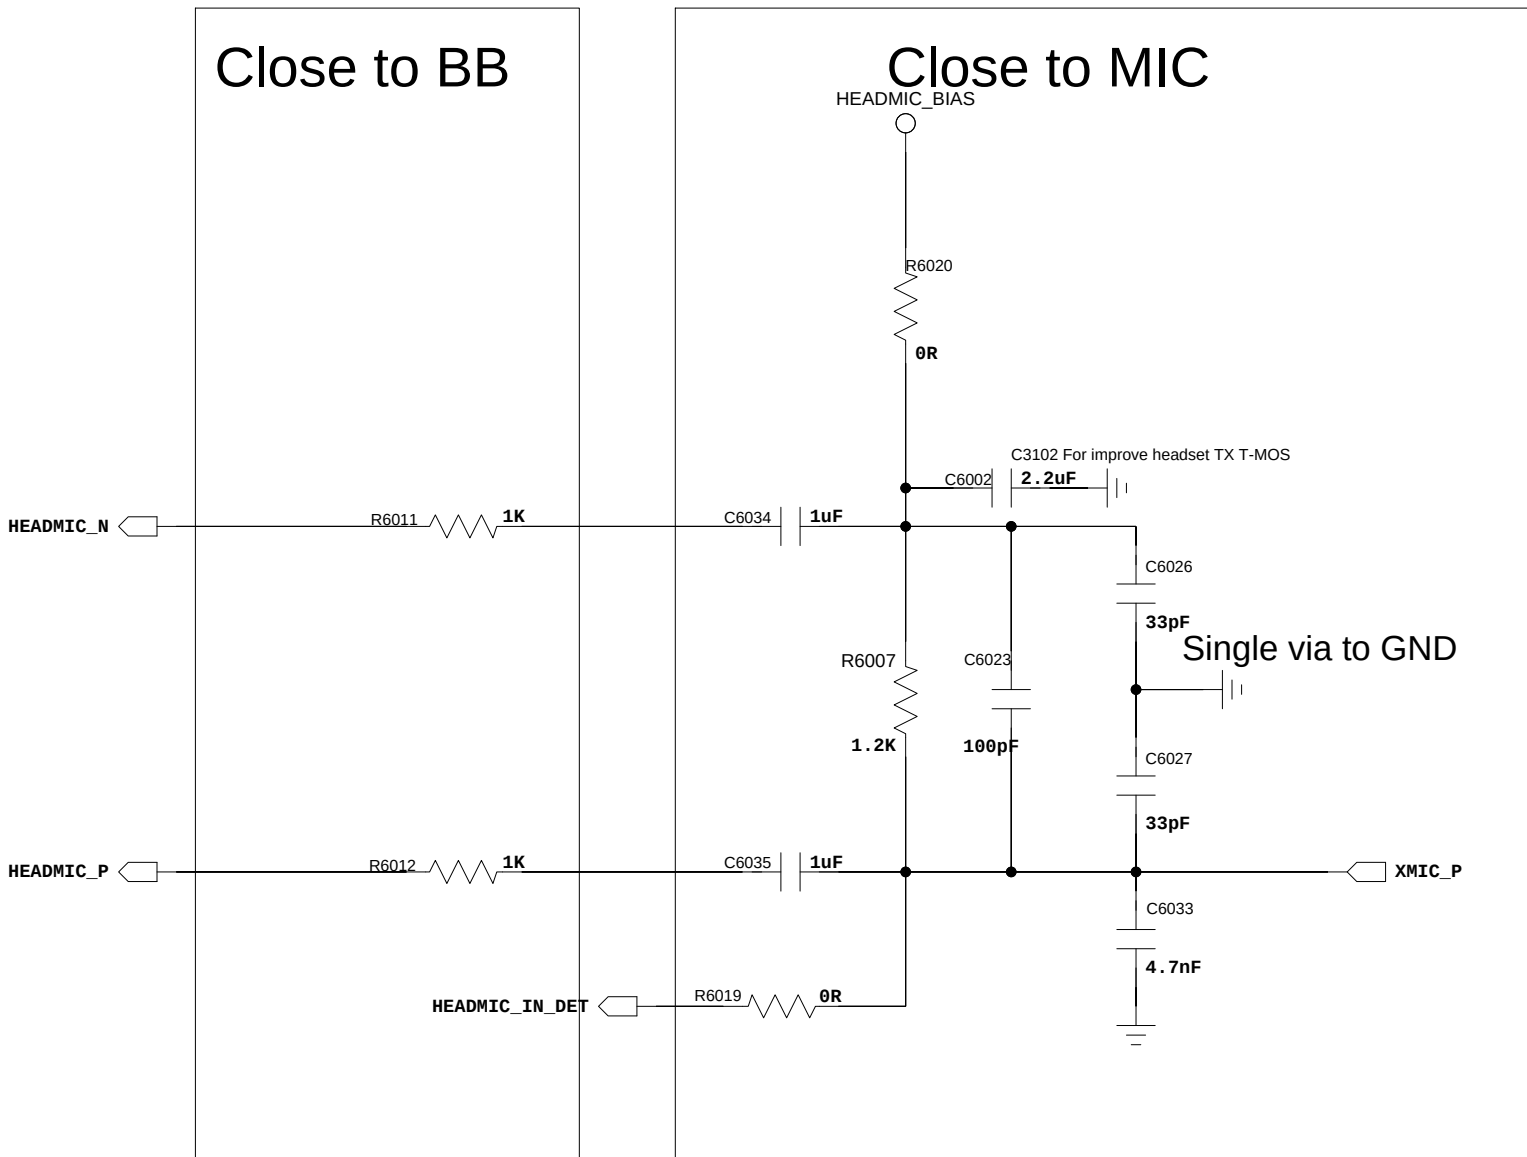


LCM

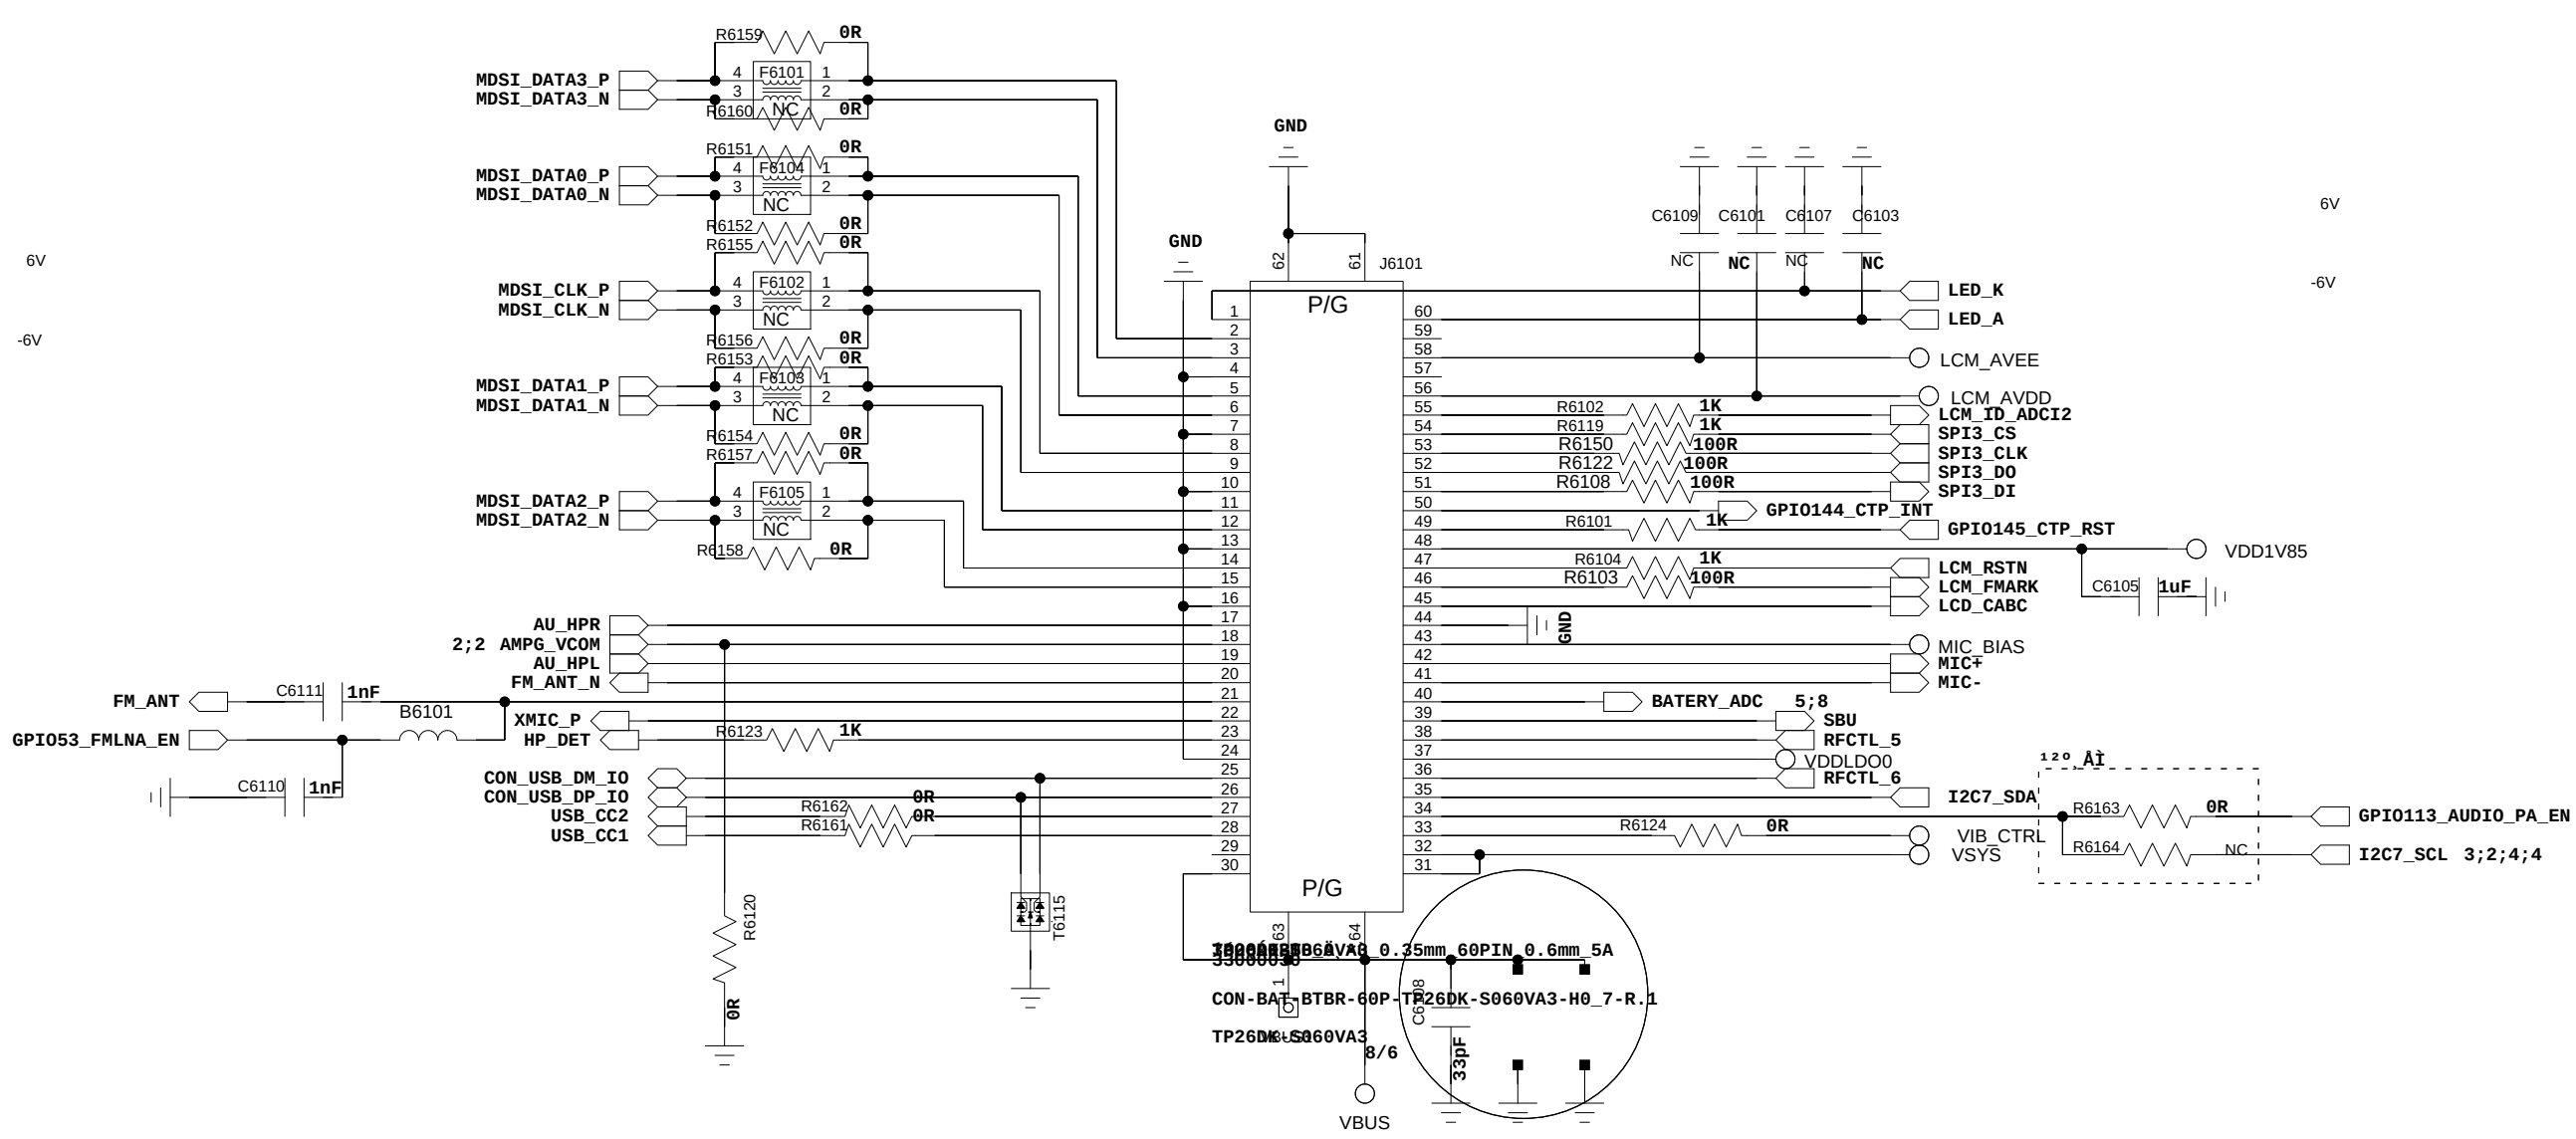

FingerPrint

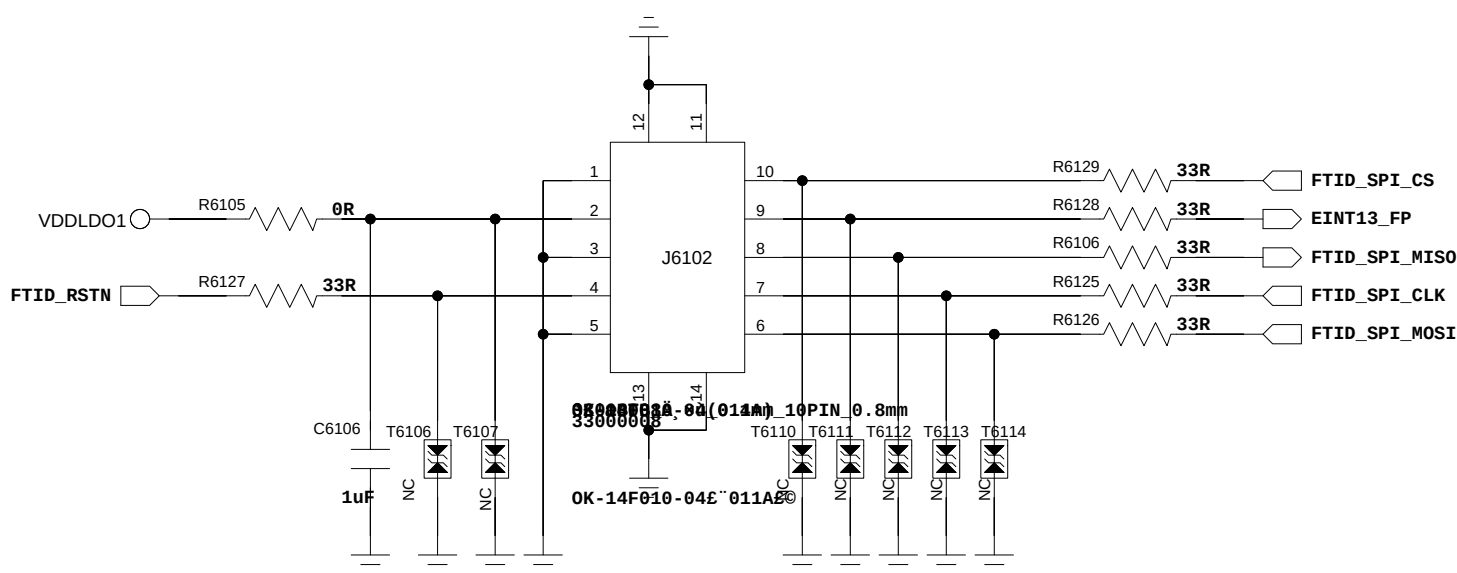


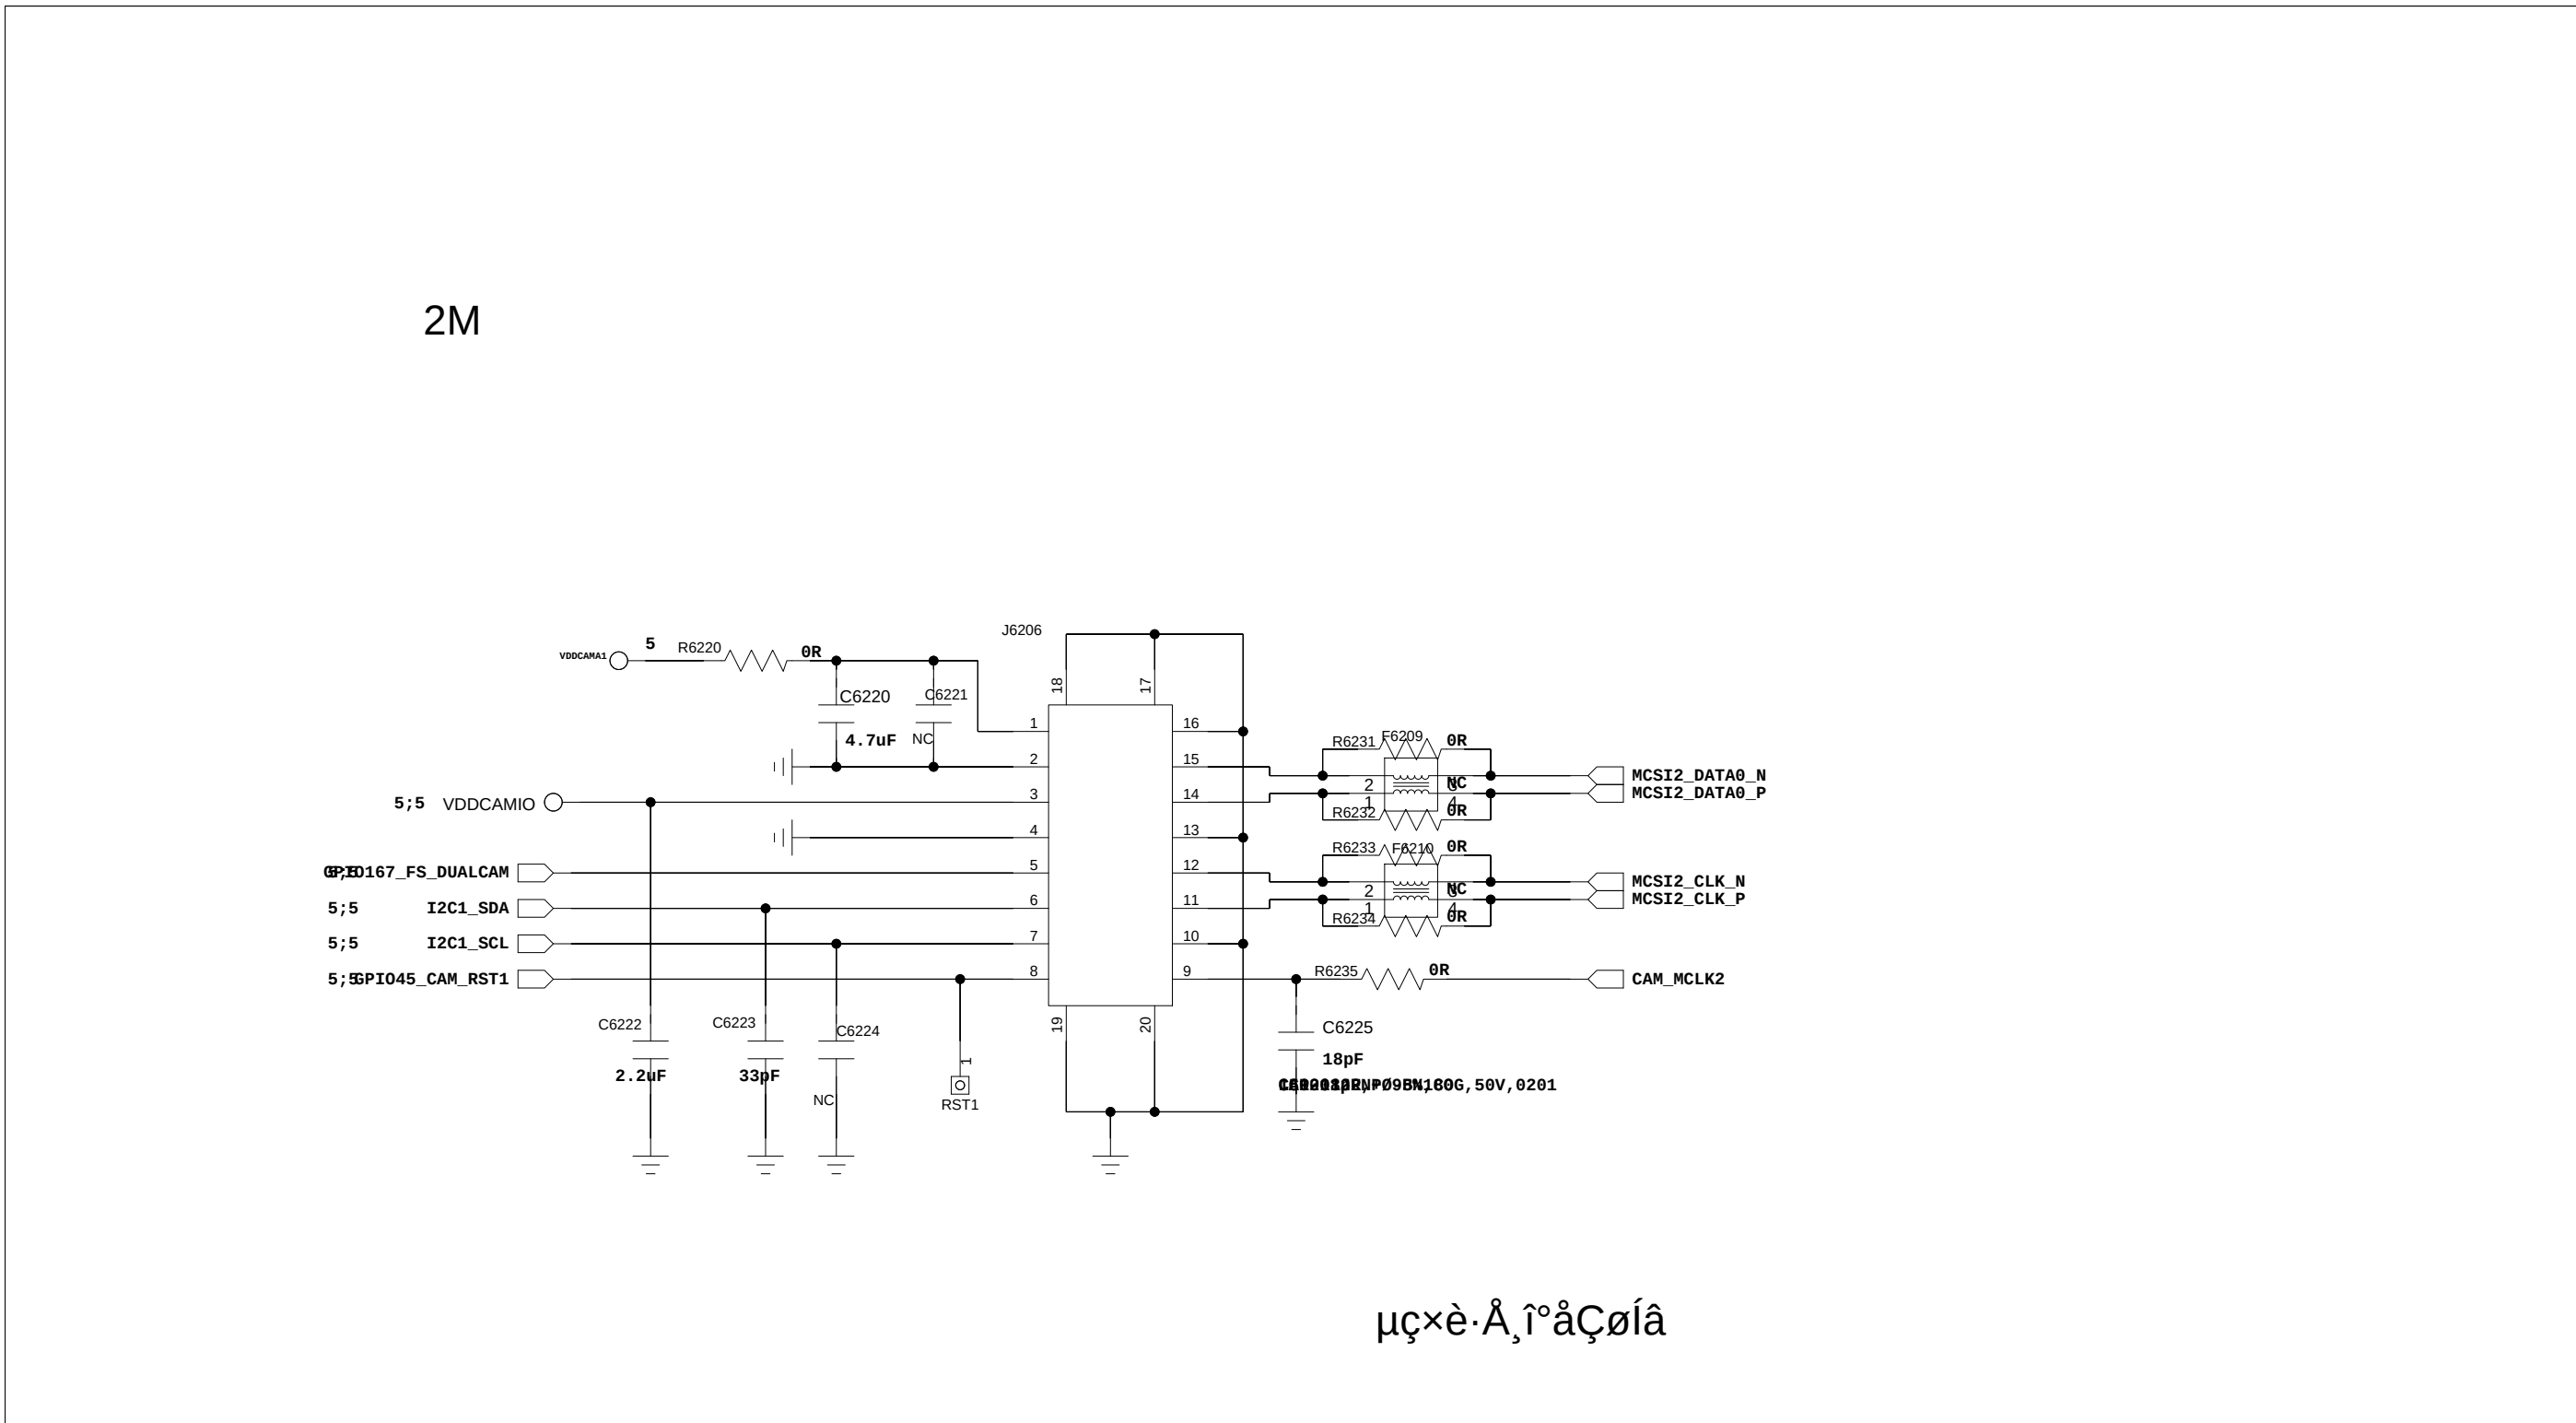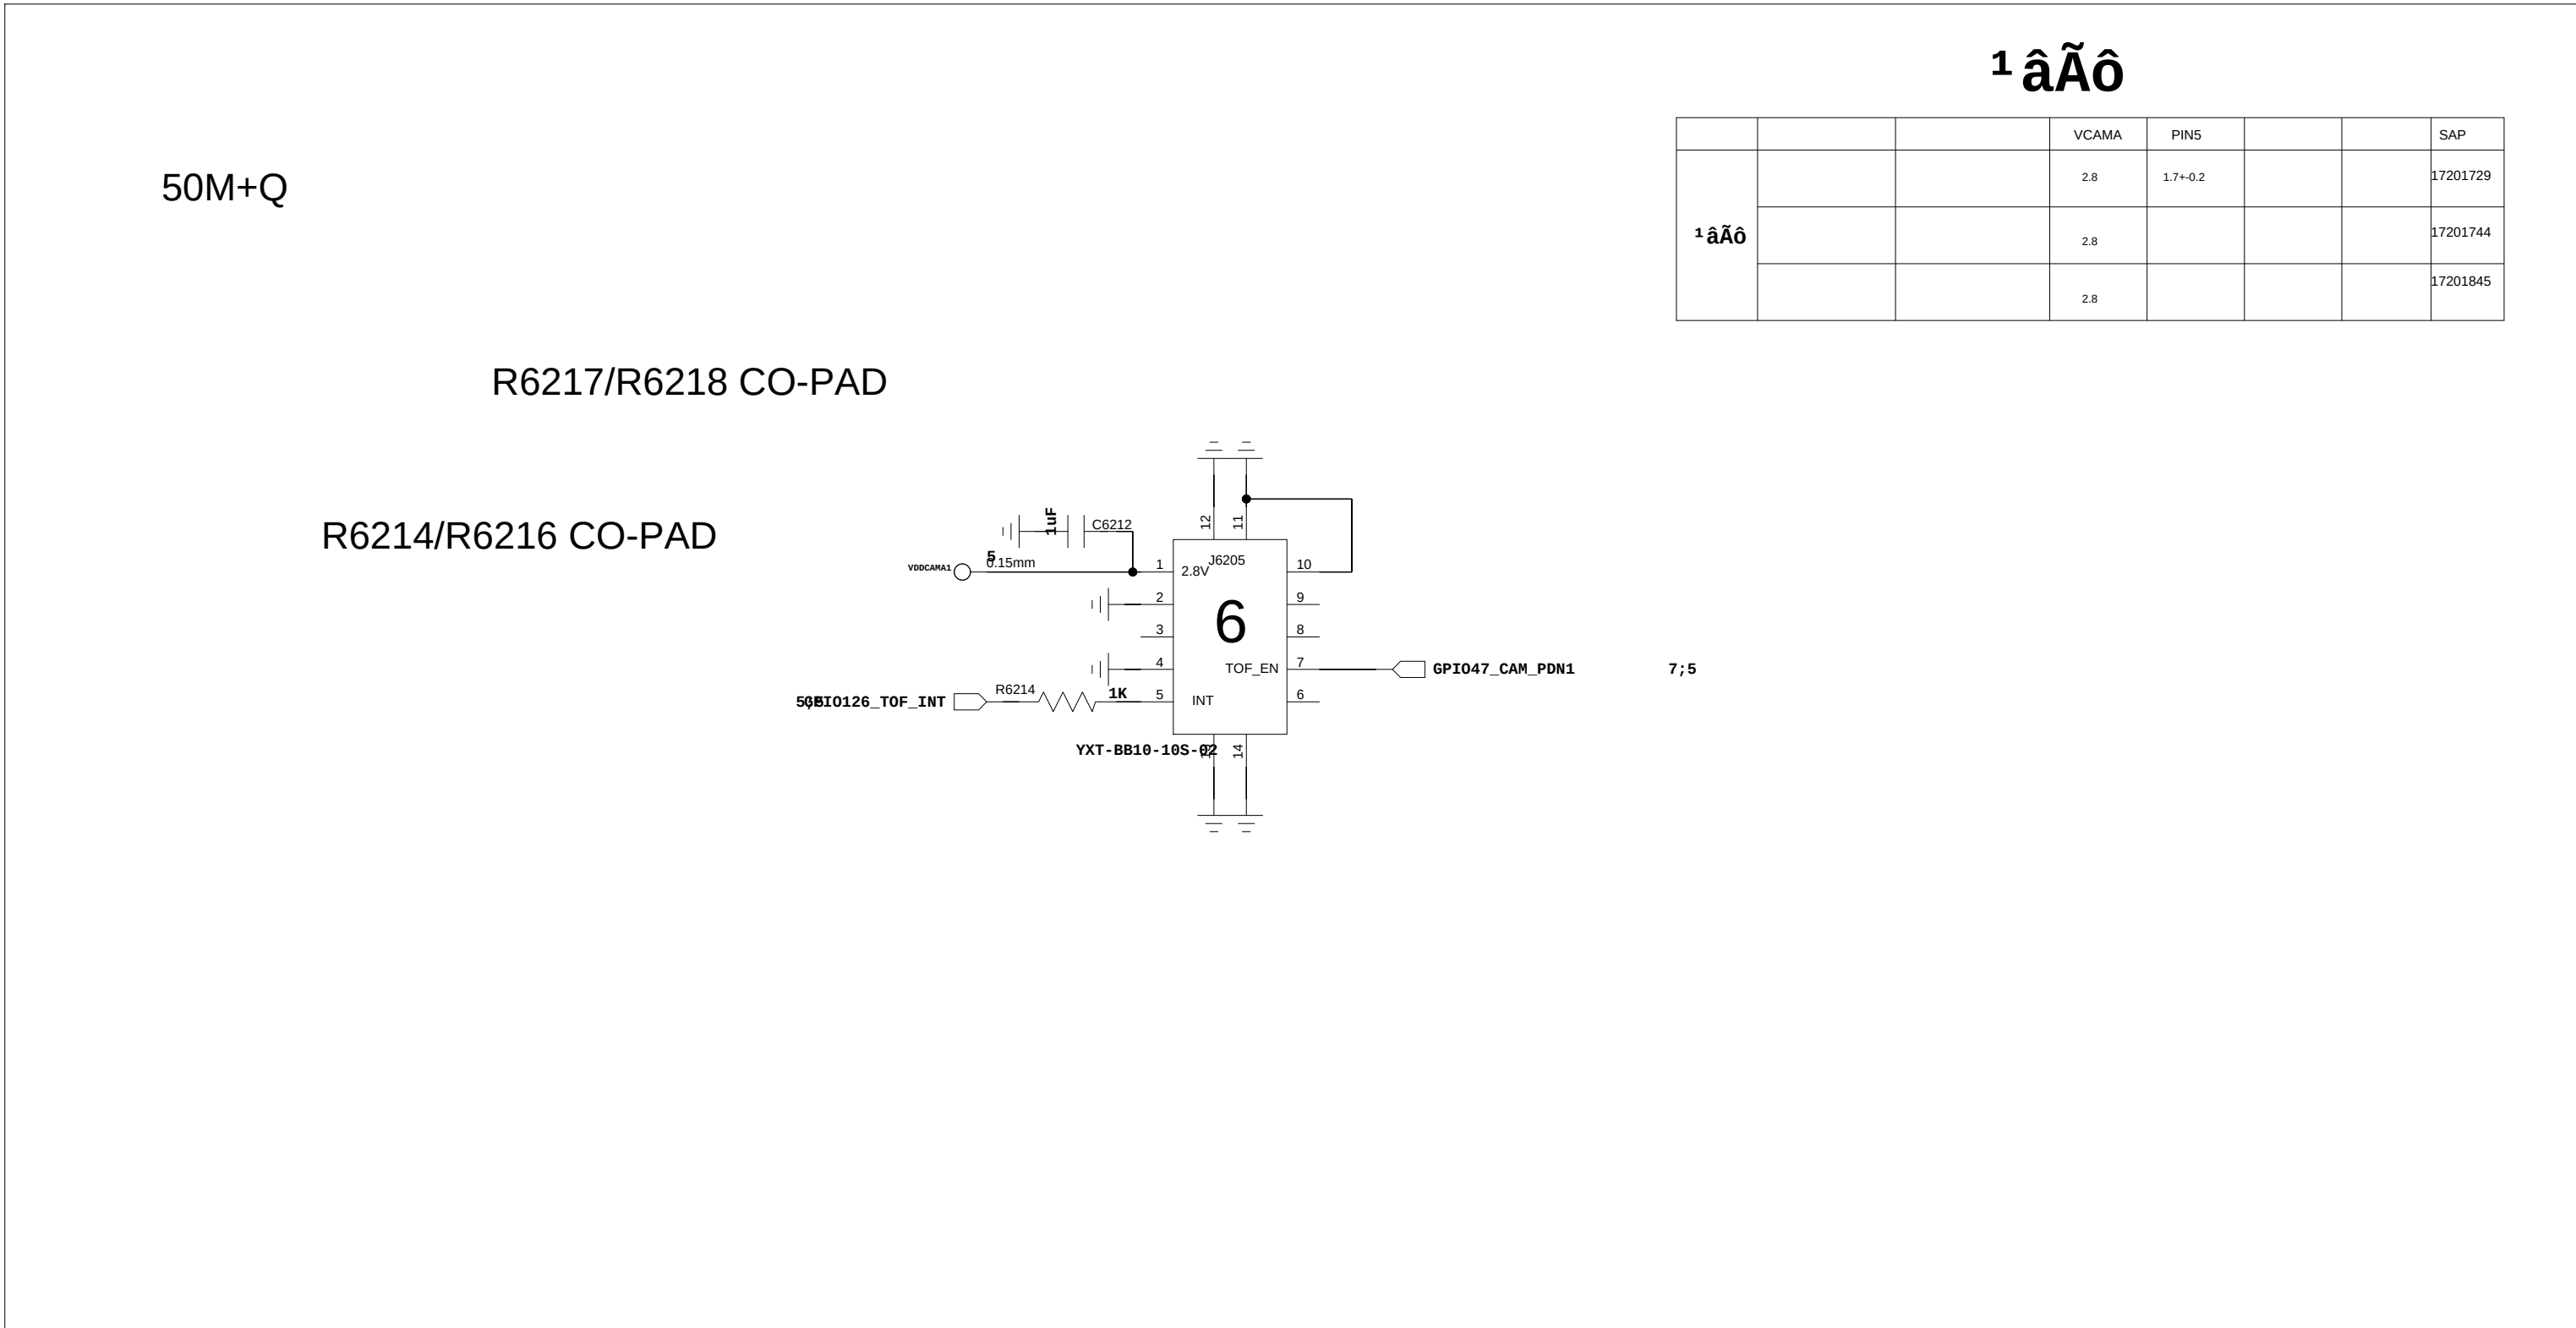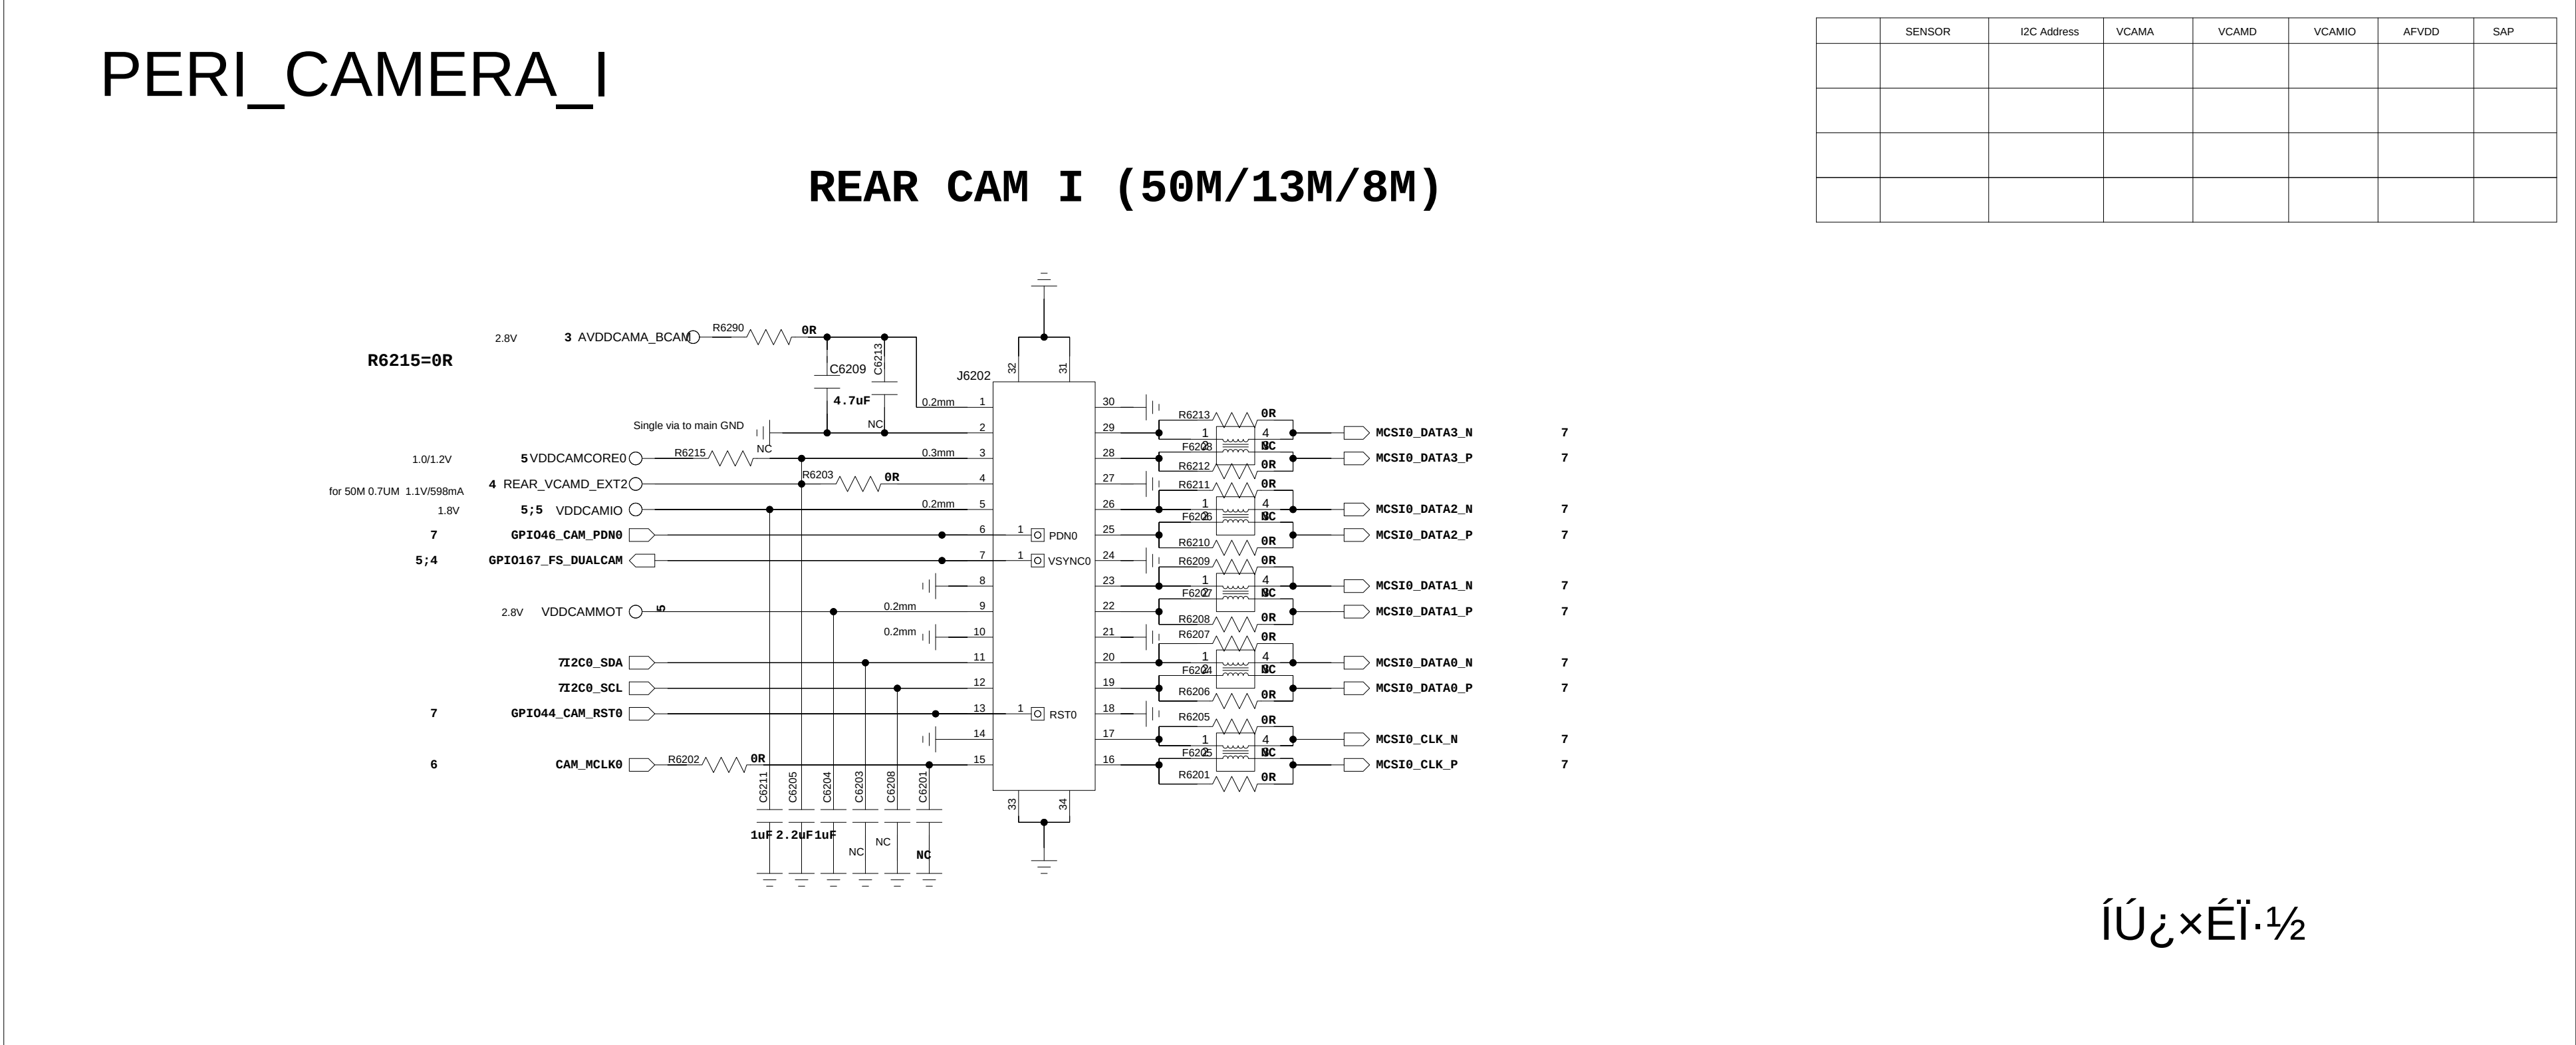

REVISION RECORD			
LTR	ECO NO.	APPROVED	DATE

ALS & PROX


STK3562-DC address: With 544C_Read0x0D

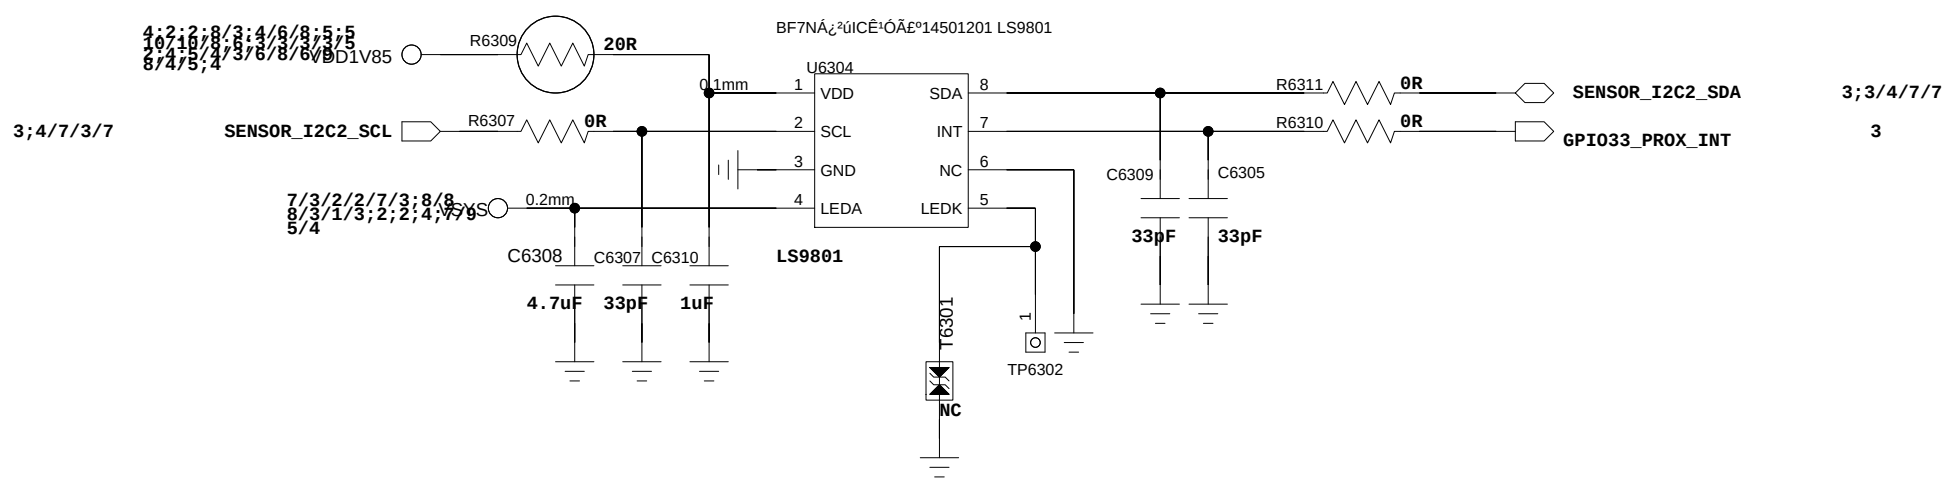


G-Sensor + Gyro Sensor

NTC

Thermistor to sense BATTERY_TEMP
Thermistor to sense BOARD_TEMP

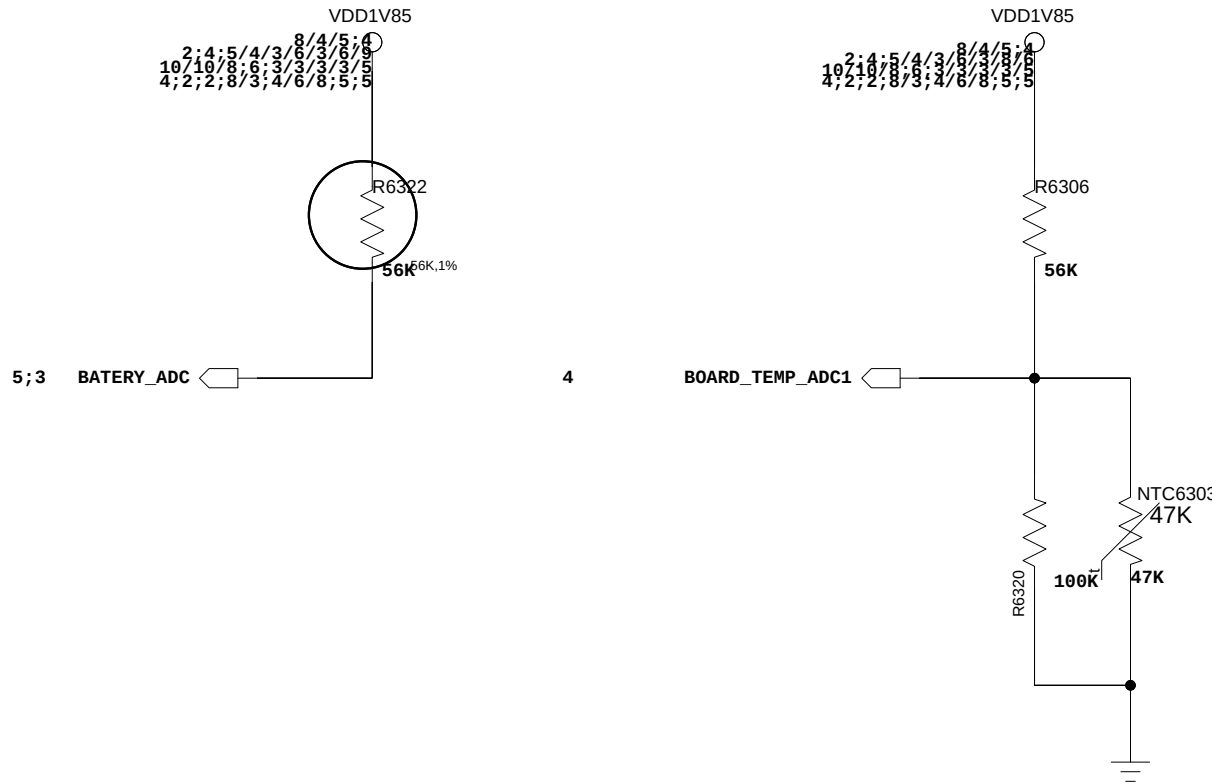


G Sensor

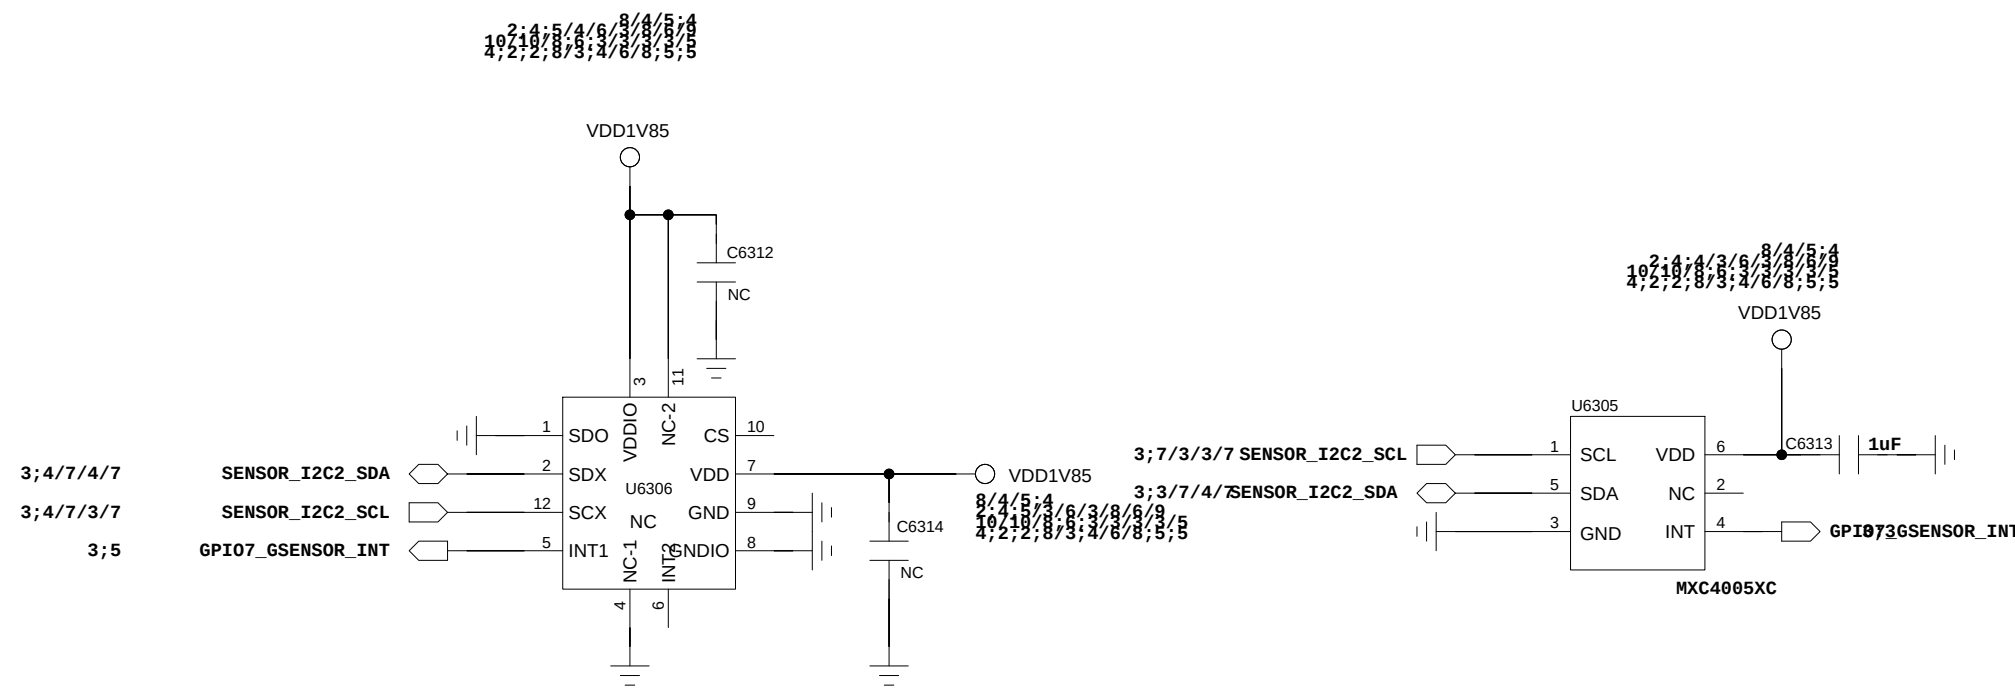

M-Sensor(COMPASS)

With 544C-DC ADDRESS: 0x30/0x31/0x32/0x33/0x34/0x35/0x36/0x37/0x38/0x39/0x3A/0x3B/0x3C/0x3D/0x3E/0x3F/0x40/0x41/0x42/0x43/0x44/0x45/0x46/0x47/0x48/0x49/0x4A/0x4B/0x4C/0x4D/0x4E/0x4F/0x50/0x51/0x52/0x53/0x54/0x55/0x56/0x57/0x58/0x59/0x5A/0x5B/0x5C/0x5D/0x5E/0x5F/0x60/0x61/0x62/0x63/0x64/0x65/0x66/0x67/0x68/0x69/0x6A/0x6B/0x6C/0x6D/0x6E/0x6F/0x70/0x71/0x72/0x73/0x74/0x75/0x76/0x77/0x78/0x79/0x7A/0x7B/0x7C/0x7D/0x7E/0x7F/0x80/0x81/0x82/0x83/0x84/0x85/0x86/0x87/0x88/0x89/0x8A/0x8B/0x8C/0x8D/0x8E/0x8F/0x90/0x91/0x92/0x93/0x94/0x95/0x96/0x97/0x98/0x99/0x9A/0x9B/0x9C/0x9D/0x9E/0x9F/0xA0/0xA1/0xA2/0xA3/0xA4/0xA5/0xA6/0xA7/0xA8/0xA9/0xAA/0xAB/0xAC/0xAD/0xAE/0xAF/0xB0/0xB1/0xB2/0xB3/0xB4/0xB5/0xB6/0xB7/0xB8/0xB9/0xBA/0xBB/0xBC/0xBD/0xBE/0xBF/0xC0/0xC1/0xC2/0xC3/0xC4/0xC5/0xC6/0xC7/0xC8/0xC9/0xCA/0xCB/0xCC/0xCD/0xCE/0xCF/0xD0/0xD1/0xD2/0xD3/0xD4/0xD5/0xD6/0xD7/0xD8/0xD9/0xDA/0xDB/0xDC/0xDD/0xDE/0xDF/0xE0/0xE1/0xE2/0xE3/0xE4/0xE5/0xE6/0xE7/0xE8/0xE9/0xEA/0xEB/0xEC/0xED/0xEE/0xEF/0xF0/0xF1/0xF2/0xF3/0xF4/0xF5/0xF6/0xF7/0xF8/0xF9/0xFA/0xFB/0xFC/0xFD/0xFE/0xFF

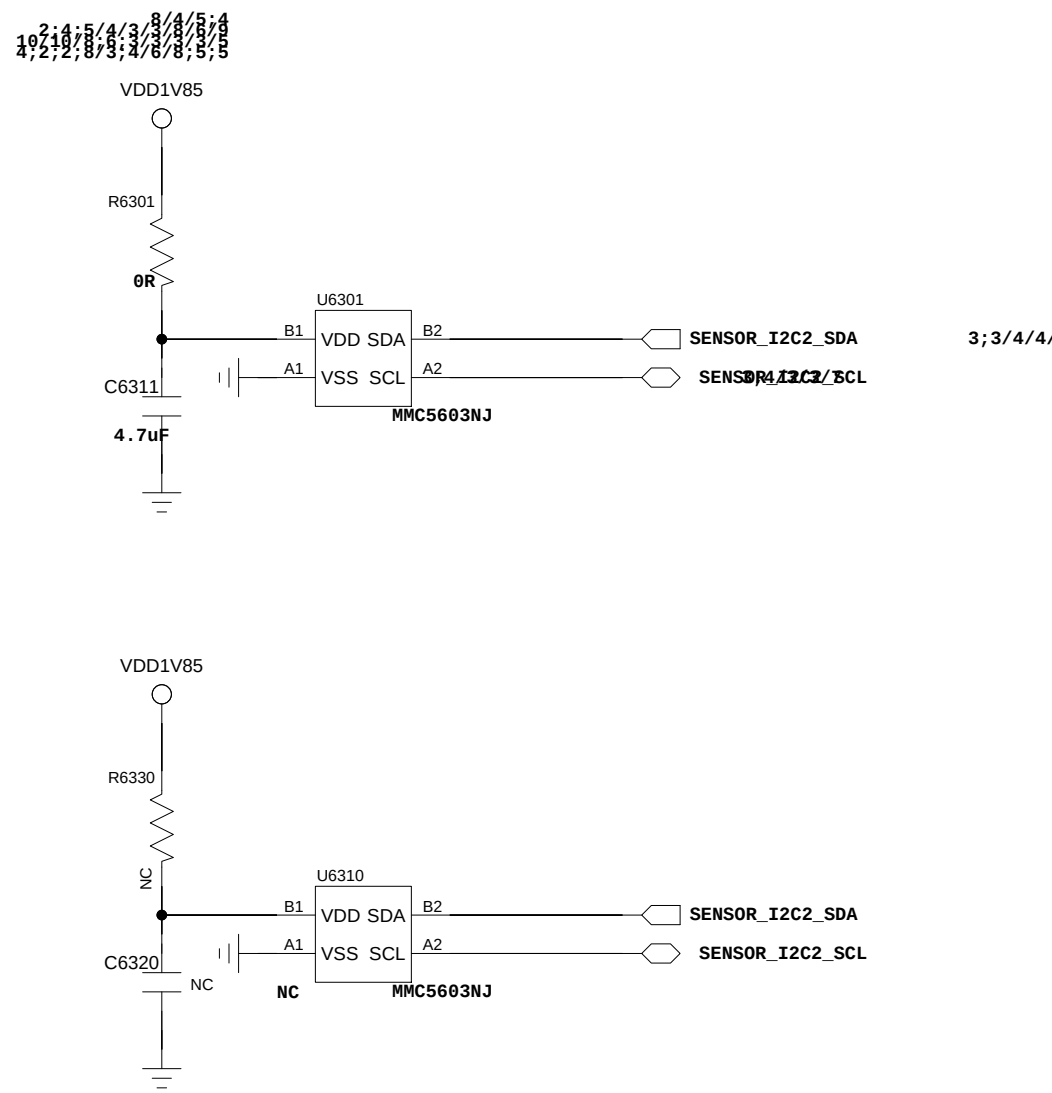

COMPANY: TRANSSION HOLDINGS			MODEL: J6563_F069_MAIN		Modified Date: 25/10/2023:15:12	
DRAWN		DATED	TITLE:		VERSION:	SHEET: 023
CHECKED		DATED	< >	Confidentiality	CONFIDENTIAL	

The schematic diagram illustrates the connection between the STM32MP157 microcontroller and the U9001 USB-to-UART bridge. The STM32MP157 is shown with its various pins connected to the U9001 and other components. Key connections include:

- Power Supply:** VDD, VDDIO, and VDDIO2 are connected to the U9001. VDDIO2 is connected to the U9001's VDDIO2 pin, which is also connected to the U9001's VDDIO2 pin.
- Clock Signals:** HSE, HSI, and HSI48 are connected to the U9001. HSE is connected to the U9001's HSE pin, HSI to the U9001's HSI pin, and HSI48 to the U9001's HSI48 pin.
- GPIO and I2C:** The STM32MP157's GPIO pins are connected to the U9001's GPIO pins. The I2C pins are connected to the U9001's I2C pins.
- SPI and UART:** The STM32MP157's SPI and UART pins are connected to the U9001's SPI and UART pins.
- Other Components:** The diagram also shows connections to other components like the U9001, U9002, and U9003.

The diagram is a detailed representation of the hardware connections, showing the internal circuitry and the external components. It is a valuable resource for understanding the board's architecture and for troubleshooting any issues that may arise.

12	11	10	9	8	2	6	5	4	3	2	1
----	----	----	---	---	---	---	---	---	---	---	---