
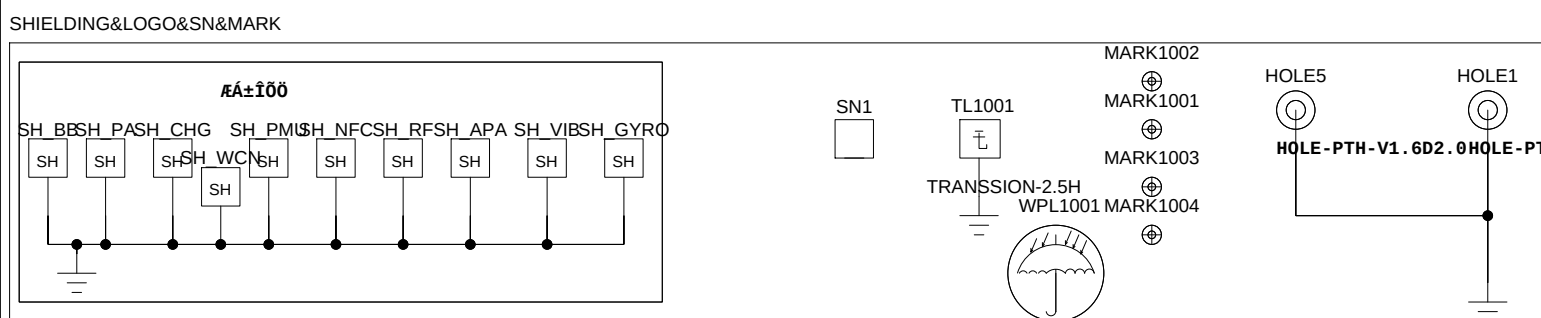
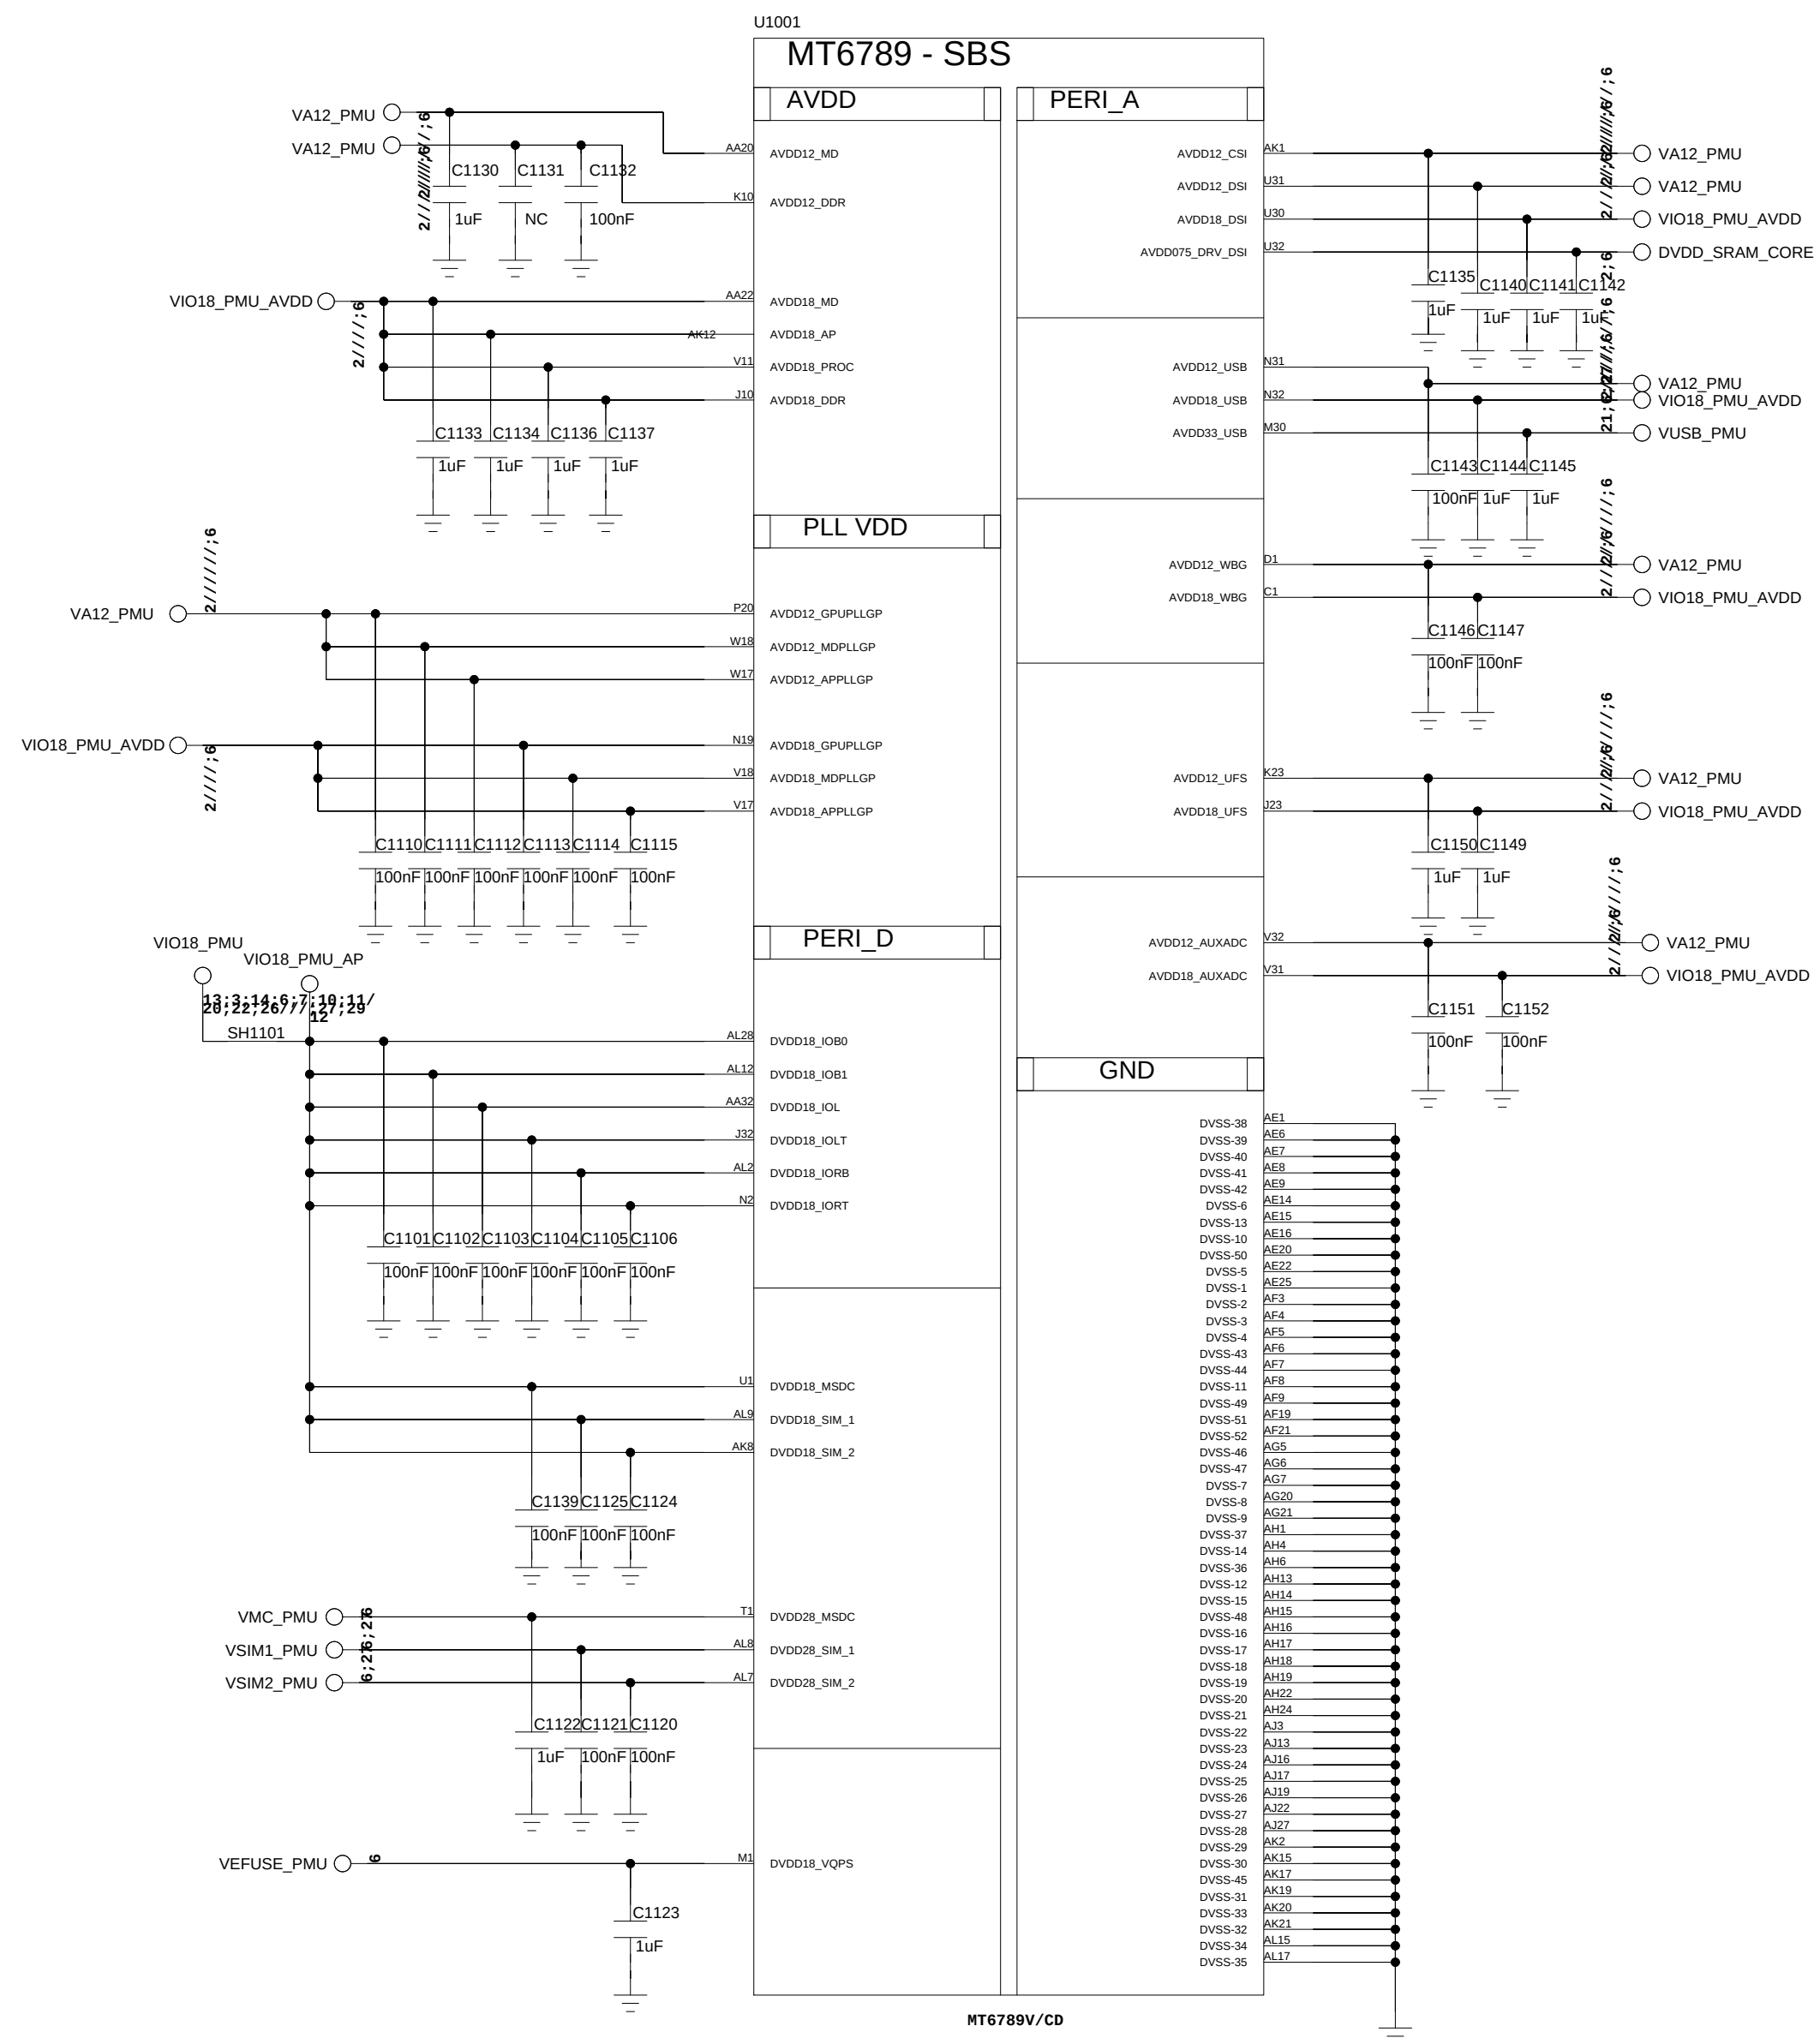



BB POWER

REVISION RECORD			
LTR	ECO NO:	APPROVED:	DATE:

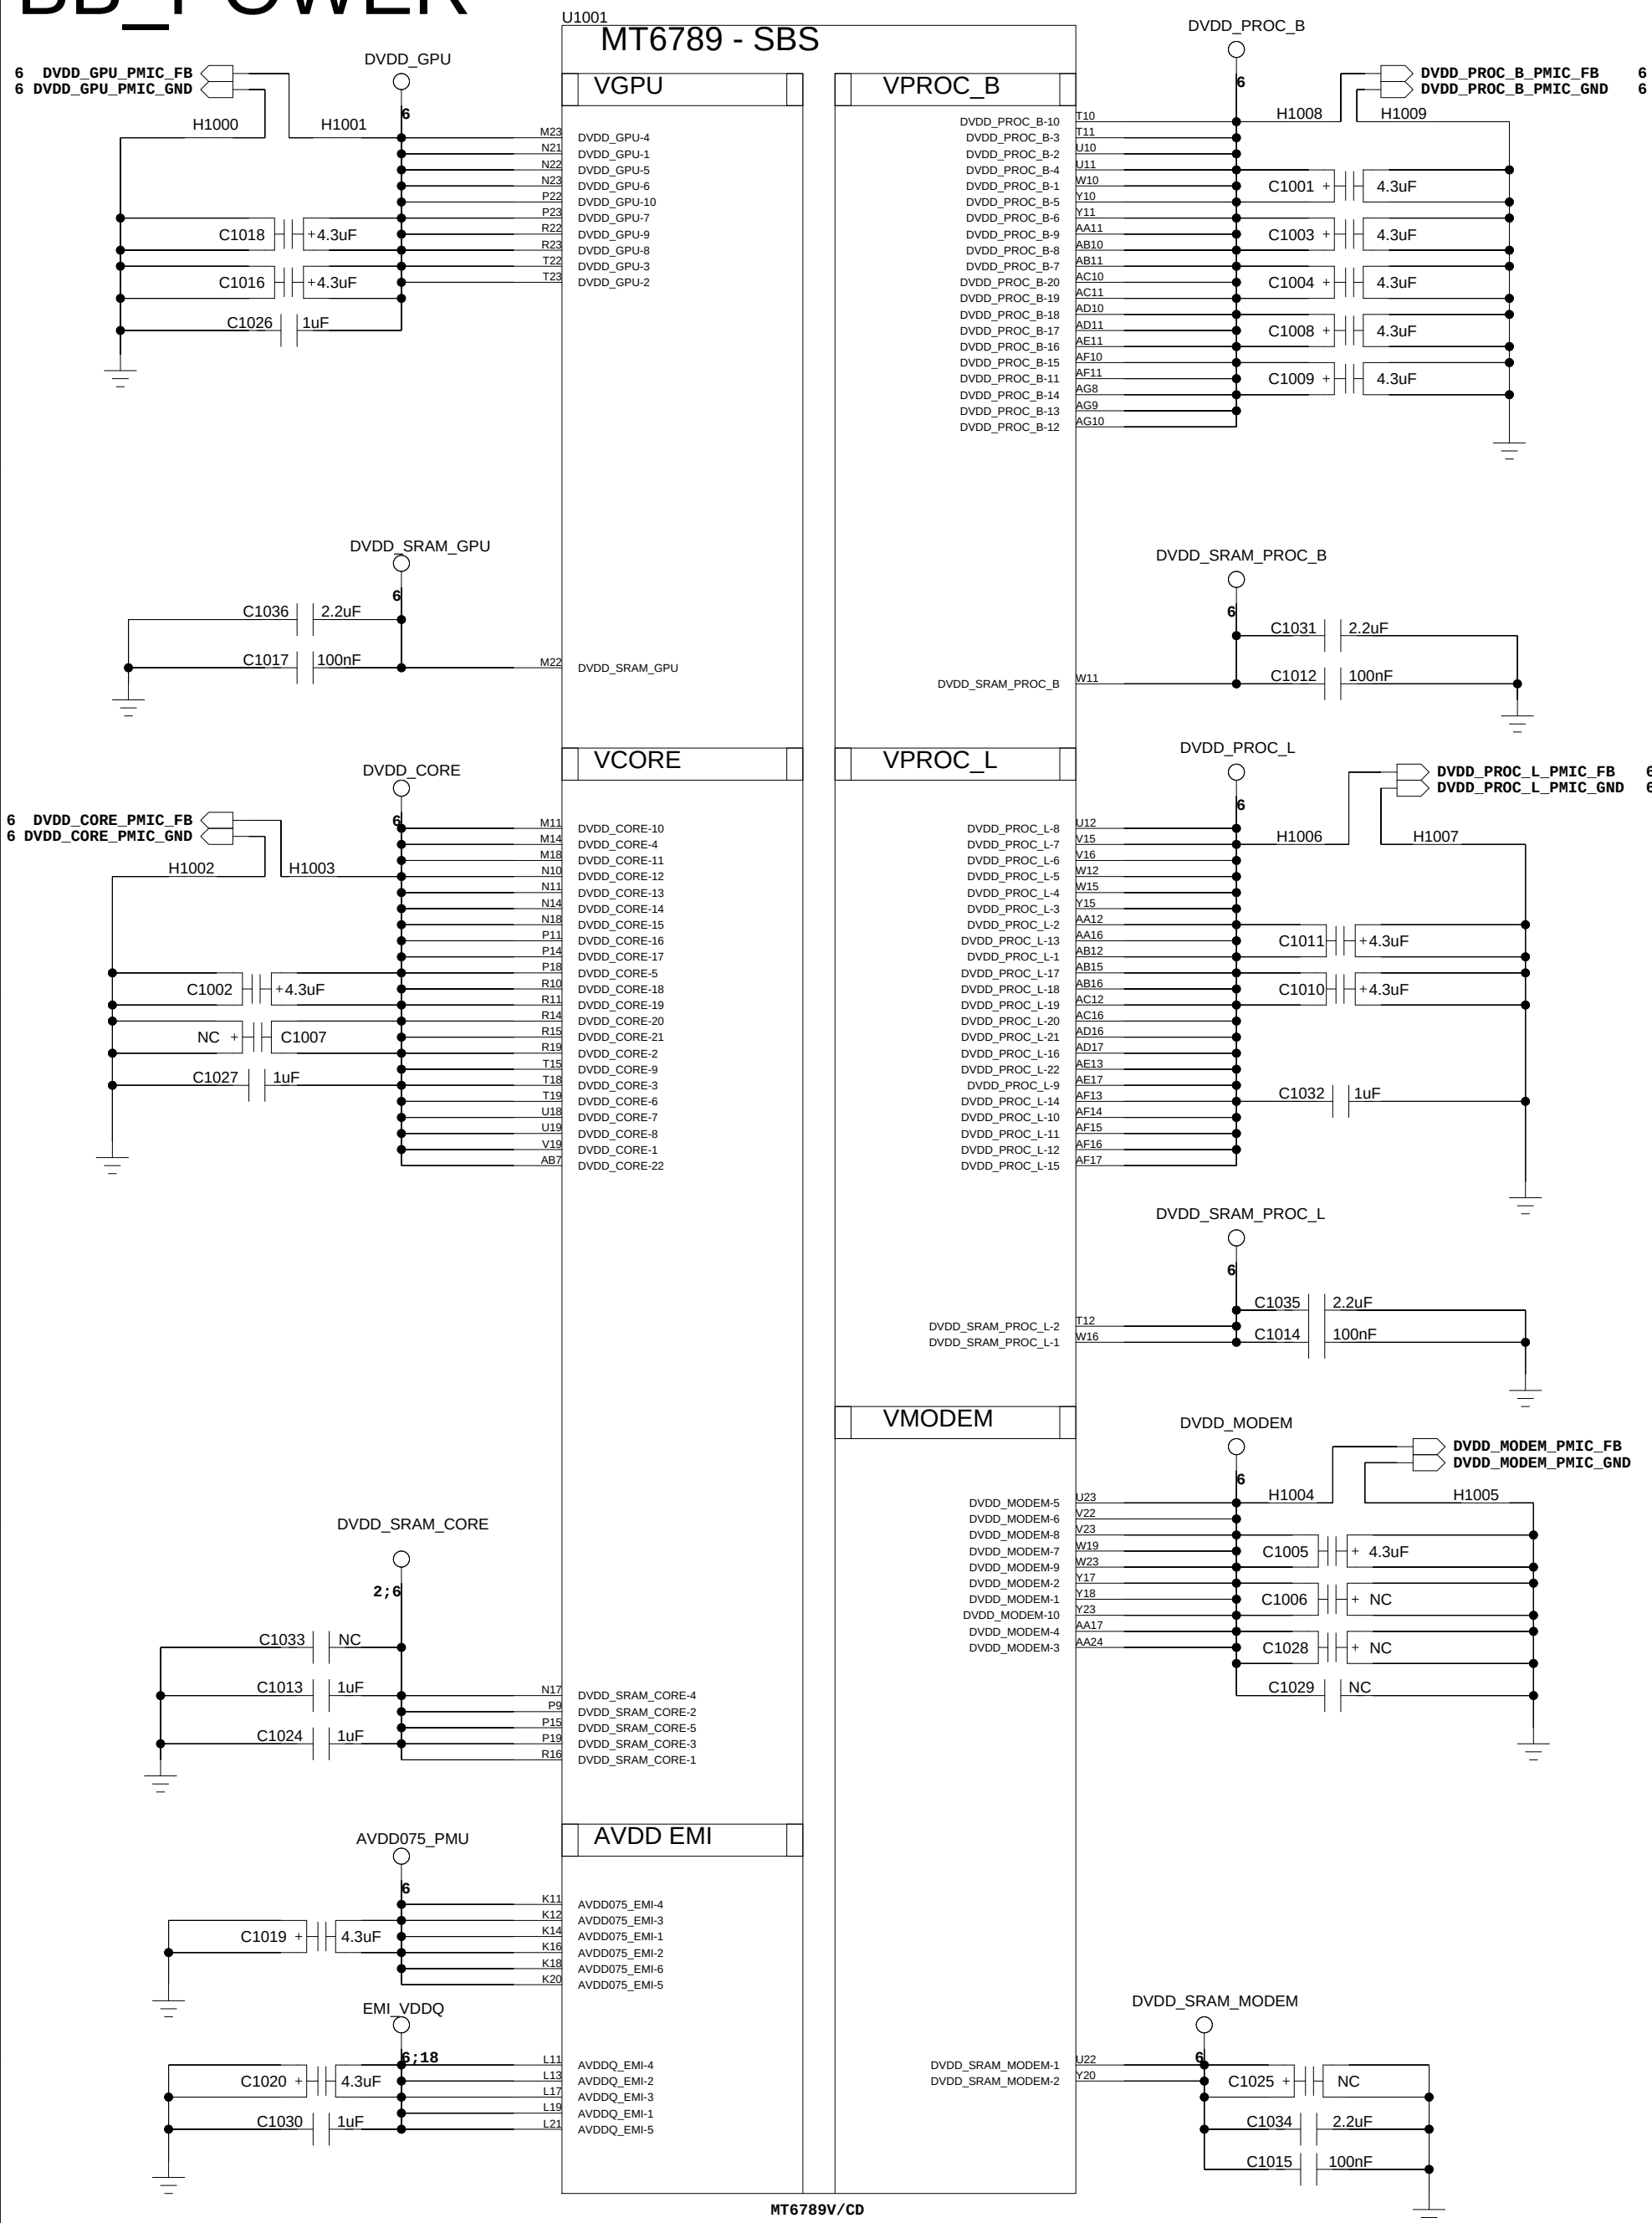

COMPANY: TRANSSION HOLDINGS				MODEL: G99_STD_MAIN		Modified Date: 05/09/2023:16:23	
DRAWN		DATED		TITLE: 10_BB_POWER_PDN		VERSION:	SHEET: 2 OF 29
CHECKED		DATED	< >	Confidentiality	CONFIDENTIAL		

REVISION RECORD			
LTR	ECO NO:	APPROVED:	DATE:

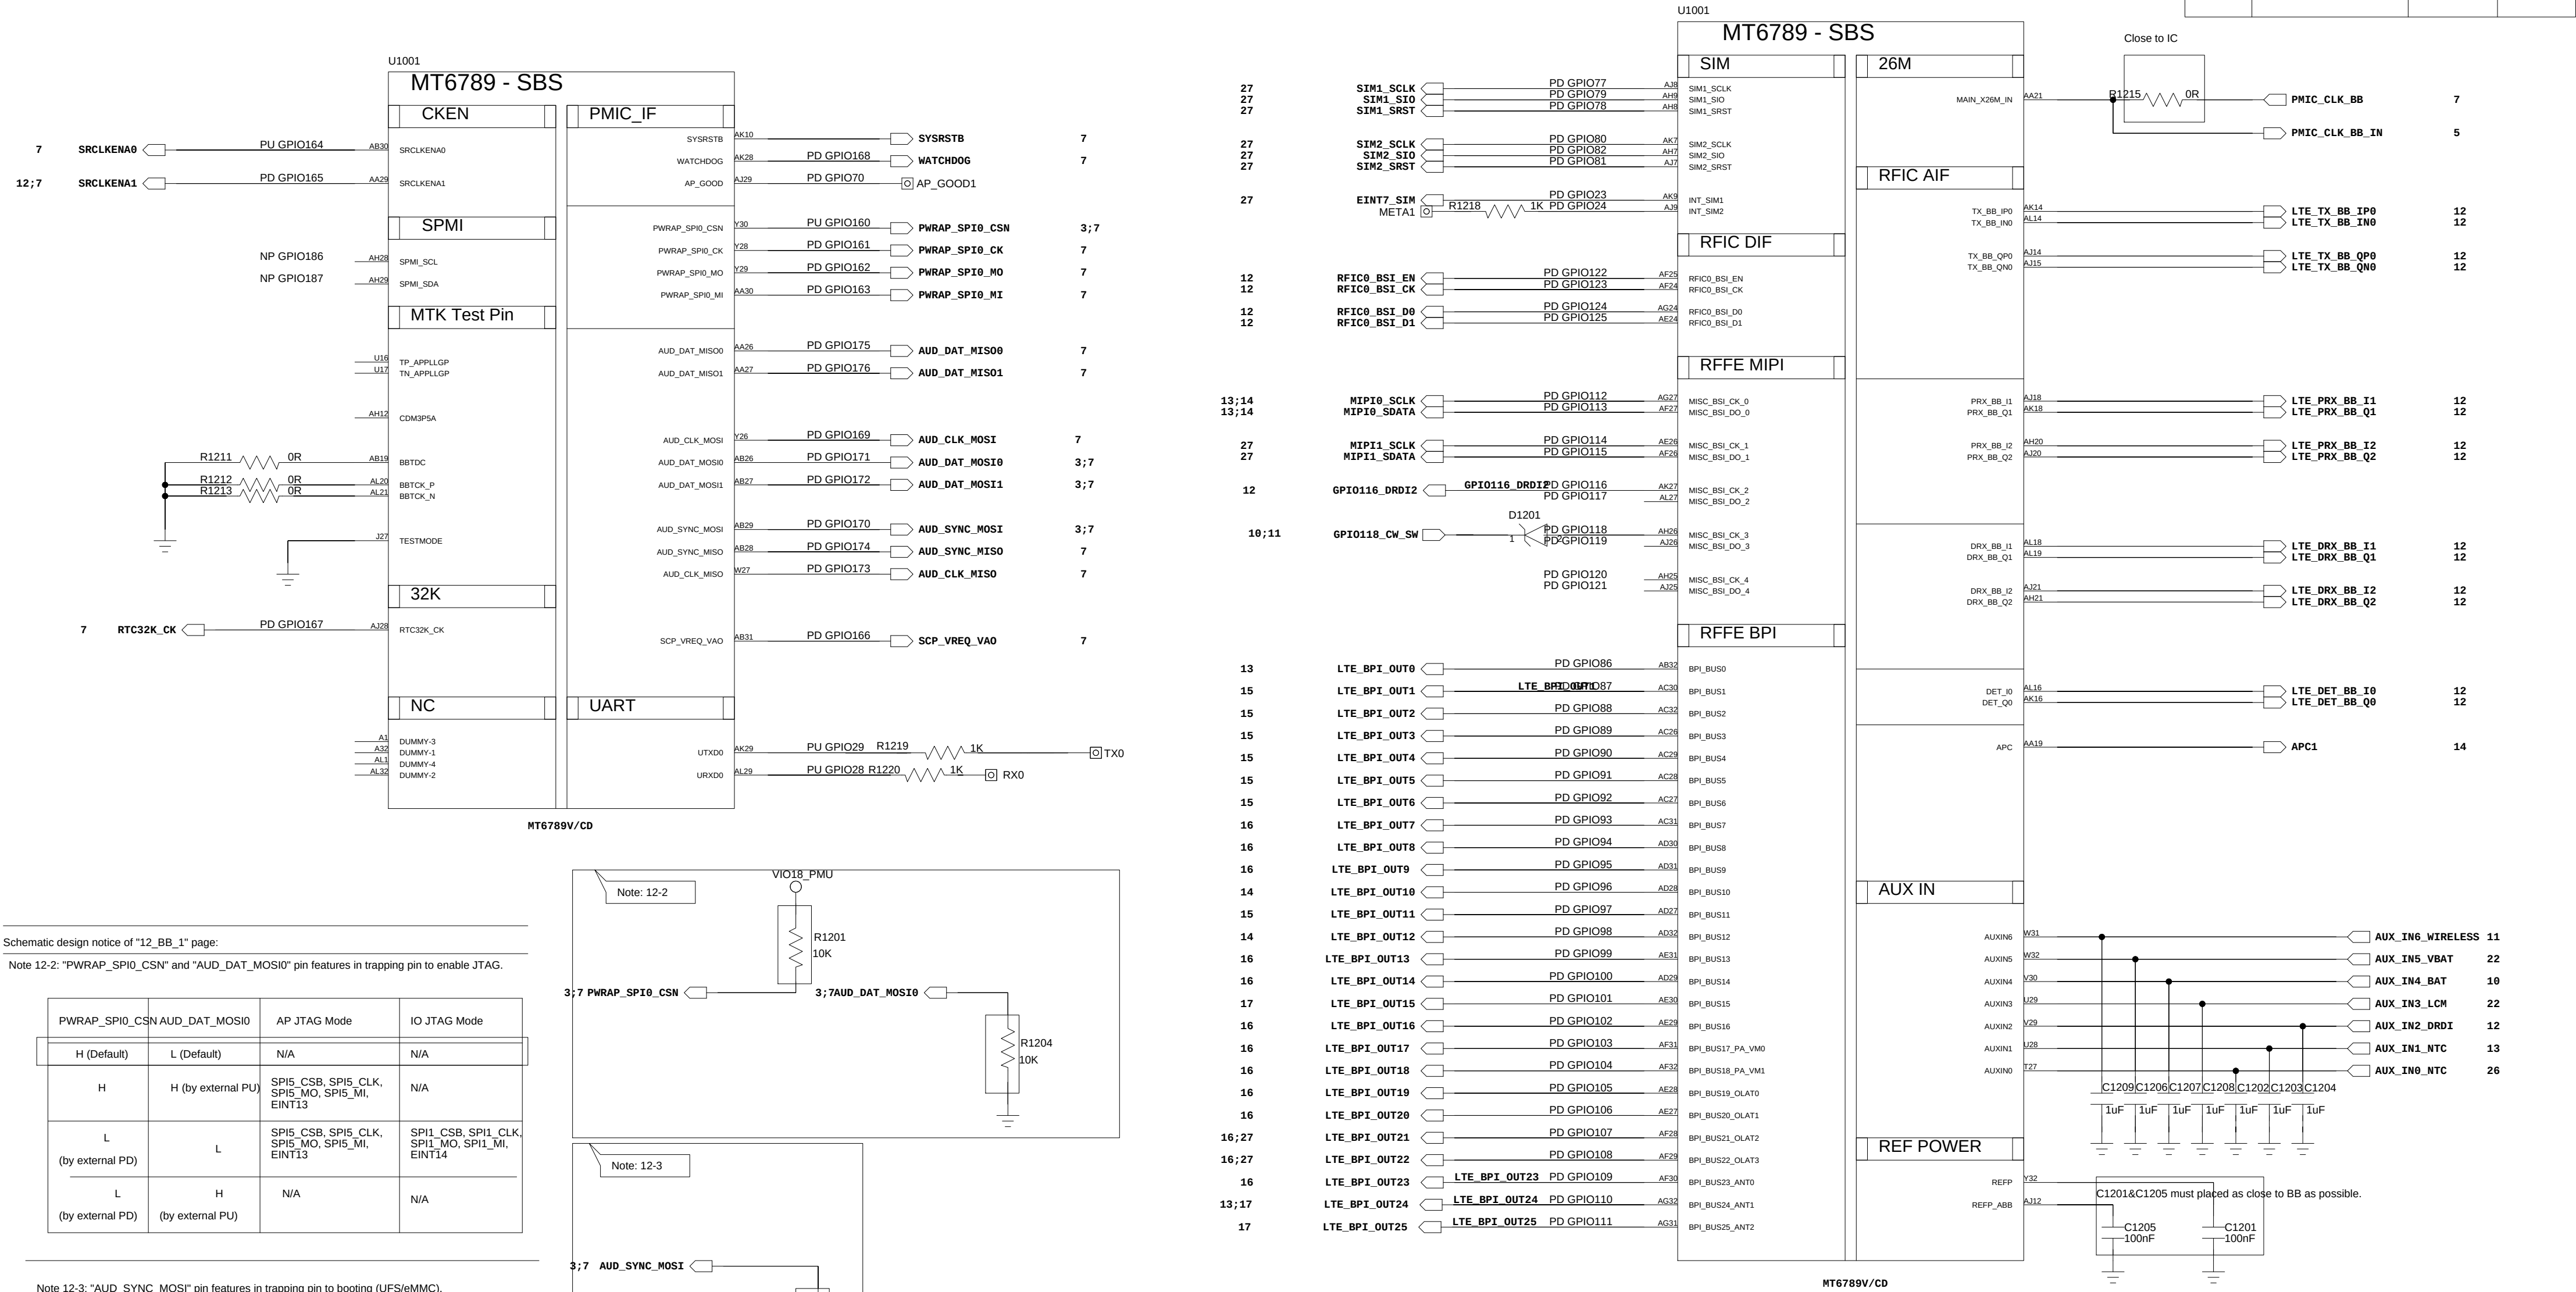

Schematic design notice of "12_BB_1" page:

Note 12-2: "PWRAP_SPI0_CSN" and "AUD_DAT_MOSI0" pin features in trapping pin to enable JTAG.

PWRAP_SPI0_CSN	AUD_DAT_MOSI0	AP JTAG Mode	IO JTAG Mode
H (Default)	L (Default)	N/A	N/A
H	H (by external PU)	SPI5_CSB, SPI5_CLK, SPI5_MO, SPI5_MI, EINT13	N/A
L (by external PD)	L	SPI5_CSB, SPI5_CLK, SPI5_MO, SPI5_MI, EINT13	SPI1_CSB, SPI1_CLK, SPI1_MO, SPI1_MI, EINT14
L (by external PD)	H (by external PU)	N/A	N/A

Note 12-3: "AUD_SYNC_MOSI" pin features in trapping pin to booting (UFS/eMMC).



AUD_SYNC_MOSI	Storage Booting Mode
L (Default)	Only UFS boot
H (by external PU)	Only eMMC boot

Note 12-4 "AUD_DAT_MOSI1" pin features in trapping pin for SW co-load.

AUD_DAT_MOSI1	Mode
L (Default)	LP4x-MCP
H (by external PU)	LP4x-Discrete



COMPANY: TRANSSION HOLDINGS				MODEL:G99_STD_MAIN		Modified Date: 12/01/2024:16:42	
DRAWN		DATED		TITLE: 12_BB_I_PMIC_RF		VERSION:	SHEET: 3 OF 29
CHECKED		DATED	< >	Confidentiality	CONFIDENTIAL		

REVISION RECORD			
LTR	ECO NO:	APPROVED:	DATE:

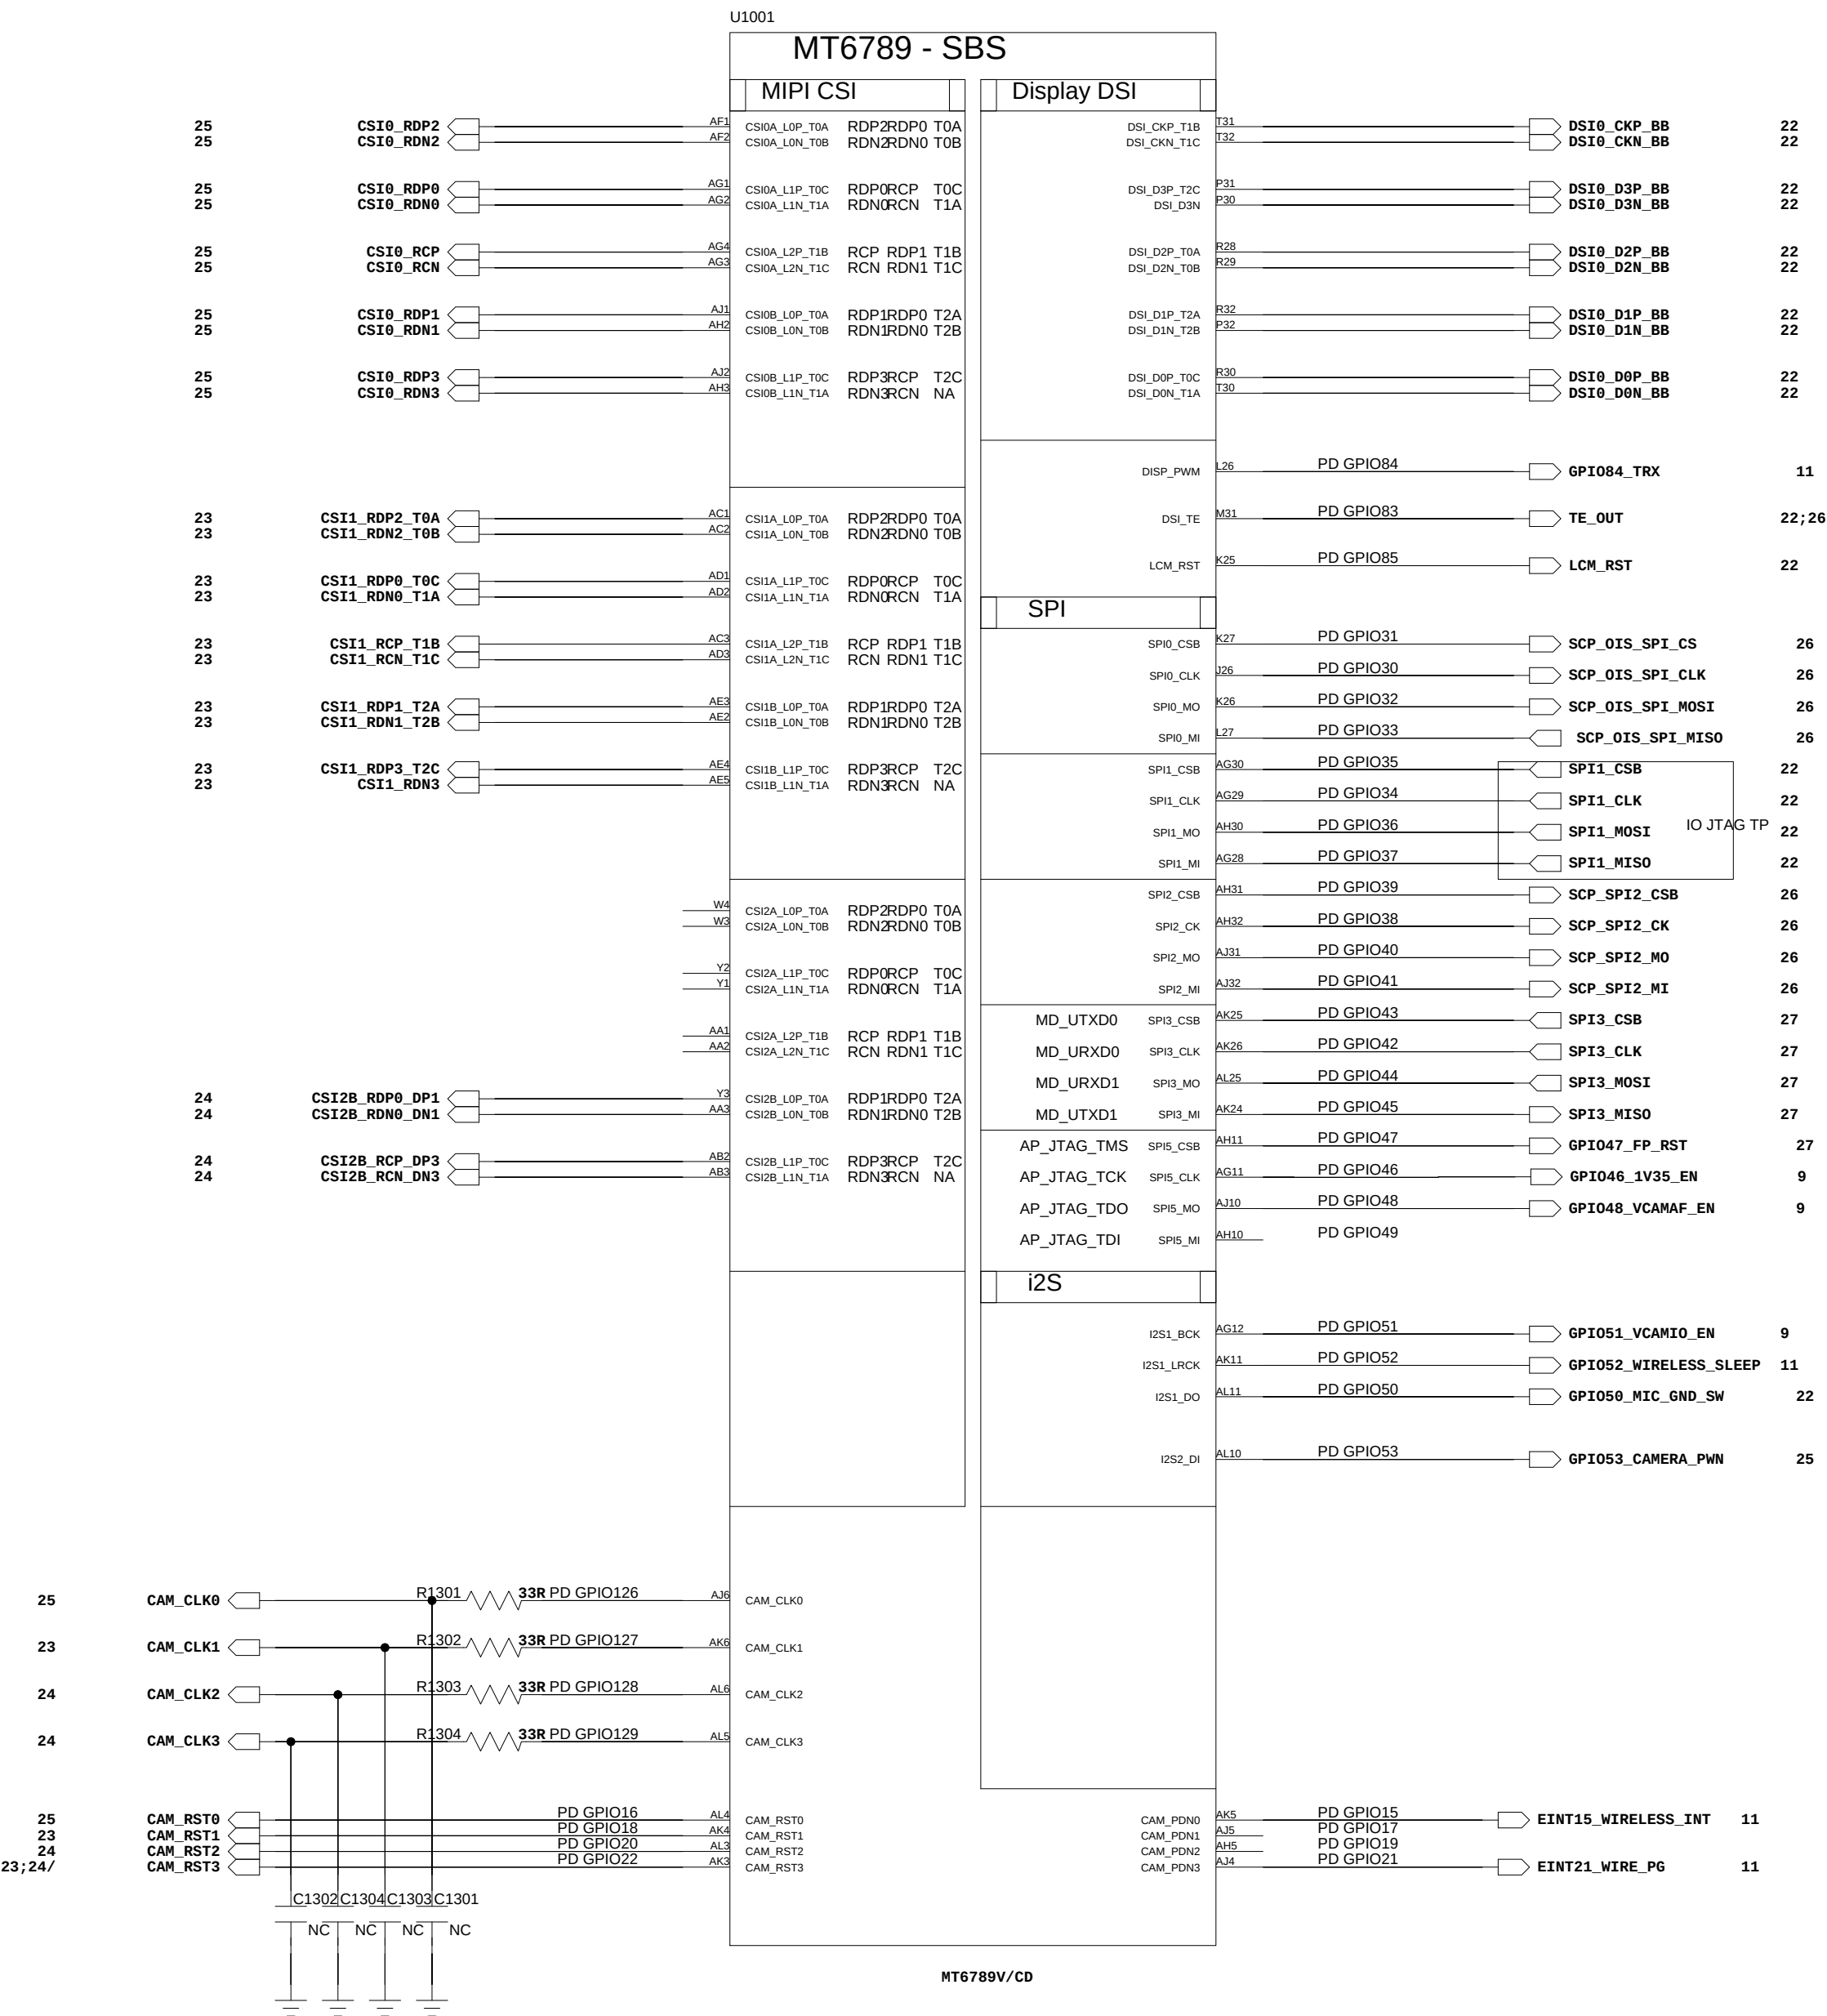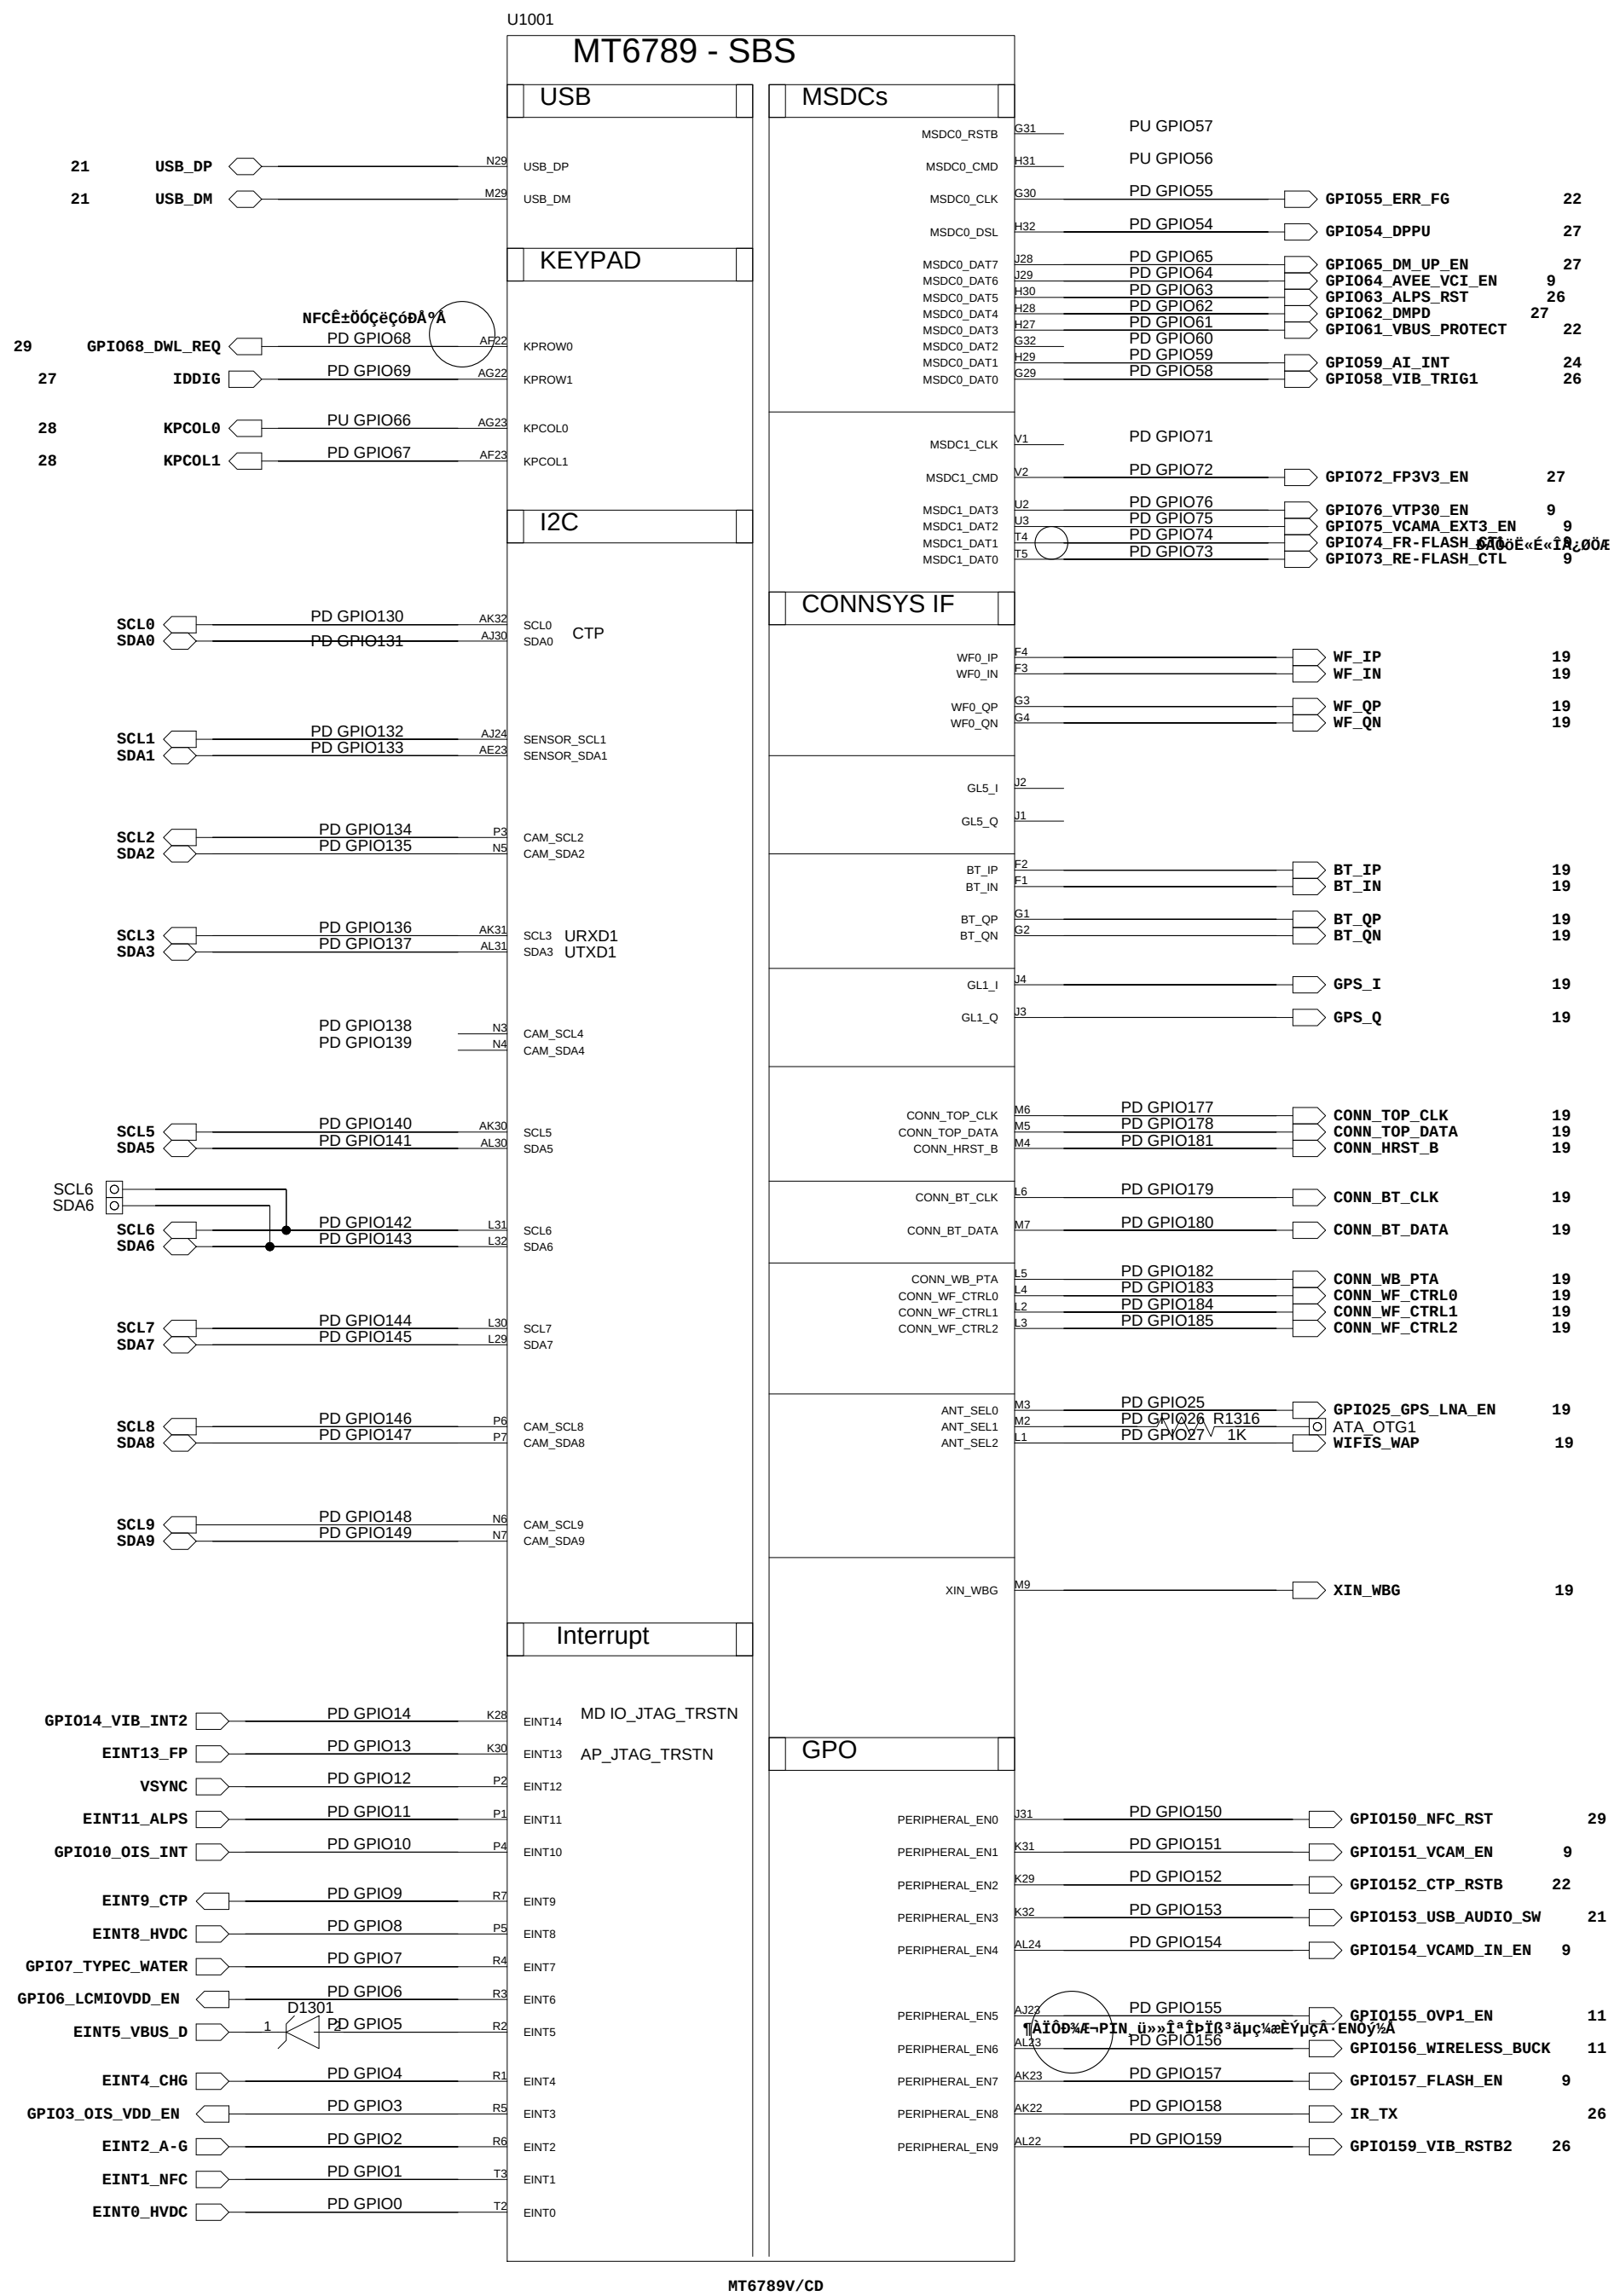

COMPANY: TRANSSION HOLDINGS				MODEL: G99_STD_MAIN		Modified Date: 15/01/2024:17:14	
DRAWN		DATED		TITLE: 13_BB_II_CONN_RF		VERSION:	SHEET: 4 OF 29
CHECKED		DATED	< >	Confidentiality	CONFIDENTIAL		

REVISION RECORD			
LTR	ECO NO:	APPROVED:	DATE:

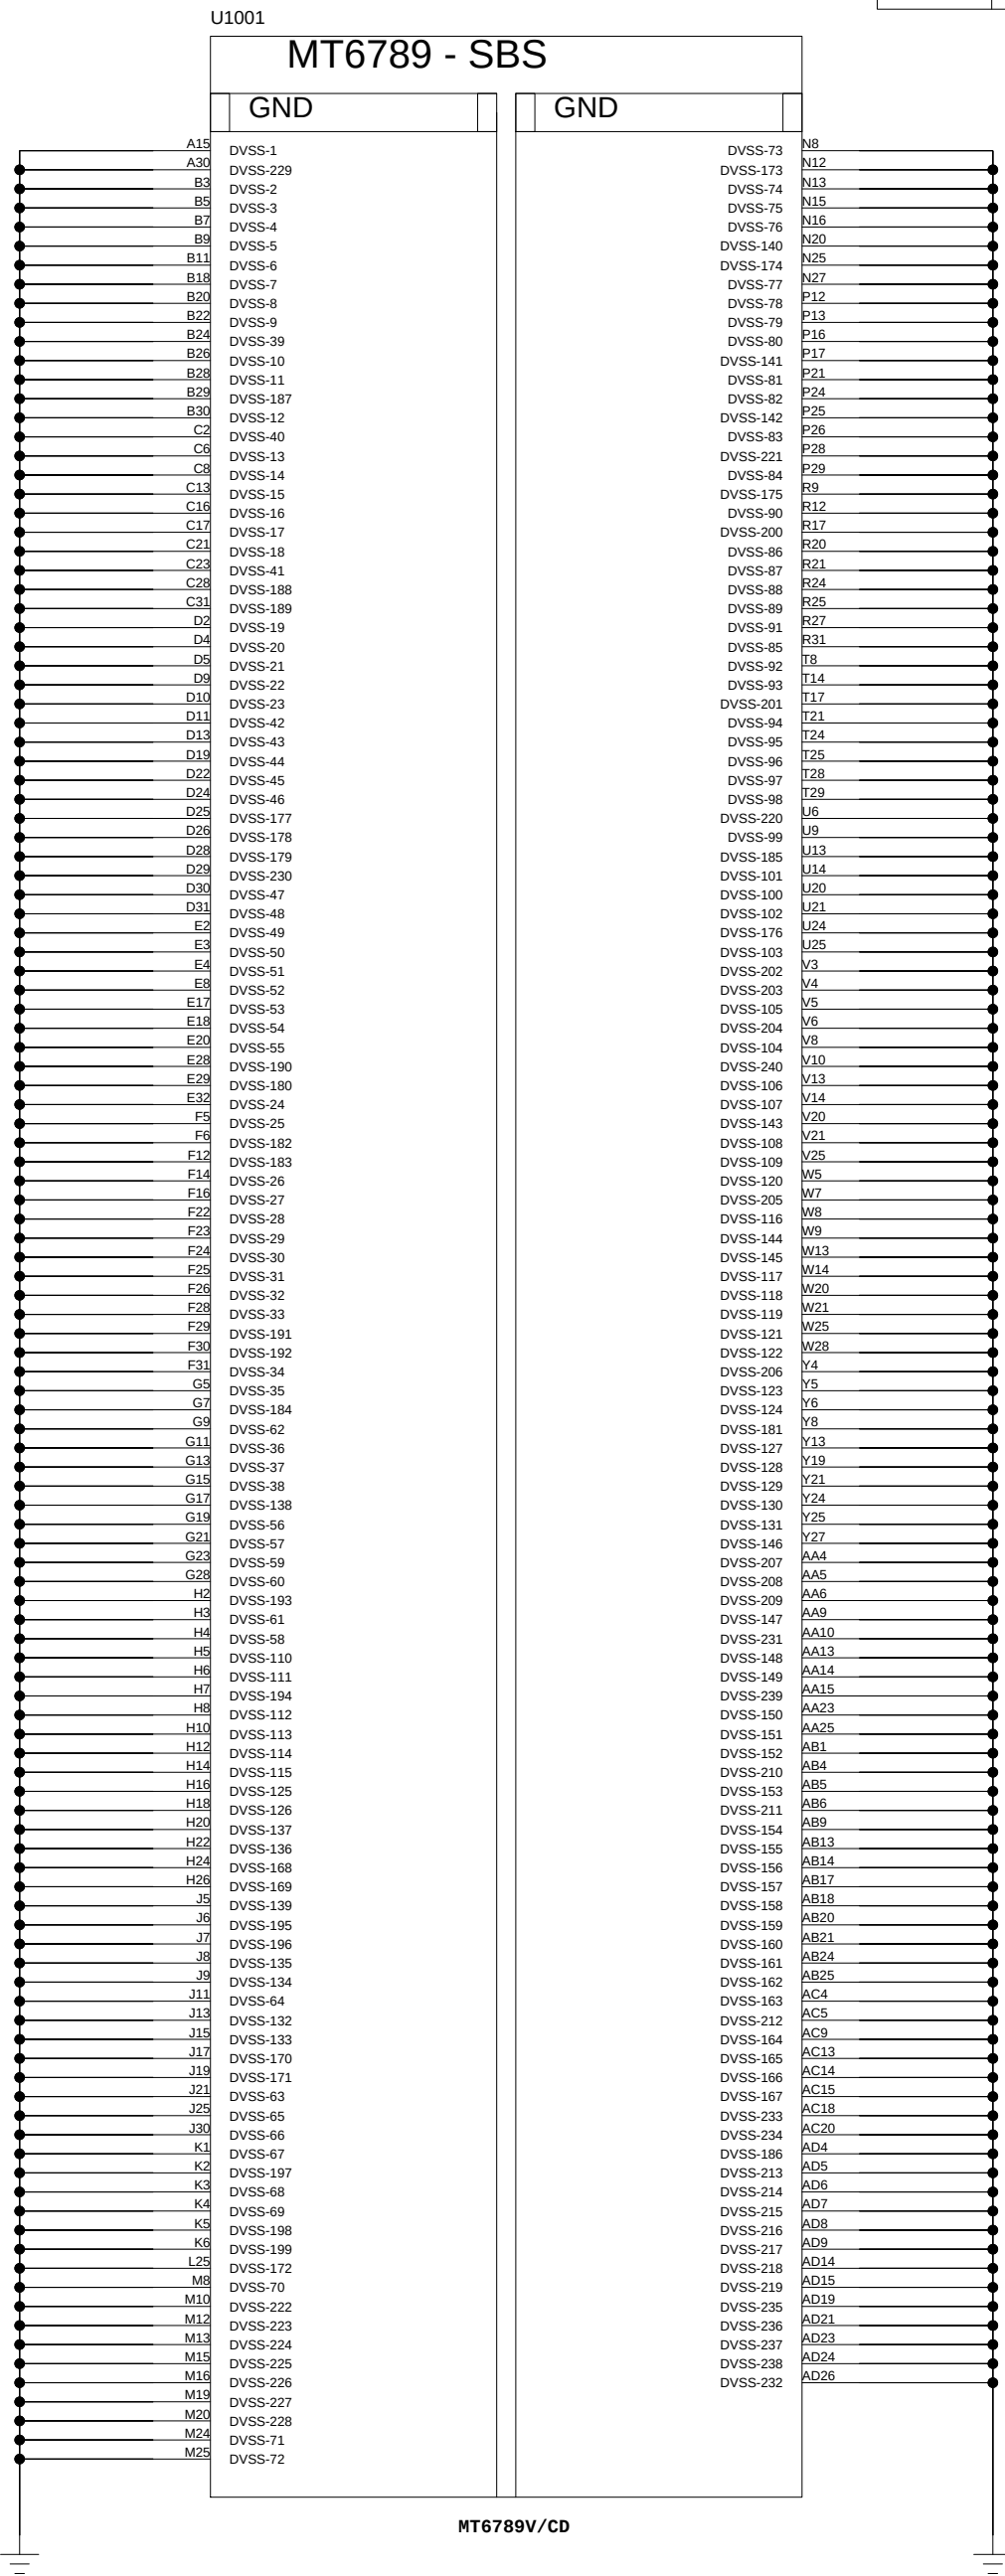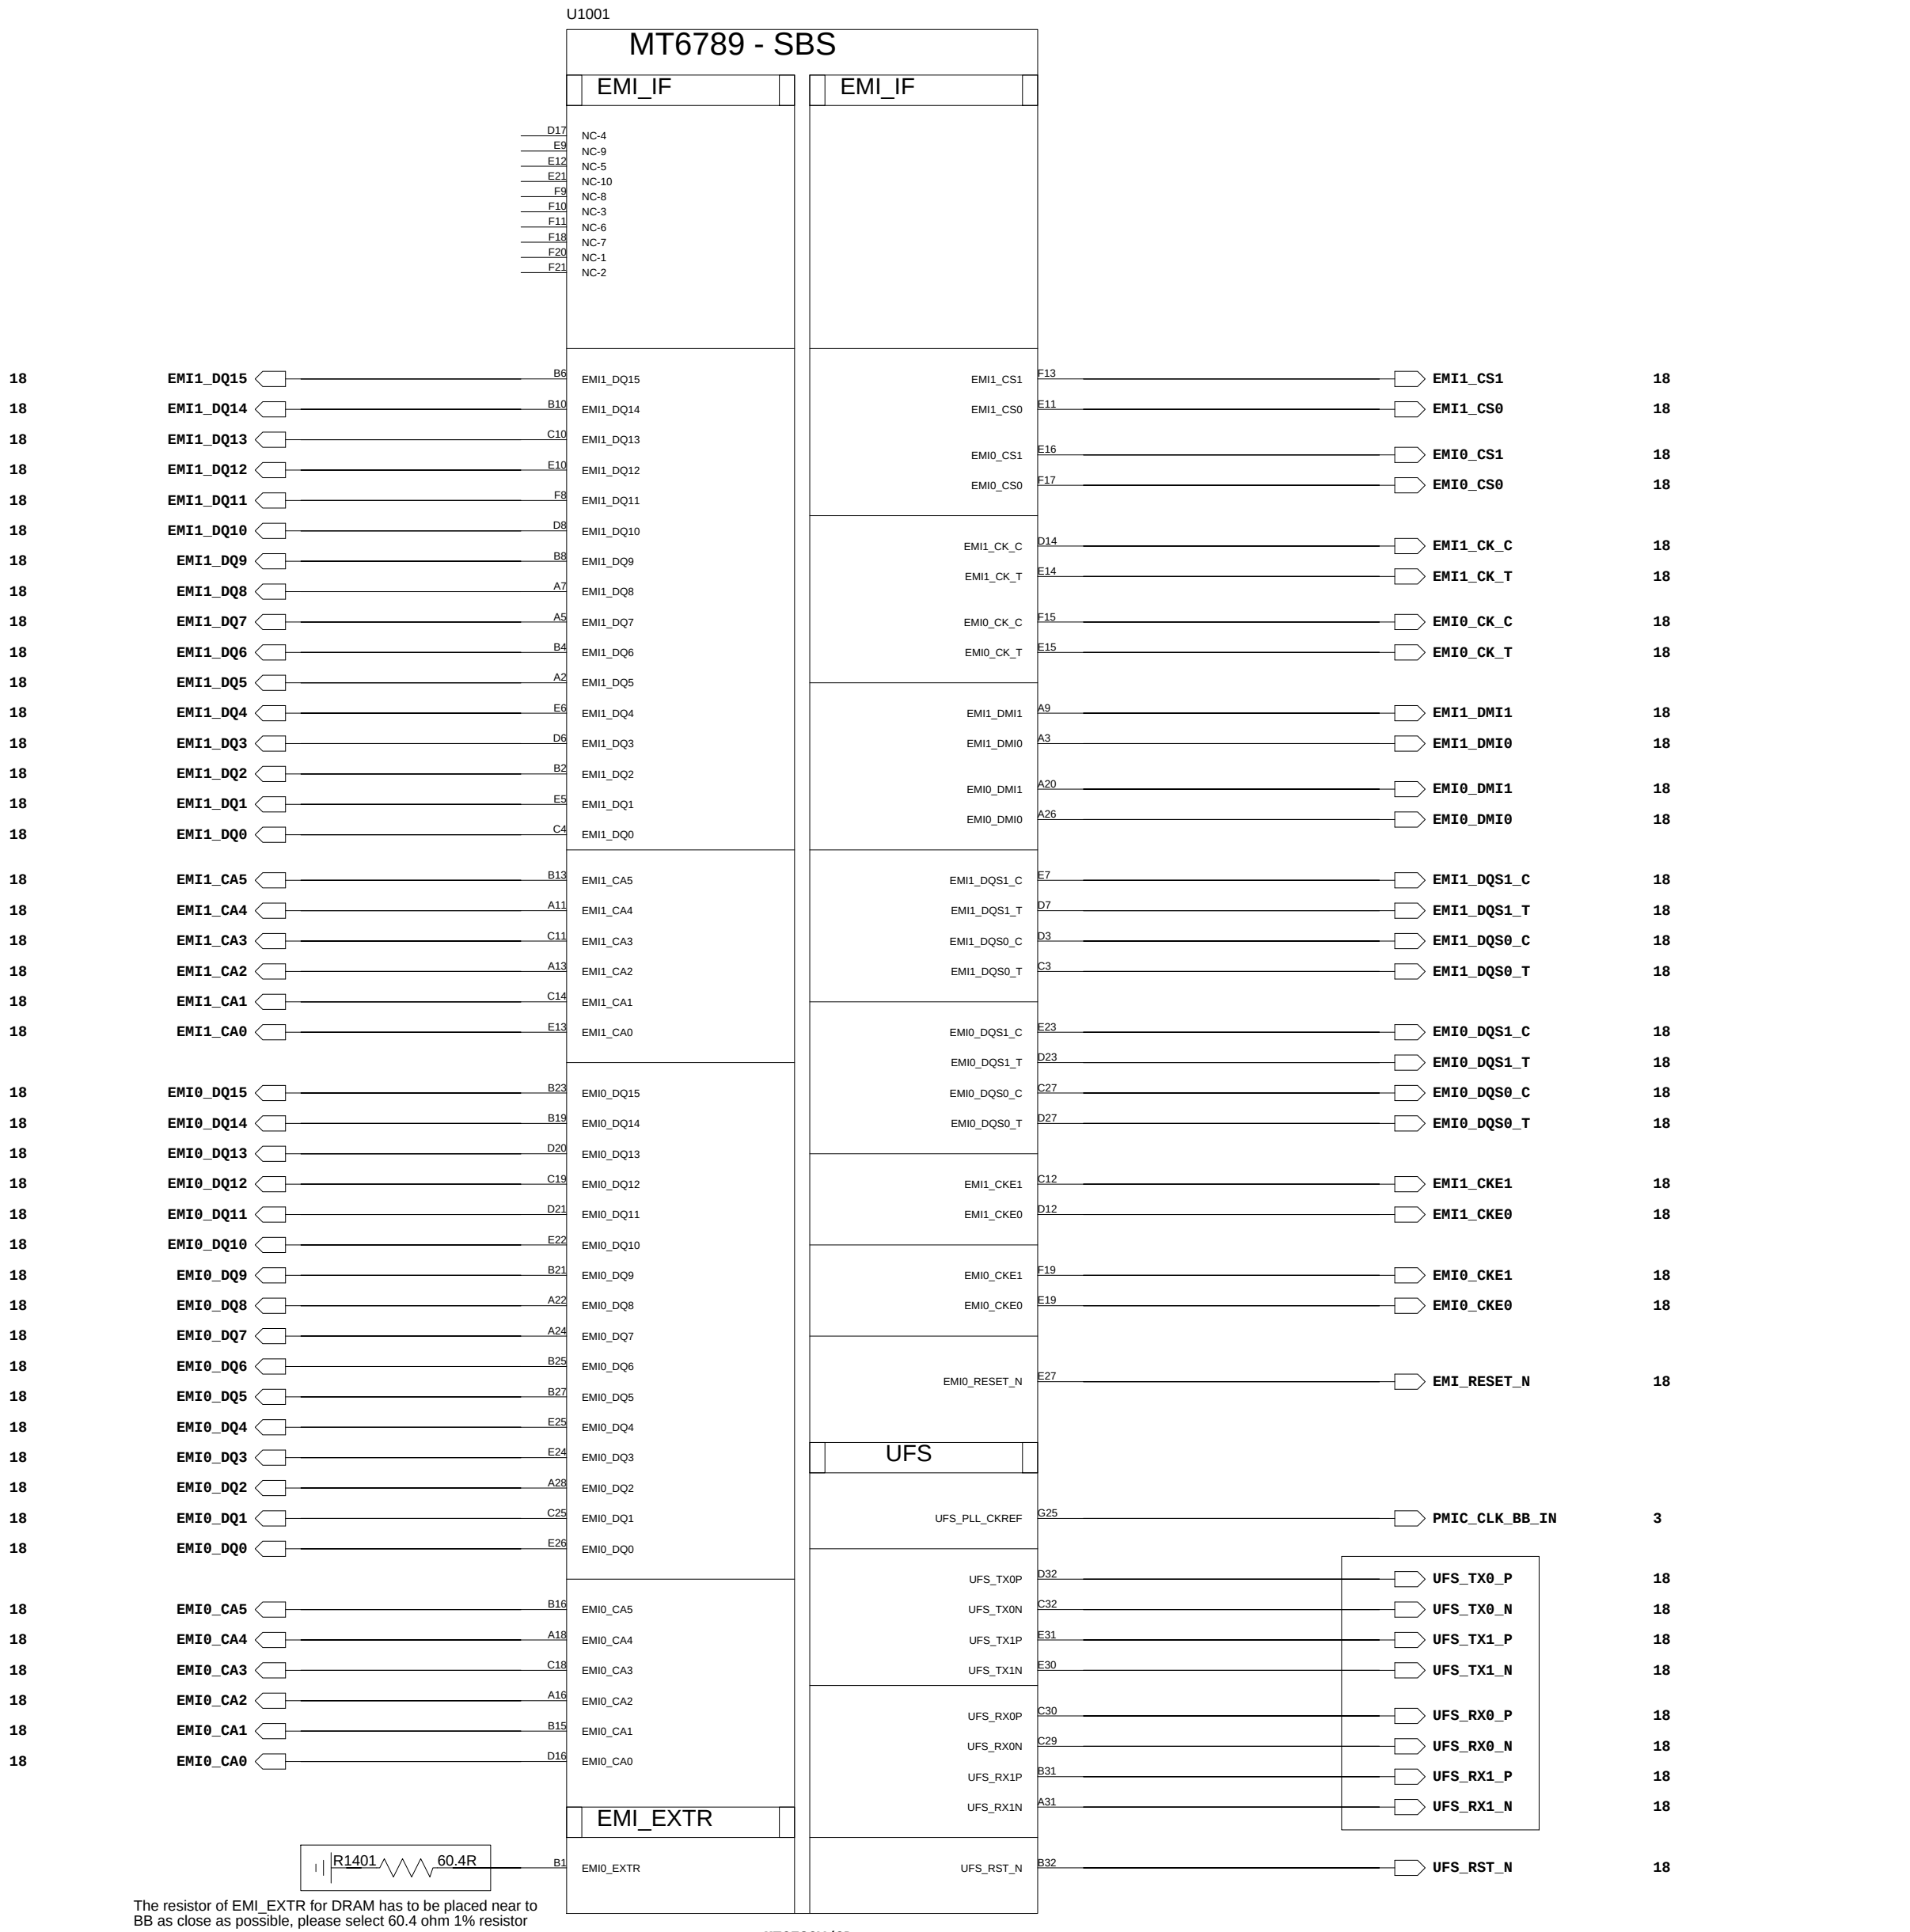

Schematic design notice of "14_BB_3_Interface" page:

Note 14-1: R4001 please select 60.4 ohm (1%) resistor

Note 14-2: Make sure TX/RX connection (T to in, R to out and P to t, N to c)

COMPANY: TRANSSION HOLDINGS

MODEL:G99_STD_MAIN

Modified Date: 05/09/2023:16:23

DRAWN

DATED

TITLE: 14_BB_III_DDR

VERSION:

SHEET: 5 OF 29

CHECKED


DATED

< >

Confidentiality

CONFIDENTIAL


PMU_BUCK

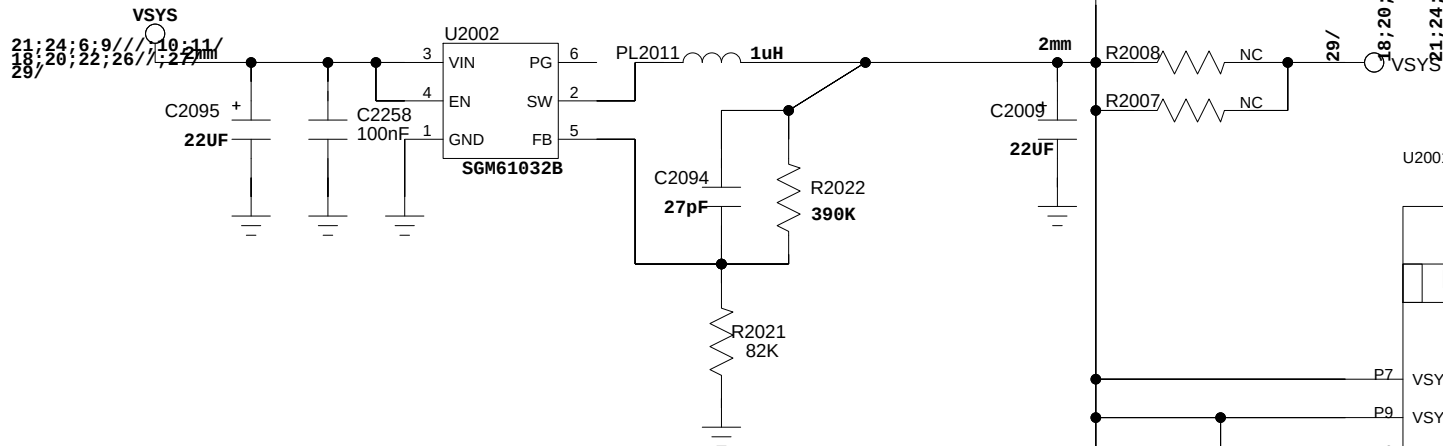

COMPANY: TRANSSION HOLDINGS				MODEL: G99_STD_MAIN		Modified Date: 05/09/2023:16:23	
DRAWN		DATED		TITLE: 20_POWER_MT6366_BUCK_LDO		VERSION: SHEET: 6 OF 29	
CHECKED		DATED	< >	Confidentiality	CONFIDENTIAL		

POWER_MT6366_II

REVISION RECORD			
LTR	ECO NO:	APPROVED:	DATE:

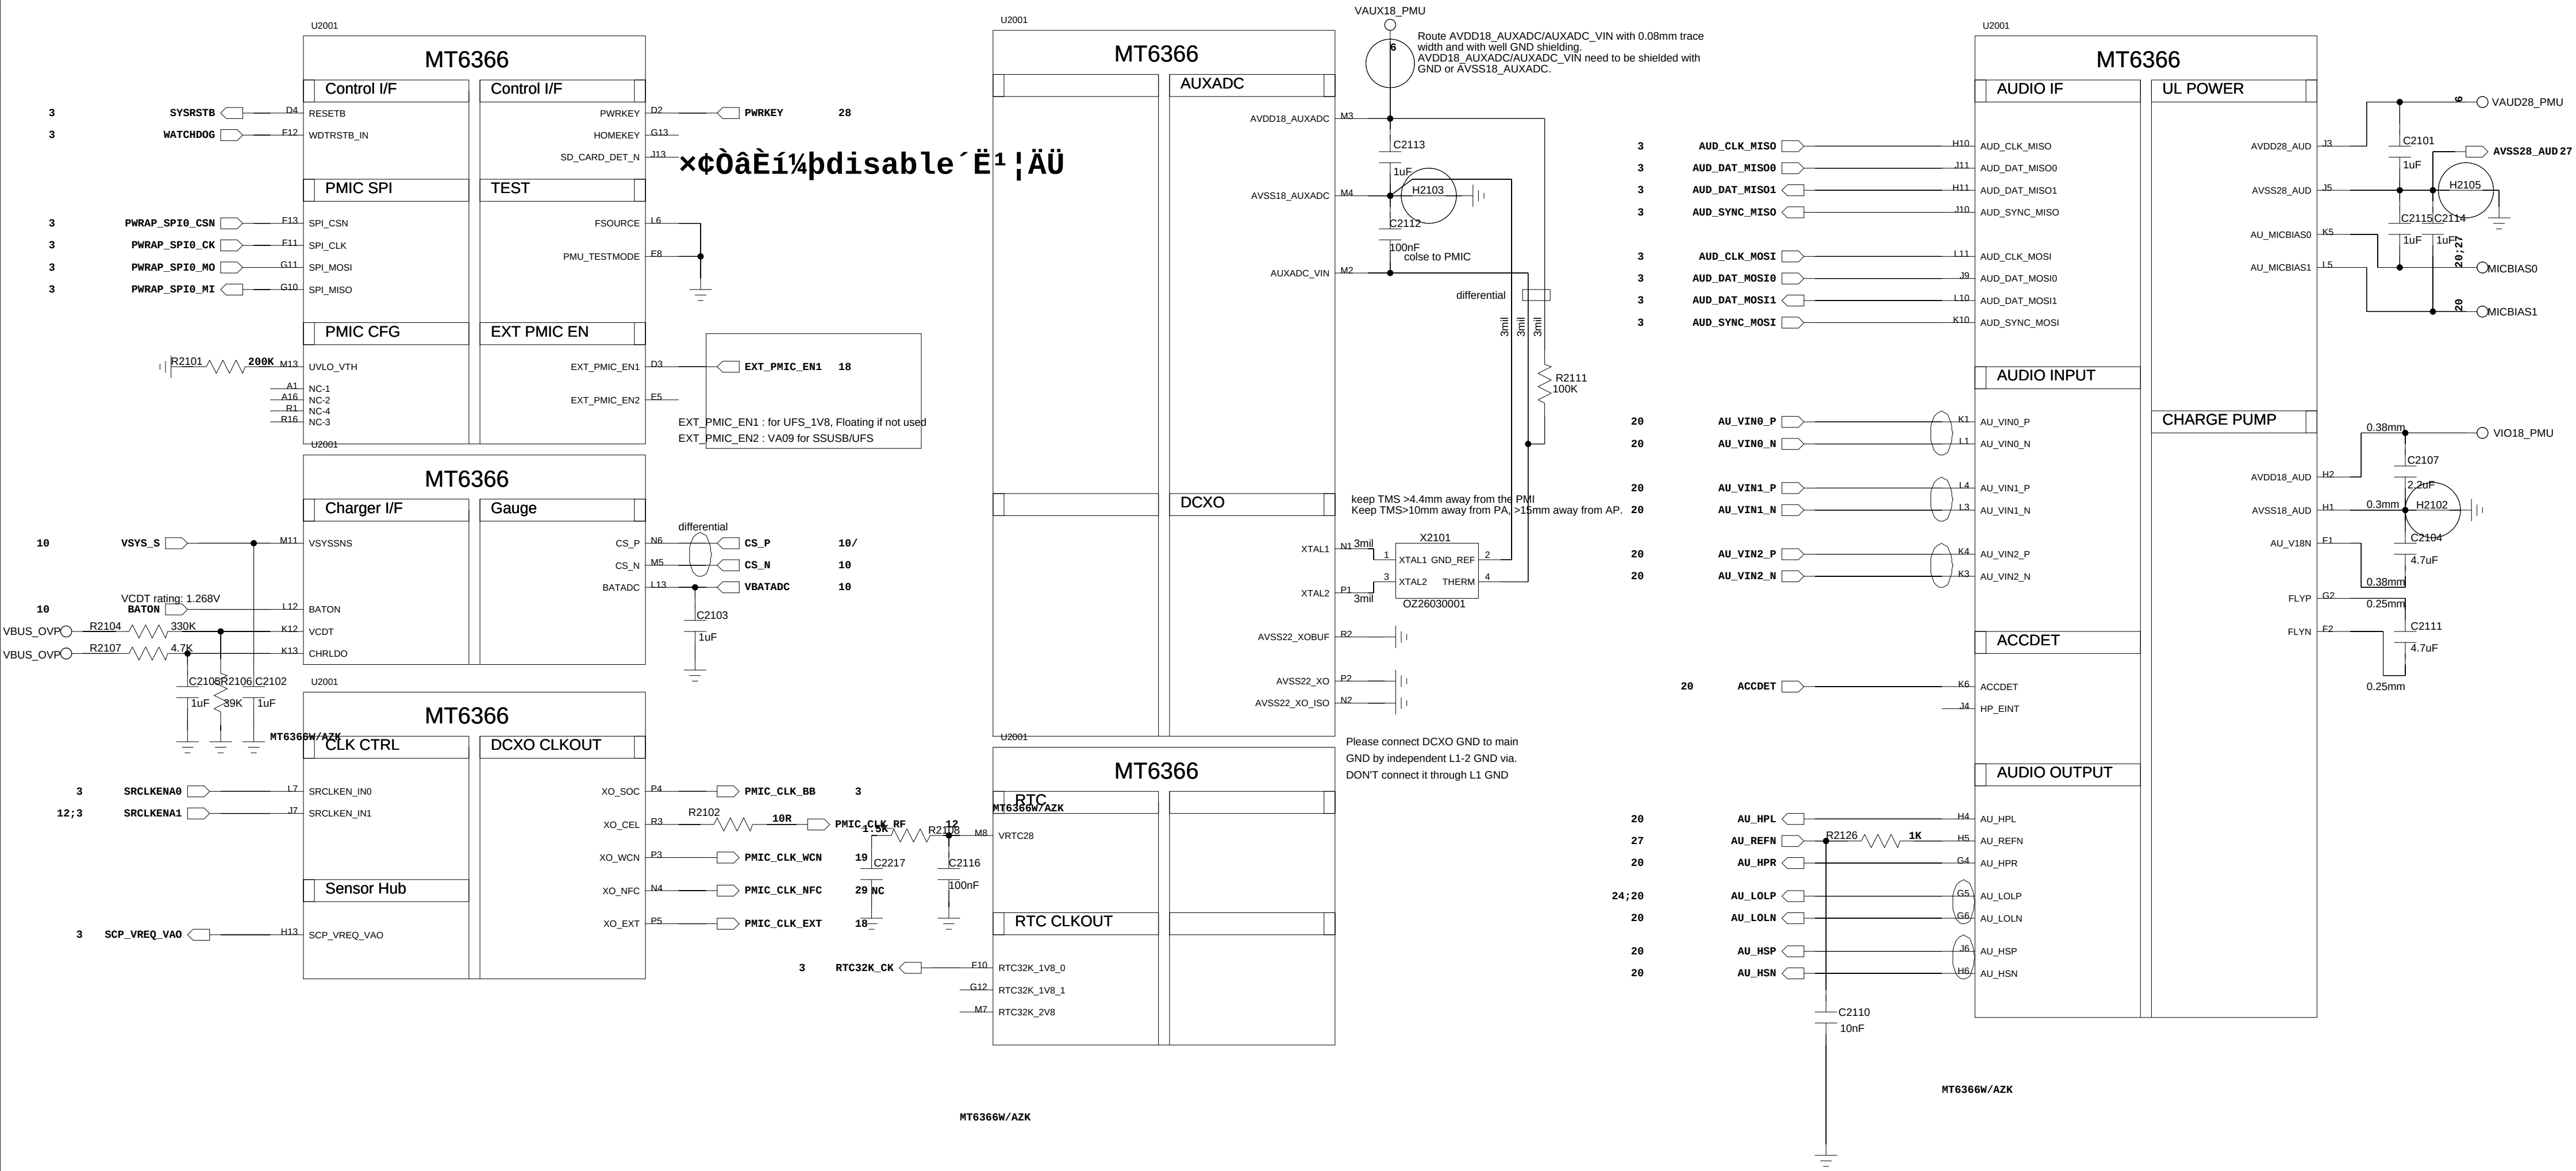

POWER_THIRD-PARTY-I



System supply

REVISION RECORD			
LTR	ECO NO:	APPROVED:	DATE:











COMPANY: TRANSSION HOLDINGS				MODEL: G99_STD_MAIN		Modified Date: 24/07/2023:21:06	
DRAWN		DATED		TITLE: 25_POWER_THIDR-PARTY_I		VERSION:	SHEET: 8 OF 29
CHECKED		DATED	< >	Confidentiality	CONFIDENTIAL		

POWER_THIRD-PARTY_II
FLASH LED

AW36515:12C ADDRESS:0xC6(Write)/0xC7(Read)

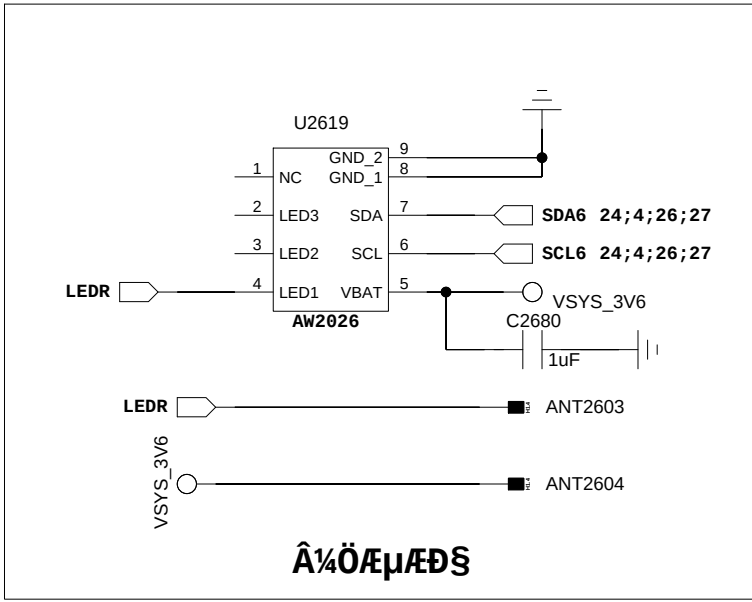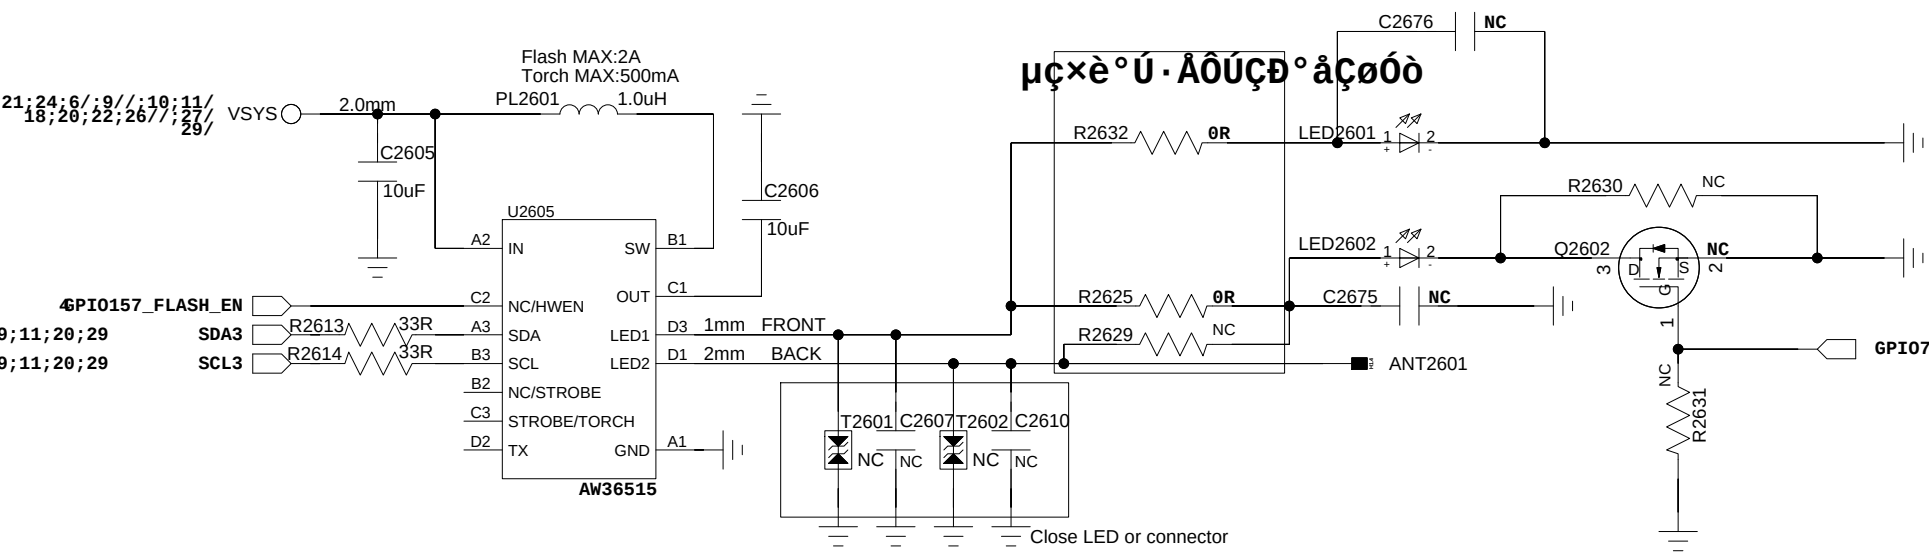

ΈΈΈΈΈ	Ç°ΈΆ	°όΈΆ
GPIO74	H	L
GPIO73	L	H

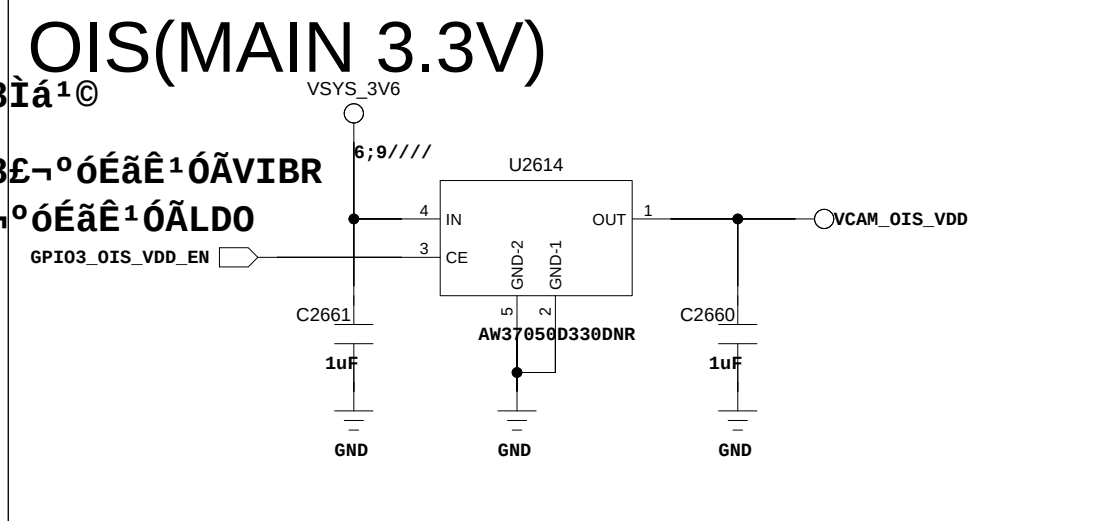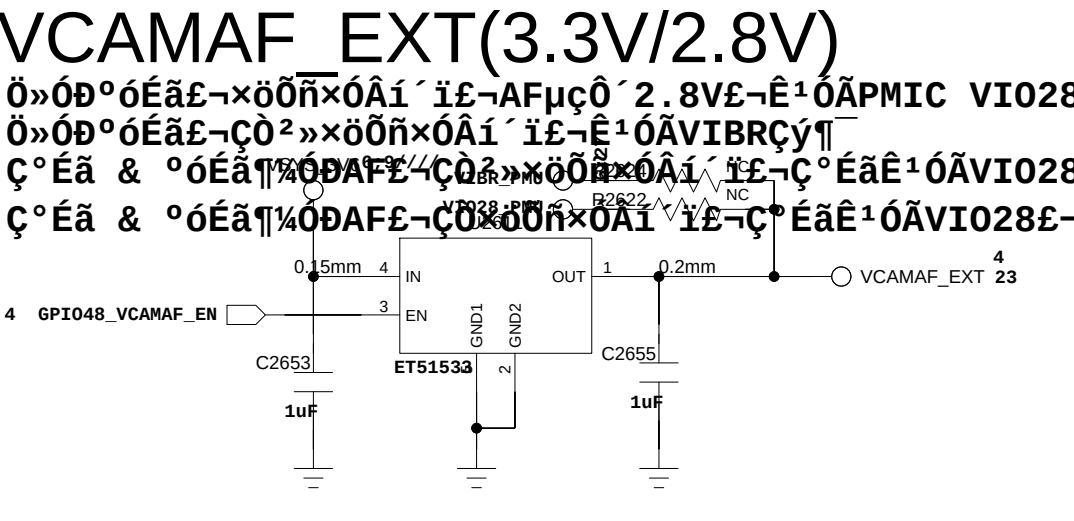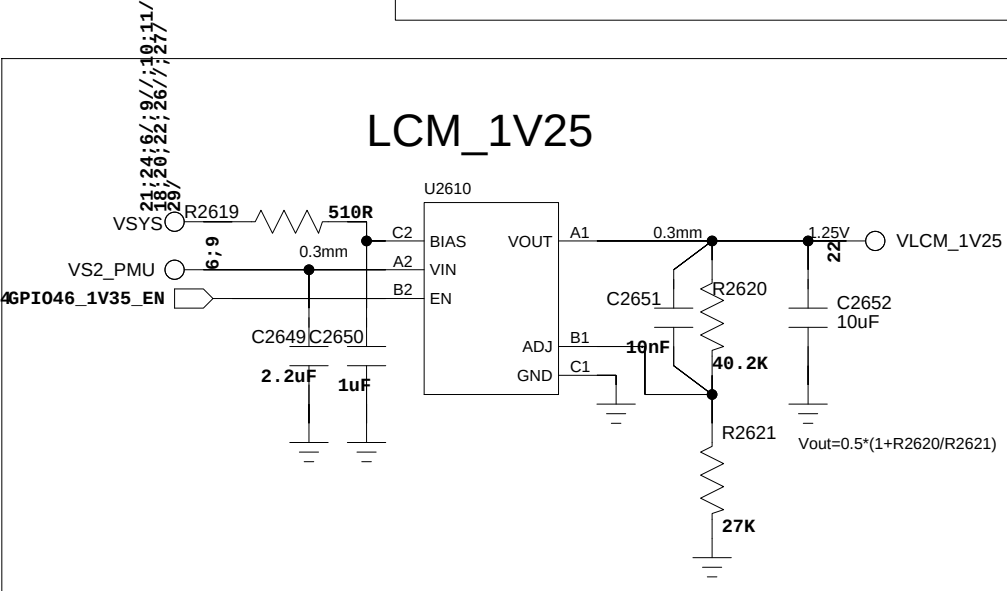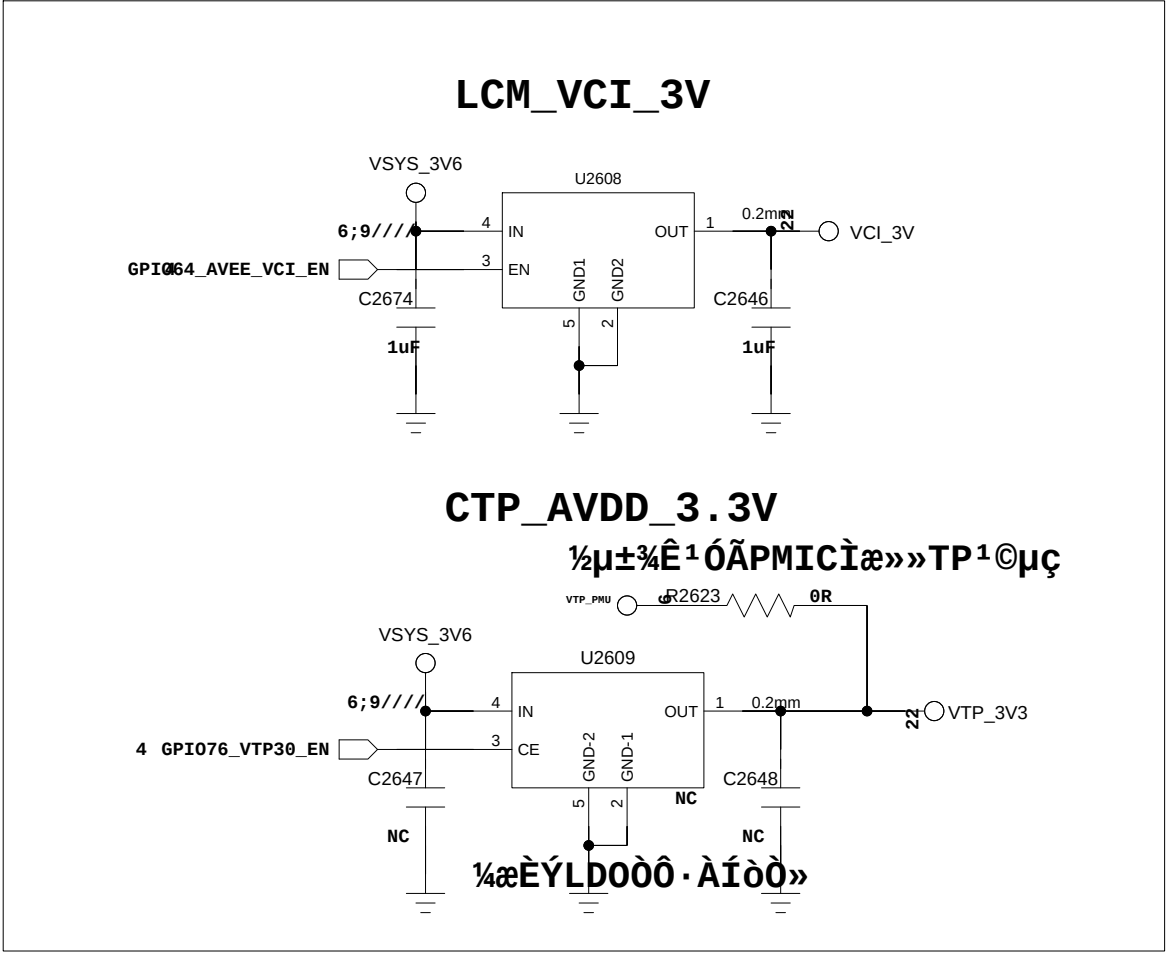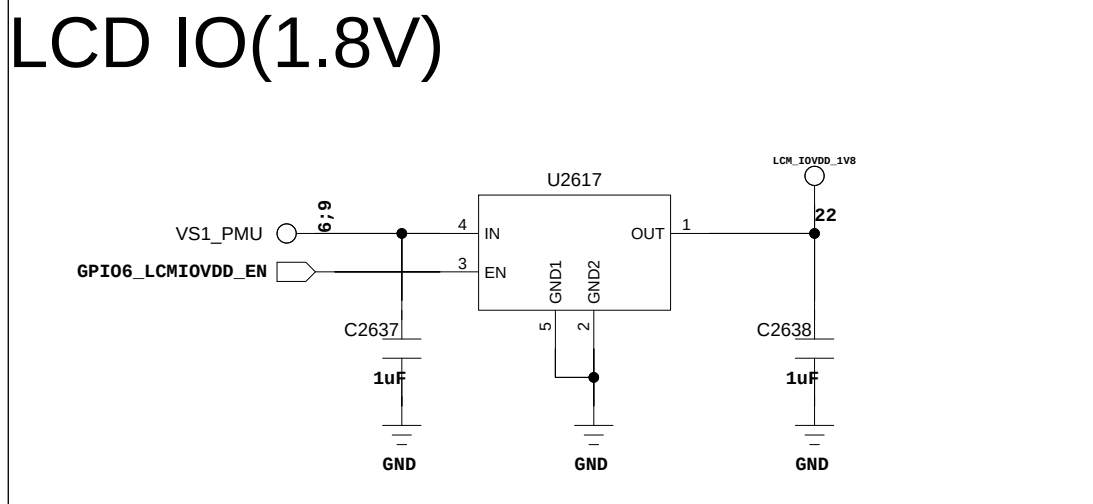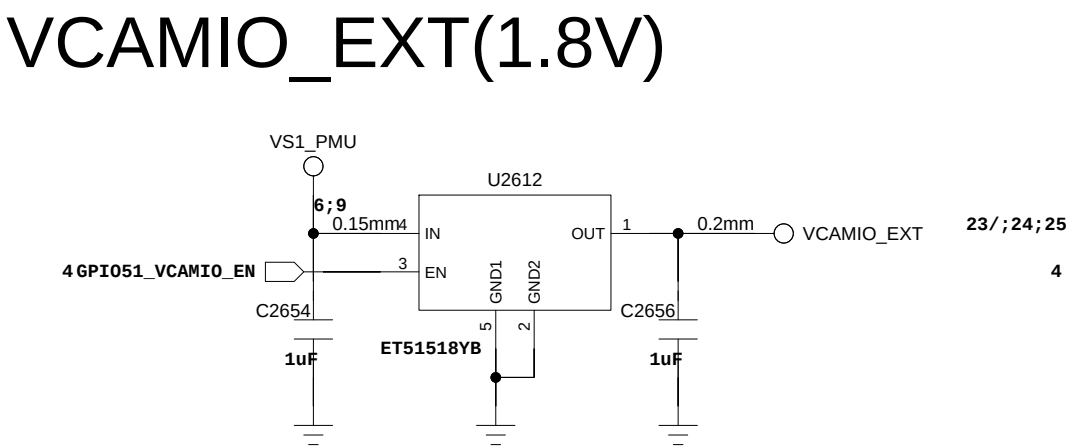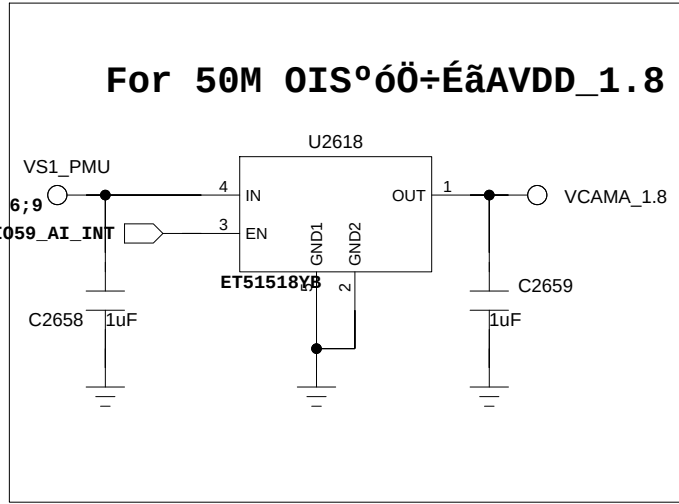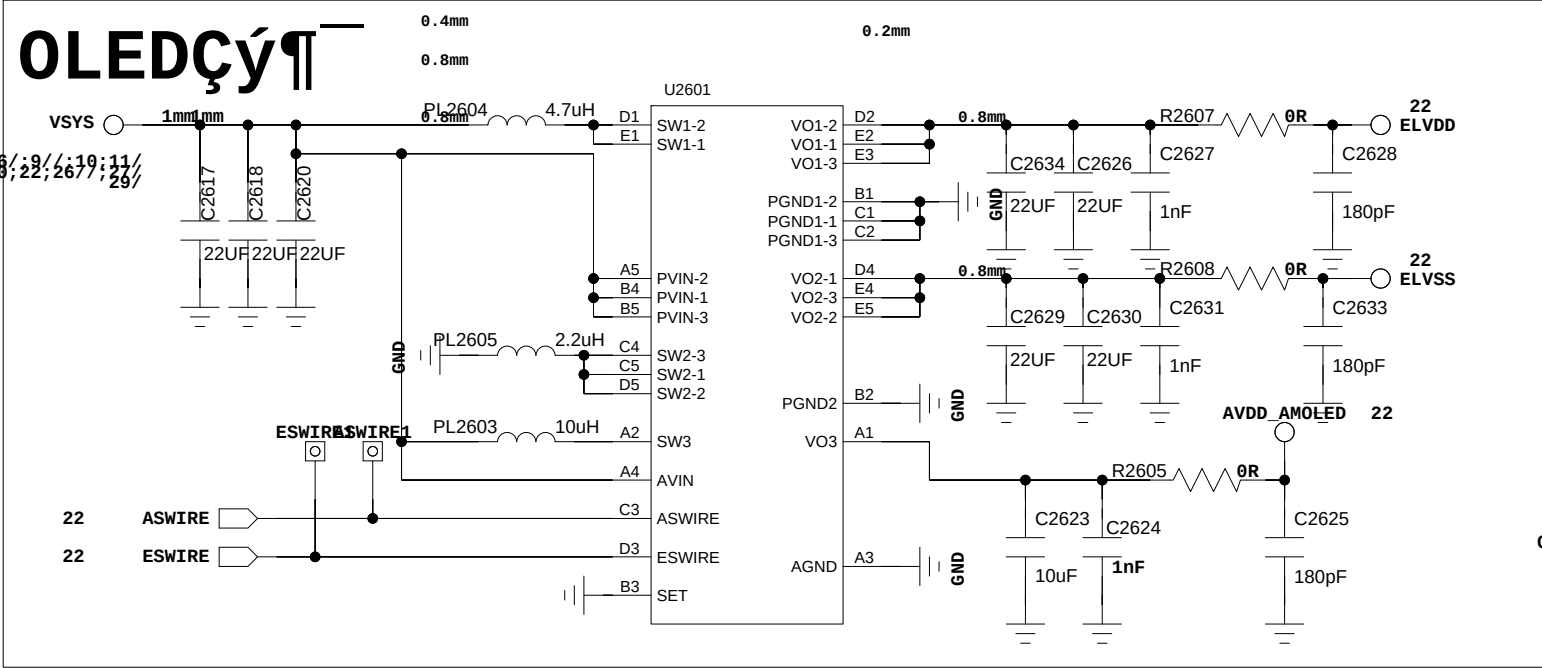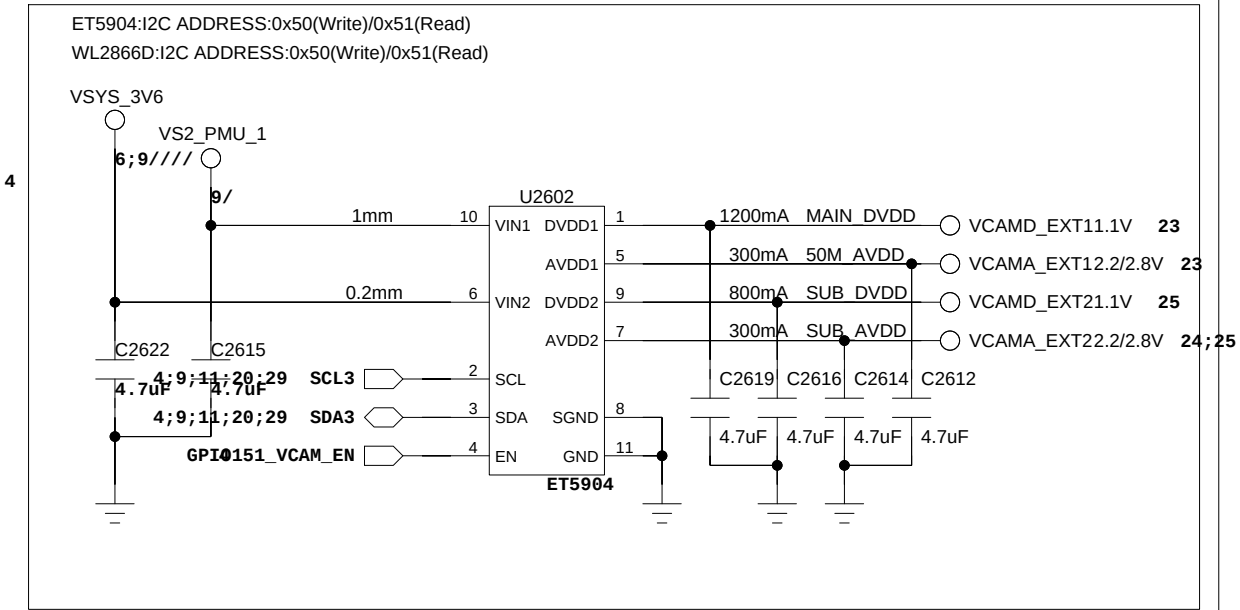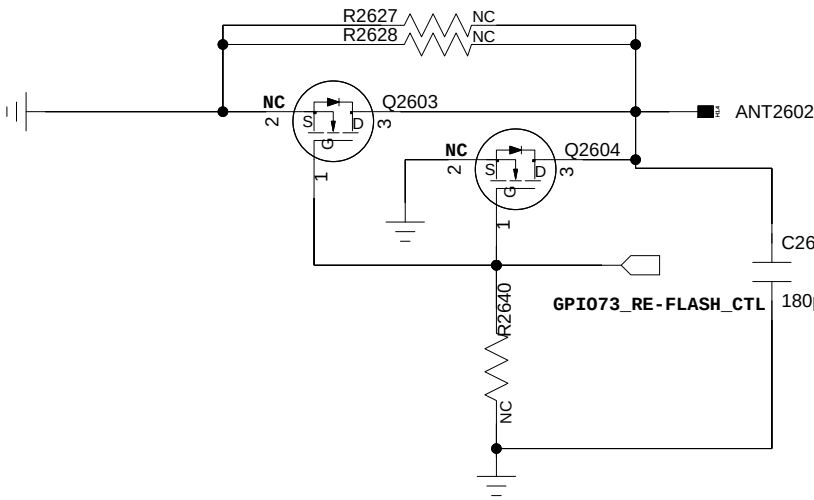

COMPANY: TRANSSION HOLDINGS

MODEL:G99_STD_MAIN

Modified Date: 15/01/2024:17:12

DRAWN

DATED

TITLE: 26_POWER_THIRD-PARTY-II

VERSION:


SHEET: 9 OF 29

CHECKED

DATED


Confidentiality

CONFIDENTIAL

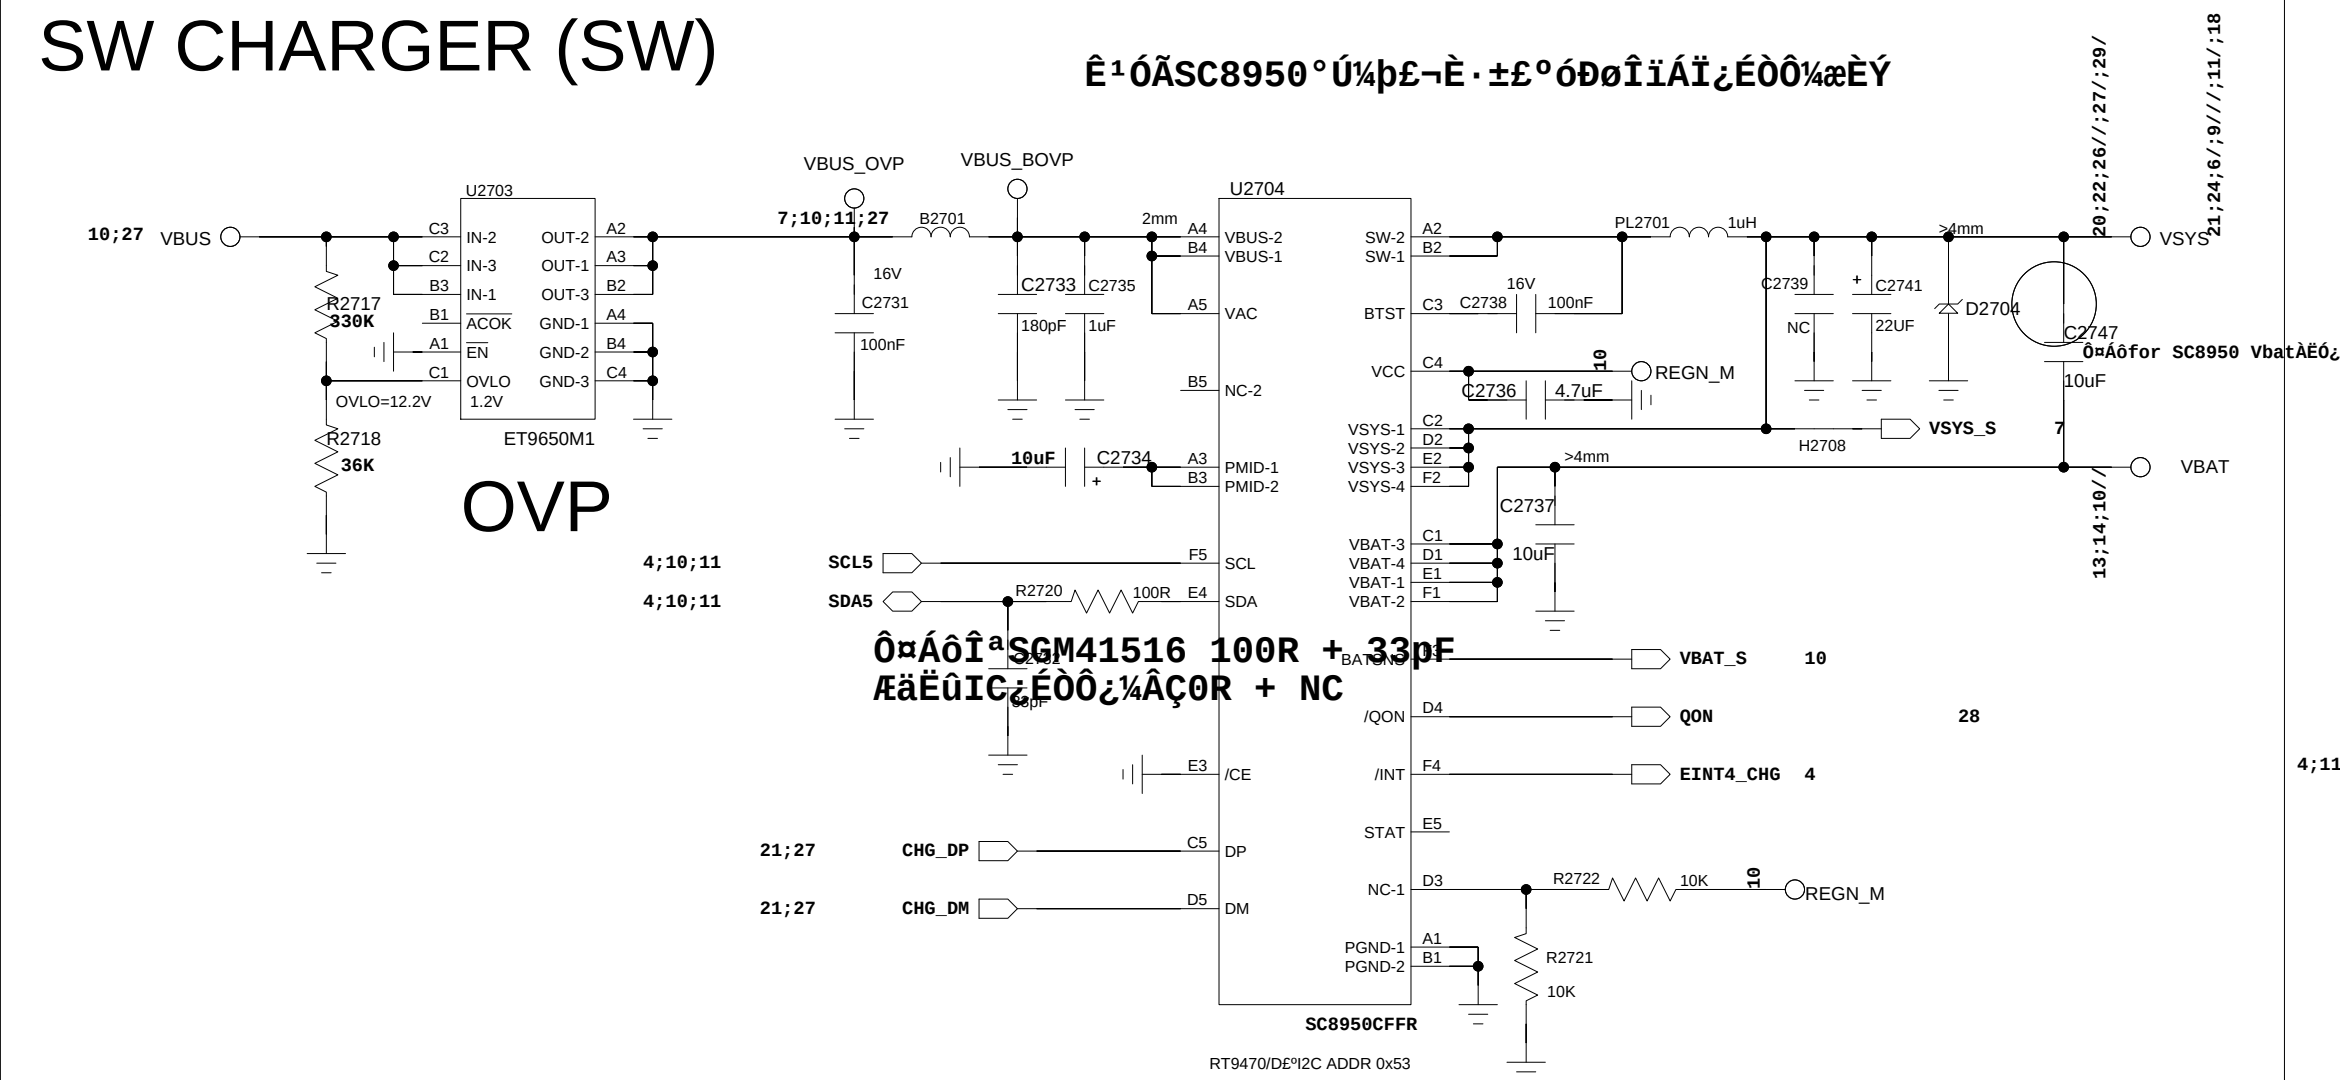
POWER_THIRD-PARTY_II
SW CHARGER (SW)

CHG_II MASTER CHG
HL7139 I2C ADR:
SNSN=Float:0x54;SNSN=GND:0x55;


REVISION RECORD			
LTR	ECO NO:	APPROVED:	DATE:

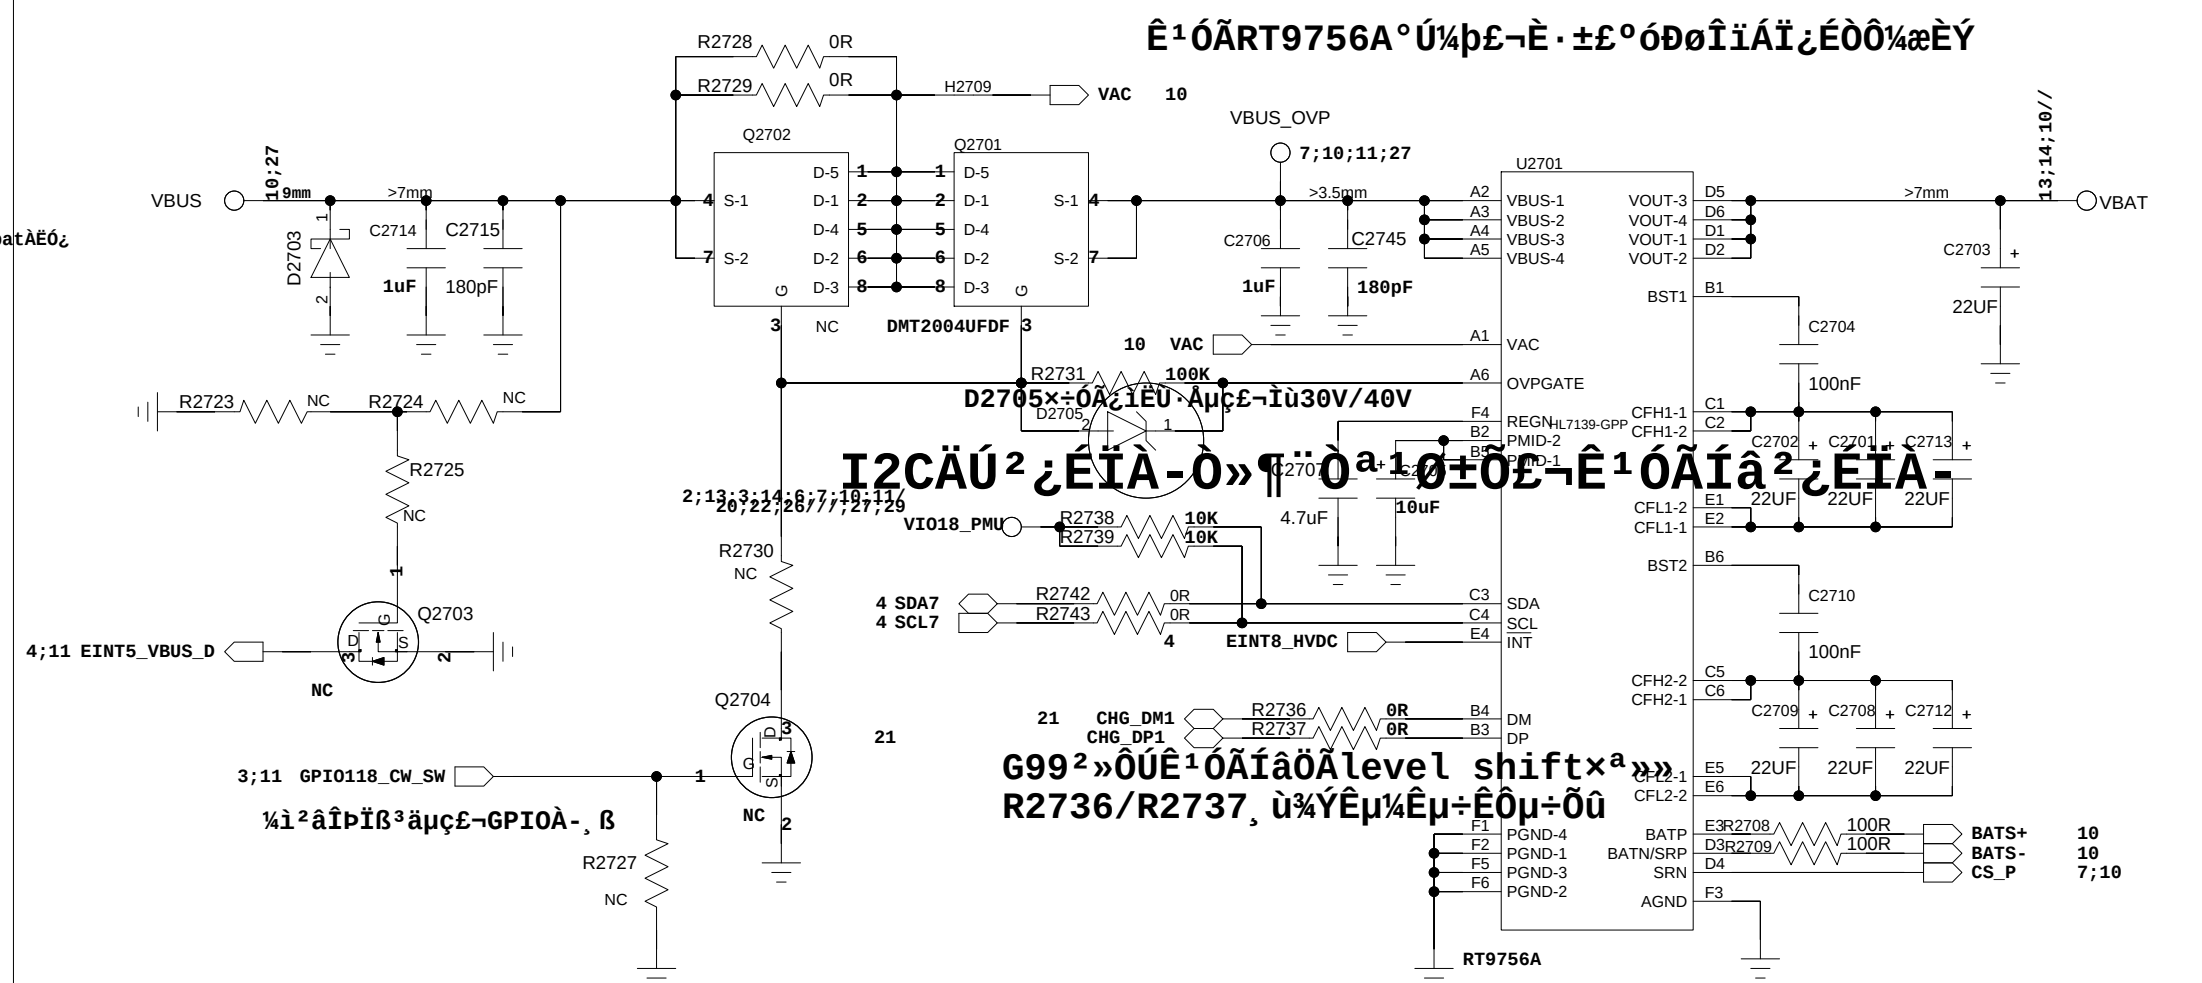

BATTERY CONNECTOR

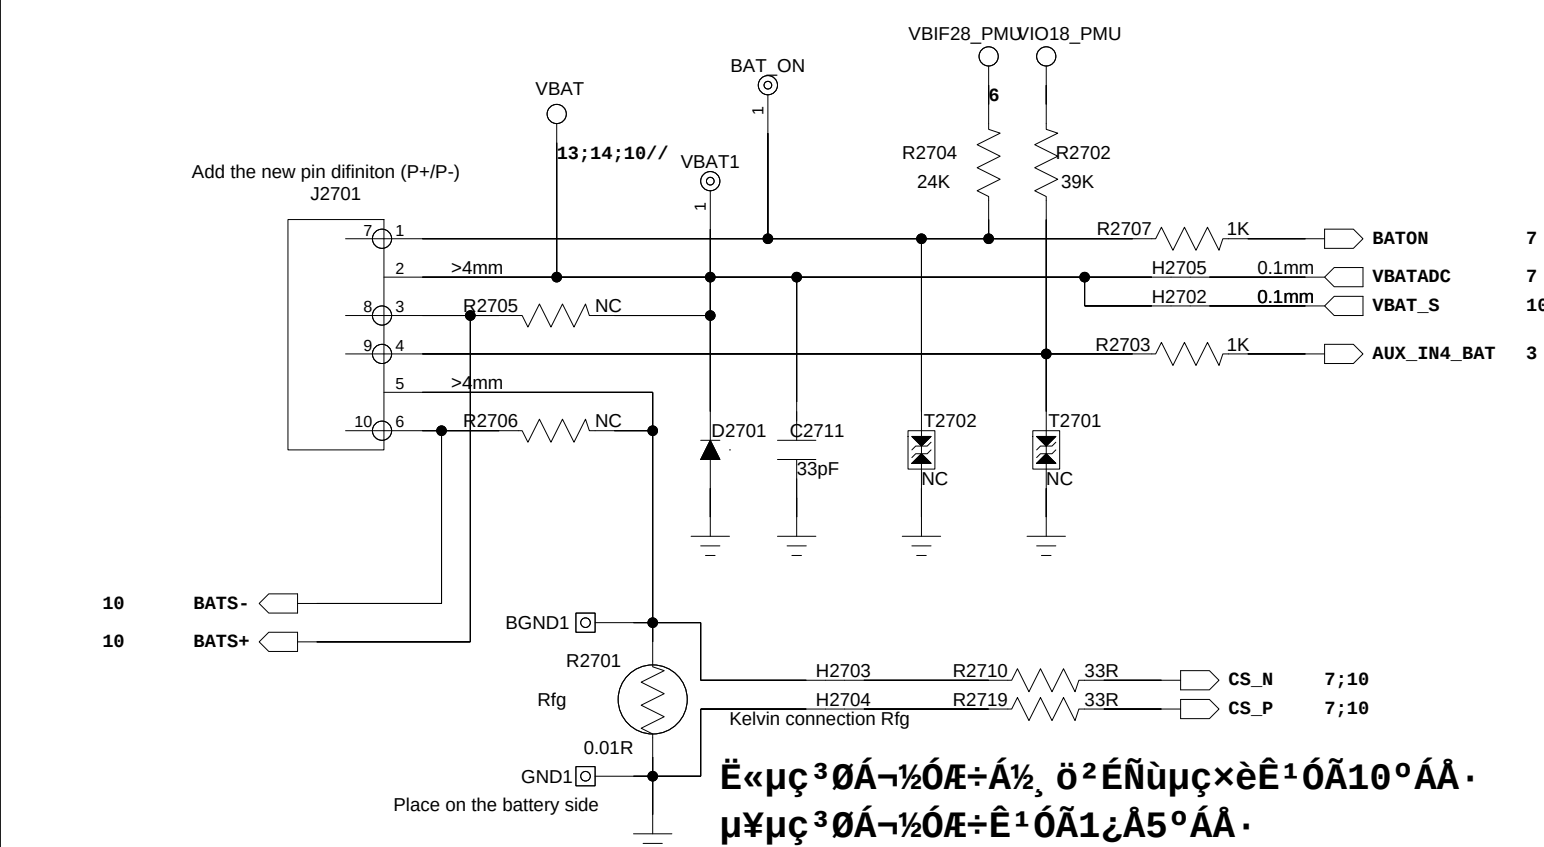

É10ART9756A°Ú¼p£-È·±£°0ð0îiÁİ¿É00¼4ÉY SLAVE
VBUS_OVP HL7138 I2C ADR:0xCC

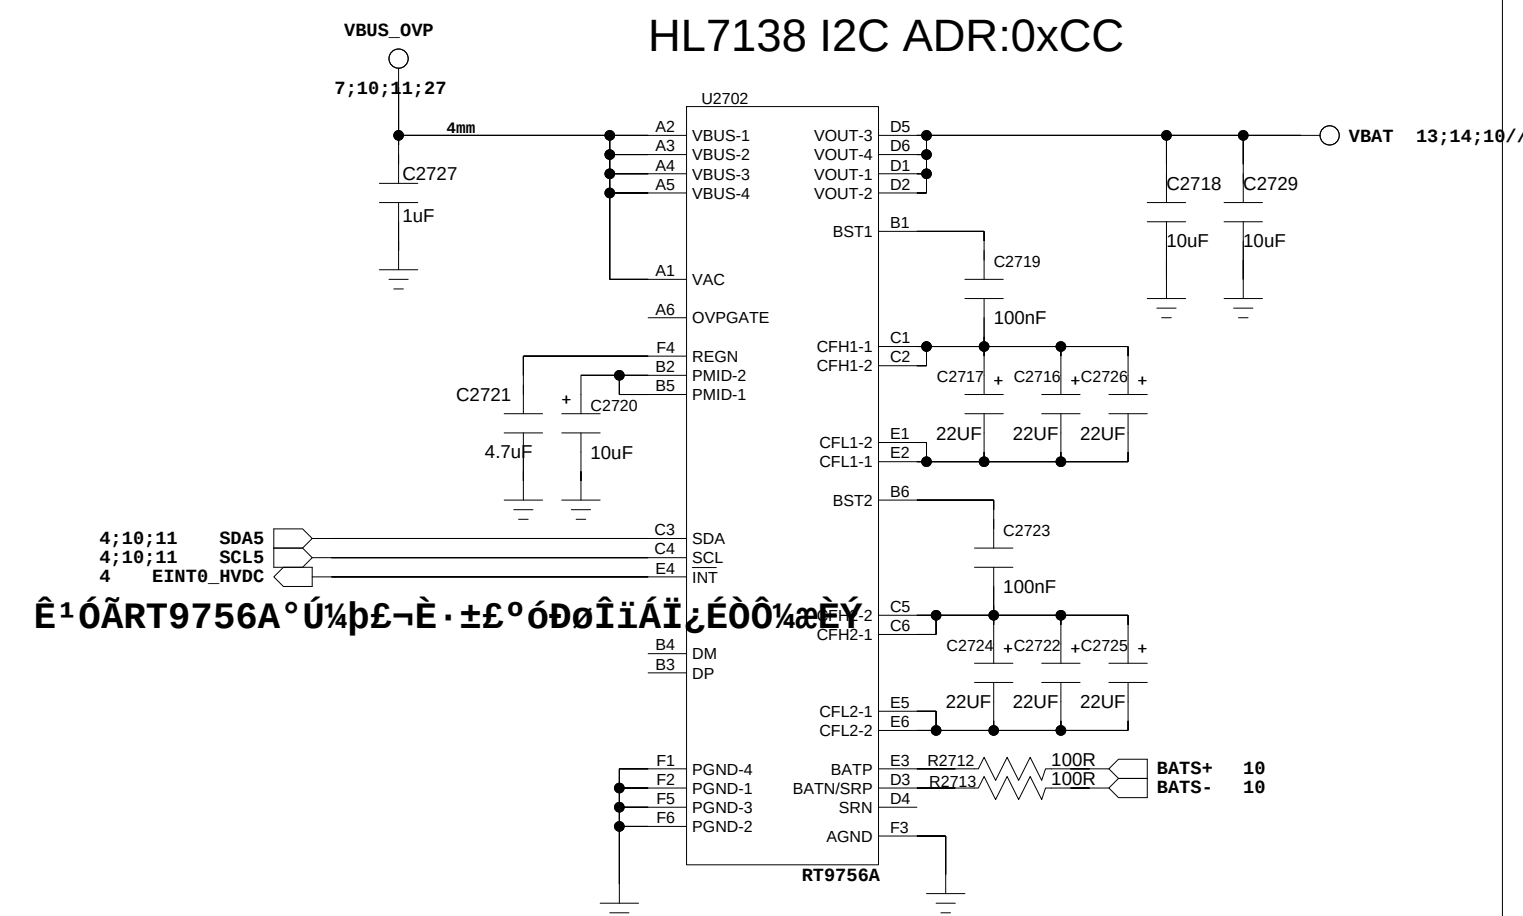

SLAVE
· Τὸ³ αἰς


COMPANY: TRANSSION HOLDINGS				MODEL:G99_STD_MAIN		Modified Date: 11/01/2024:09:49	
DRAWN		DATED		TITLE: 27_POWER_THIRD-PARTY-III		VERSION: SHEET: 10 OF 29	
CHECKED		DATED	< >	Confidentiality	CONFIDENTIAL		

POWER_THIRD-PARTY-IV


REVISION RECORD			
LTR	ECO NO:	APPROVED:	DATE:

WIRELESS CHG

MT5728:I2C3 ADDRESS:0x54(Write)/0x55(Read)

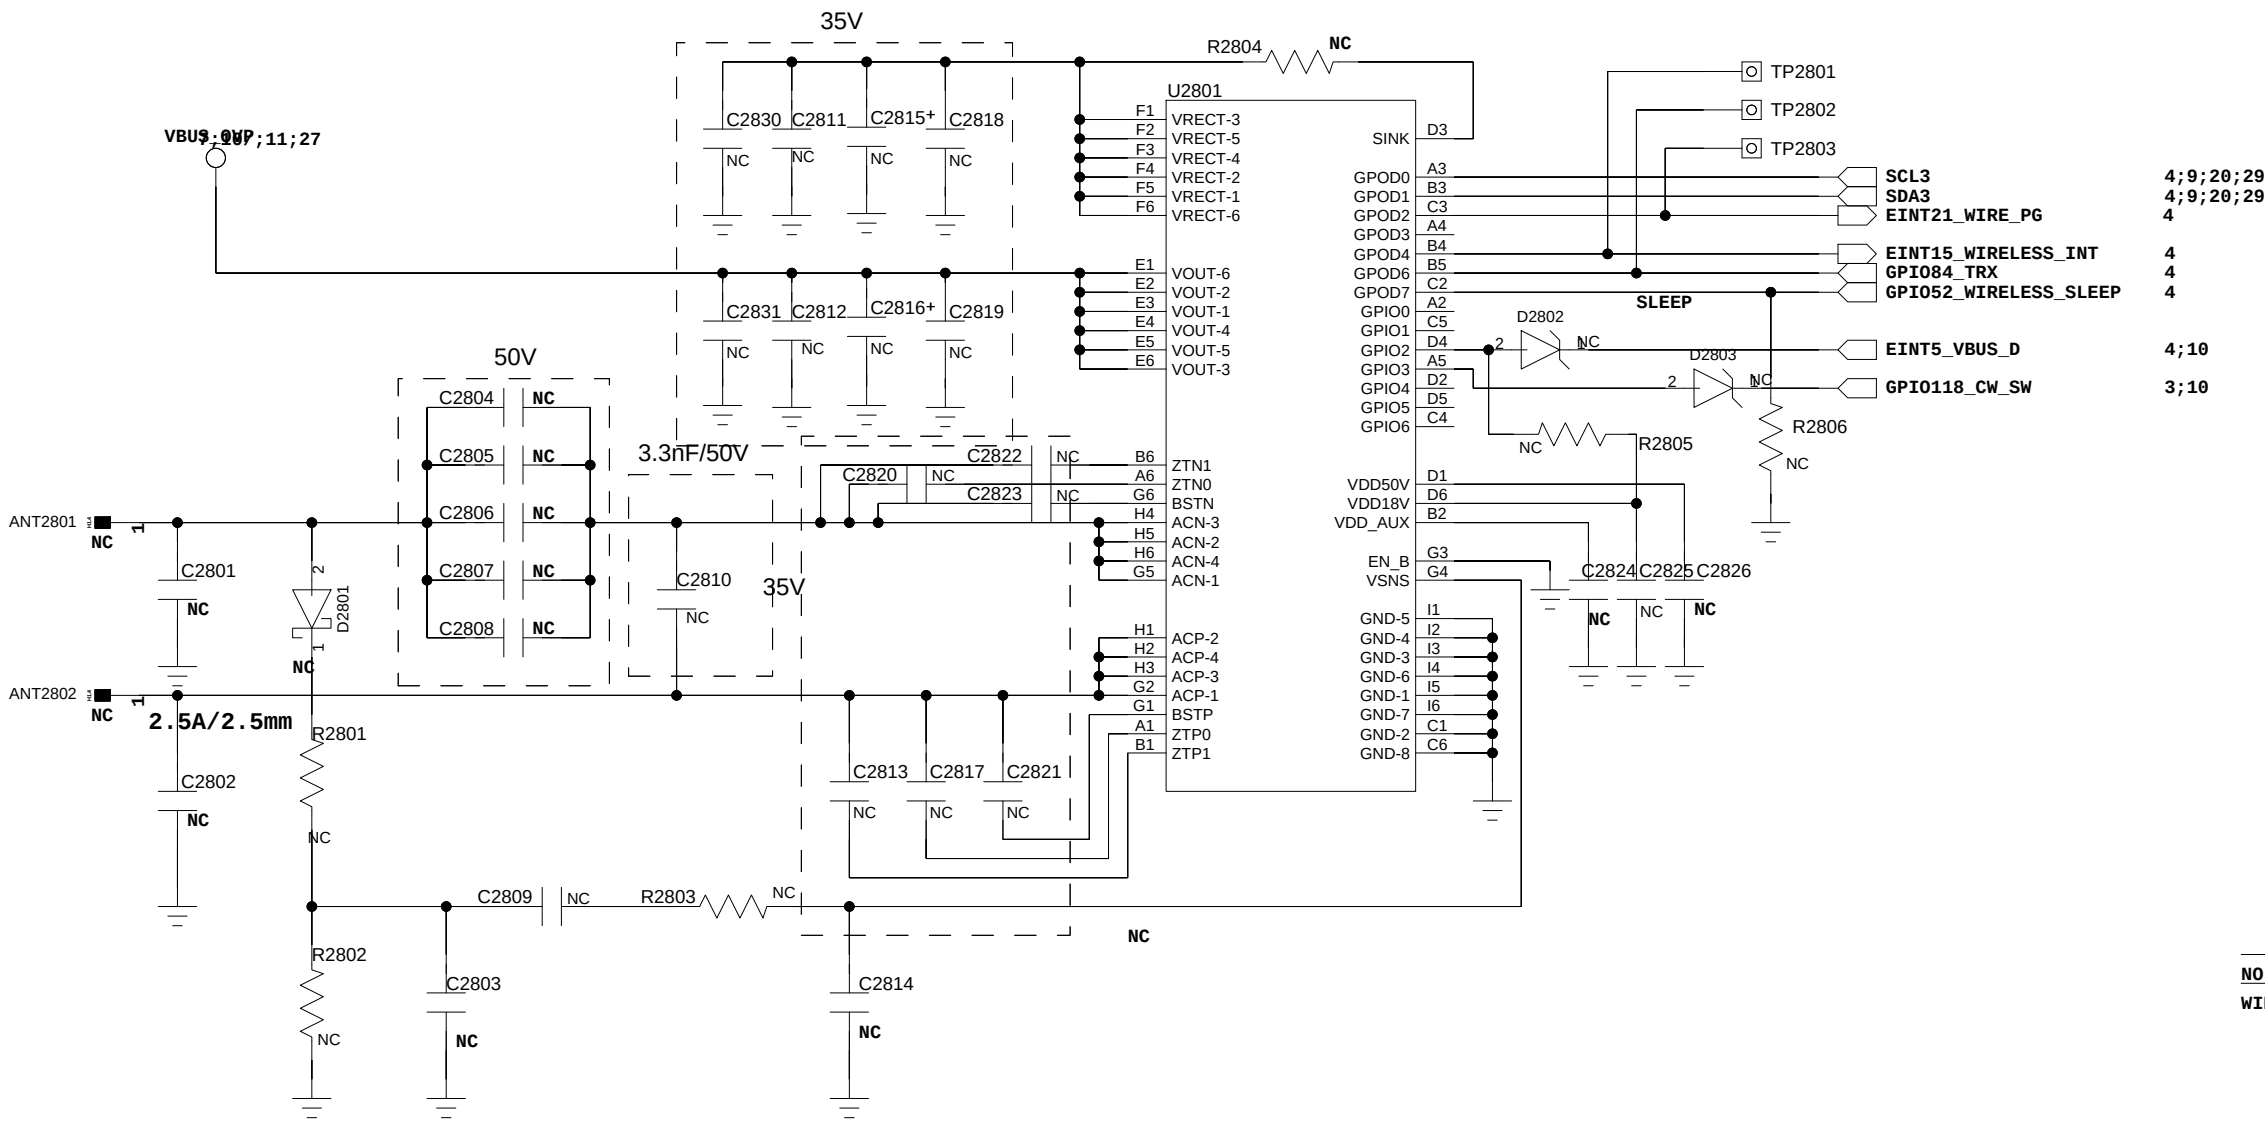


Thermistor to sense U2801 temperature

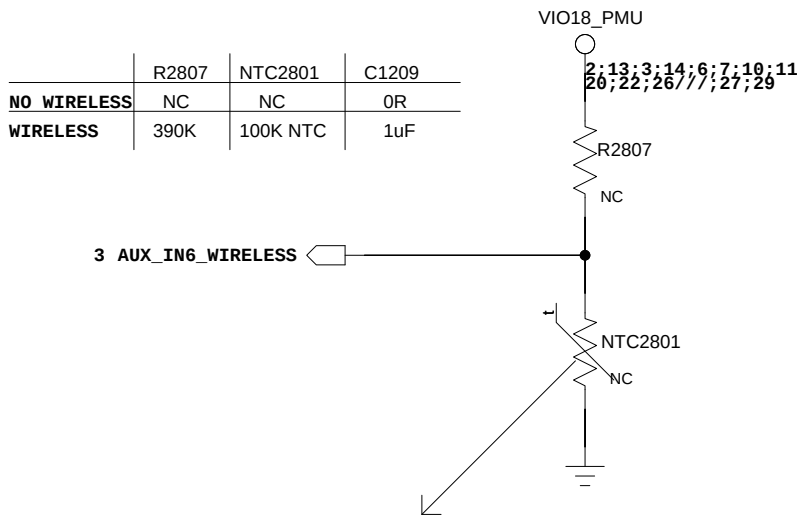

1. NTC2801 must keep a distance about 2 mm away from U2801 and far from other heat sources 10 mm at least.
2. The distance is the shortest distance from package edge to edge.


ÐÂÔÖ¼æÈÝÎĤİß. ´³ă10wμçÂ.

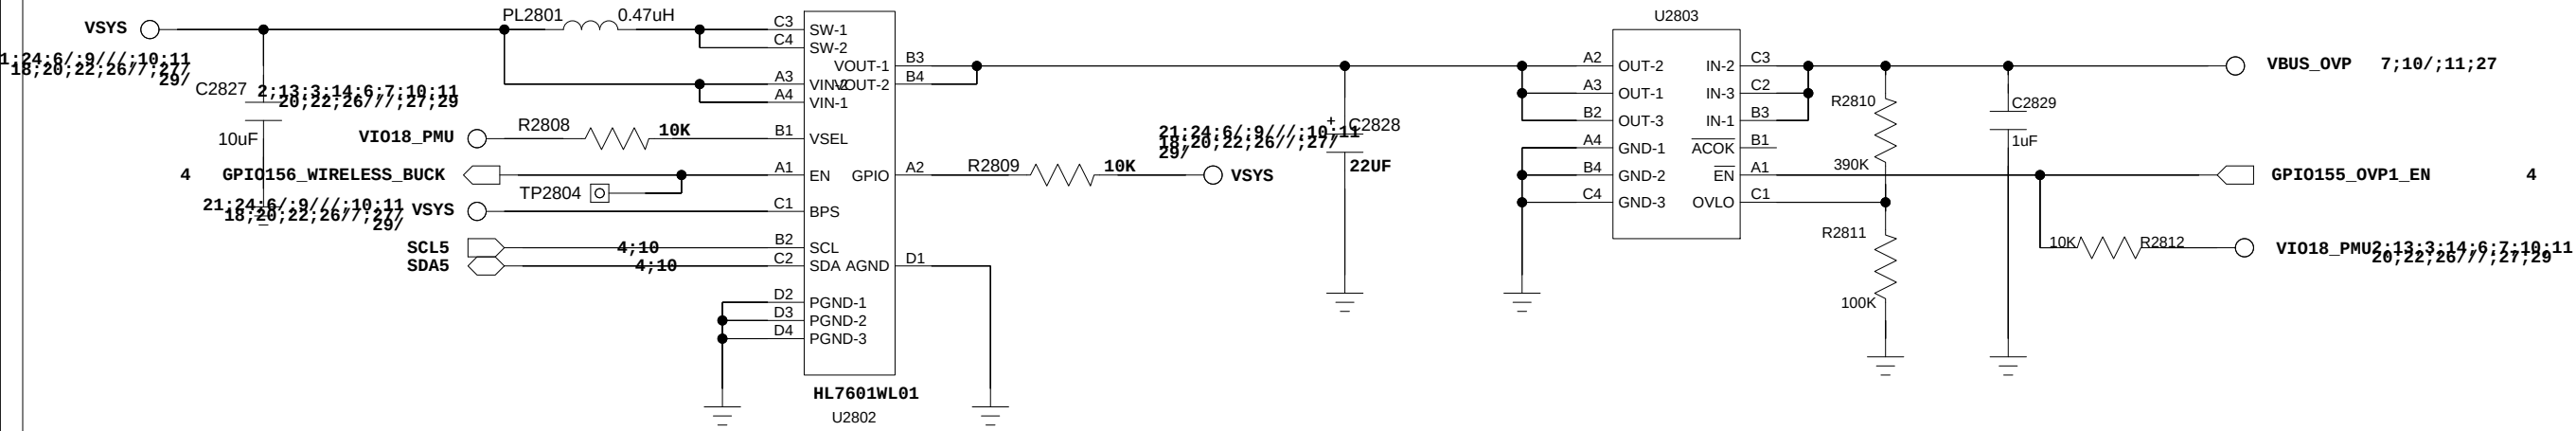

COMPANY: TRANSSION HOLDINGS				MODEL: G99_STD_MAIN		Modified Date: 05/09/2023:16:23	
DRAWN		DATED		TITLE: 28_POWER_THIRD-PARTY-IV		VERSION:	SHEET: 11 OF 29
CHECKED		DATED	< >	Confidentiality	CONFIDENTIAL		


RF_MT6186M_PIN_OUT

REVISION RECORD			
LTR	ECO NO:	APPROVED:	DATE:

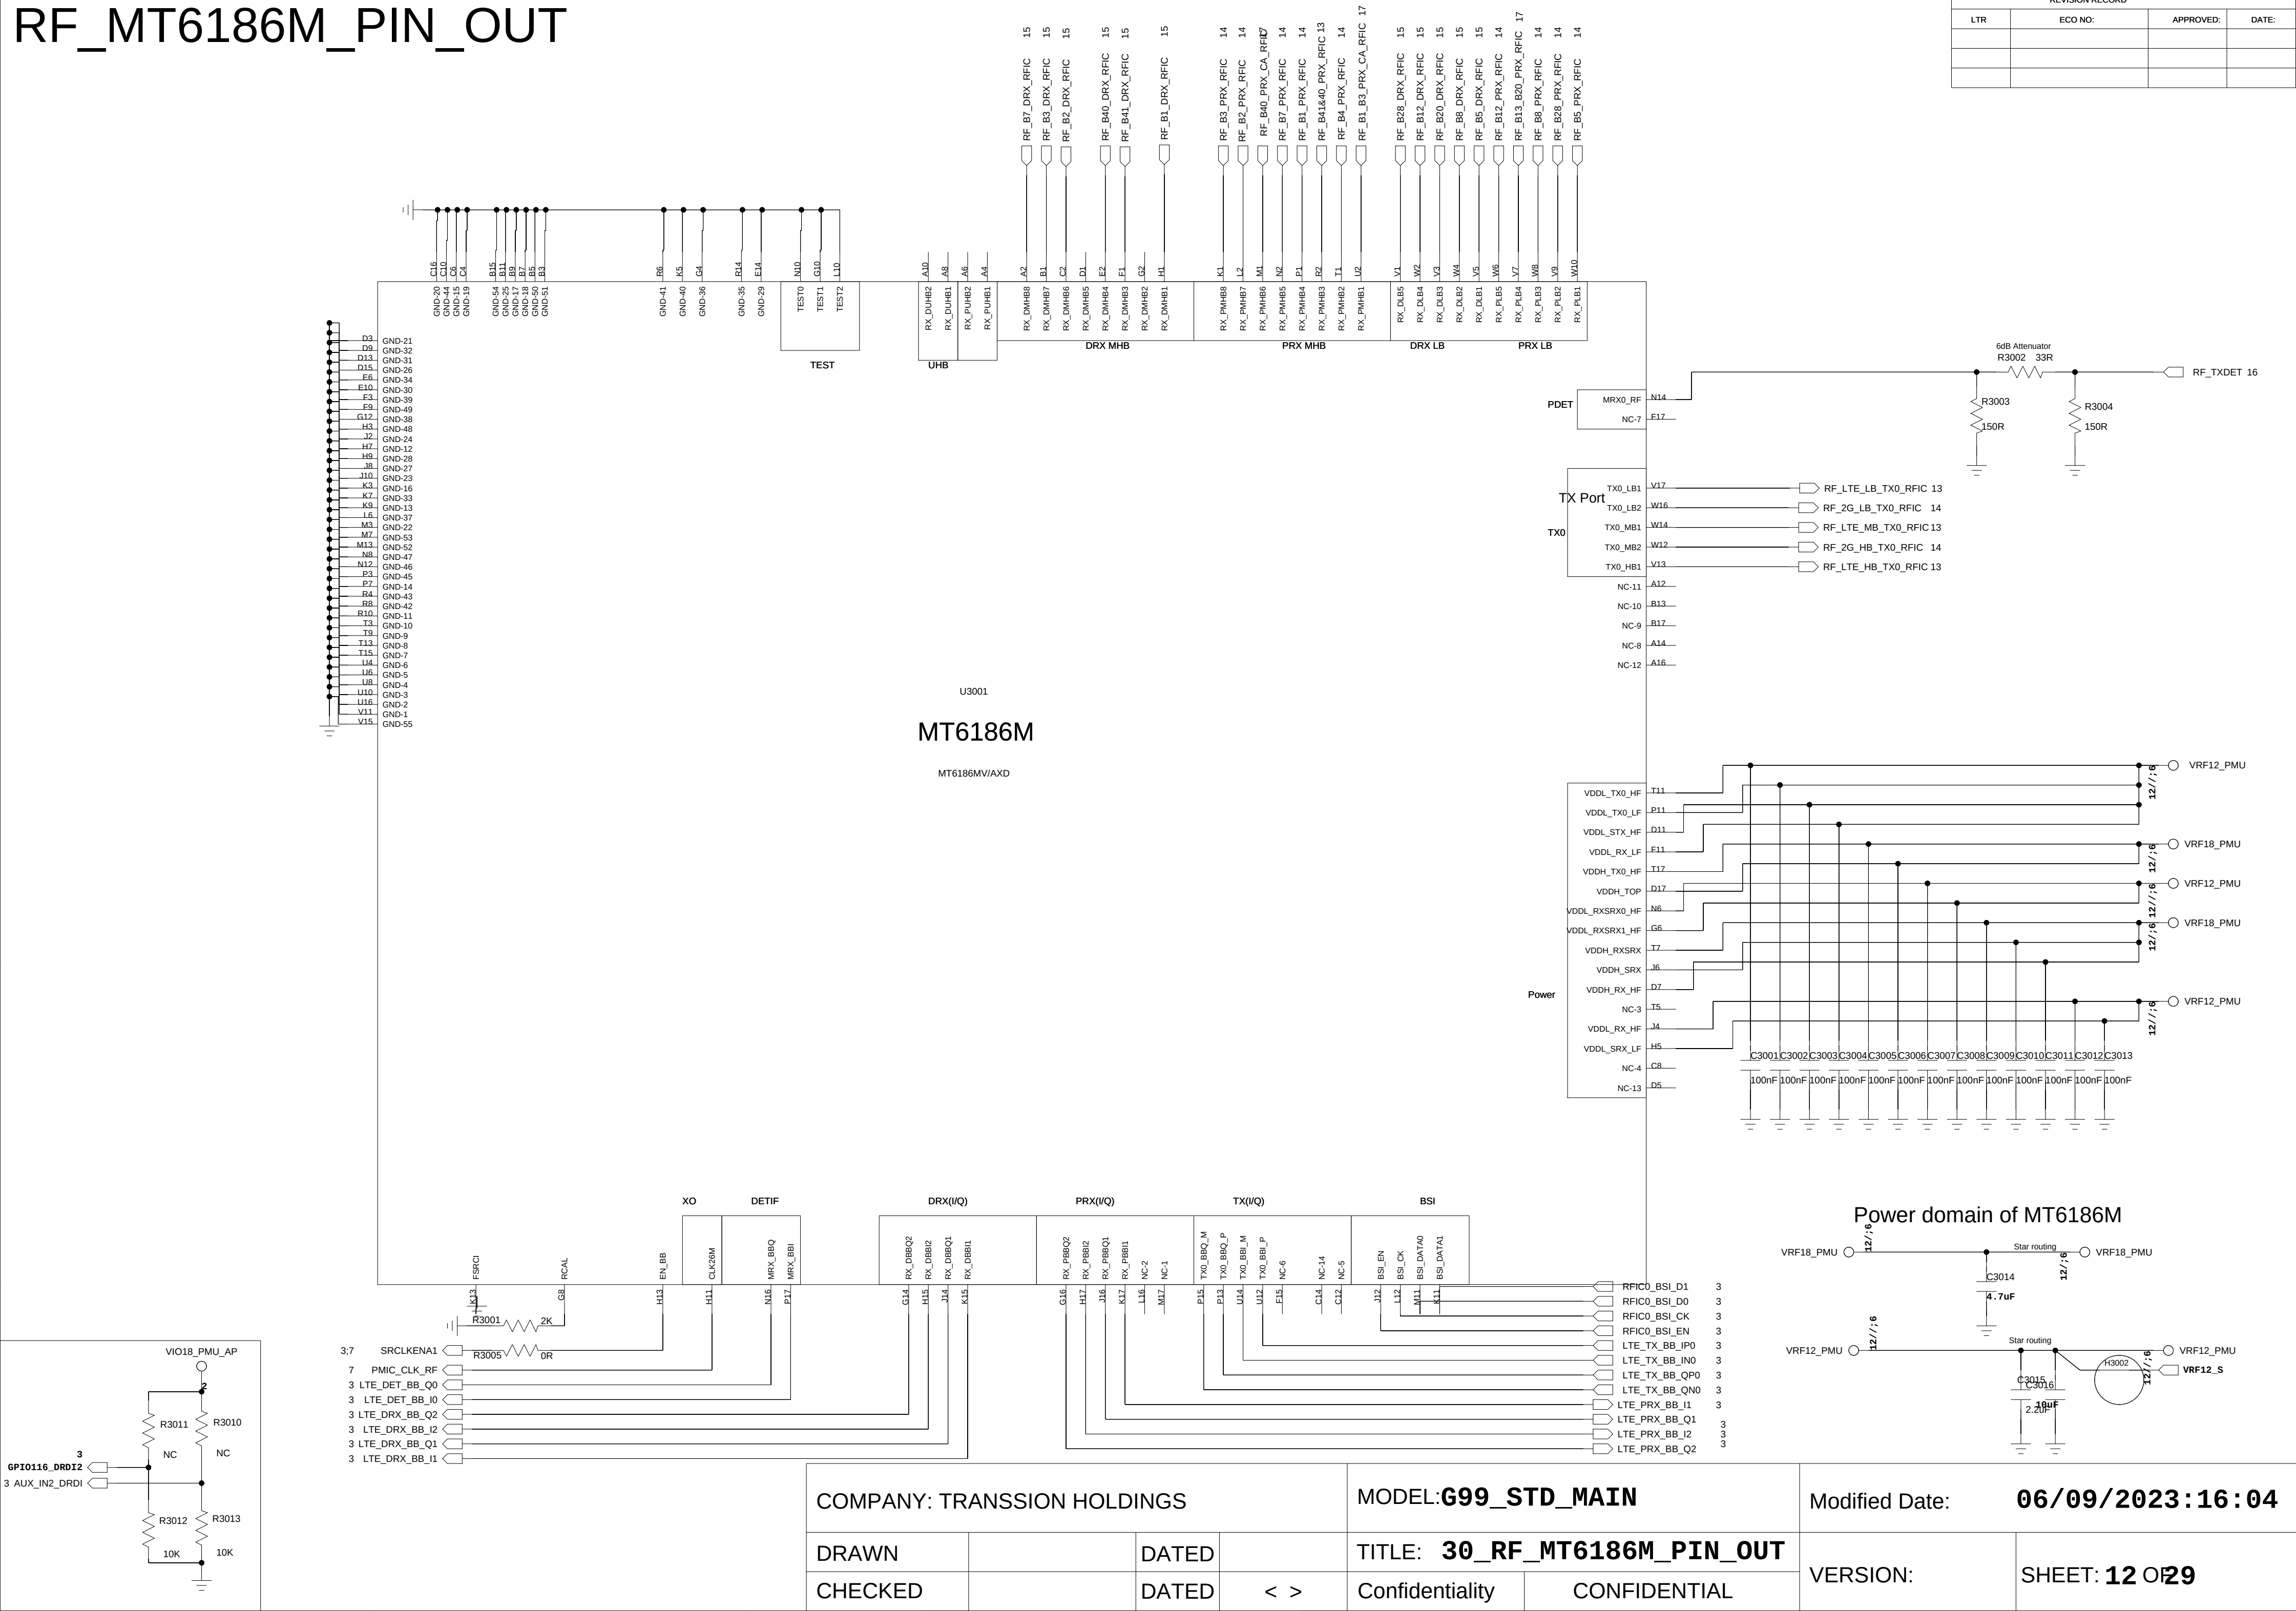

RF_MT6186M_RF_TX









REVISION RECORD			
LTR	ECO NO:	APPROVED:	DATE:

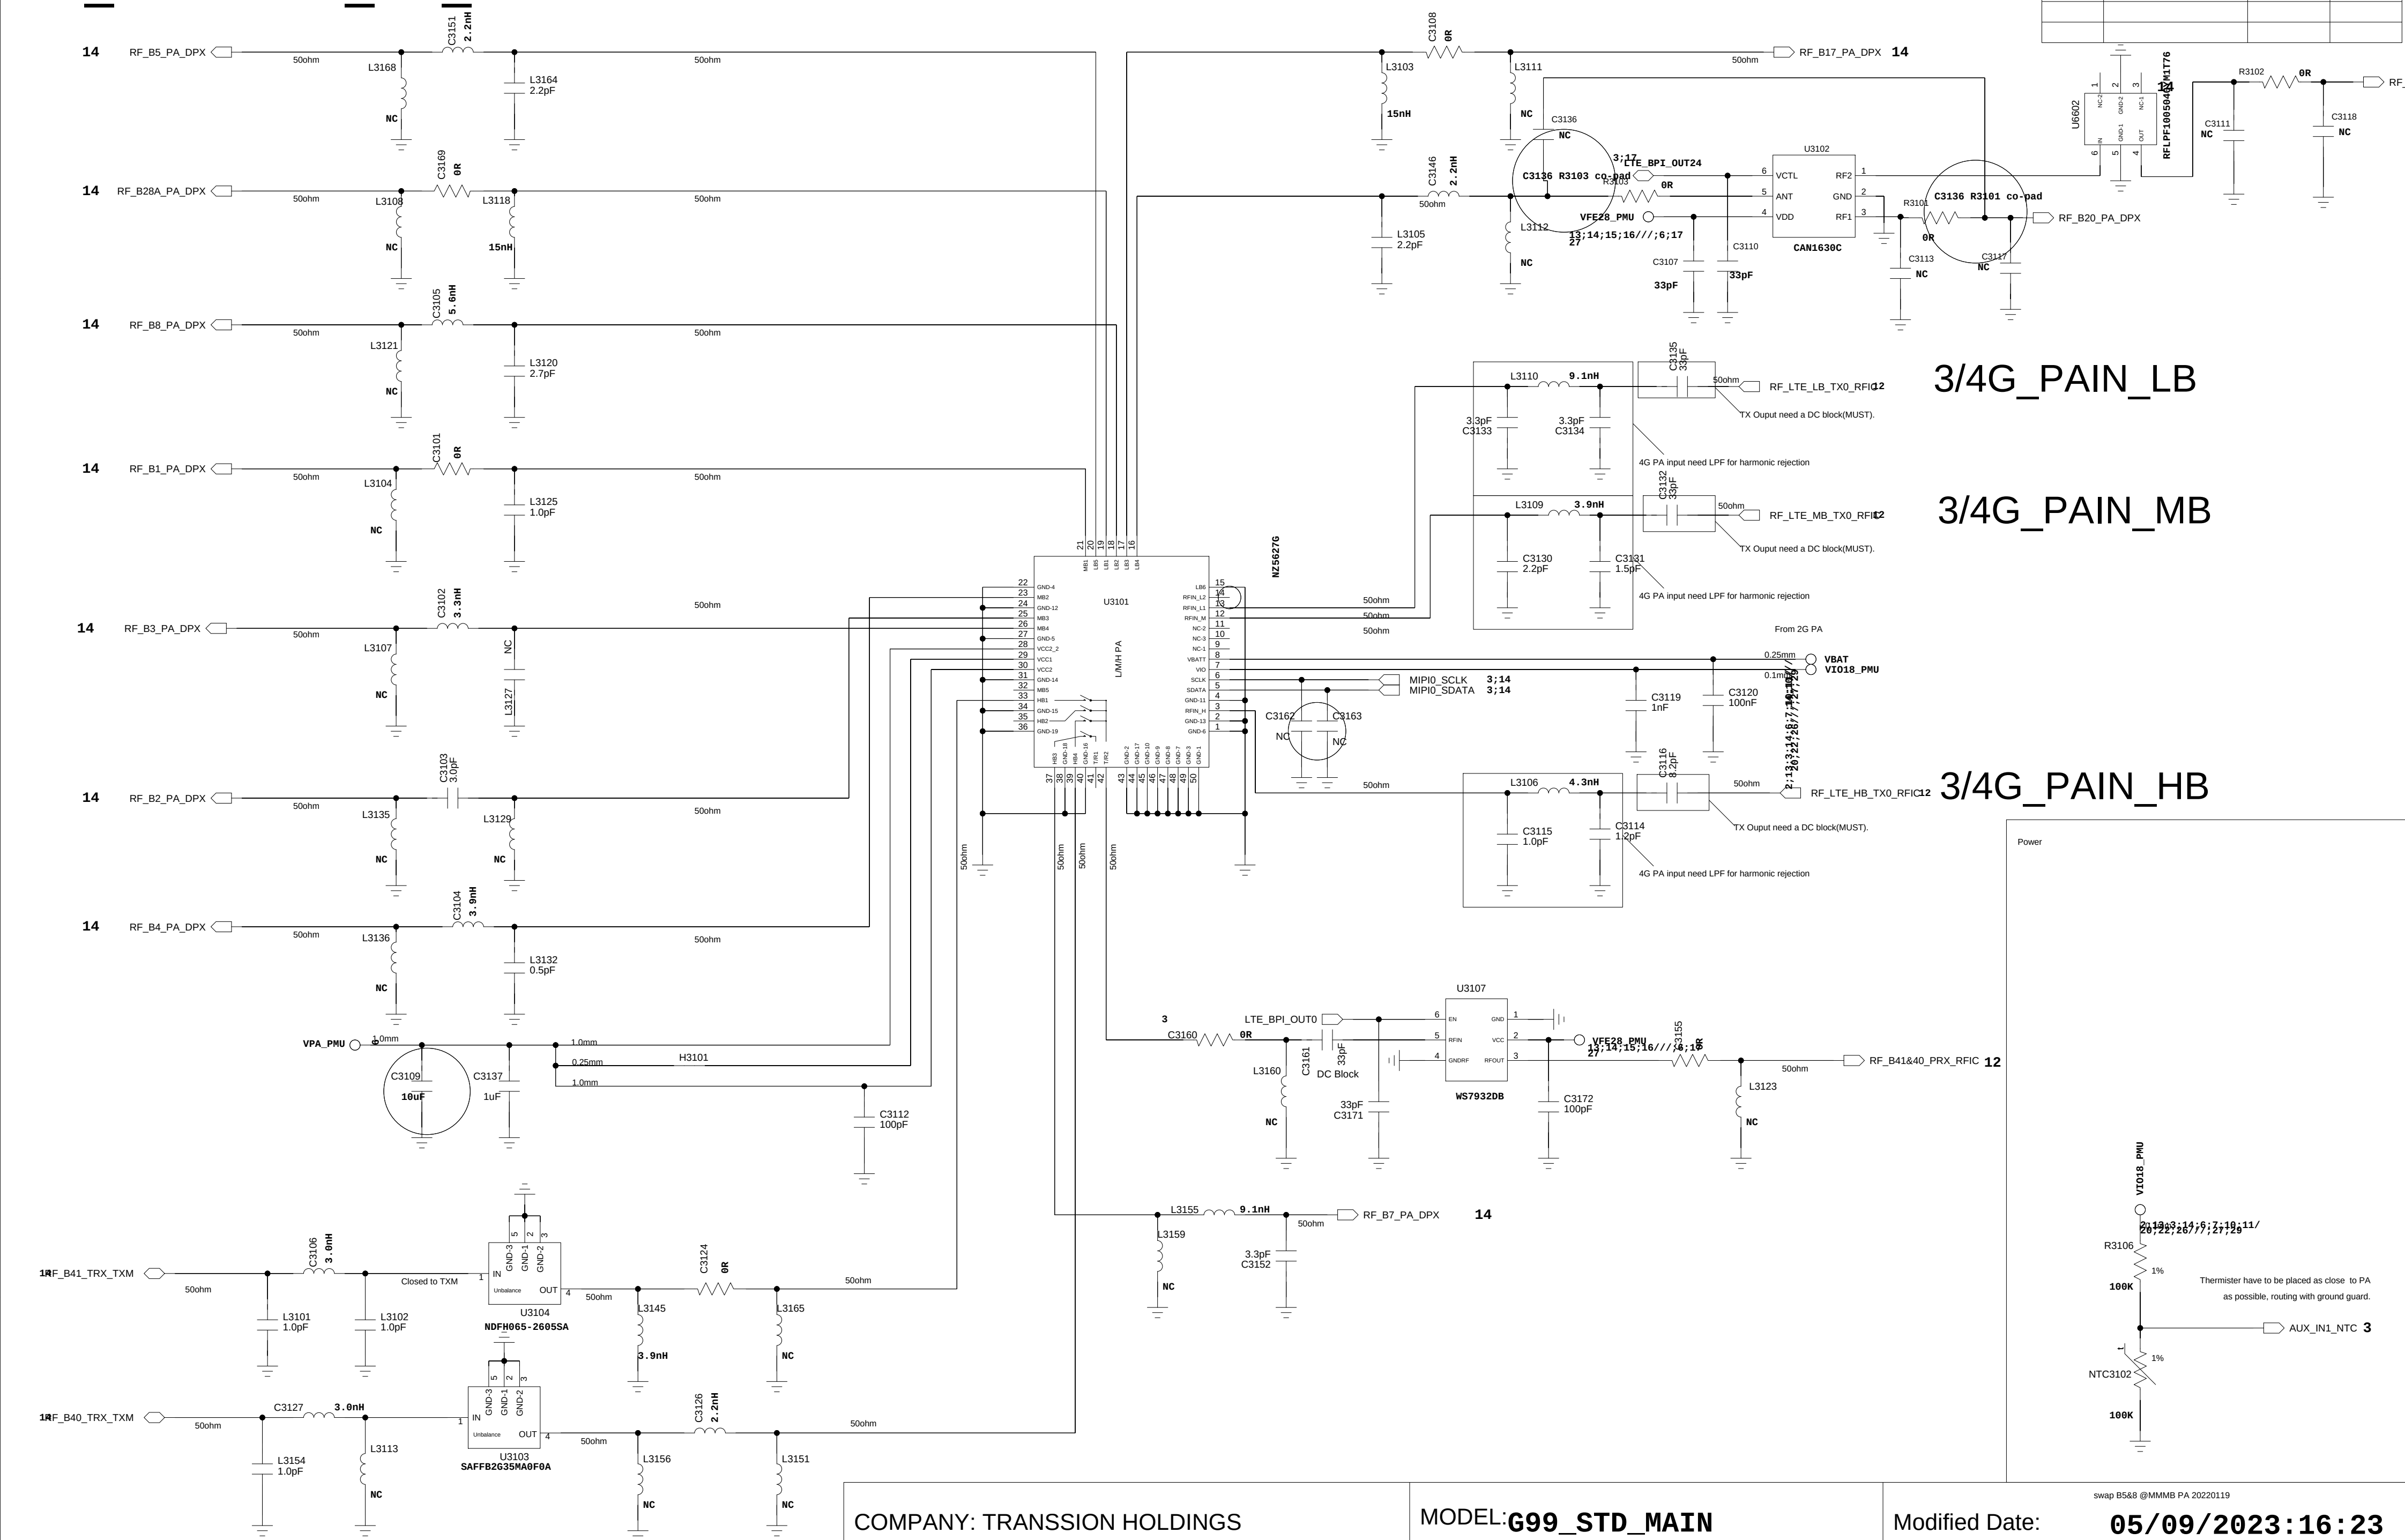


COMPANY: TRANSSION HOLDINGS				MODEL: G99_STD_MAIN		Modified Date: 05/09/2023:16:23	
DRAWN		DATED		TITLE: 31_RF_MT6186M_RF_TRX		VERSION:	SHEET: 13 OF 29
CHECKED		DATED	< >	Confidentiality	CONFIDENTIAL		



REVISION RECORD			
LTR	ECO NO:	APPROVED:	DATE:

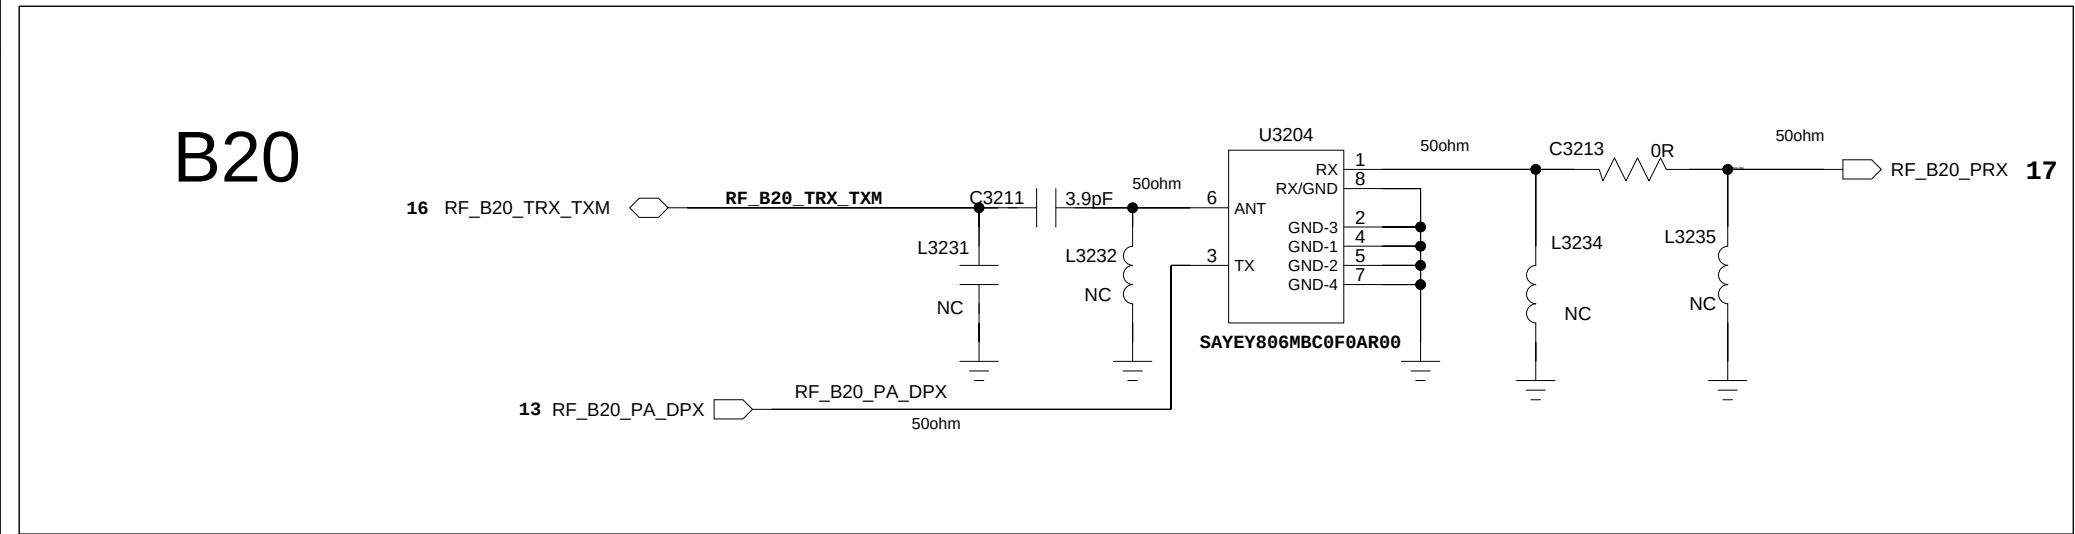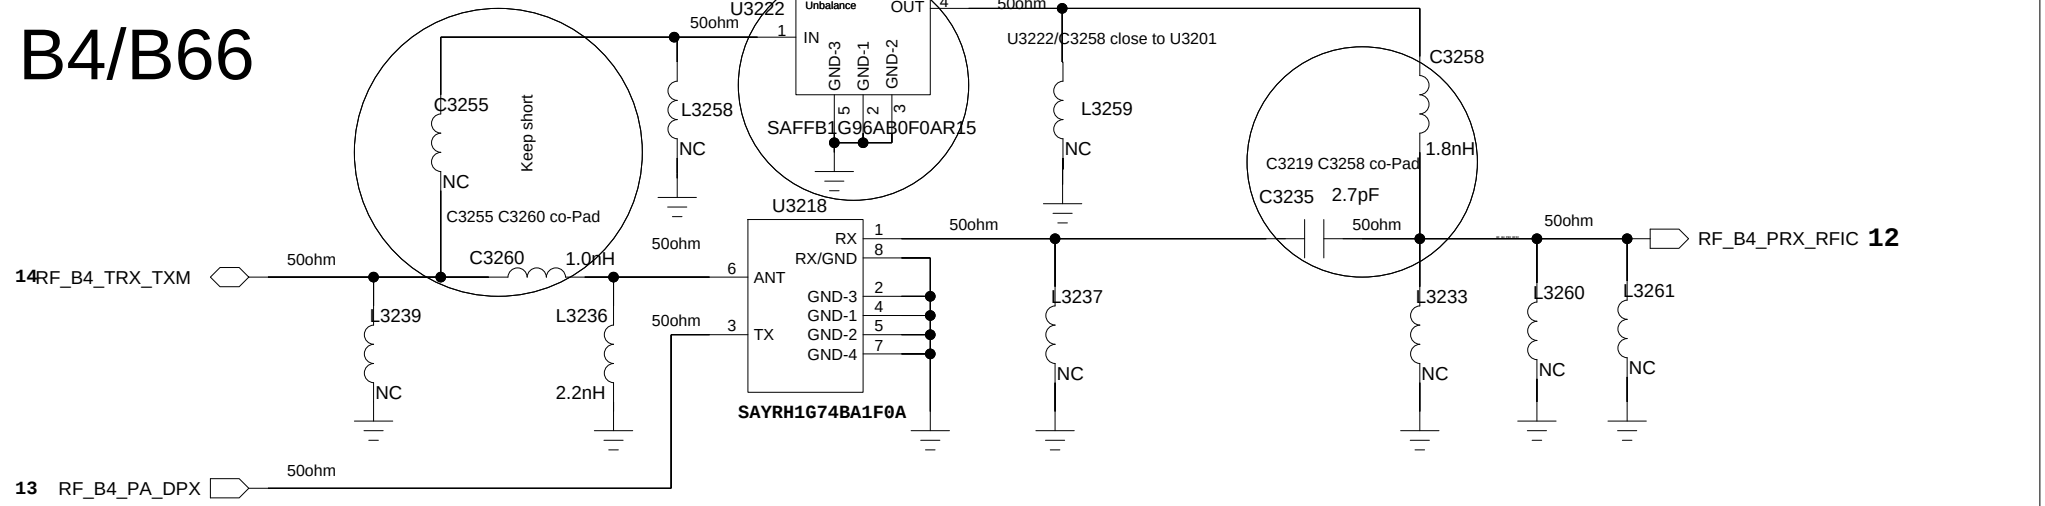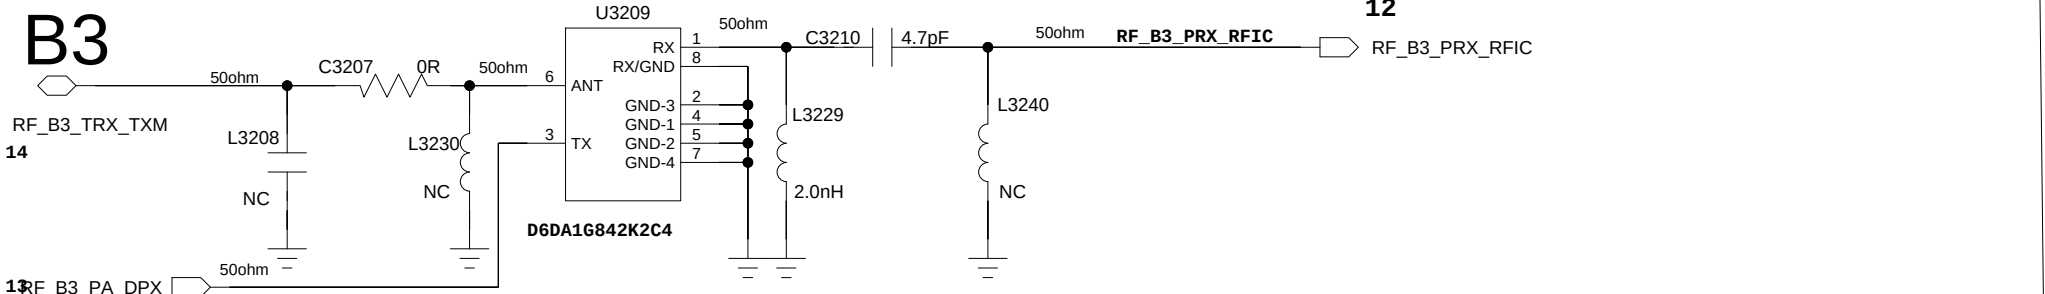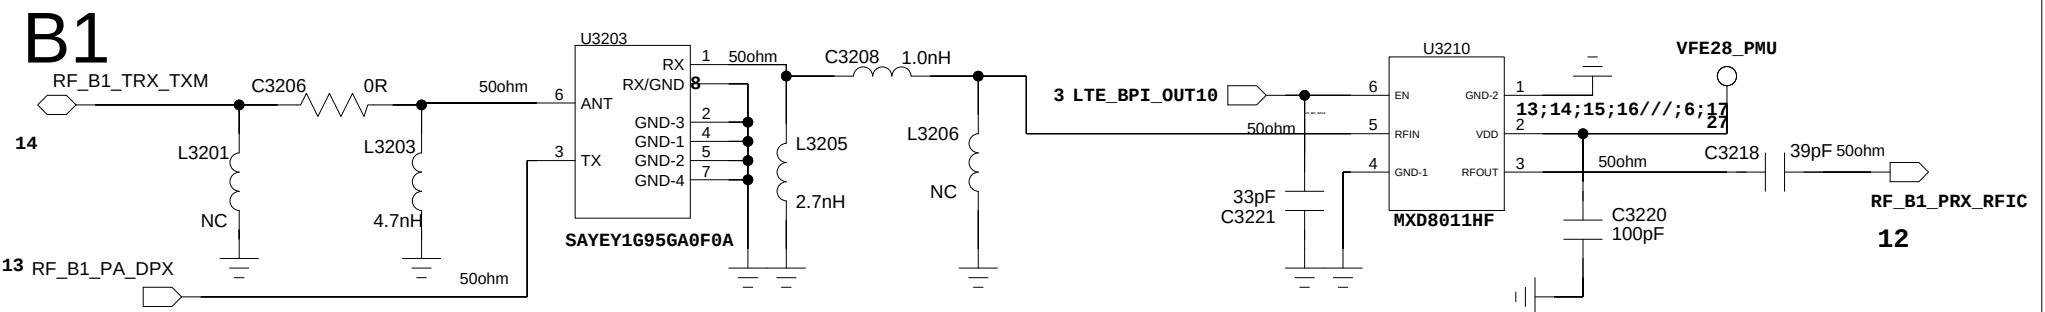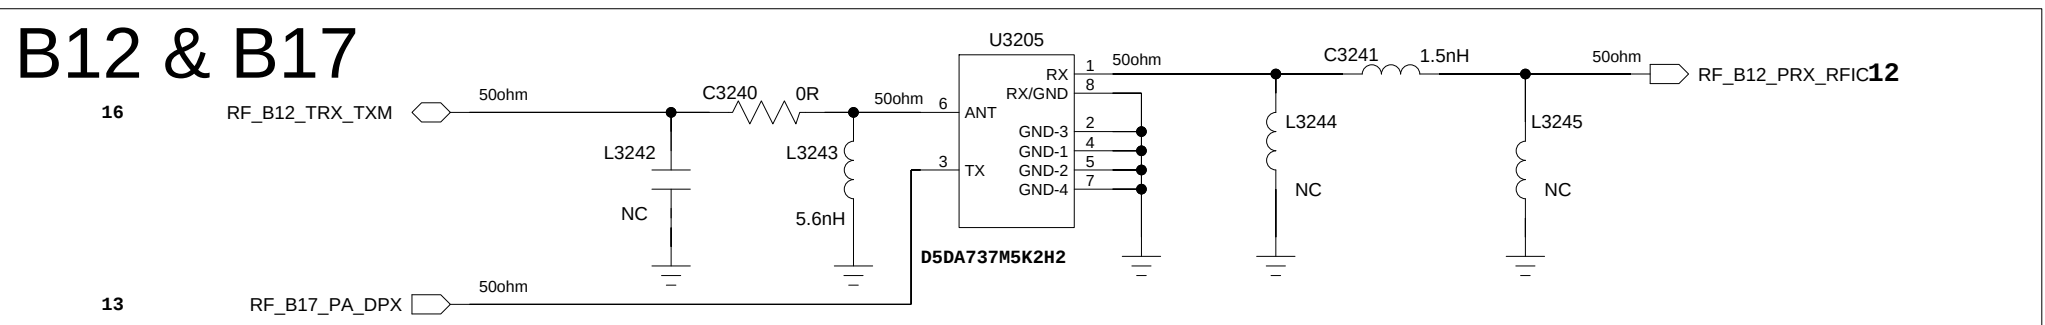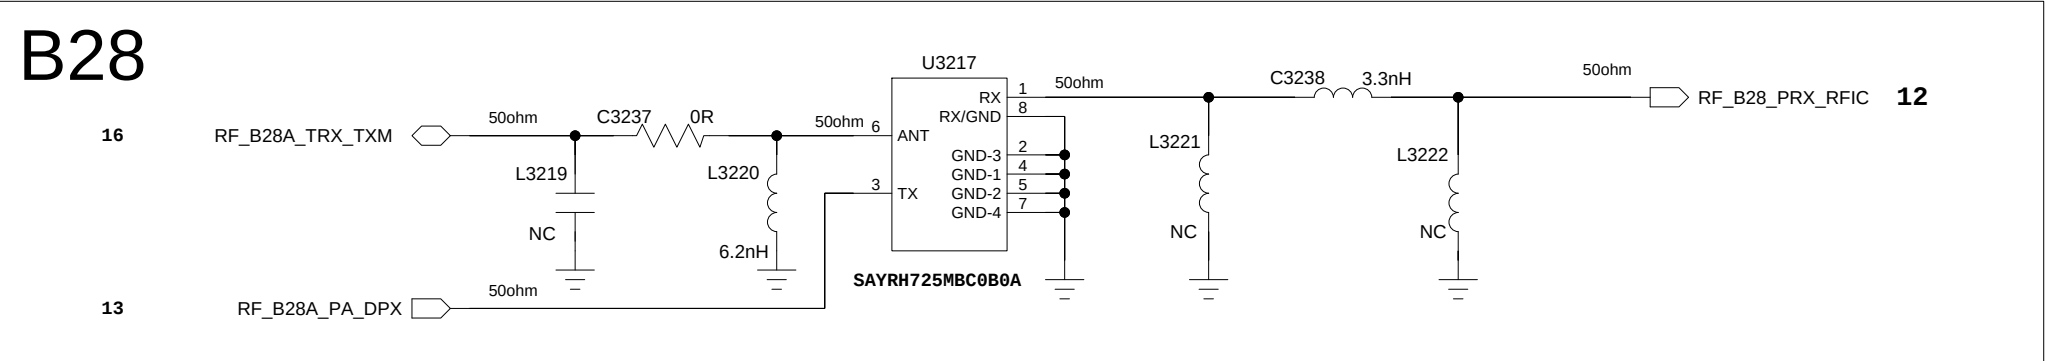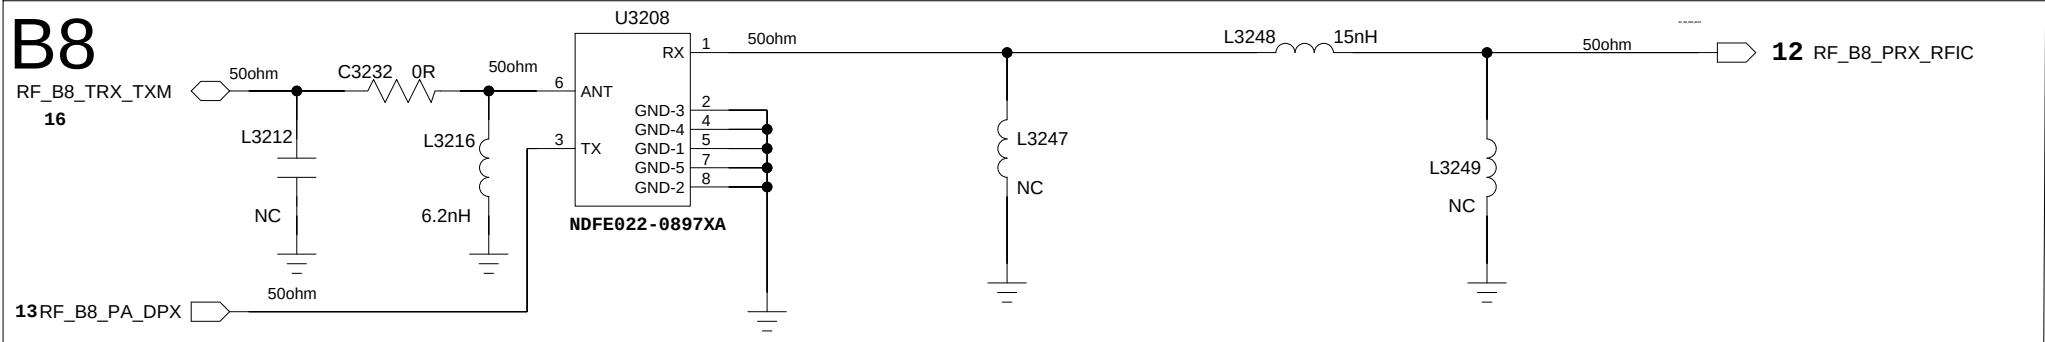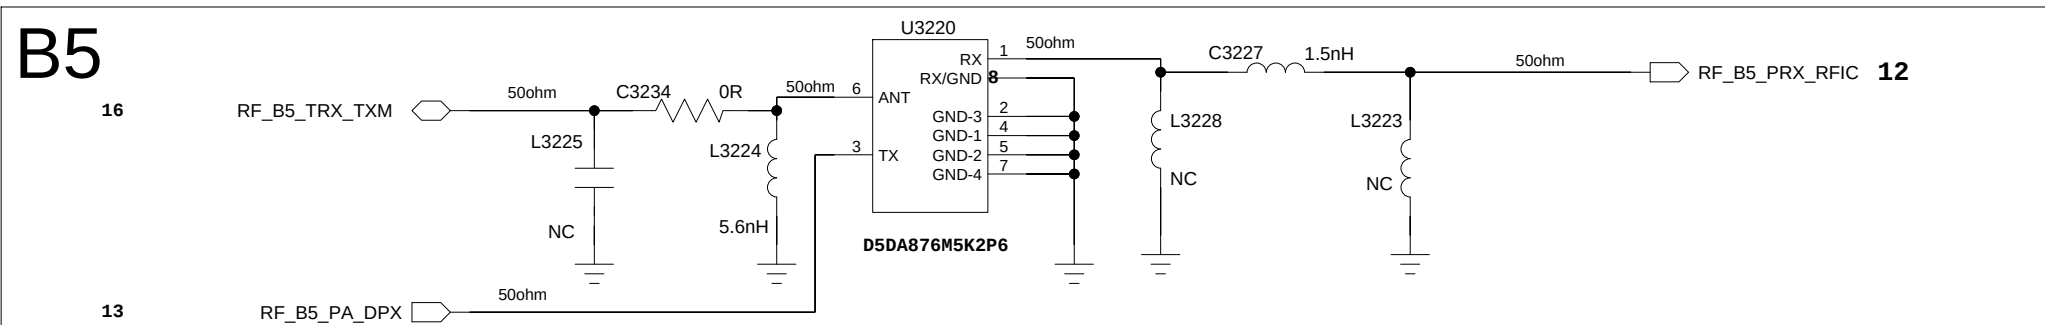

CA_2A-7A/B7 standalone

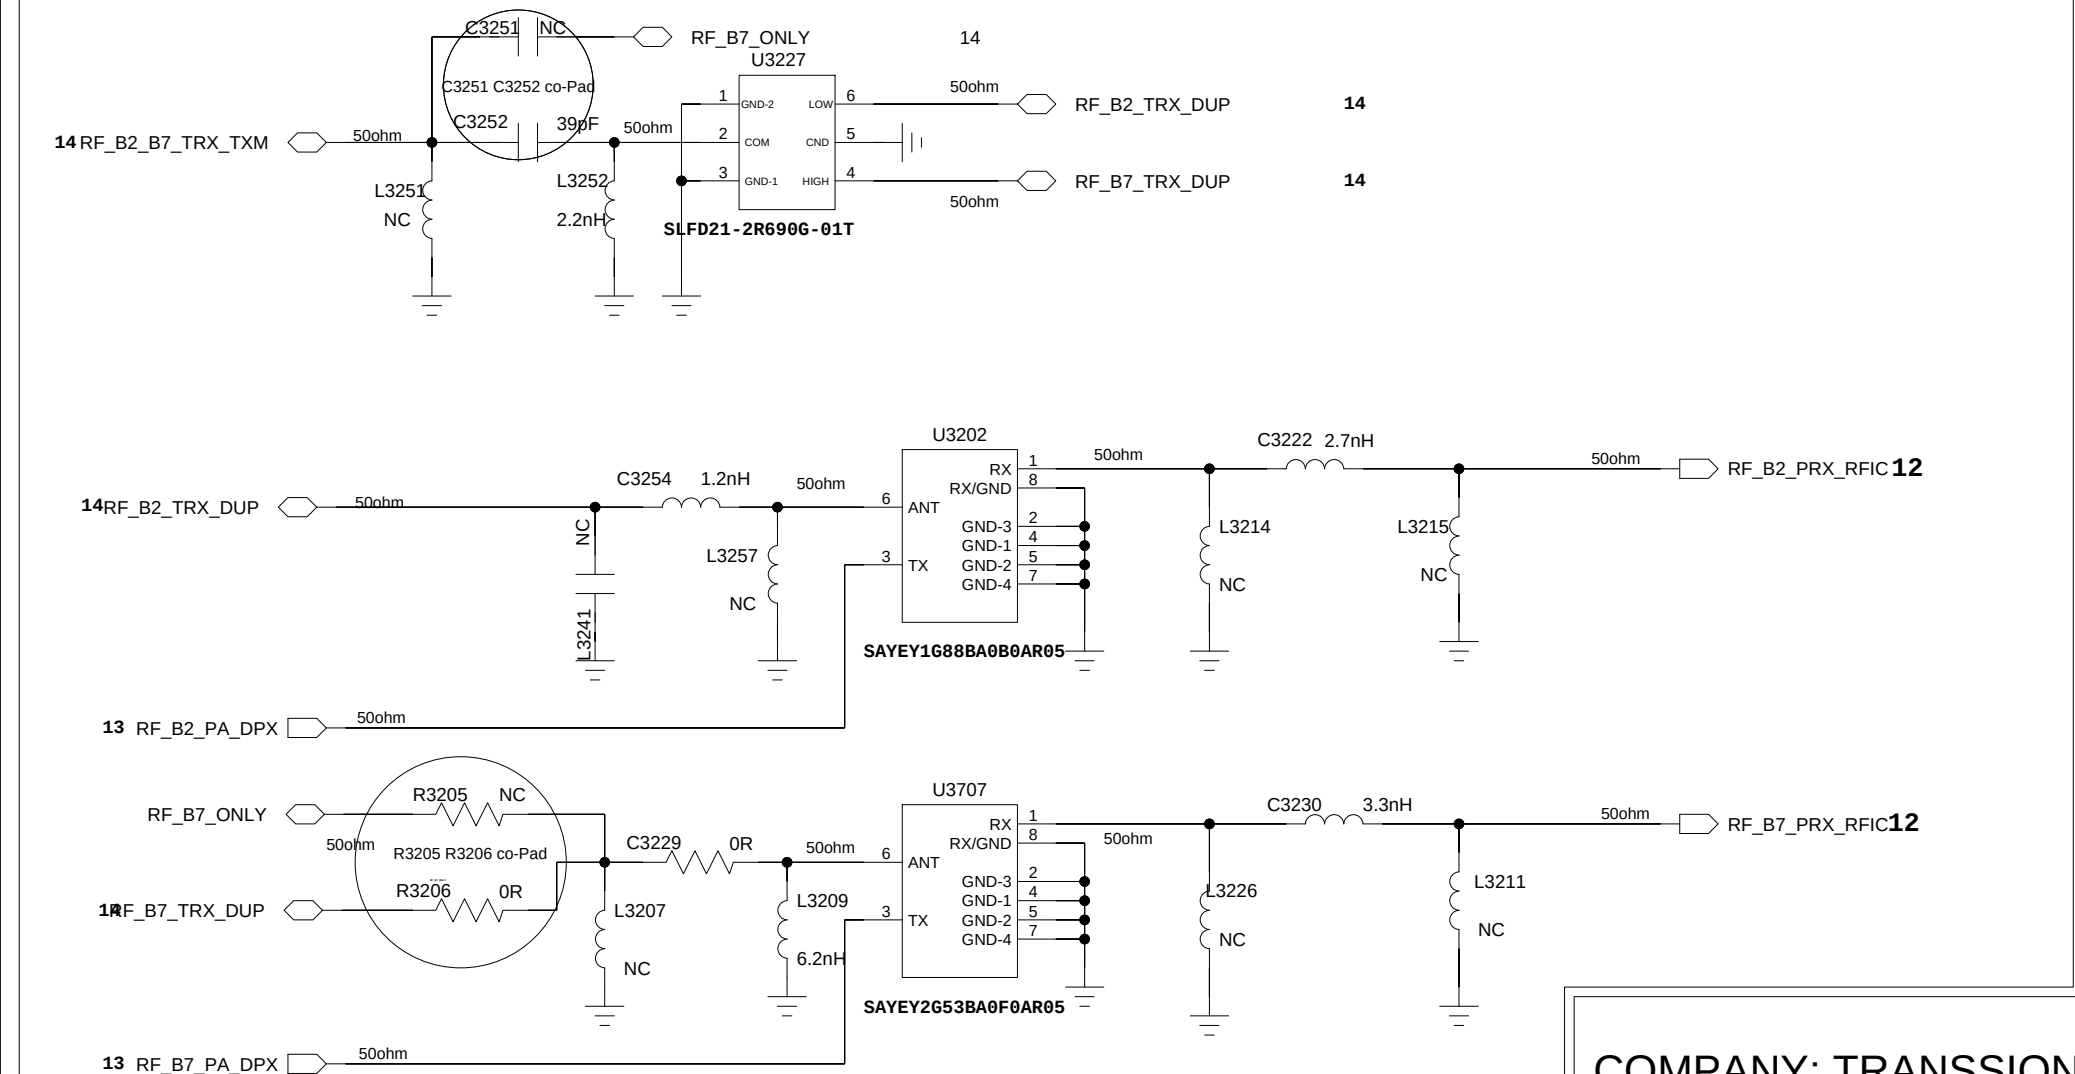

COMPANY: TRANSSION HOLDINGS

MODEL: **G99_STD_MAIN**

Modified Date: **06/09/2023:15:50**

DRAWN		DATED
-------	--	-------

TITLE: **32_RF_MT6186M_RF_PRX**

VERSION: | SHEET: **14** OF **29**

CHECKED		DATED
---------	--	-------



Confidentiality

CONFIDENTIAL


RF_MT6186M_RF_DRX

SP8T_MHB


SP8T_LB

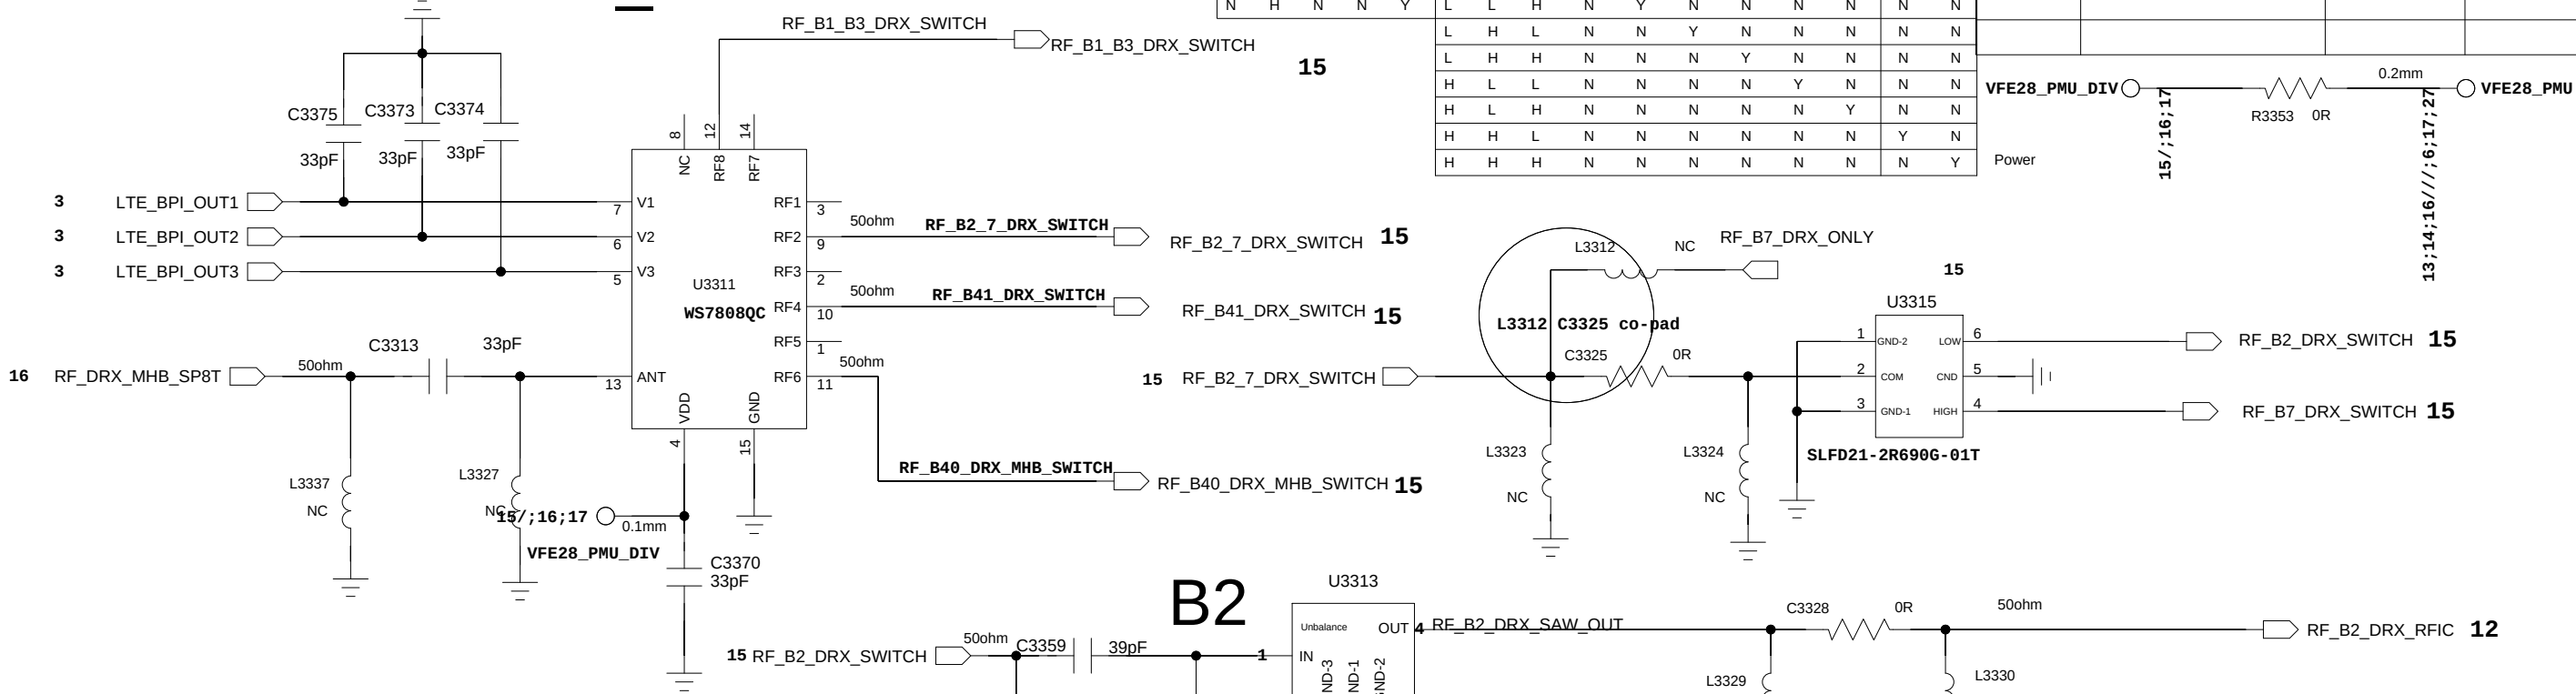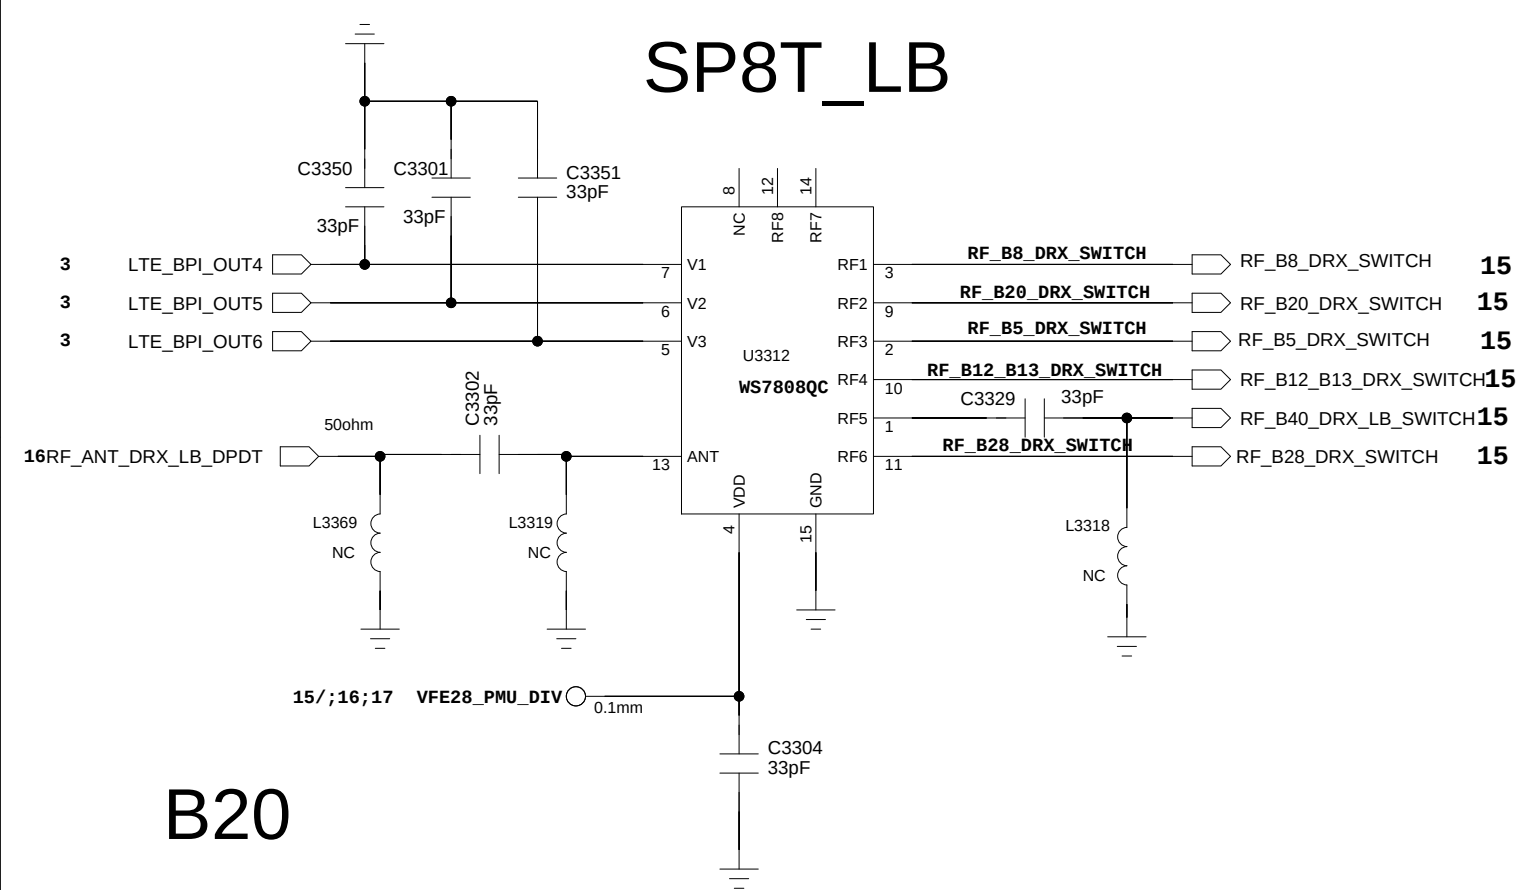


B20

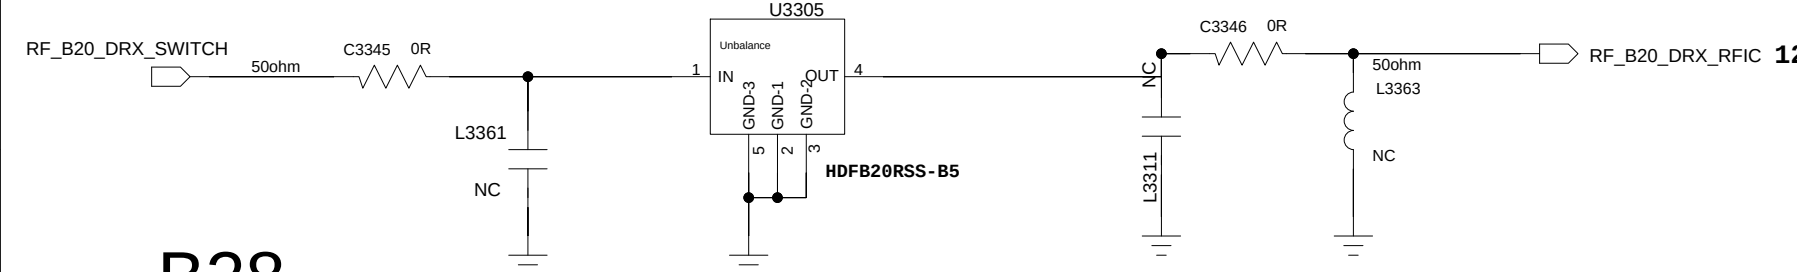


B28

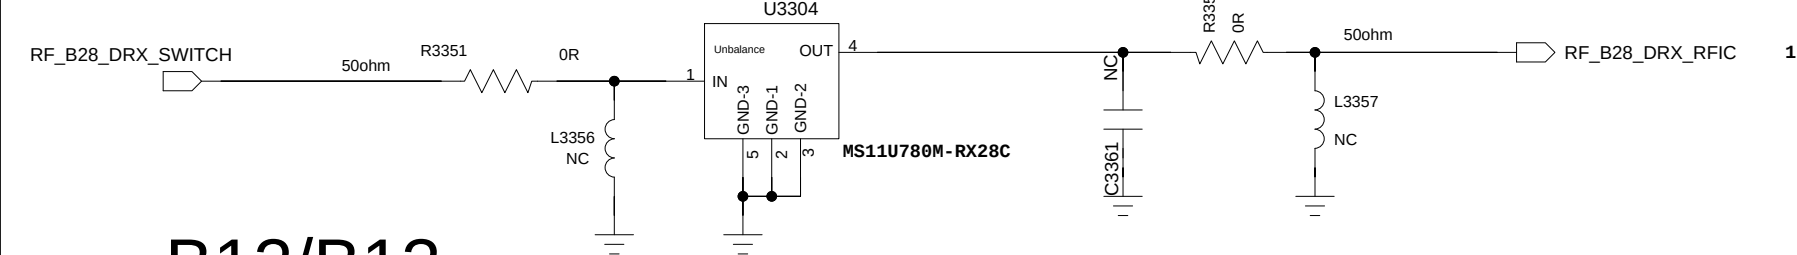


B12/B13

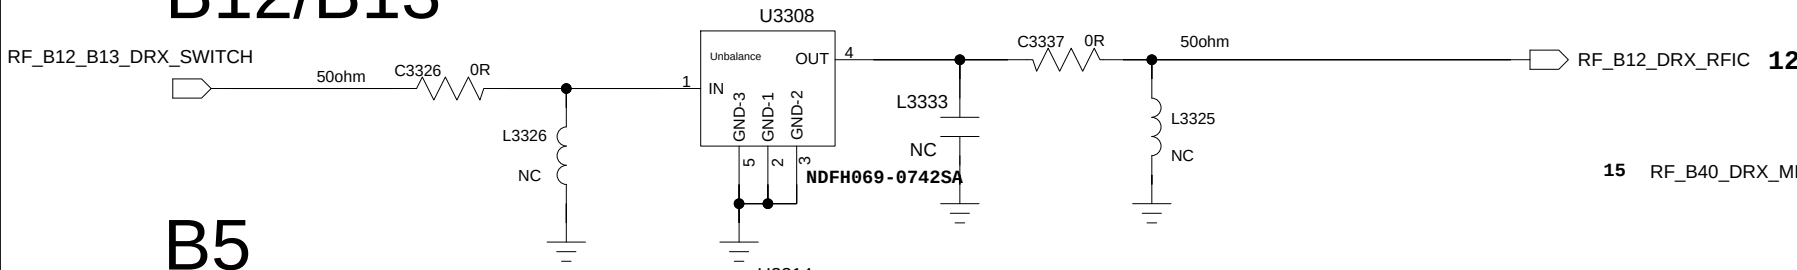


B5

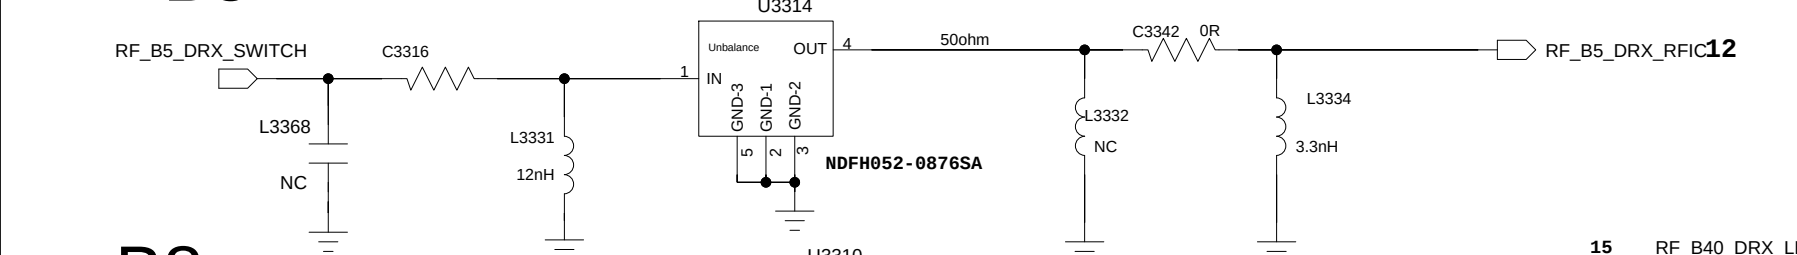


B8

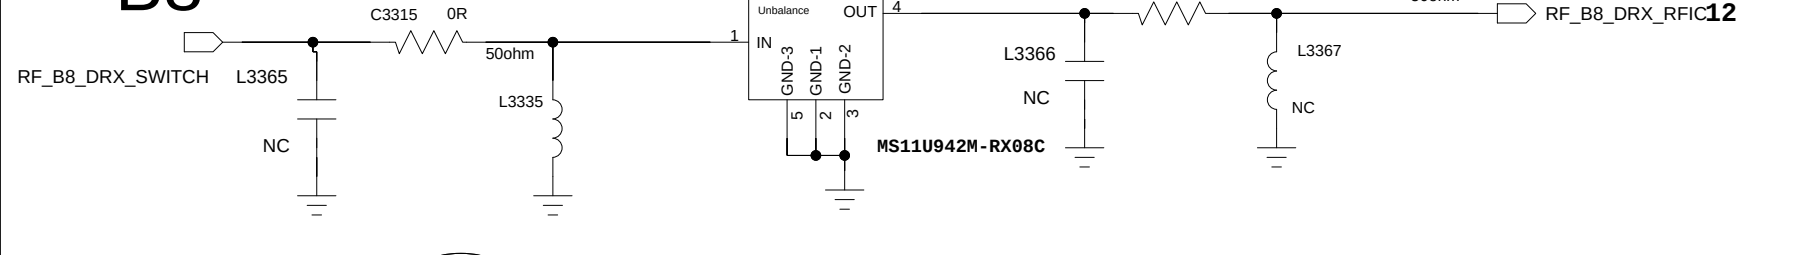


B1&B3

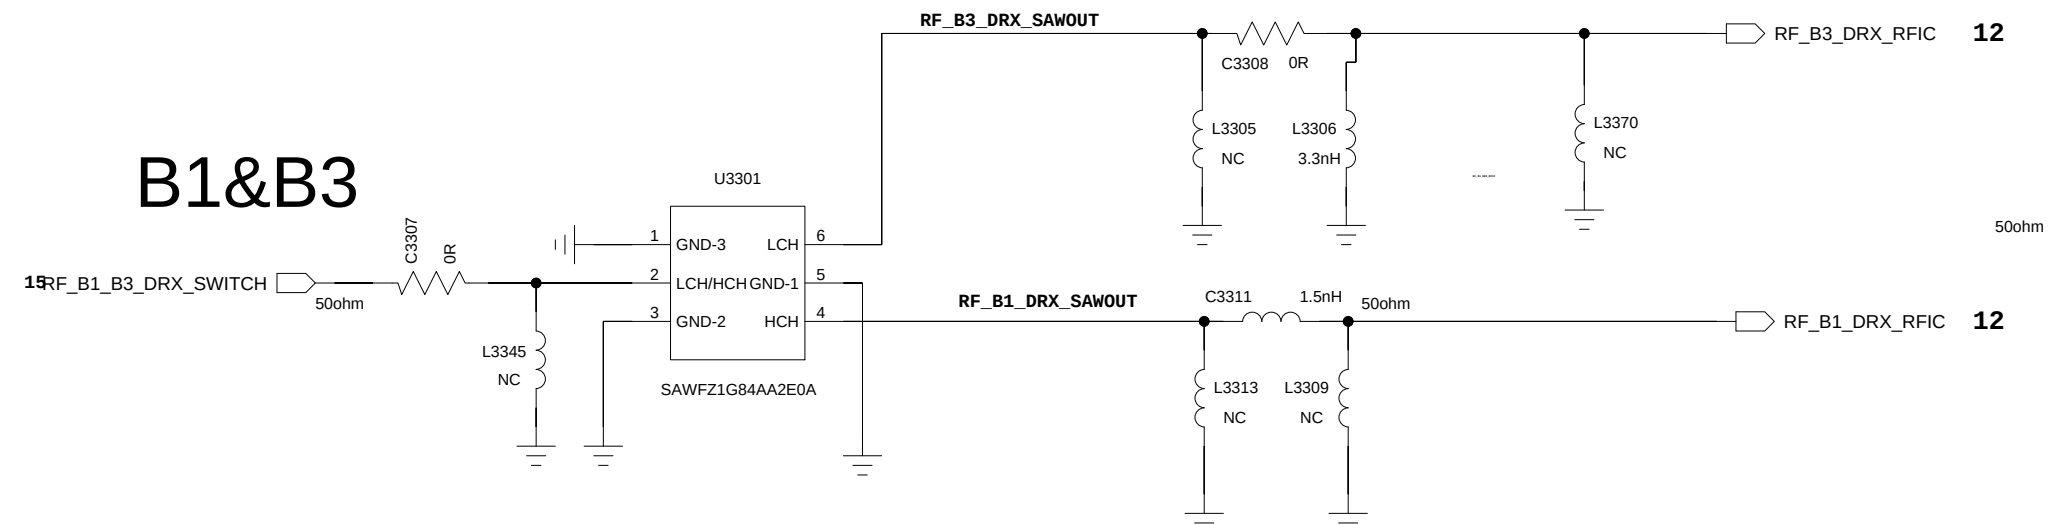


B41

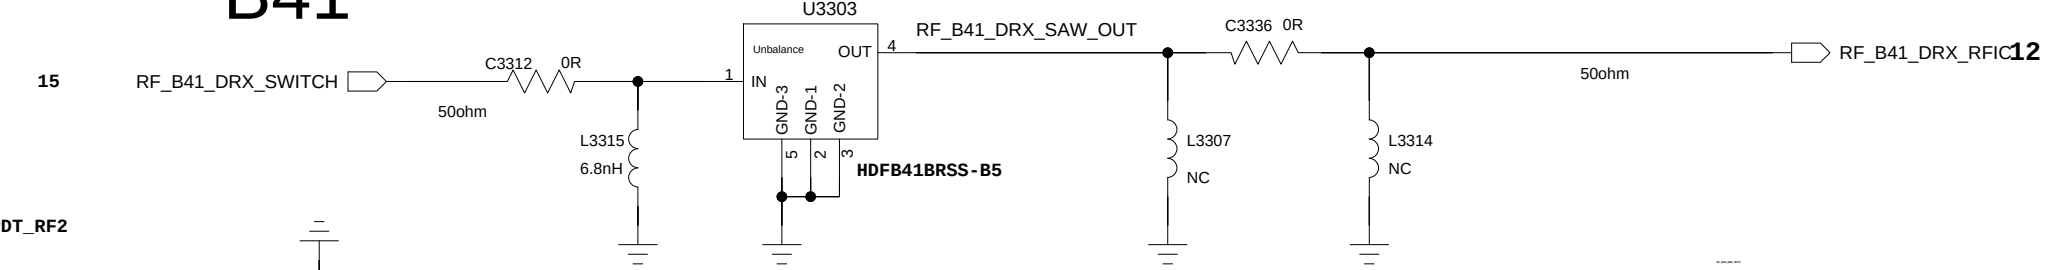

B40

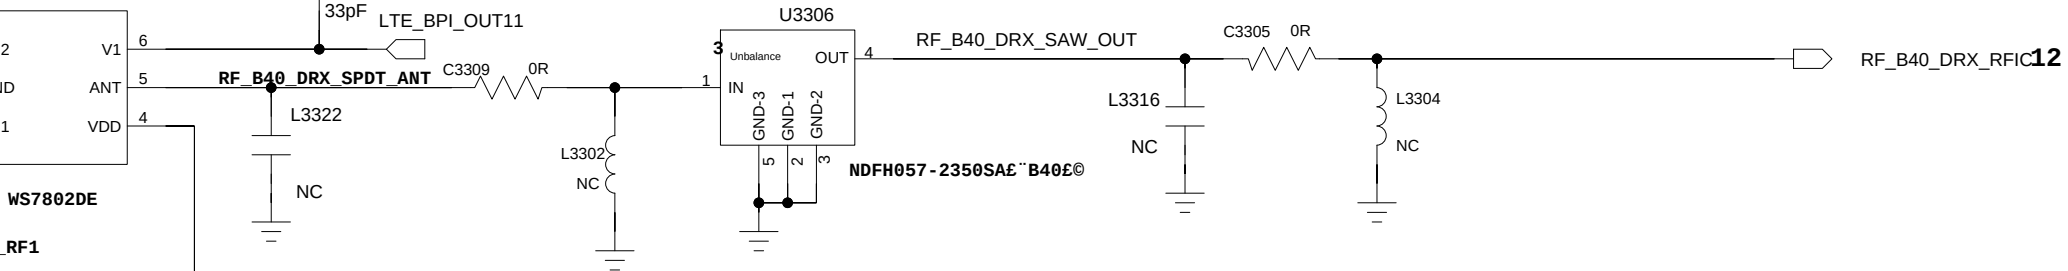

BPI





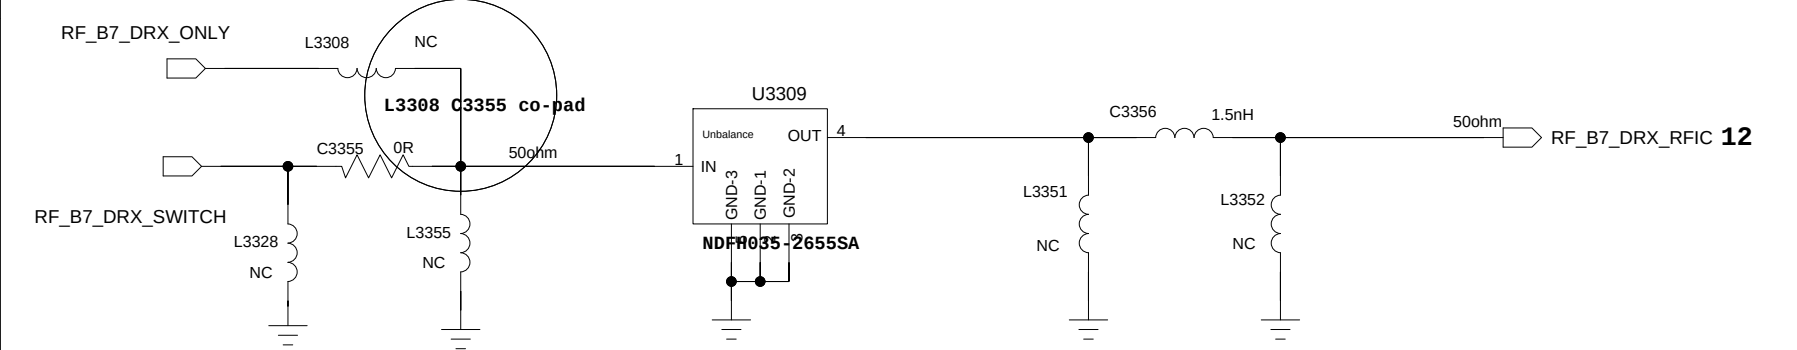


B7




COMPANY: TRANSSION HOLDINGS				MODEL:G99_STD_MAIN		Modified Date: 06/09/2023:15:51	
DRAWN		DATED		TITLE: 33_RF_MT6186M_RF_DRX		VERSION:	SHEET: 15 OF 29
CHECKED		DATED	< >	Confidentiality	CONFIDENTIAL		

REVISION RECORD			
LTR	ECO NO:	APPROVED:	DATE:

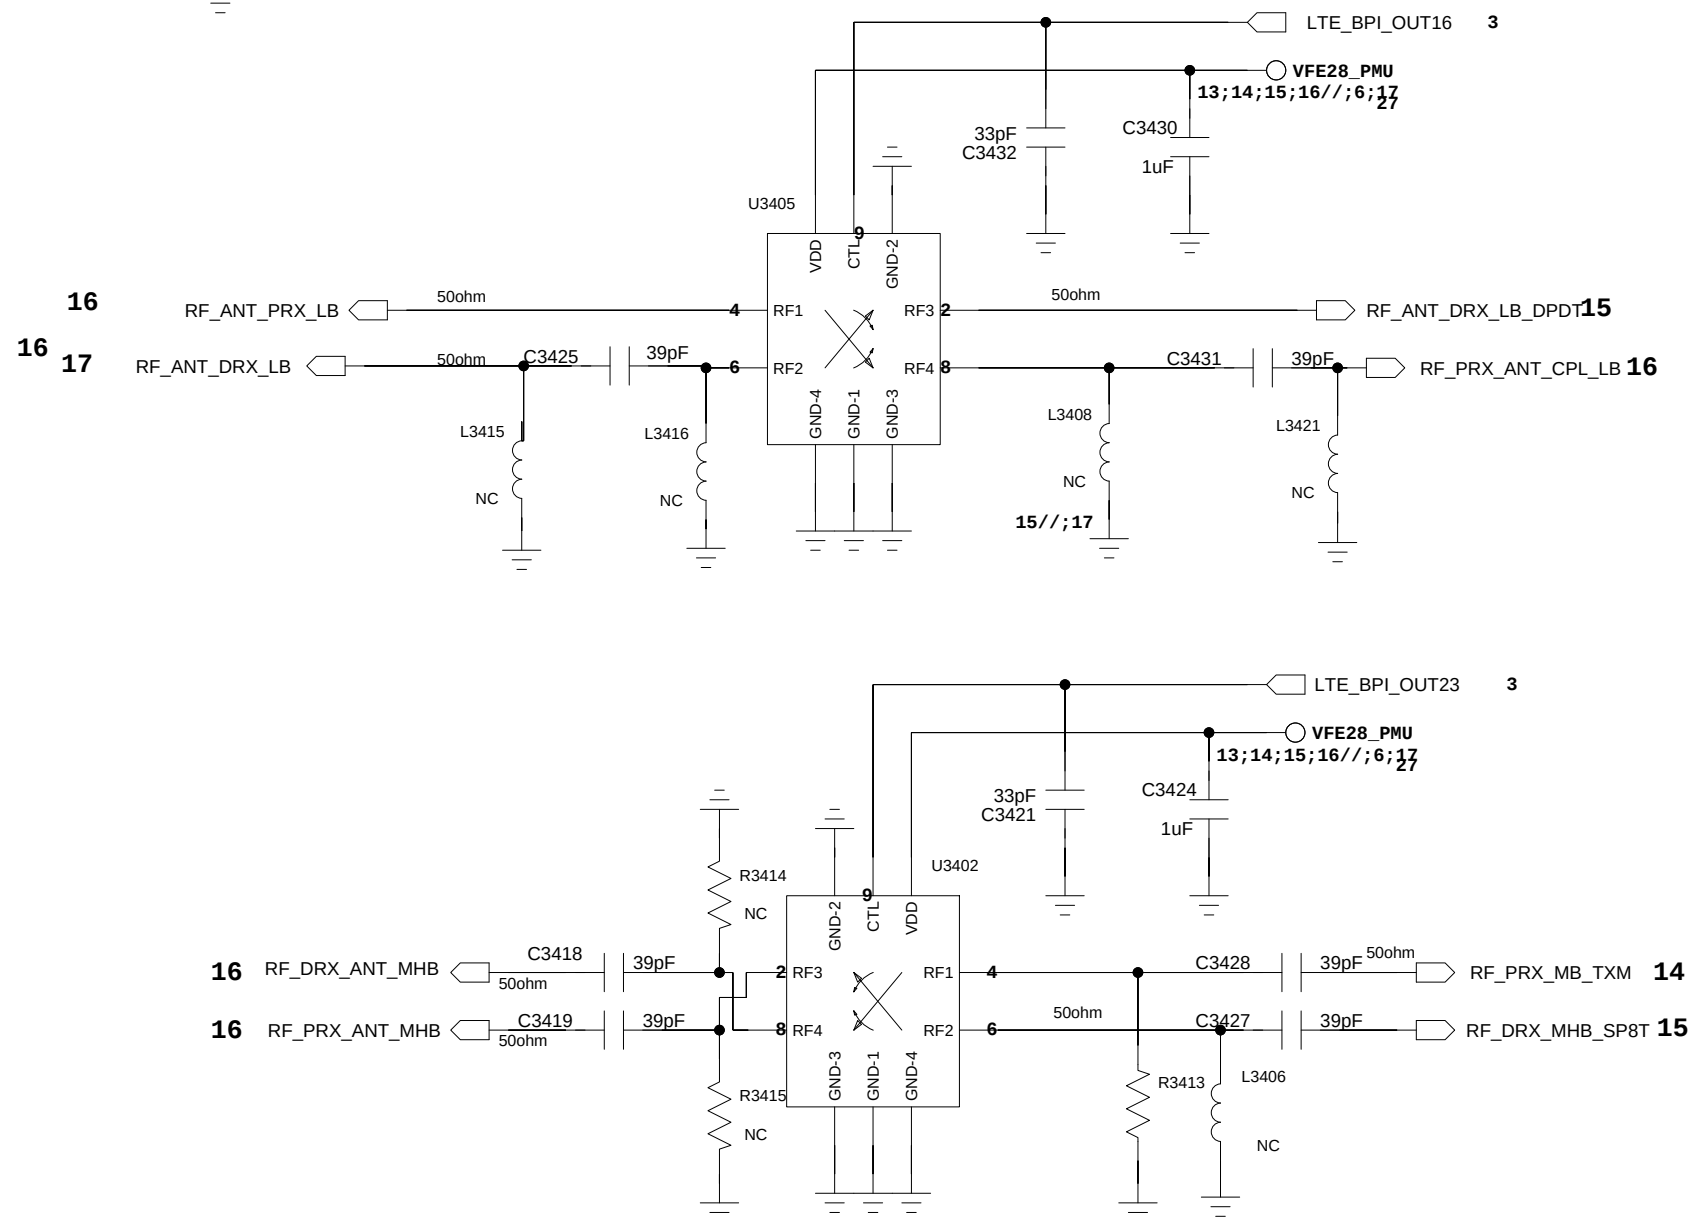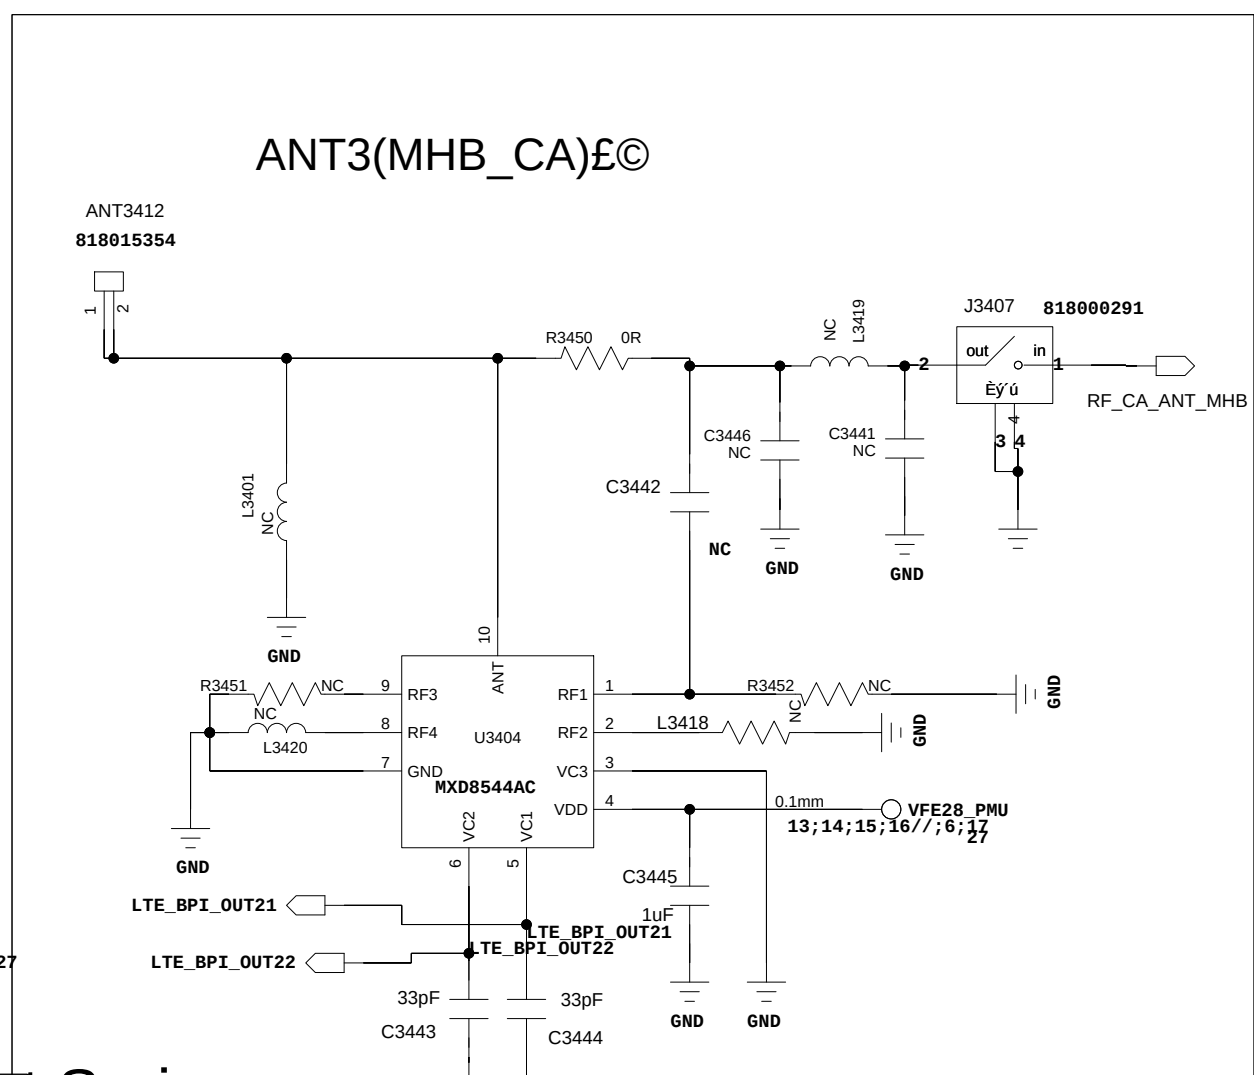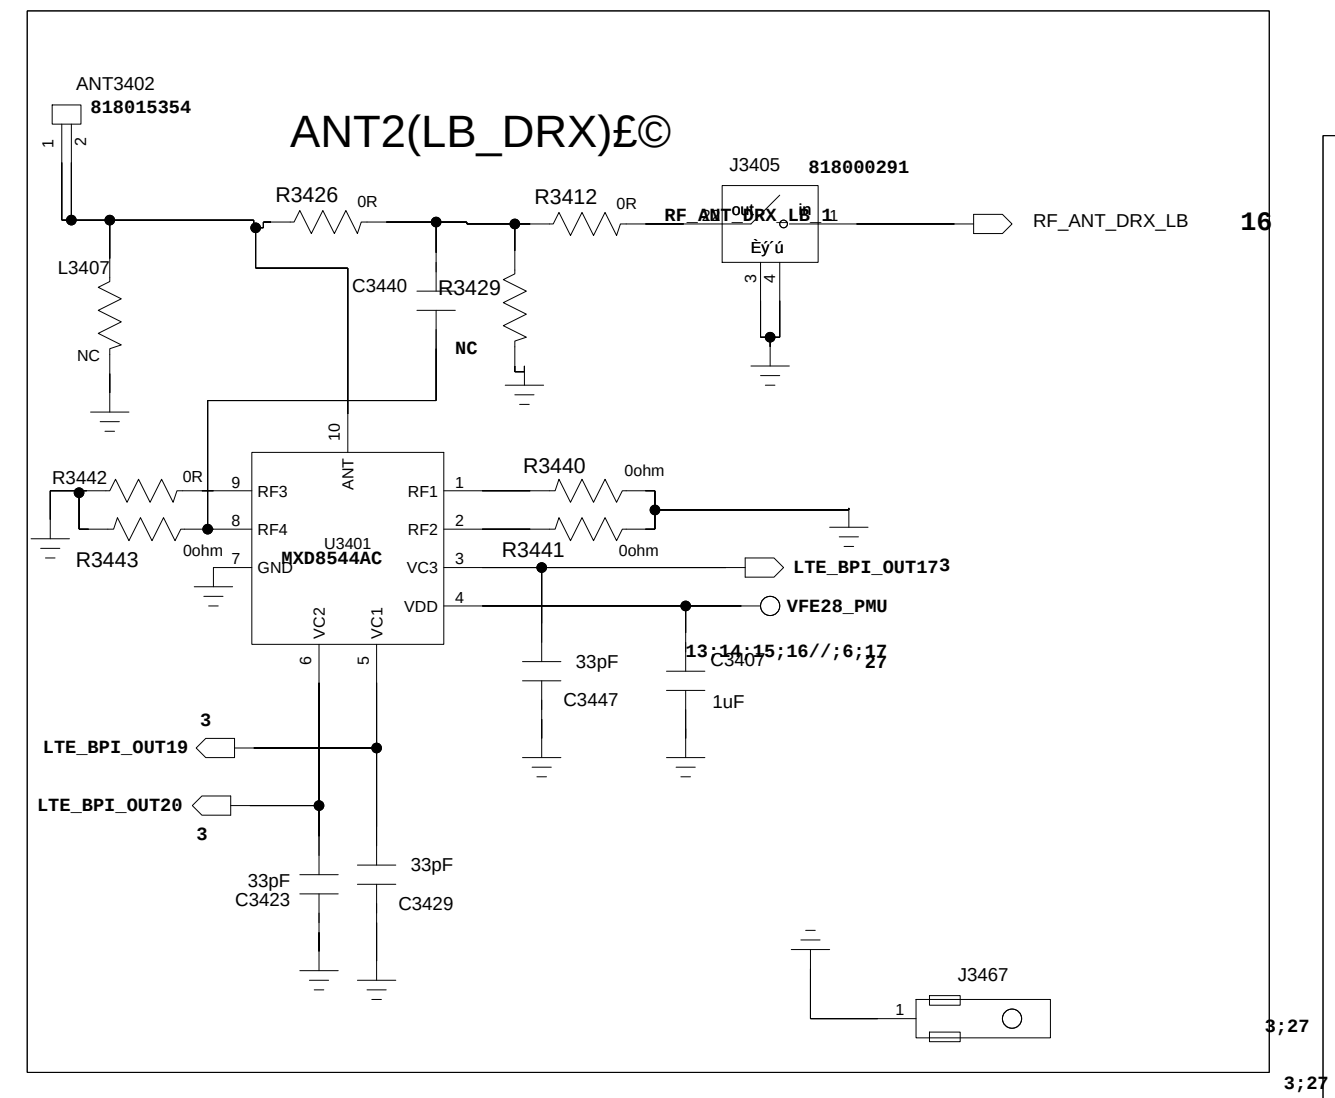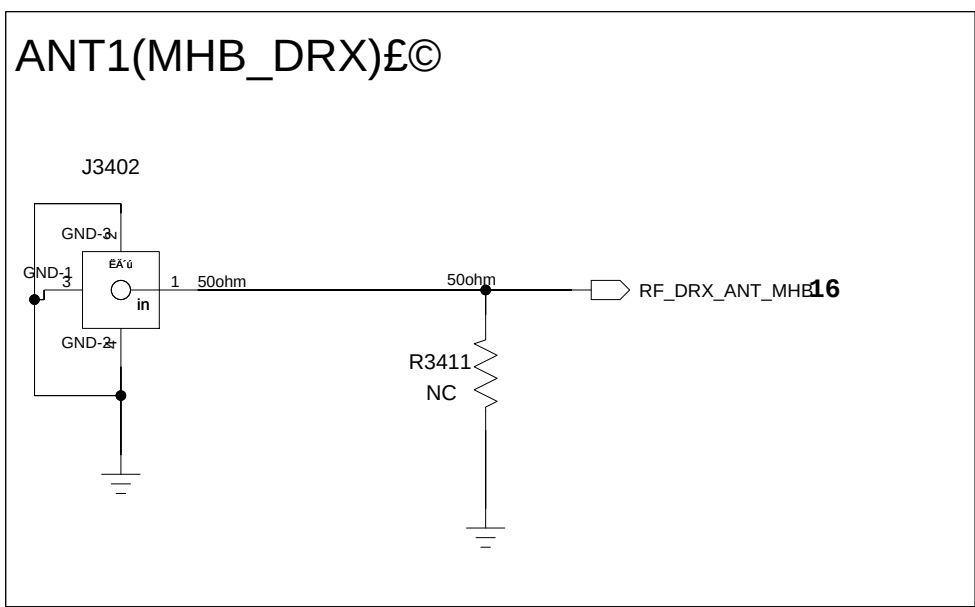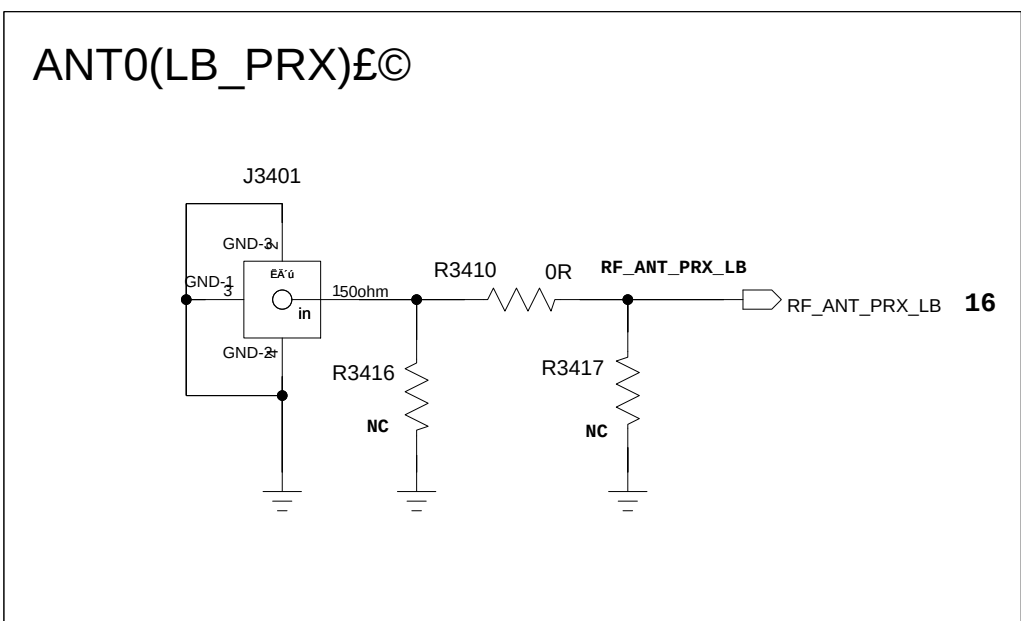



bot Spring

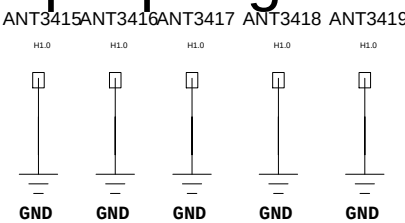

COMPANY: TRANSSION HOLDINGS				MODEL: G99_STD_MAIN		Modified Date: 11/01/2024:16:57	
DRAWN		DATED		TITLE: 34_RF_ANT_CONTROLLER		VERSION:	SHEET: 16 Of 29
CHECKED		DATED	< >	Confidentiality	CONFIDENTIAL		

VC1613 control logic					SP8T control logic											
VC1	VC2	RF1	RF2	RF3	SP8T control logic											
H	L	Y	N	N	V1	V2	V3	RF1	RF2	RF3	RF4	RF5	RF6	RF7	RF8	
H	H	N	Y	N	L	L	L	N	Y	N	N	N	N	N	N	
N	H	N	N	Y	L	L	H	N	Y	N	N	N	N	N	N	
					L	H	L	N	N	Y	N	N	N	N	N	
					L	H	H	N	N	N	Y	N	N	N	N	
					H	L	L	N	N	N	N	Y	N	N	N	
					H	L	H	N	N	N	N	N	Y	N	N	
					H	H	L	N	N	N	N	N	N	Y	N	
					H	H	H	N	N	N	N	N	N	N	Y	





Power

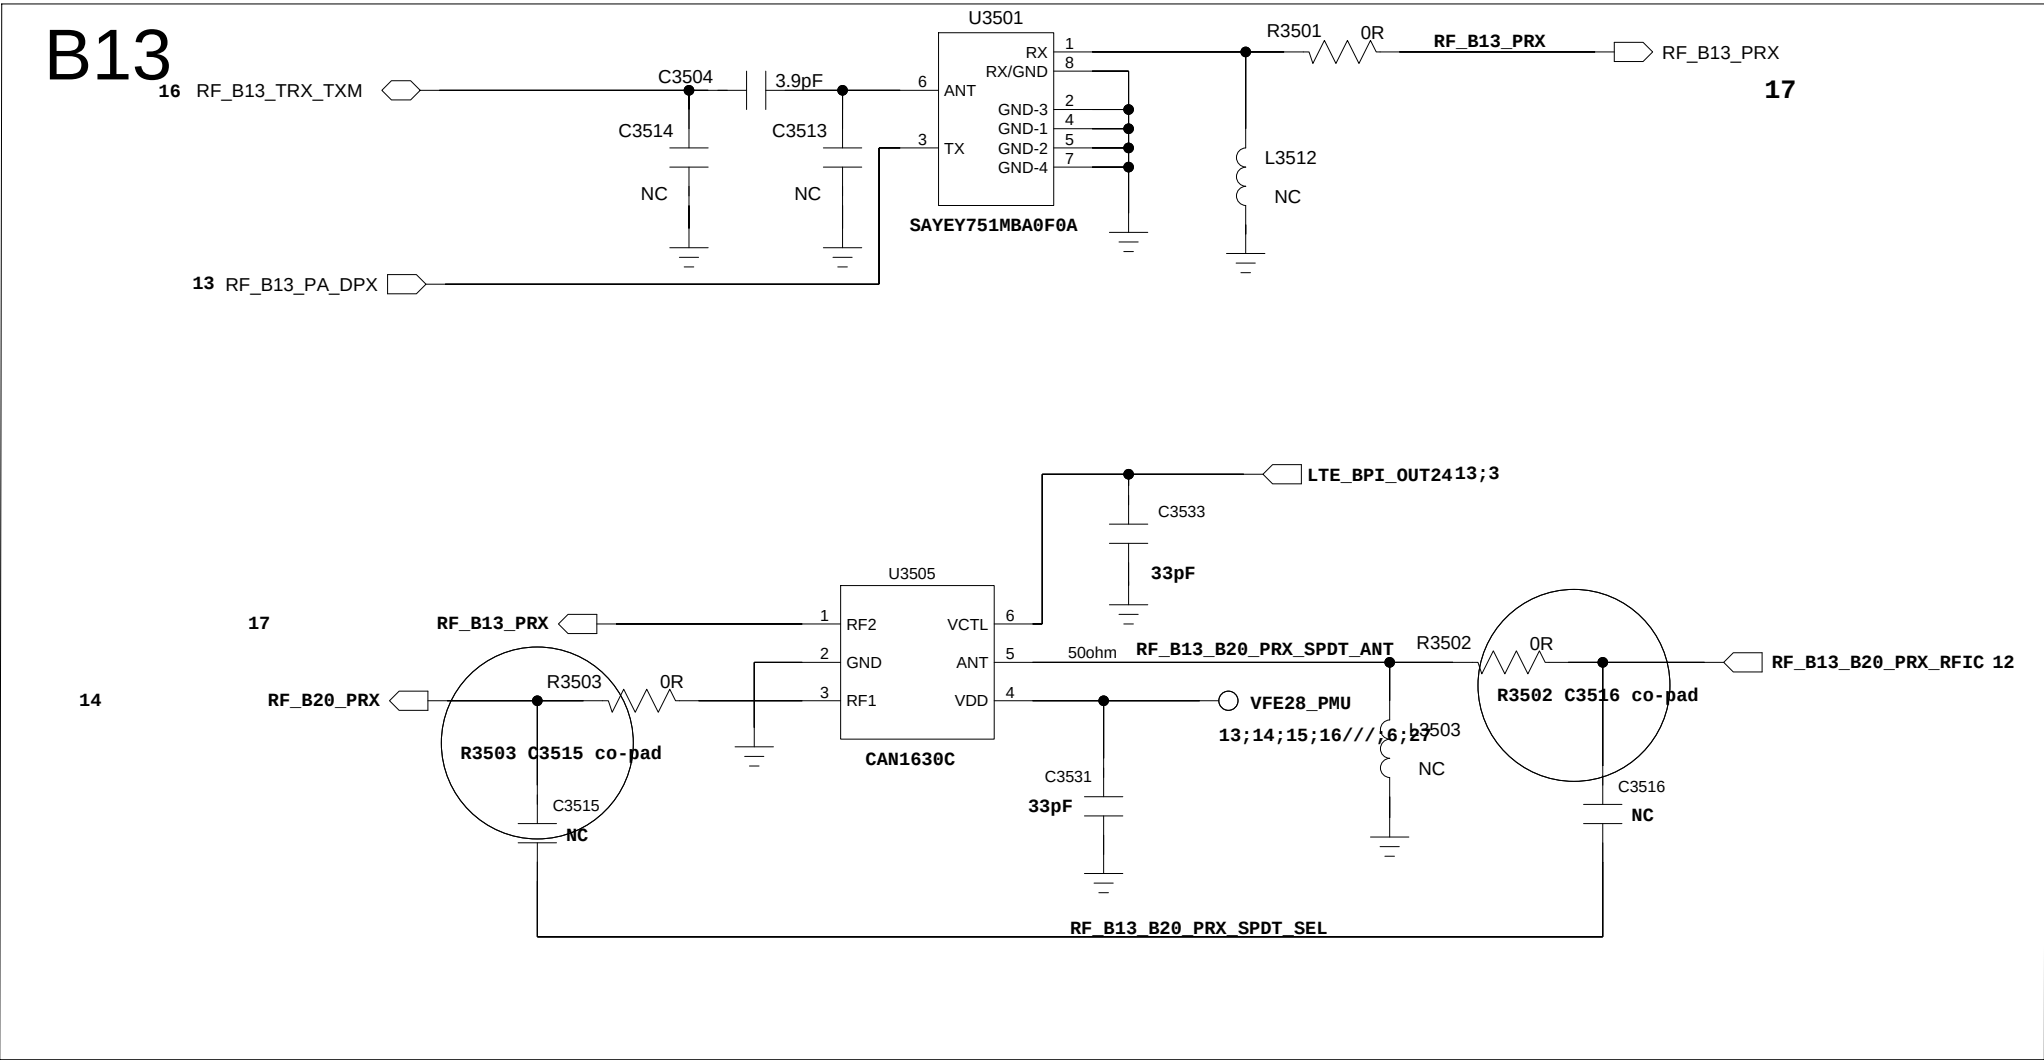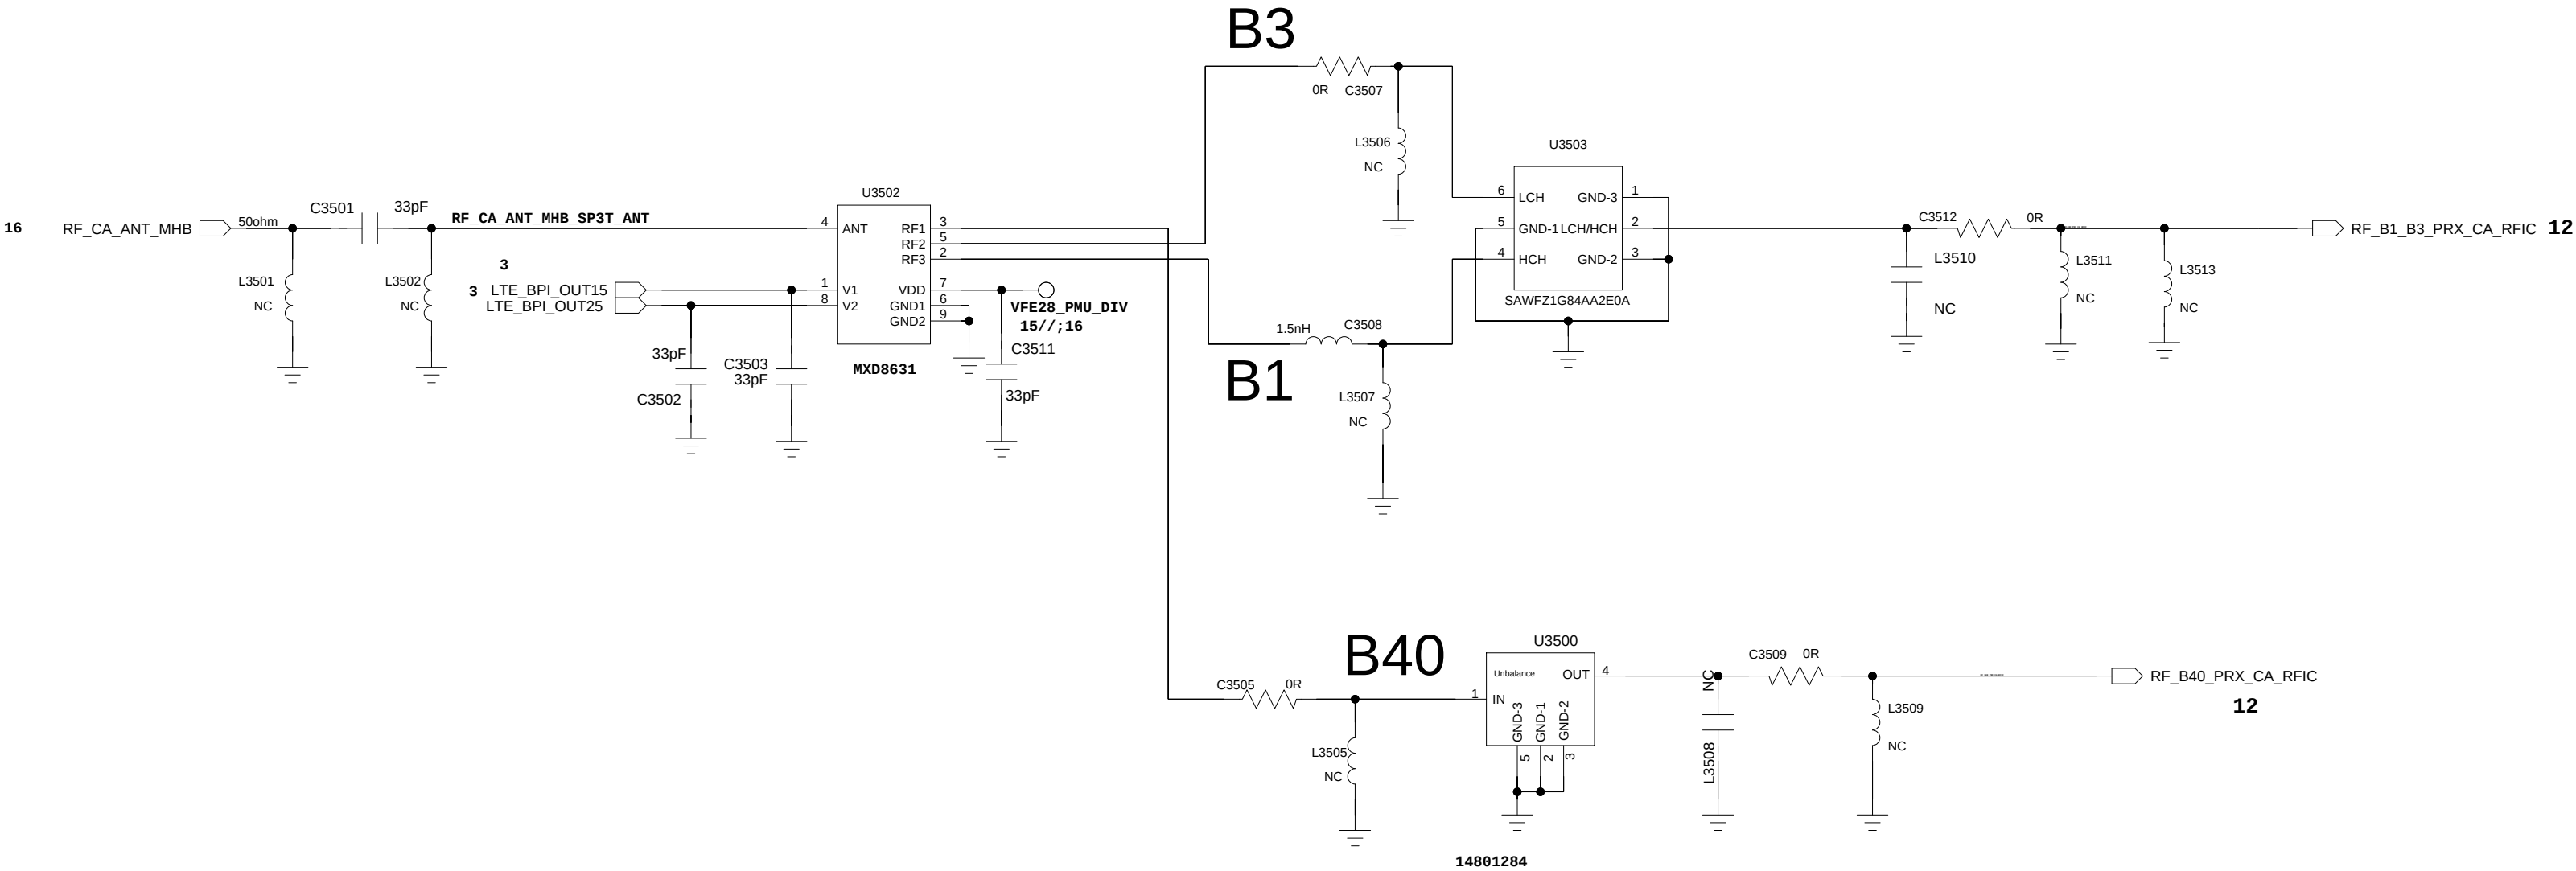

COMPANY: TRANSSION HOLDINGS				MODEL:G99_STD_MAIN		Modified Date: 06/09/2023:15:49	
DRAWN		DATED		TITLE: 35_RF_MT6186M_RF_MHB_CA		VERSION:	SHEET: 17 OF 29
CHECKED		DATED	< >	Confidentiality	CONFIDENTIAL		

MEM_DSC_LPDDR4x

REVISION RECORD			
LTR	ECO NO:	APPROVED:	DATE:

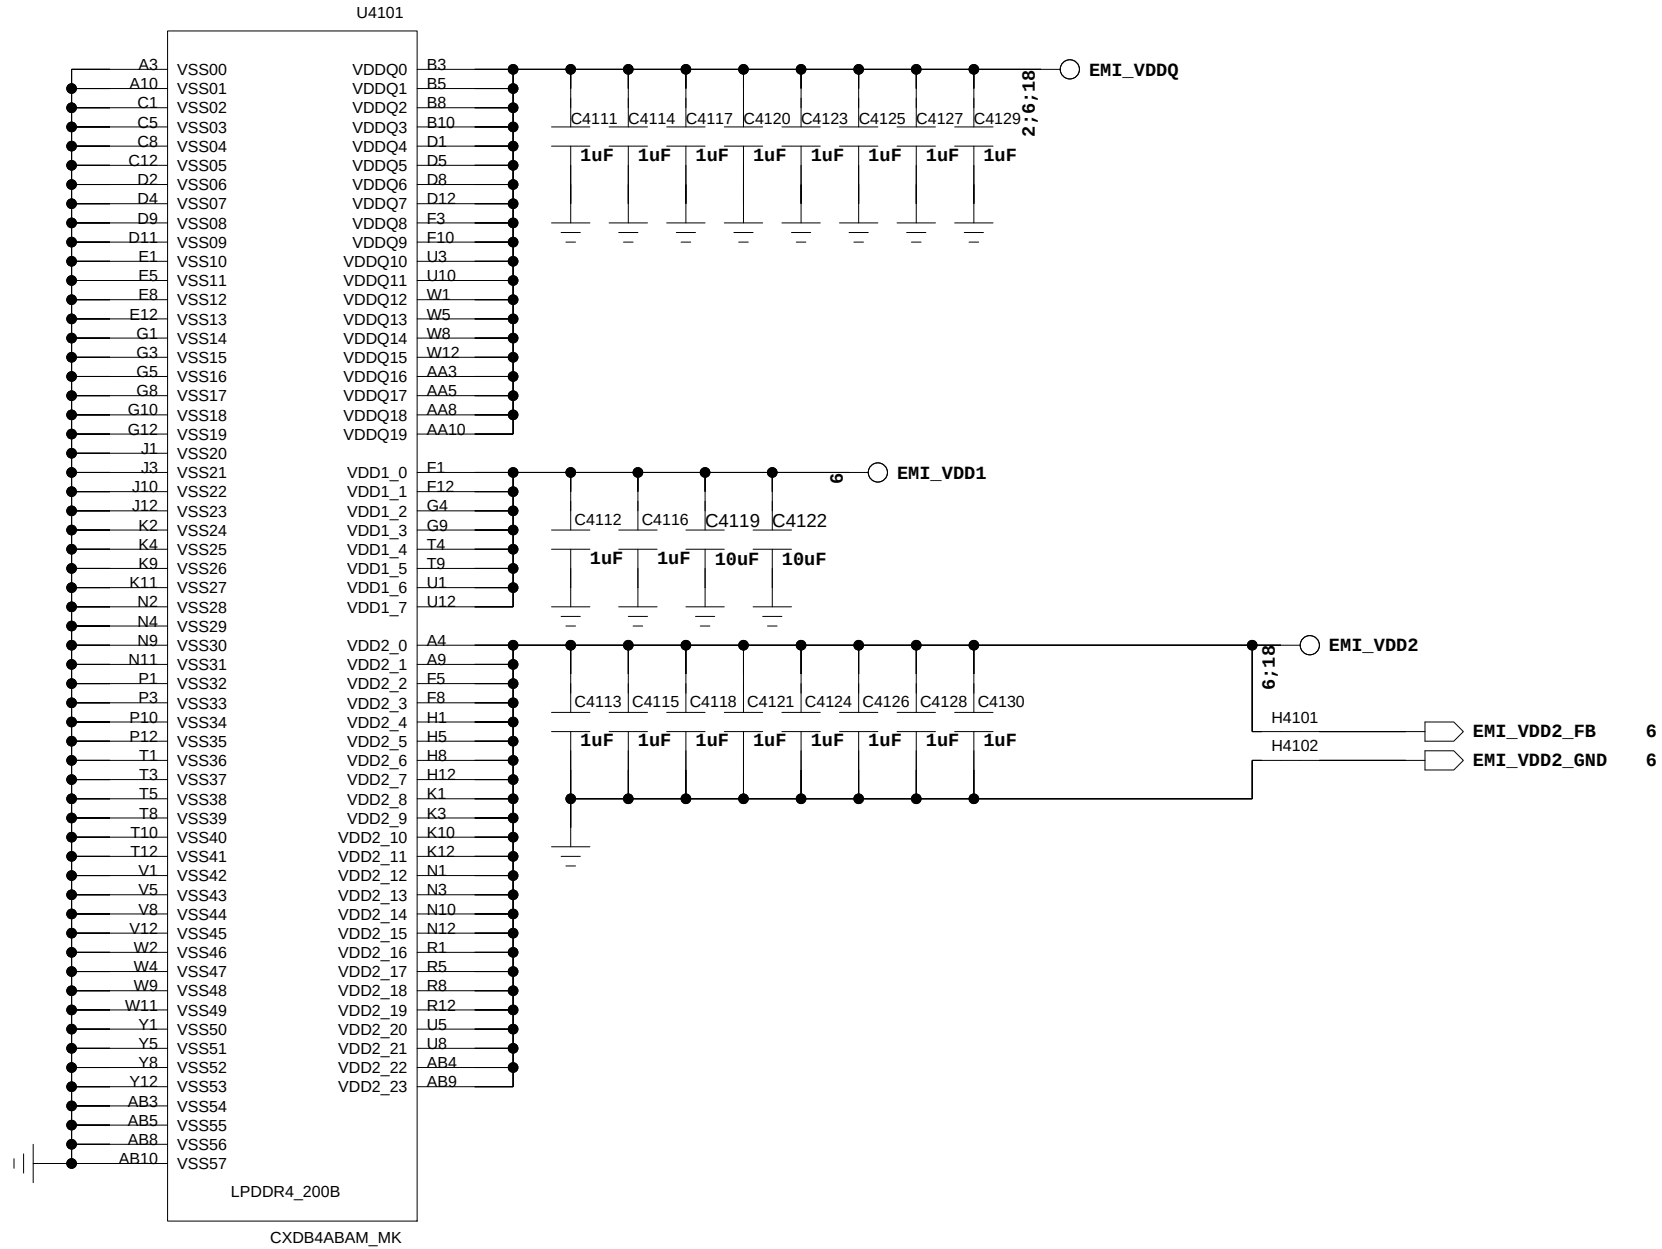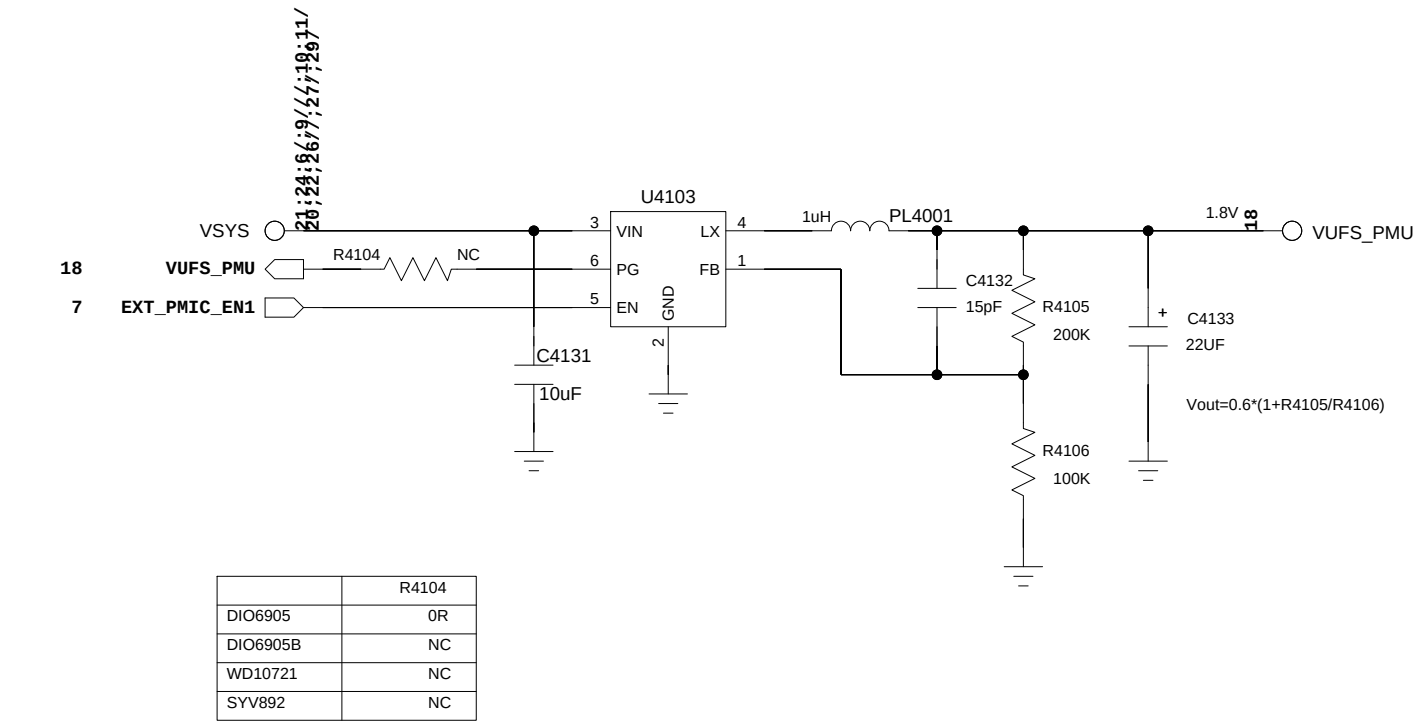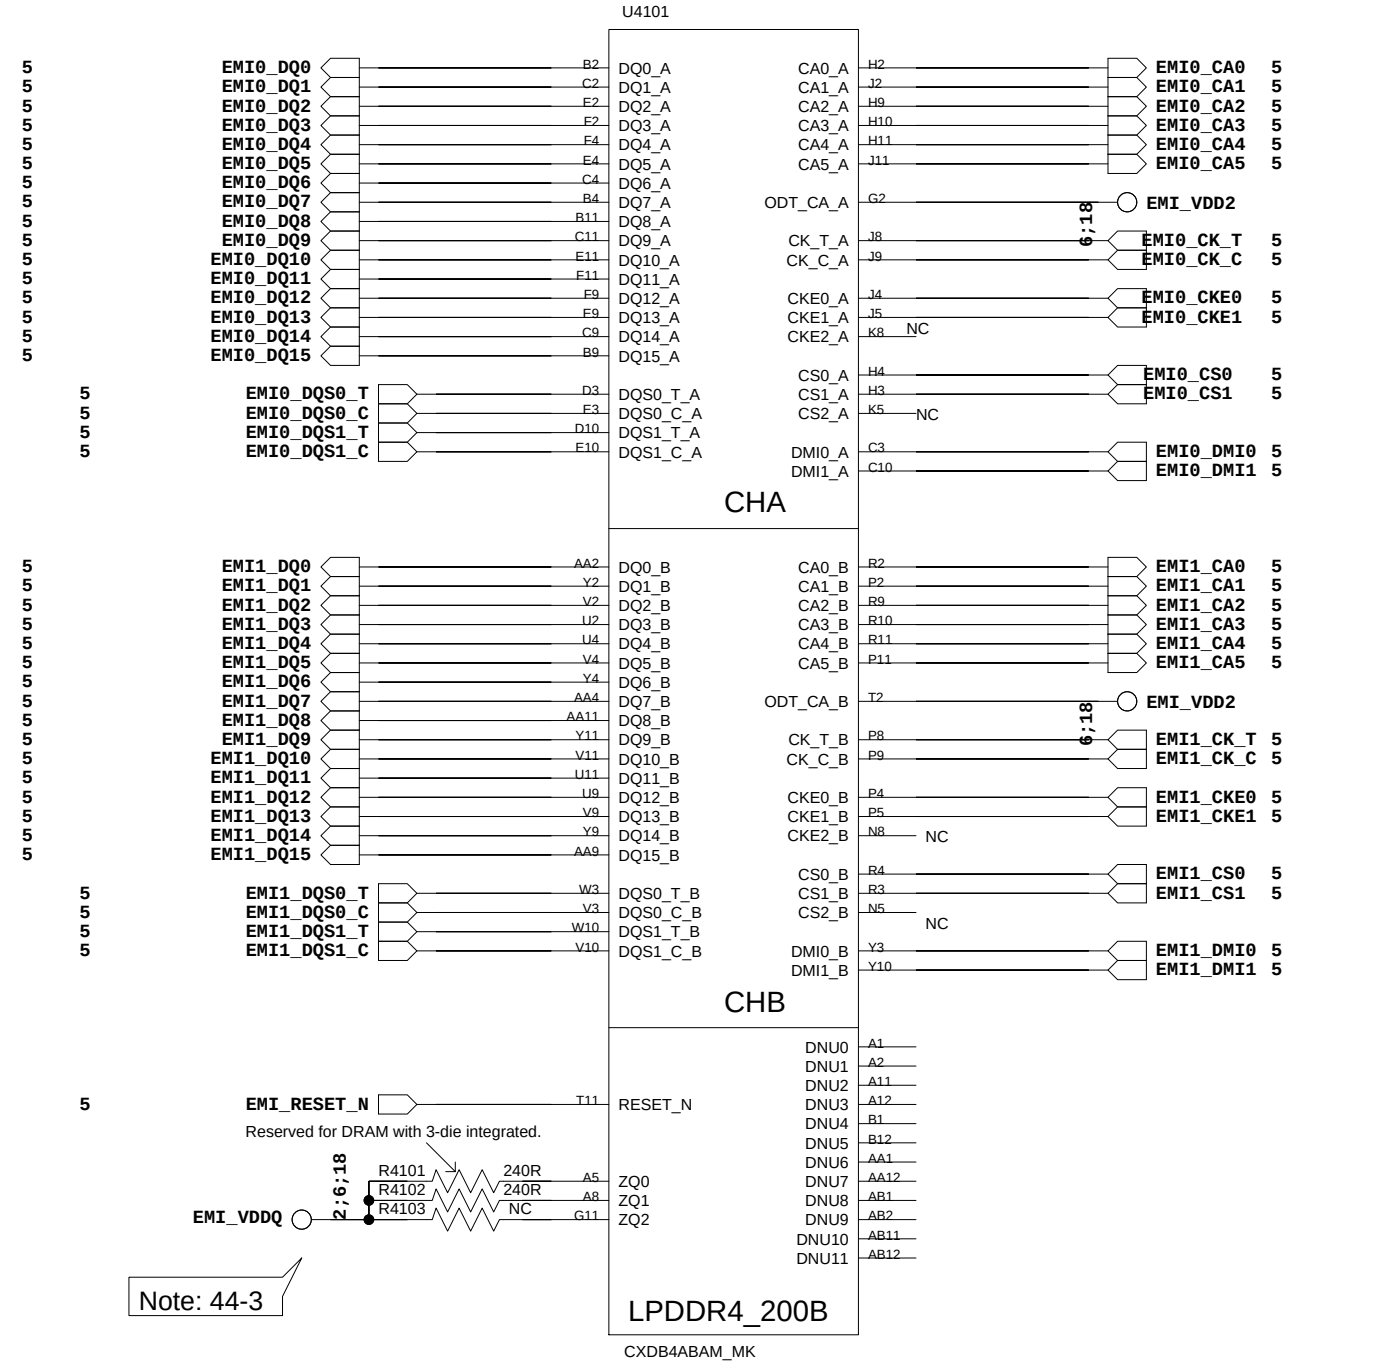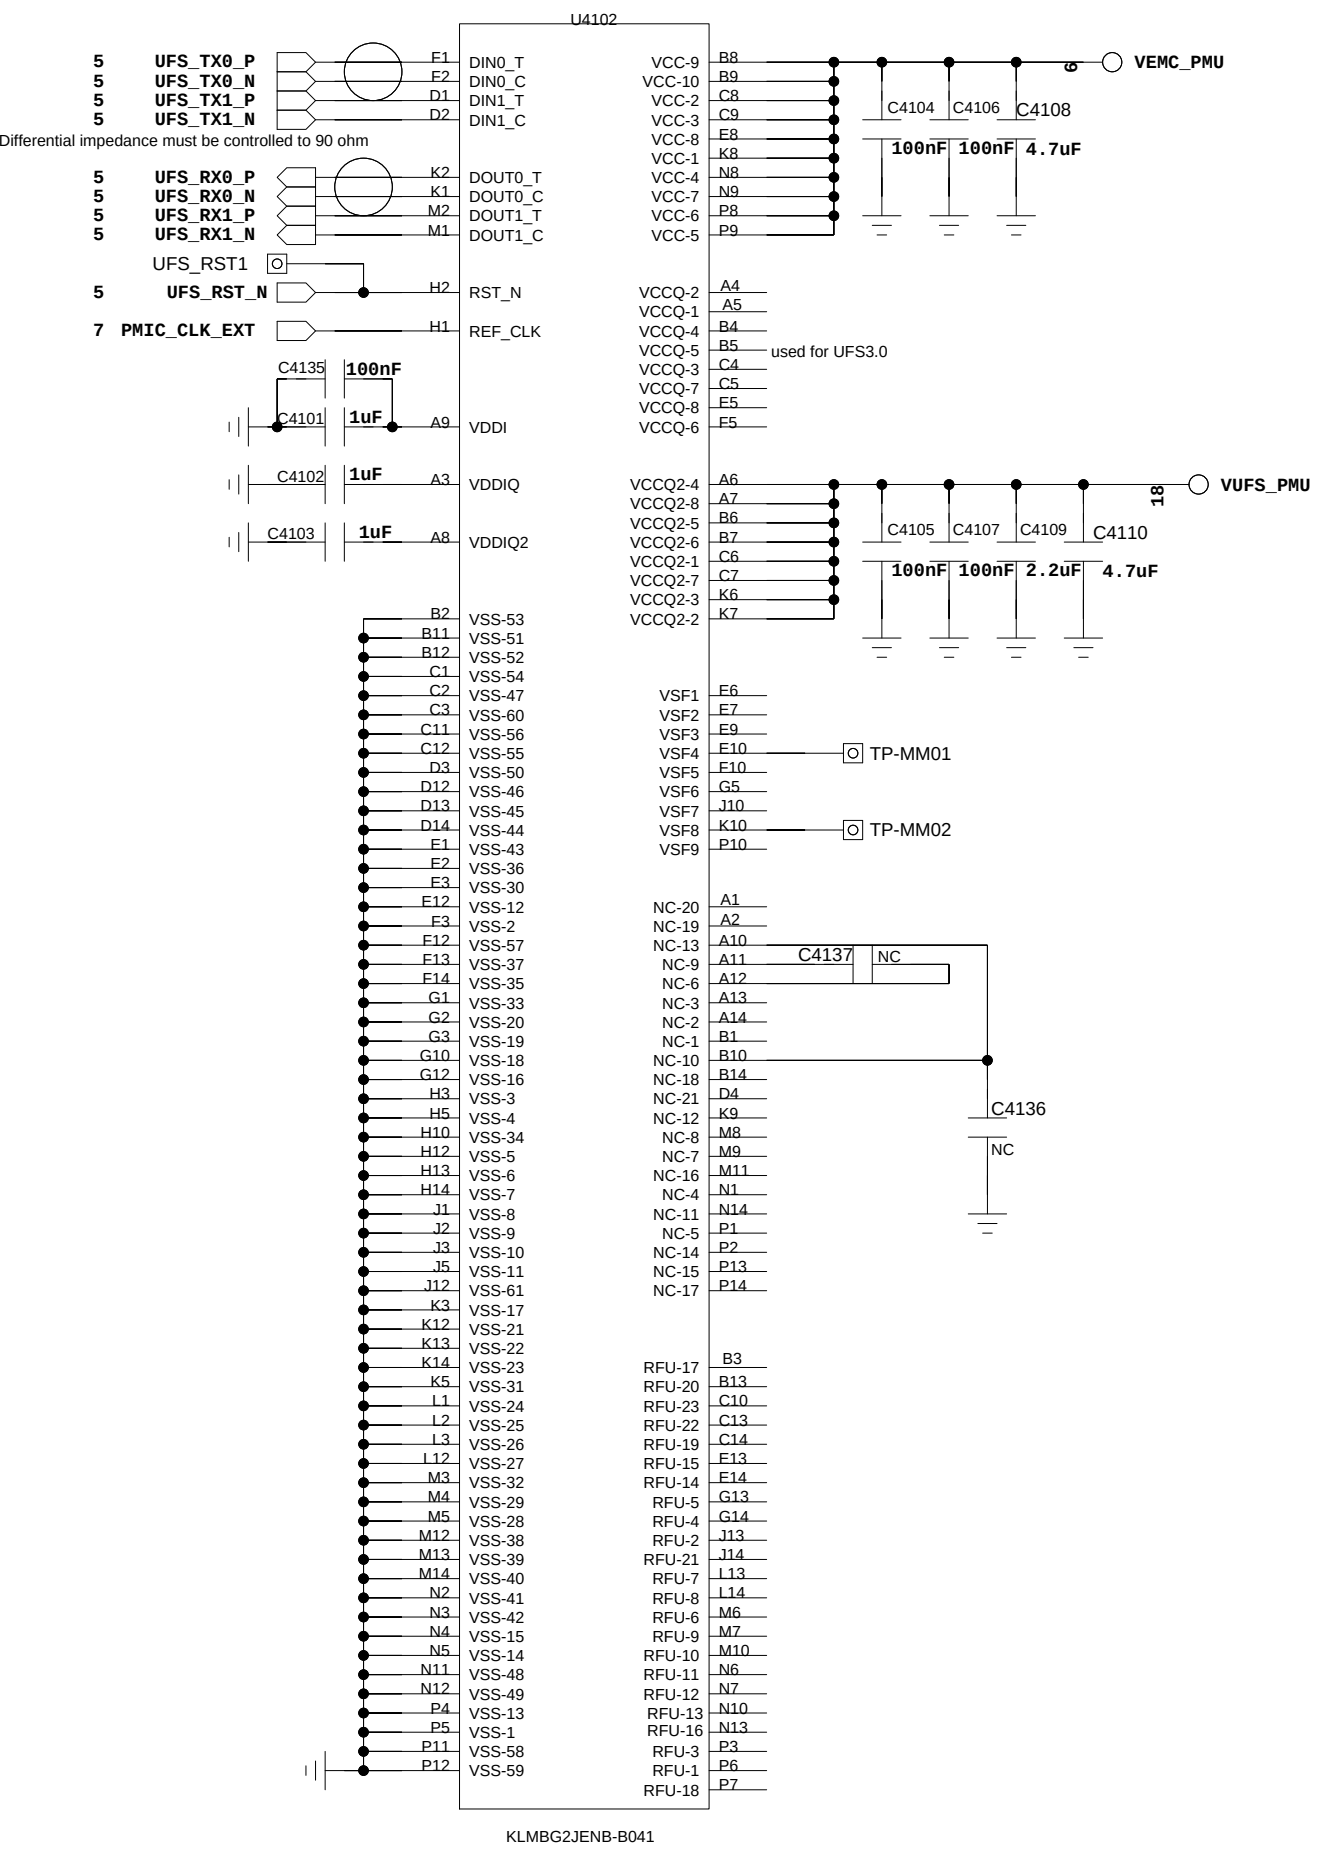

COMPANY: TRANSSION HOLDINGS

MODEL:G99_STD_MAIN

Modified Date: 05/09/2023:16:23

DRAWN

DATED

TITLE: 41_MEMORY_DSC_LPDDR4X

CHECKED

DATED

< >


Confidentiality

CONFIDENTIAL

VERSION:

SHEET: 18 OF 29

REVISION RECORD			
LTR	ECO NO:	APPROVED:	DATE:

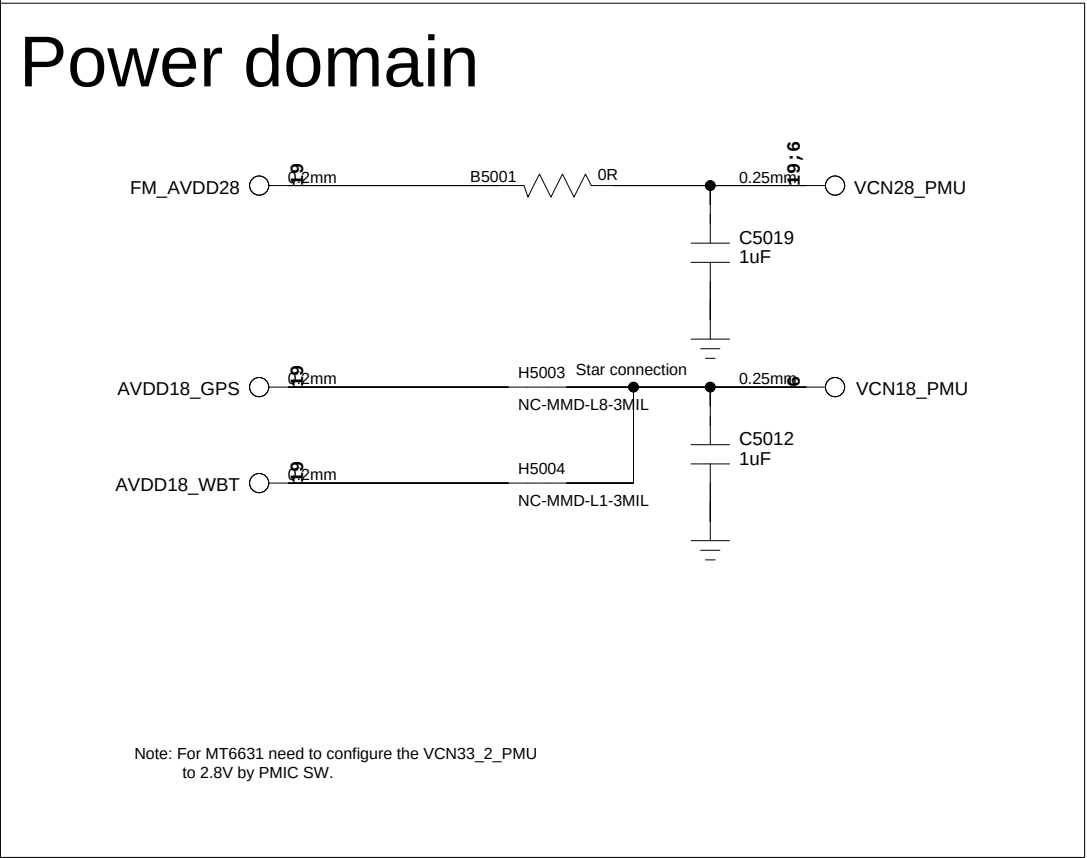


COMPANY: TRANSSION HOLDINGS				MODEL:G99_STD_MAIN		Modified Date: 08/09/2023:09:35	
DRAWN		DATED		TITLE: 50_CONNECTIVITY_MT6631		VERSION:	SHEET: 19 OF 29
CHECKED		DATED	< >	Confidentiality	CONFIDENTIAL		


PERI_AUDIO_IO

Audio_PA_TOP


FS1599N:I2C ADDRESS:0x6A(W)/0x6B(R)

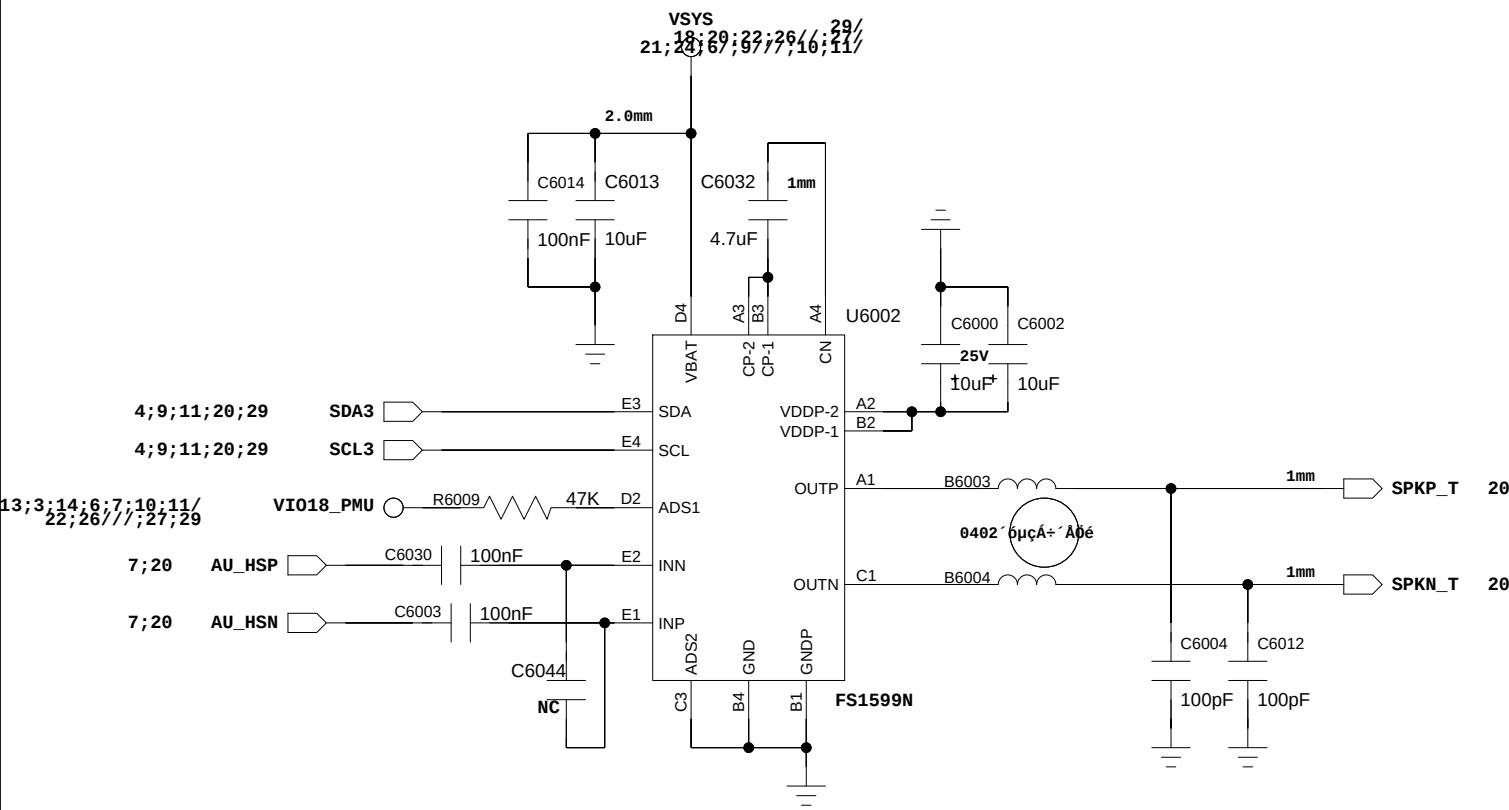

SUB MIC

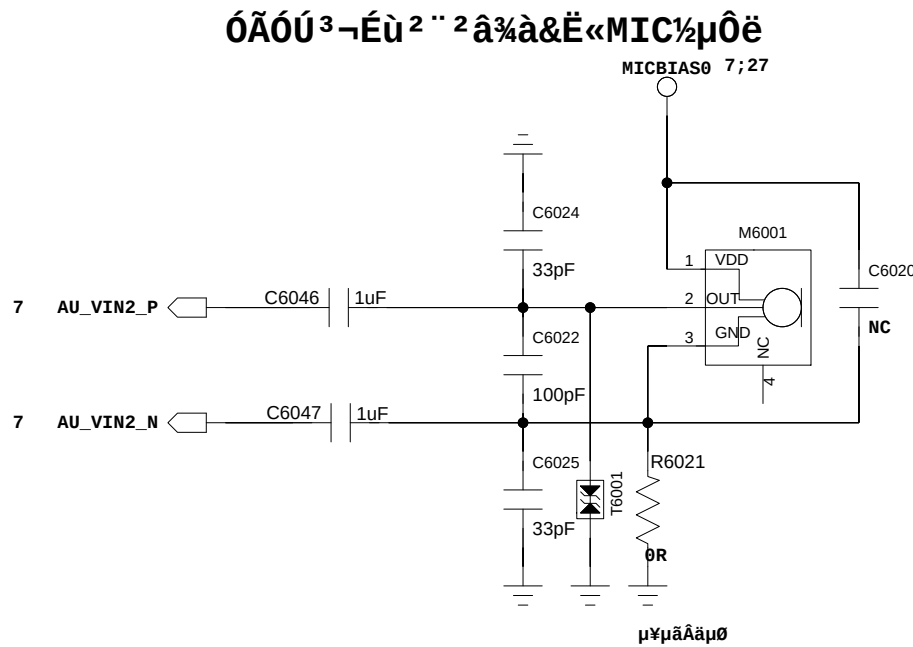


Receiver

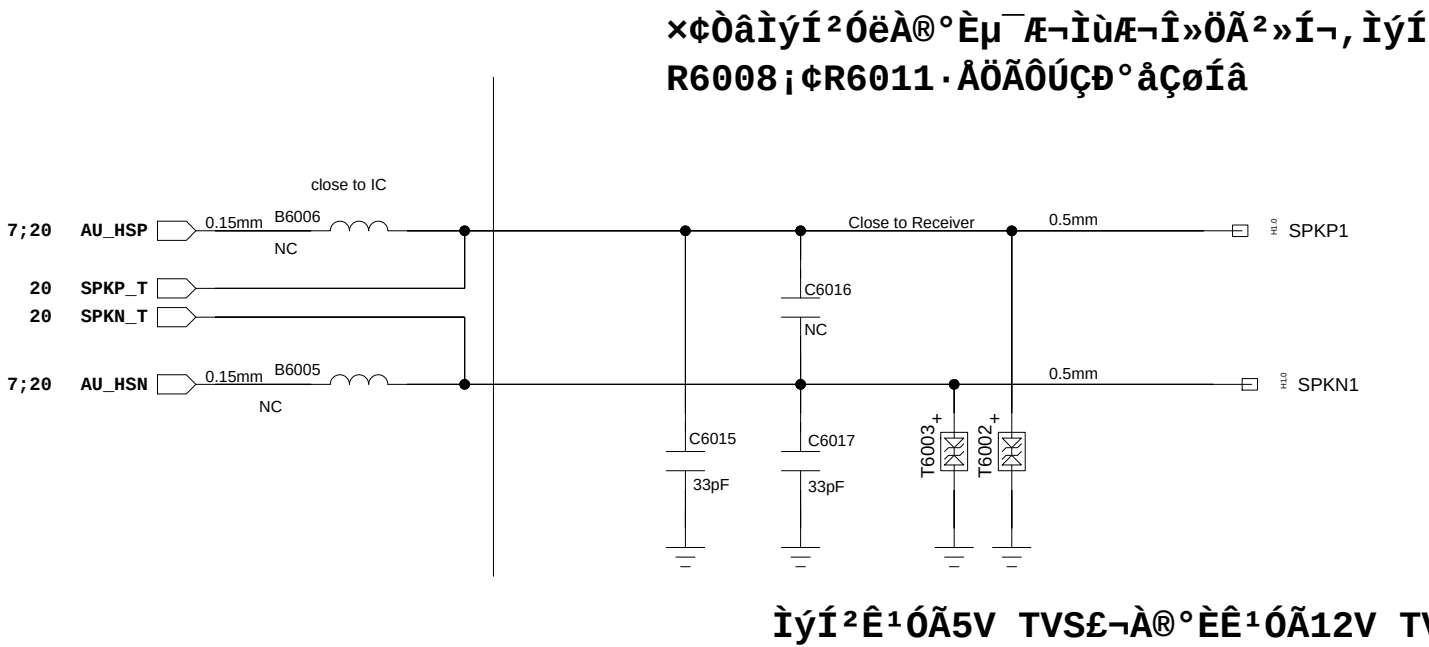


Audio_PA_BOTTOM

FS1599N:I2C ADDRESS:0x68(W)/0x69(R)

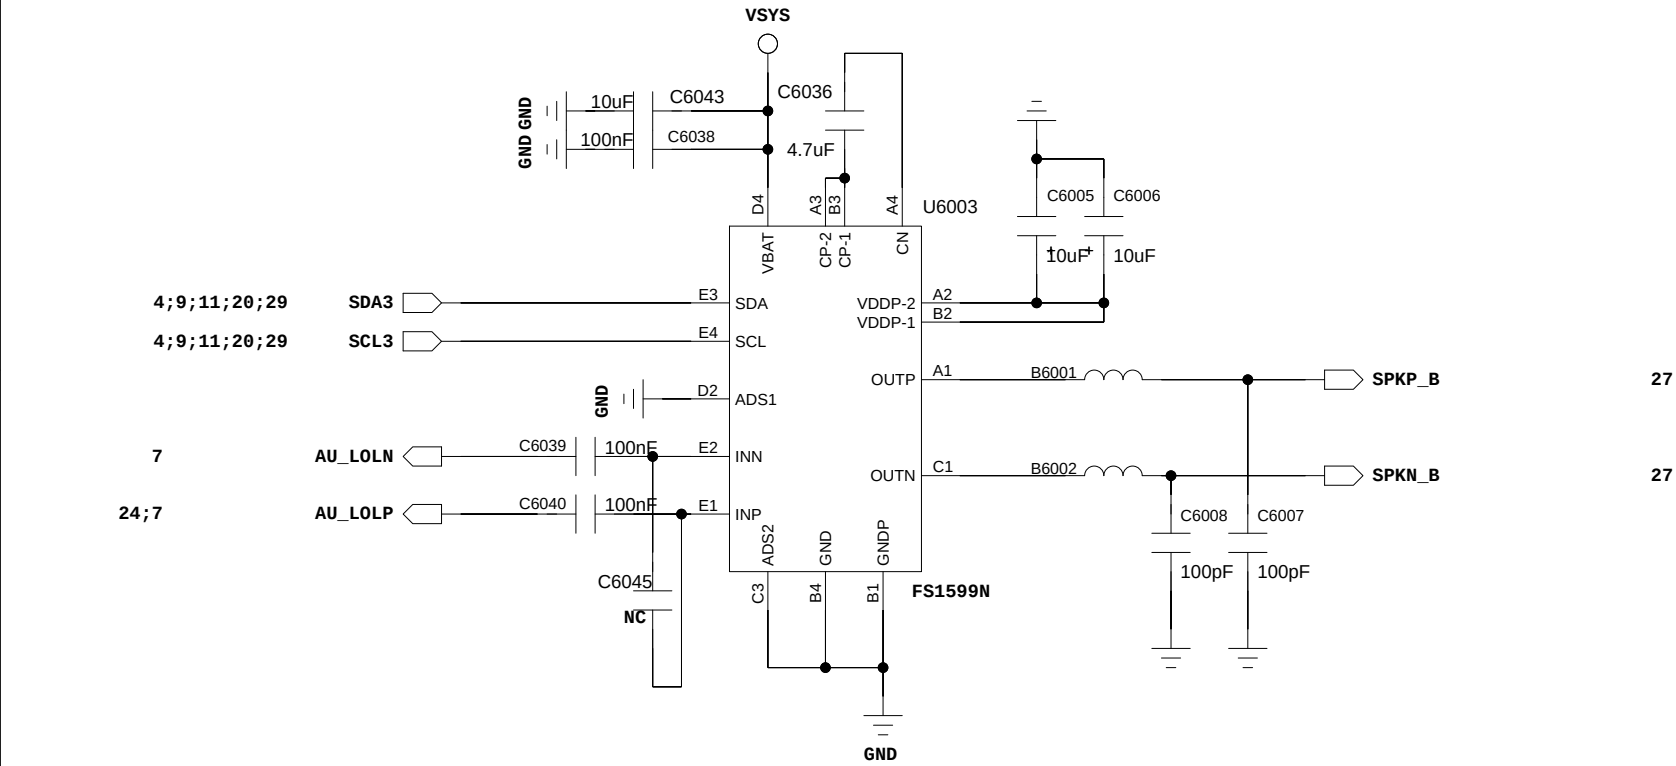


MAIN MIC

DCC Mode

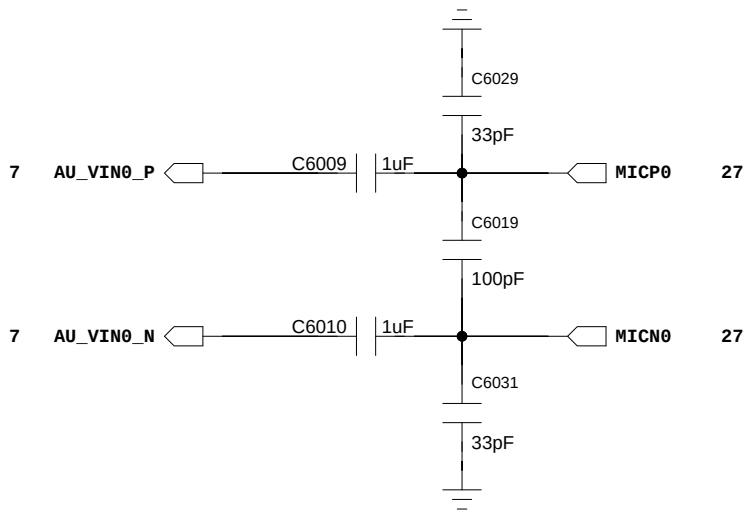


Earphone MICPHONE

ACC MODE

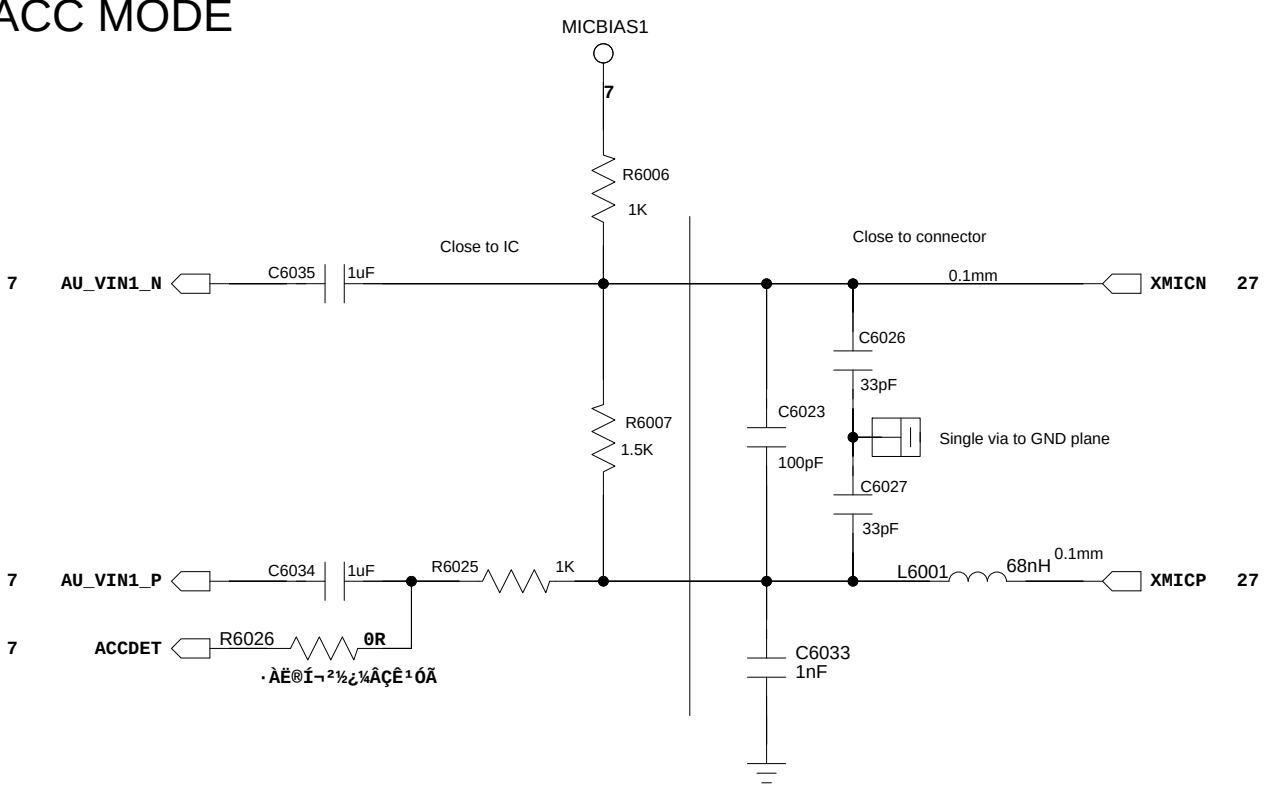

Earphone Receiver

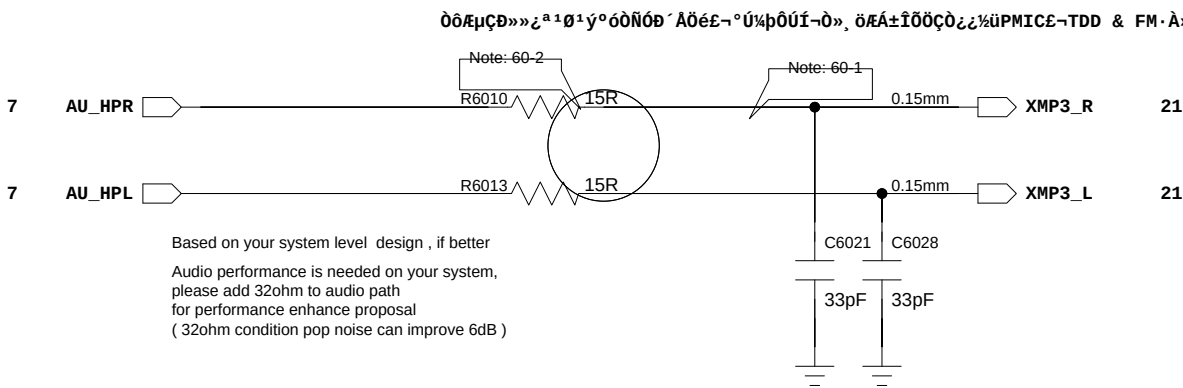

- Schematic design notice of "60_PERI_AUDIO_IO" page:
- Note 60-1: B6009-B6010-B6013-B6014 needs change to "BLM188D102SN1" for high THD performance(-90dB), but this BOM change will result in FM RSSI 10dB degraded.
- Note 60-2: To reserve a resistor in HPL and HPR in series connection both in order to optimize headphone pop noise. The recommended value of this resistor is 33R.
- Note 60-3: Layout trace from MT6353 ball 33-AUDREFN to Audio jack GND must surround shield with GND.
- Note 60-4: Only support DCC mode.

COMPANY: TRANSSION HOLDINGS

MODEL:G99_STD_MAIN

Modified Date: 11/01/2024:09:55

DRAWN

DATED

TITLE: 60_PERI_AUDIO_I

CHECKED

DATED

< >

Confidentiality

CONFIDENTIAL

VERSION:


SHEET: 20 OF 29

PERI_AUDIO_IO

REVISION RECORD			
LTR	ECO NO:	APPROVED:	DATE:

Type C¶ú»ú¿^{a 1}øμçÂ.


MIC & GNDÇĐ»»»¿ª¹Ø·ÅĐ; °å£¬İáÉýÒôÆμ, úFMĐÔÄÜ

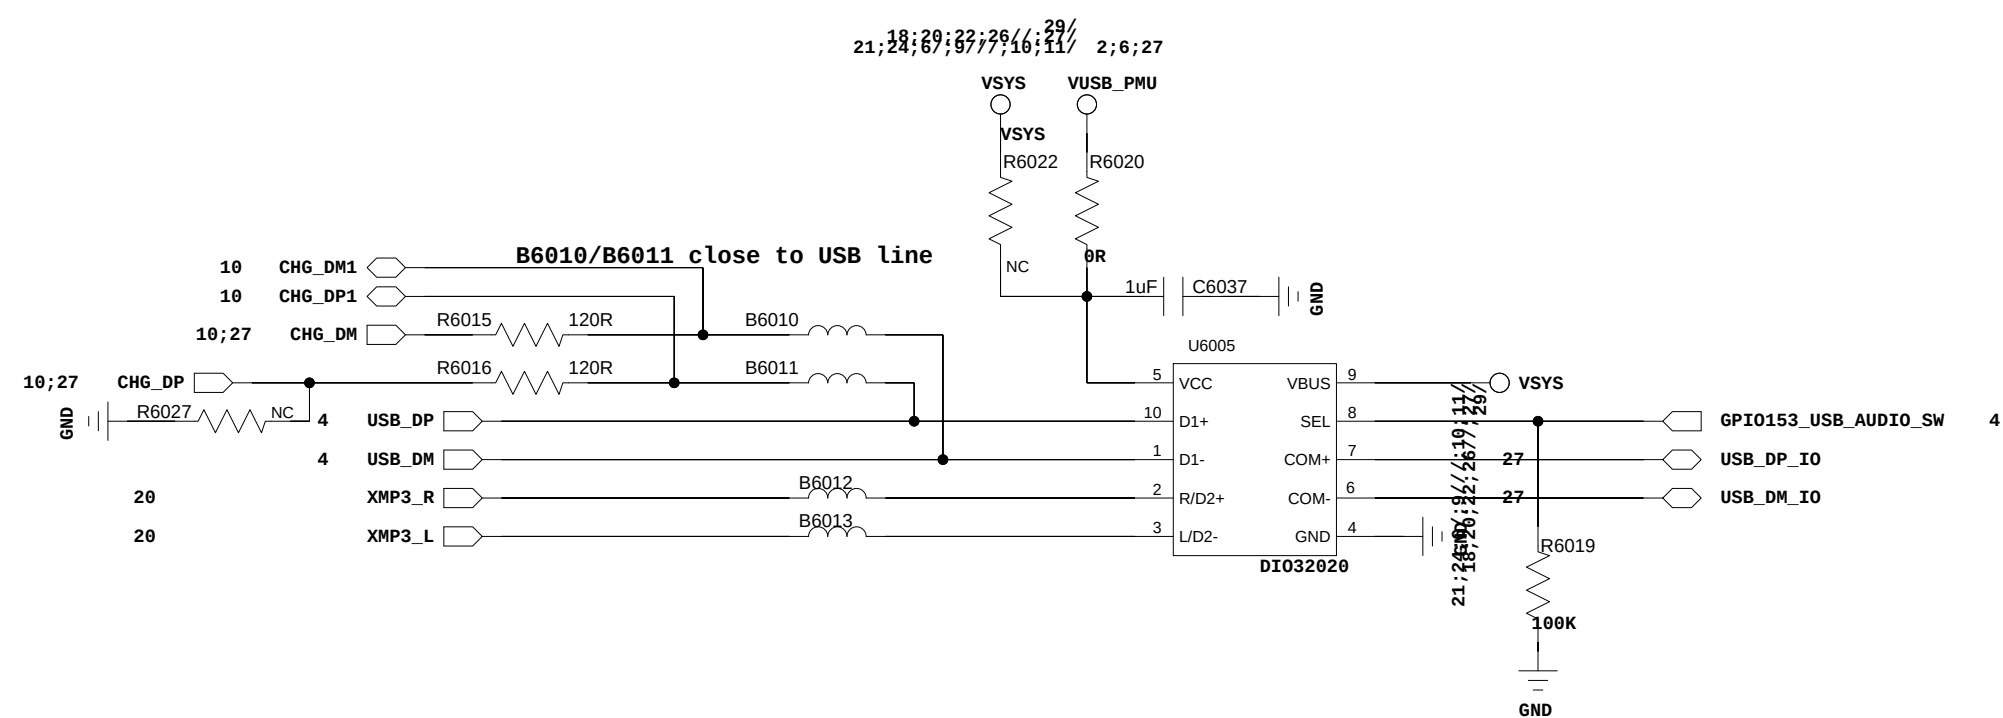

COMPANY: TRANSSION HOLDINGS				MODEL: G99_STD_MAIN		Modified Date: 05/09/2023:16:23	
DRAWN		DATED		TITLE: 60_PERI_AUDIO_II		VERSION:	SHEET: 21 OF 29
CHECKED		DATED	< >	Confidentiality	CONFIDENTIAL		

PERI_CAMERA_I


(CAM I 64M/50M)

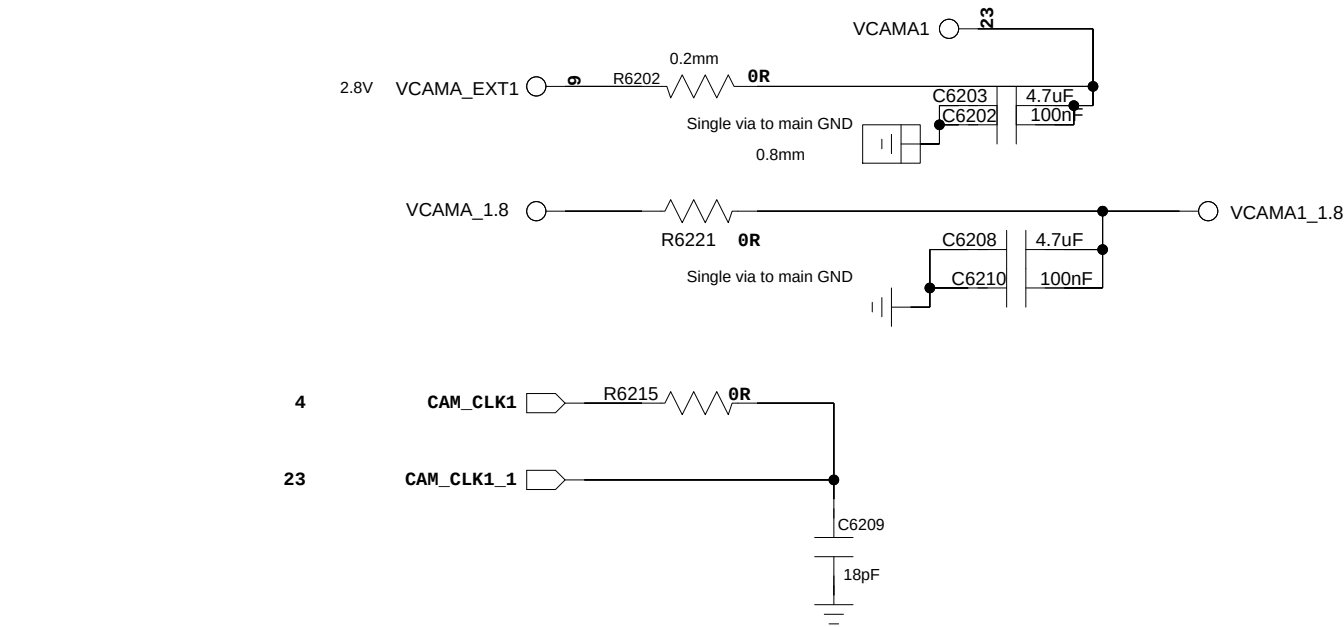

50M1ã½Ç

REVISION RECORD			
LTR	ECO NO:	APPROVED:	DATE:

(CAM II 108M/50M OIS)

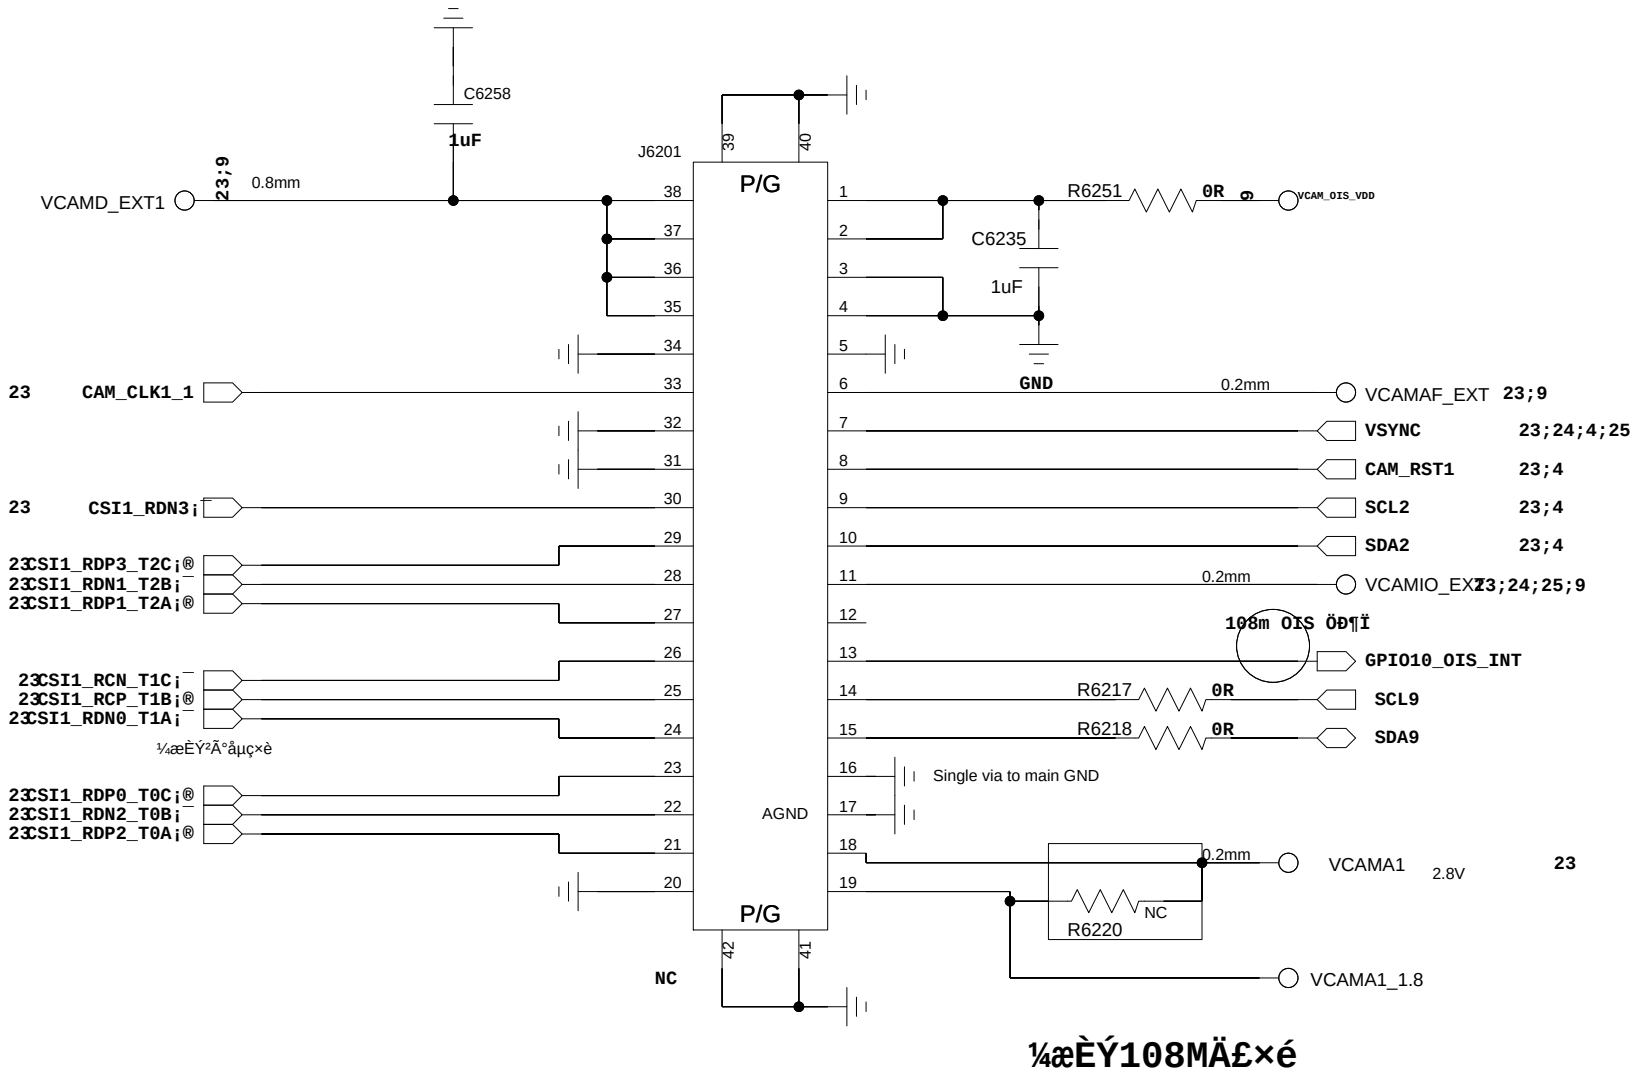


Ö÷ÉãÐÃİç

COMPANY: TRANSSION HOLDINGS				MODEL:G99_STD_MAIN		Modified Date: 11/01/2024:17:02	
DRAWN		DATED		TITLE: 62_PERI_CAMERA_I		VERSION:	SHEET: 23 OF 29
CHECKED		DATED	< >	Confidentiality	CONFIDENTIAL		

CAM III (2M)

CAM IV (2M)


REVISION RECORD			
LTR	ECO NO:	APPROVED:	DATE:

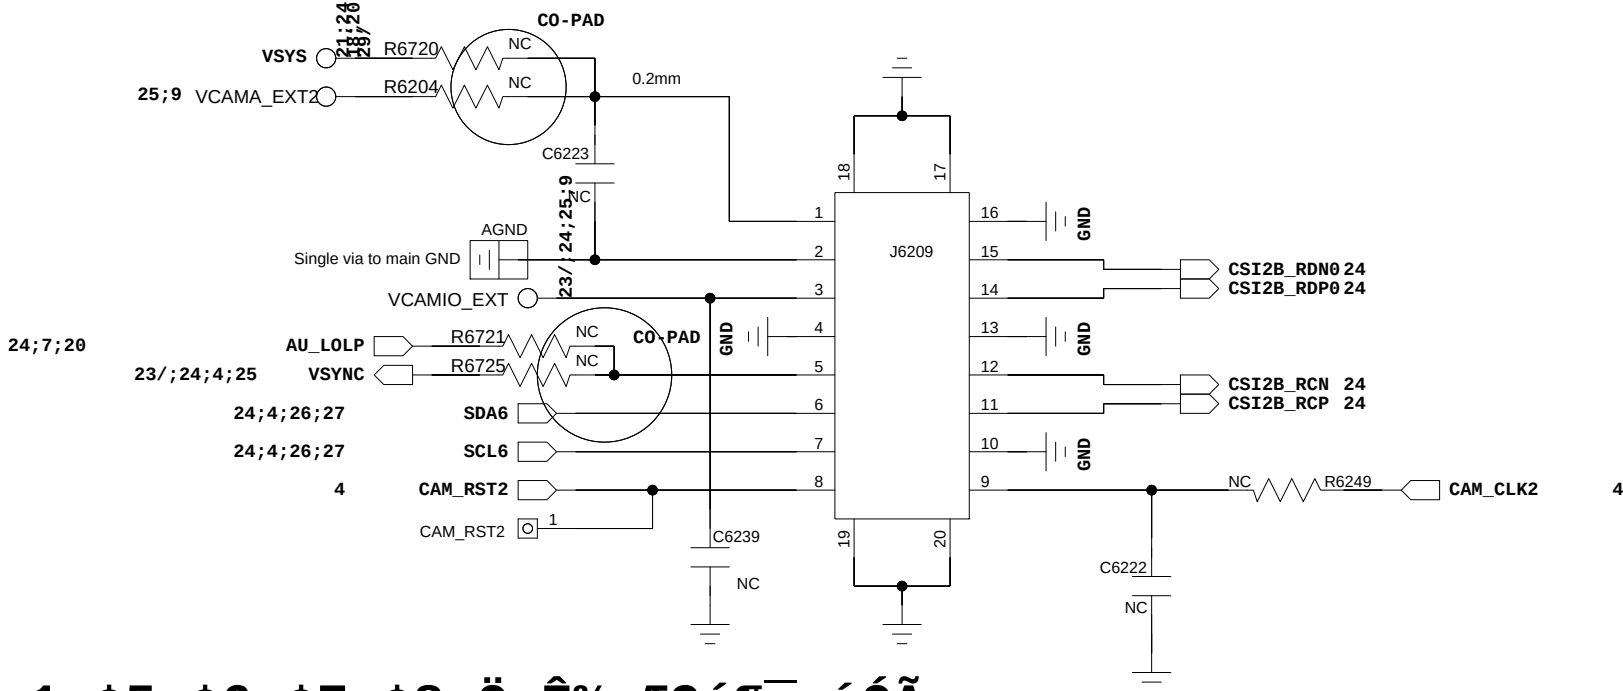


1;5;6;7;8 Ö, ÊµÆÇýΠ´, ´ÓÃ
Ê¼°ôÎüµÆÐèÇó R6702¿´ÊÇ·ñÌùÆ¬

2MÐé»	AVDD	DVDD	IOVDD	I2C addr
	2M(17201755) GC02M1-C24Y0 (CSP)	2.8V,40mA /	1.8V,70mA	sensor:0x20(W)/0x21(R)

CAM VI (QVGA)

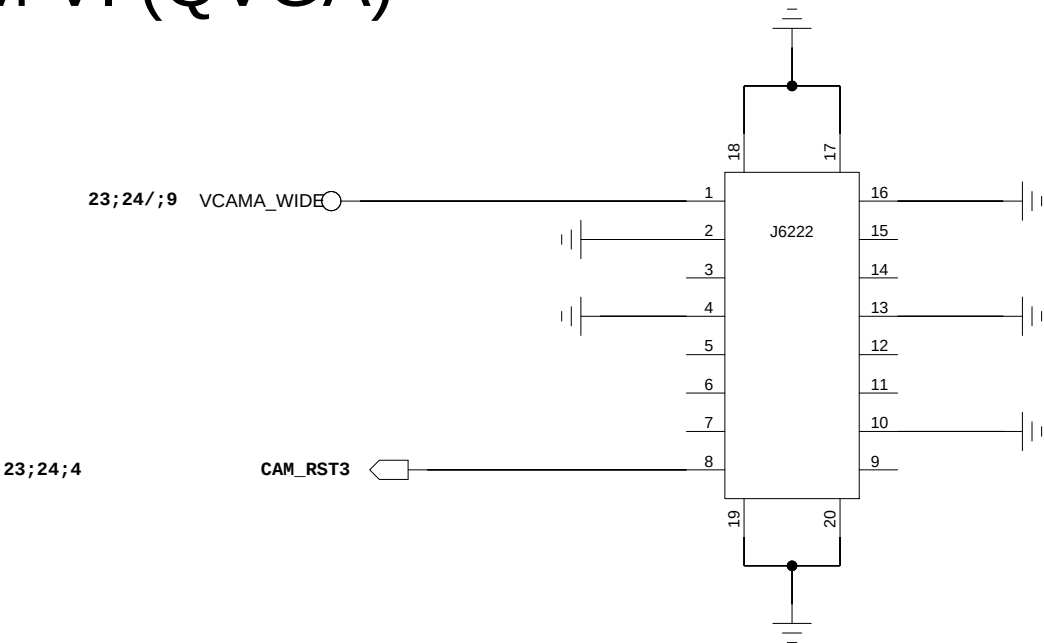

¿¿¼ü·Ö°åµÄÉãĭńÍ··ÄÖÃ

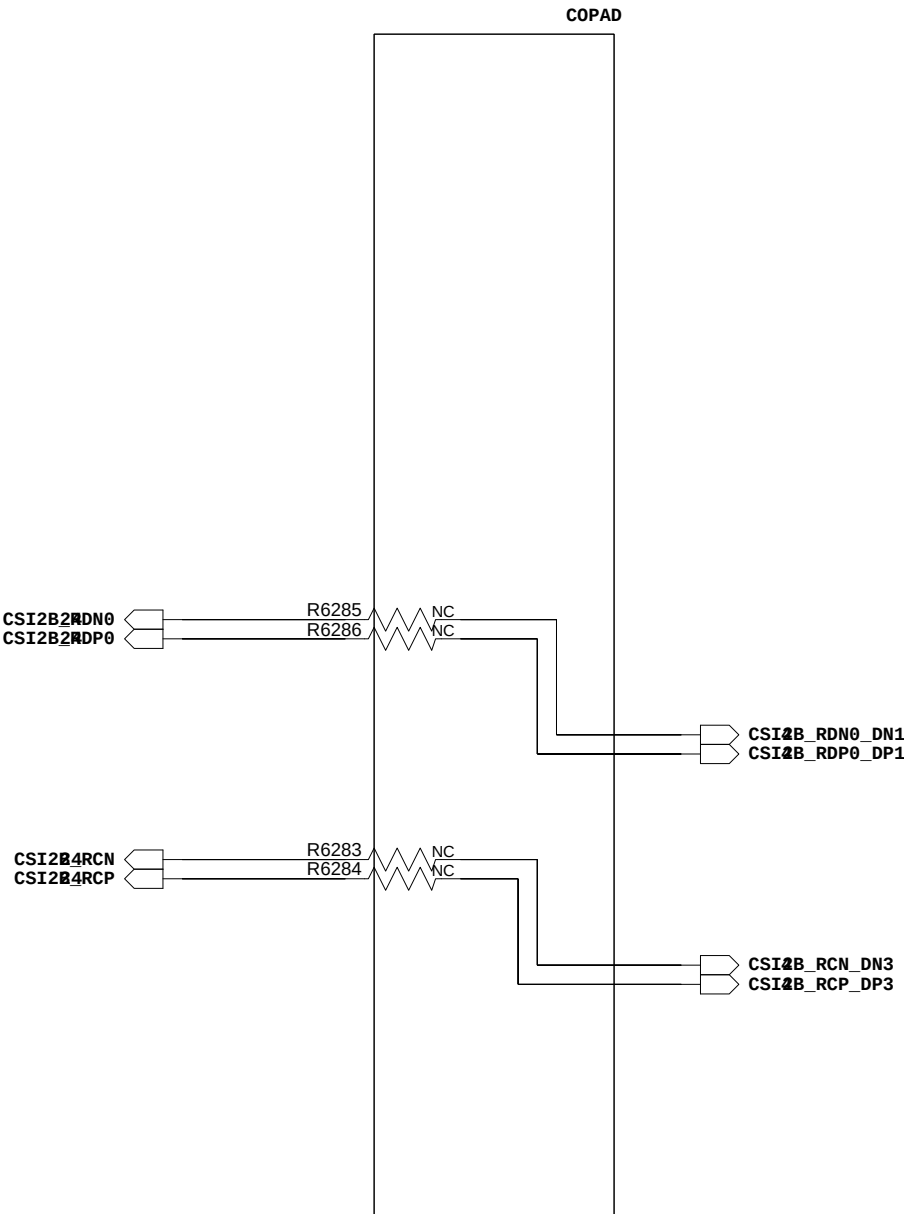


COMPANY: TRANSSION HOLDINGS				MODEL: G99_STD_MAIN		Modified Date: 12/01/2024:10:17	
DRAWN		DATED		TITLE: 62_PERI_CAMERA_II		VERSION:	SHEET: 24 OF 29
CHECKED		DATED	< >	Confidentiality	CONFIDENTIAL		

PERI_CAMERA_III

FRONT MAIN CAMERA (8M/16M/32M/50M)

REVISION RECORD			
LTR	ECO NO:	APPROVED:	DATE:

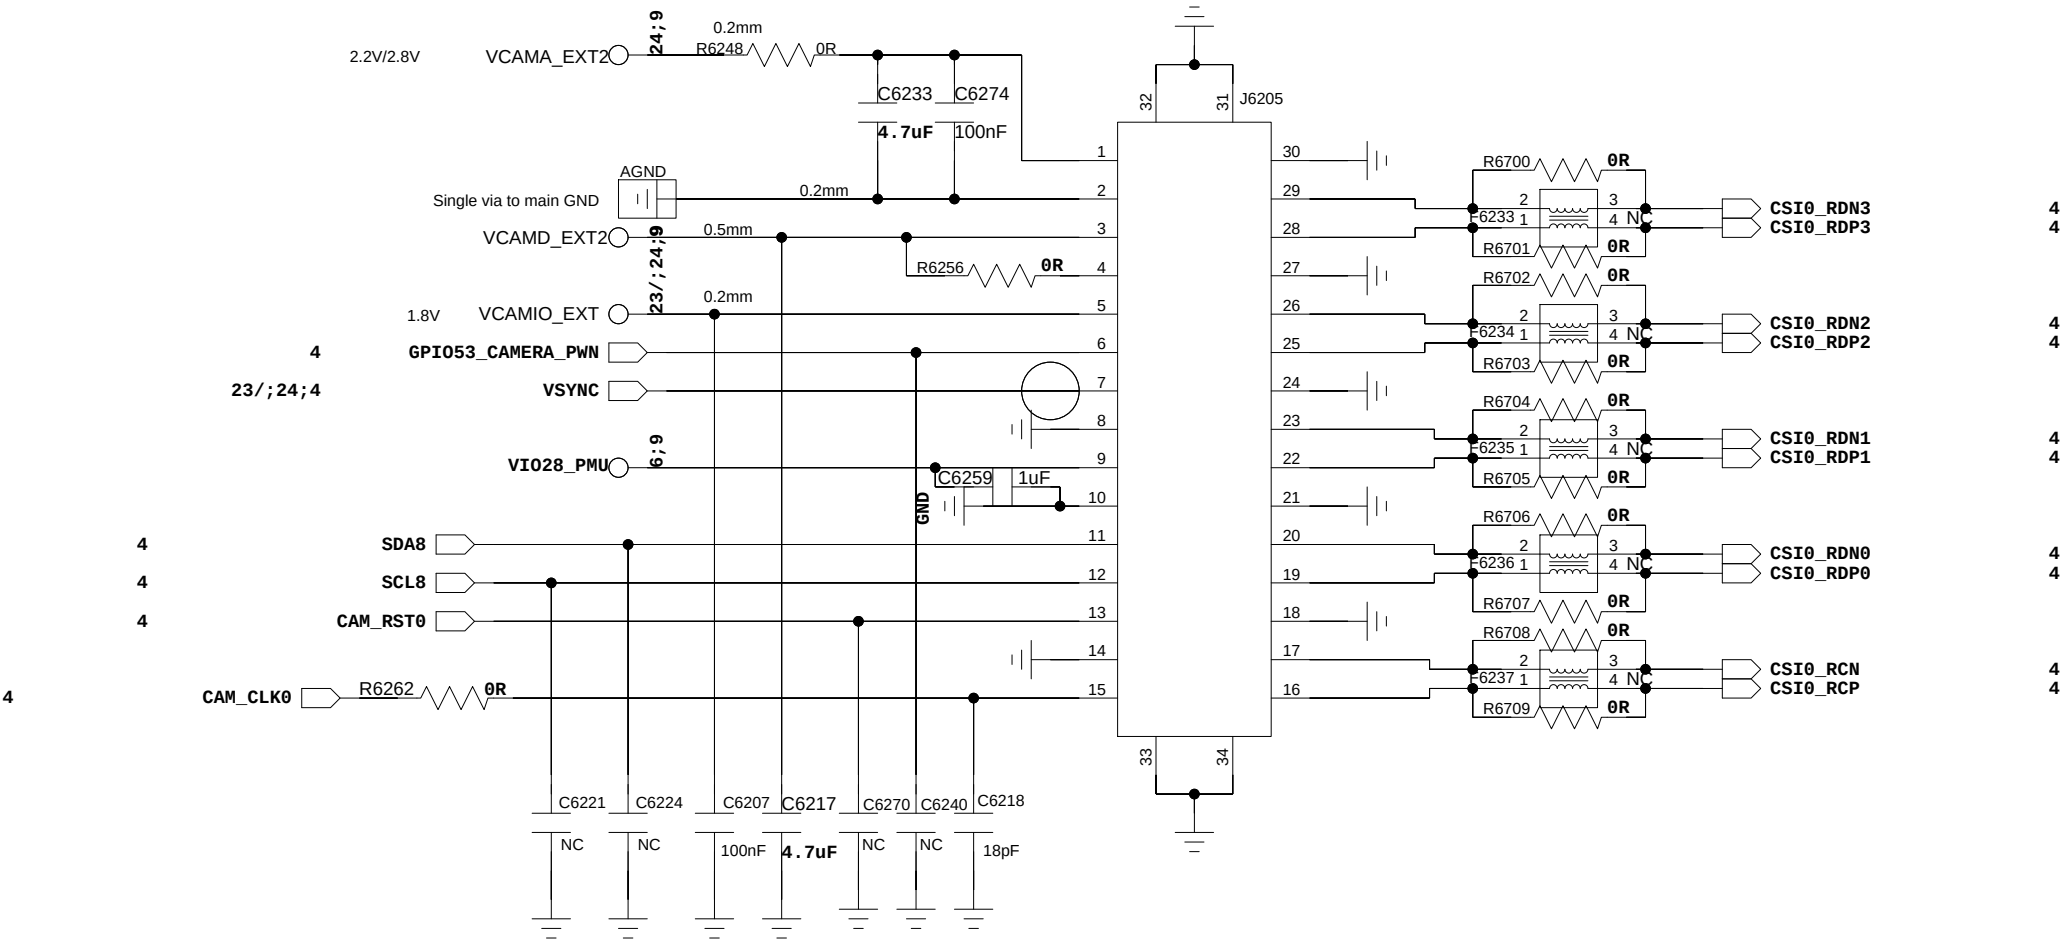




ç°ÉãÐÃİç

COMPANY: TRANSSION HOLDINGS				MODEL: G99_STD_MAIN		Modified Date: 05/09/2023:16:23	
DRAWN		DATED		TITLE: 62_PERI_CAMERA_III		VERSION:	SHEET: 25 OF 29
CHECKED		DATED	< >	Confidentiality	CONFIDENTIAL		


REVISION RECORD			
LTR	ECO NO:	APPROVED:	DATE:

G-Sensor + Gyro Sensor


VEML36198A30U I2C address£°0XC0/0XC1

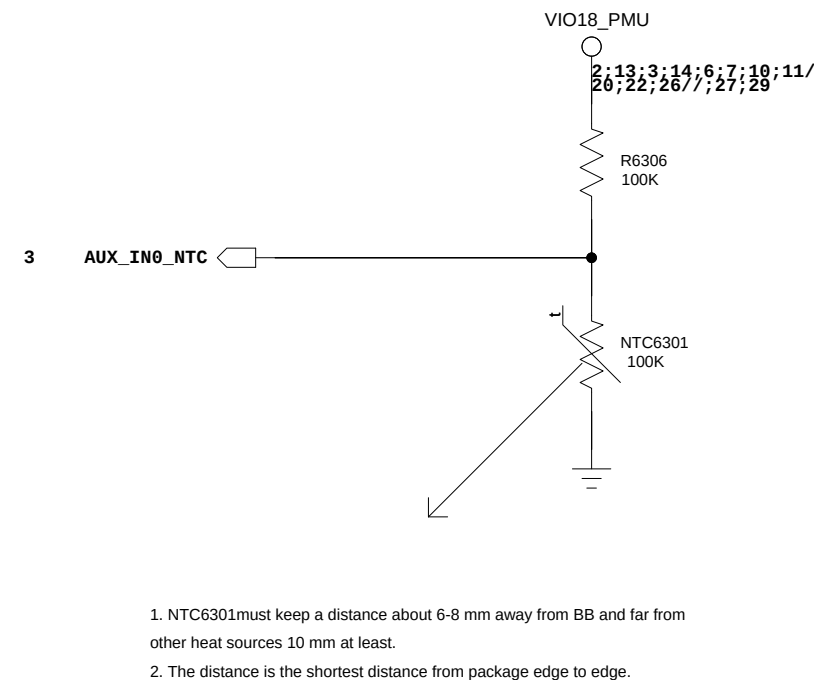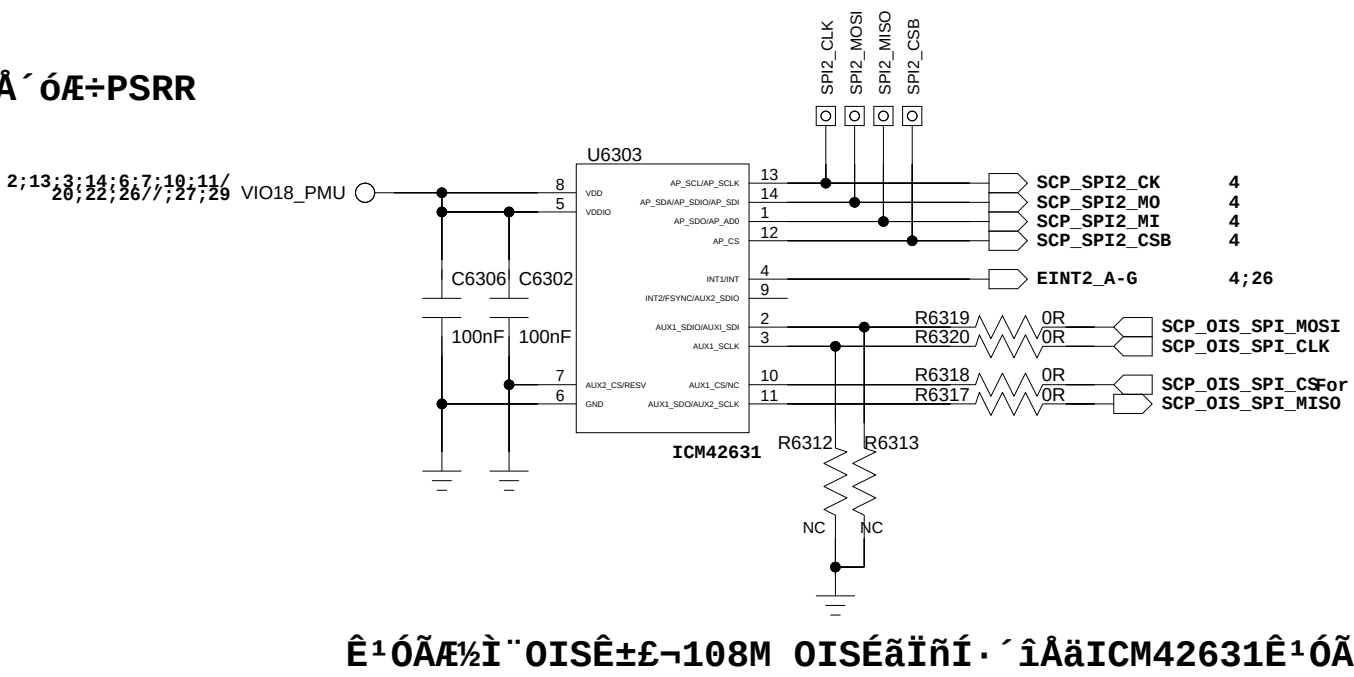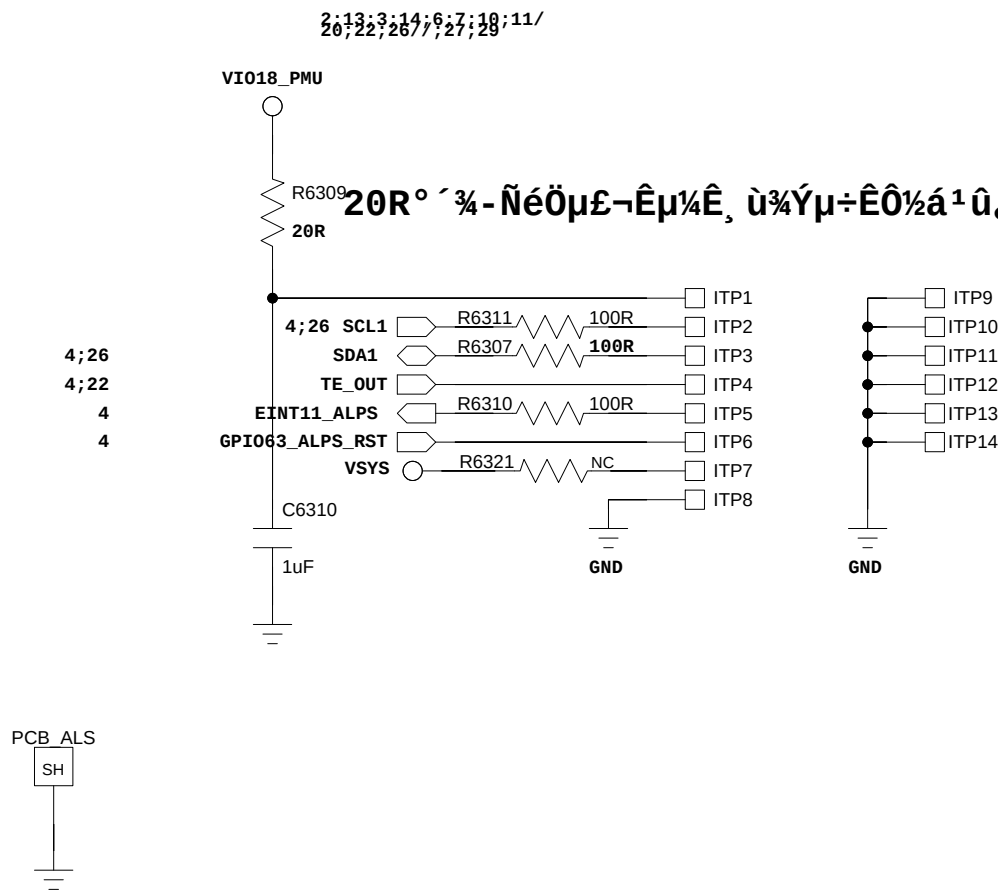


```
MXC6655XA:ADDRESS:0x2A(Write)/0x2B(Read)
SC7A20:ADDRESS:0x30(Write)/0x31(Read)
MXC4005XC:ADDRESS:0x2A(Write)/0x2B(Read)
```

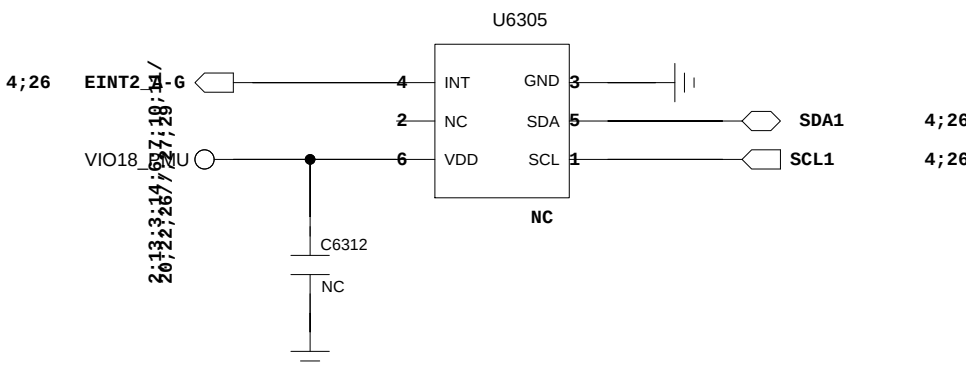

```
MMC5603:I2C ADDRESS:0x60(Write)/0x61(Read)
QMC6308:I2C ADDRESS:0x58(Write)/0x59(Read)
```

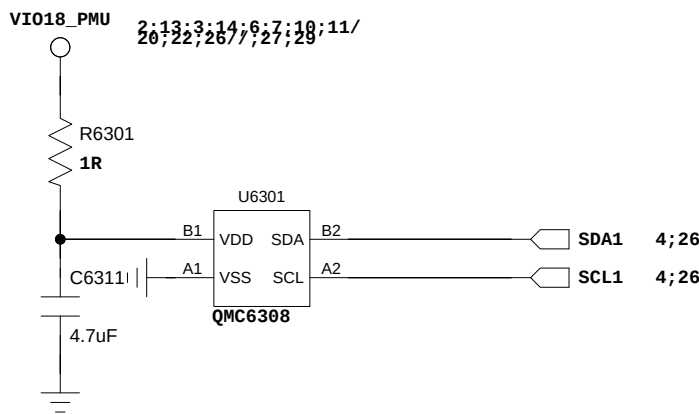


AW86227FCR:I2C ADDRESS:0xB4(Write)/0xB5(Read)

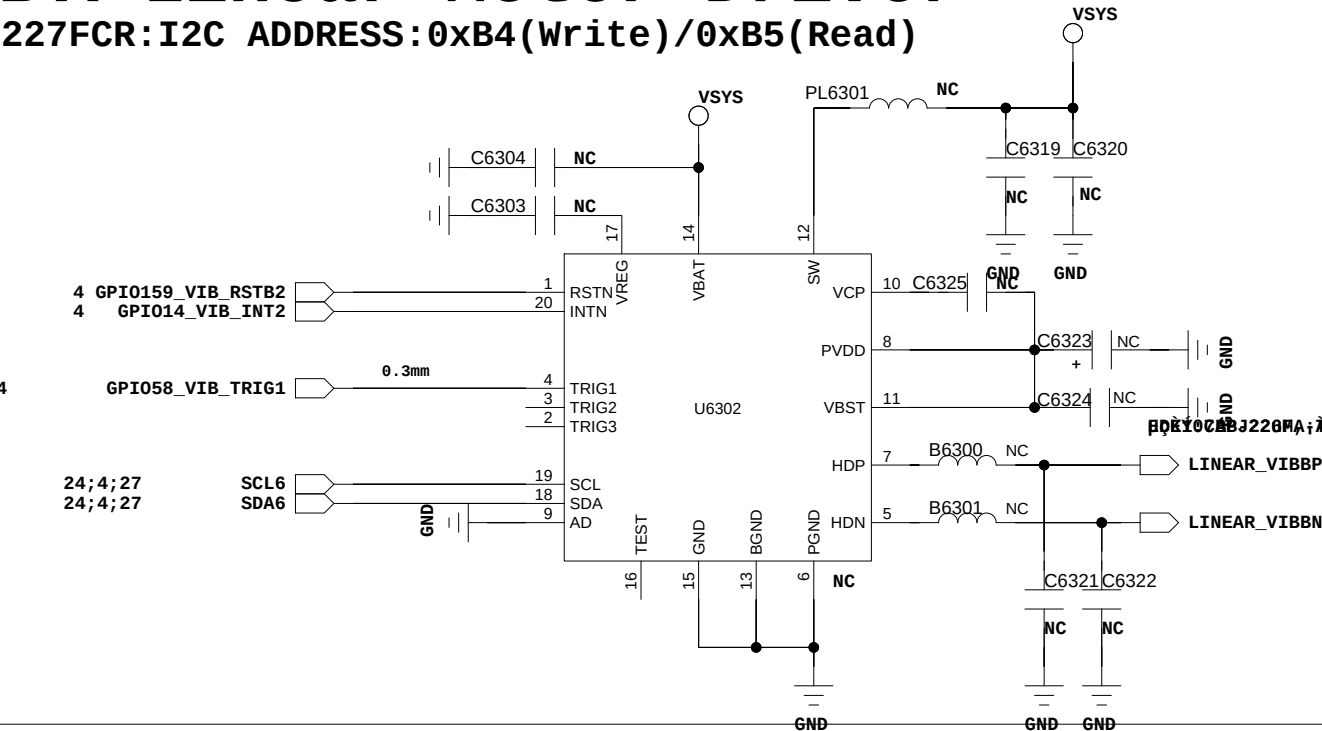


Exchange IO

1. $\ddot{O} \div \text{Å} \text{Å} \text{Å} 50 + 38 \text{£} \neg \text{D} ; \text{Å} \text{Å} \text{Å} 60 \text{£} \neg \text{LCD} \hat{U} \times \text{a} \frac{1}{2} \text{ÓFPC} \cdot \text{Í} \text{ò}^3 \text{ä} \mu \text{ç} \text{Ì} \text{ù}$


2. $\ddot{O} \div \text{Å} \text{Å} \text{Å} 50 + 38 \text{£} \neg \text{D} ; \text{Å} \text{Å} \text{Å} 50 + 38$

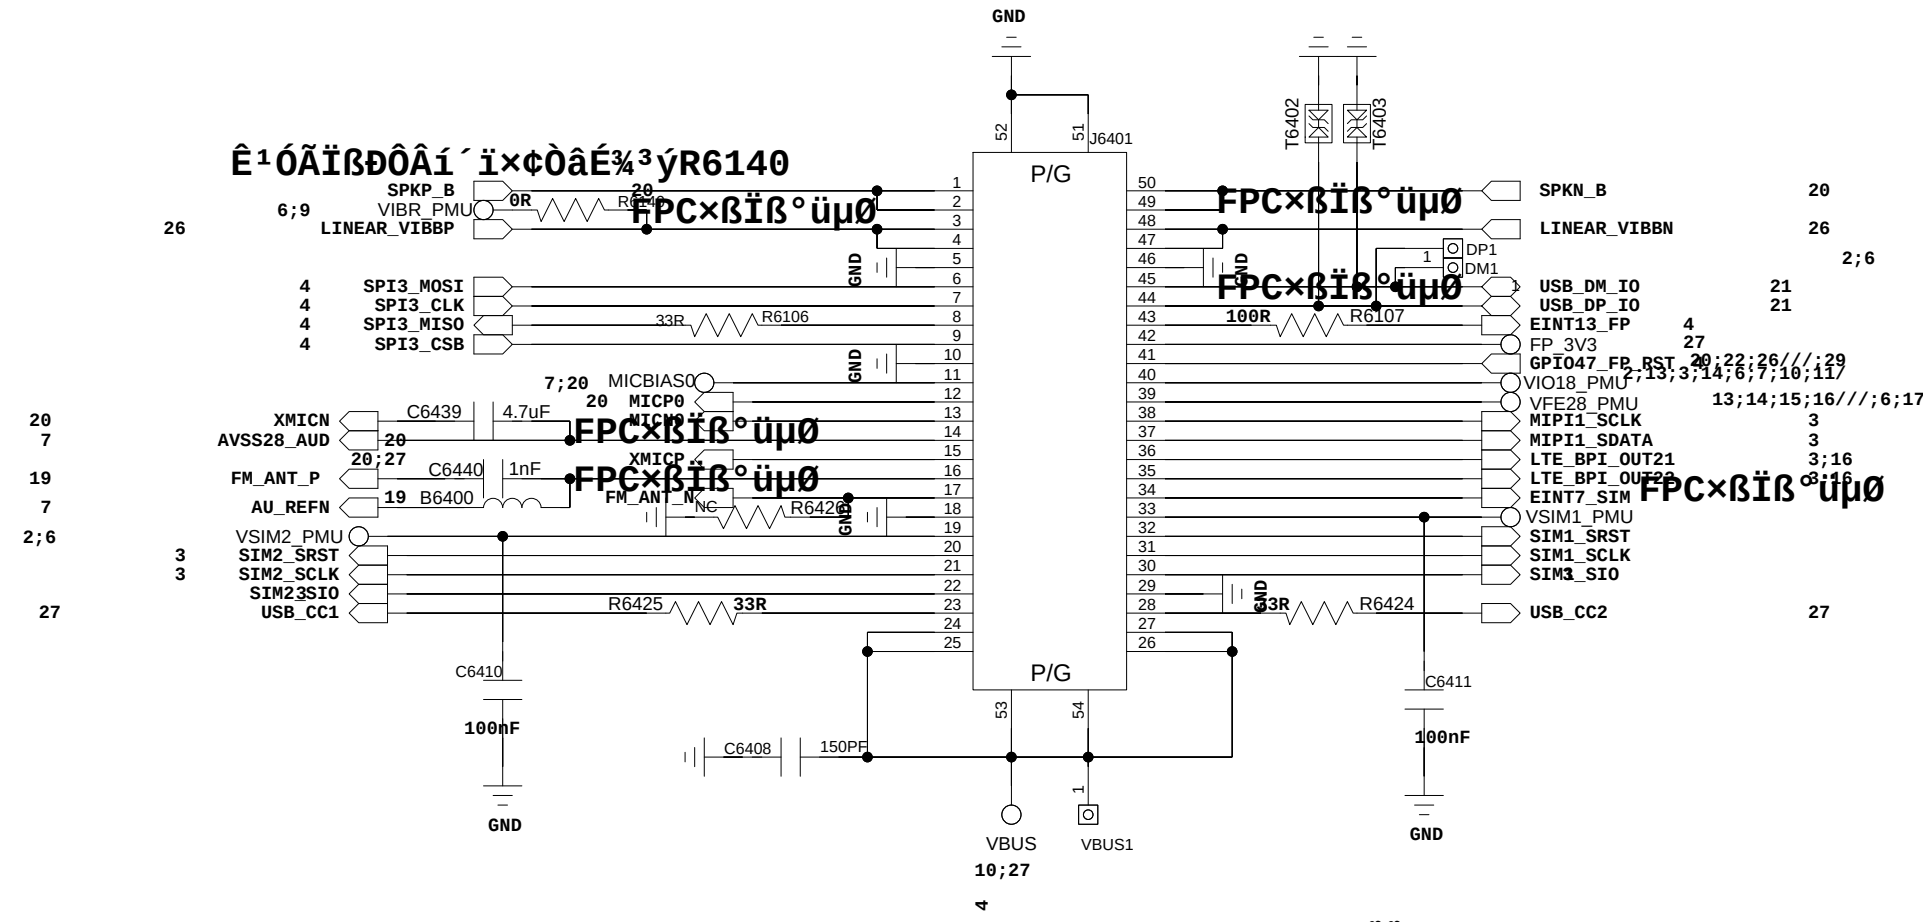

RT1715: I2C ADDRESS: 0x9C(Write)/0x9D(Read)

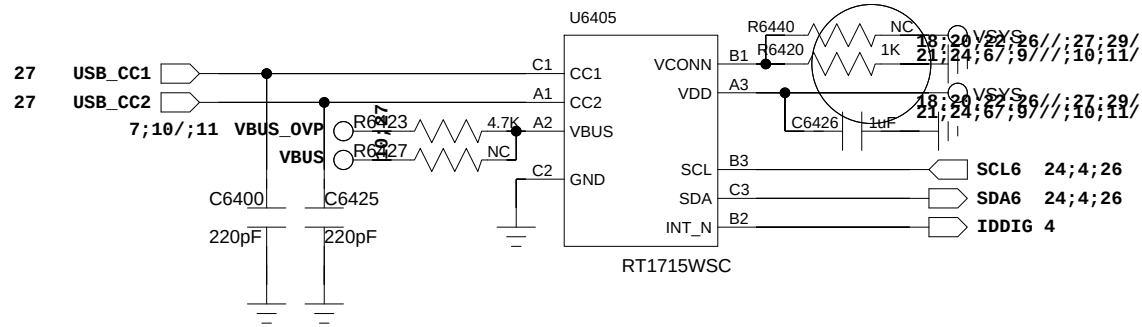


Q6405\U6402\U6401°²È«³äµç£¬ 68W00ÊĬĬ-Ö÷ICÊÇSGM41516/SC8950 Ê¹0Ã

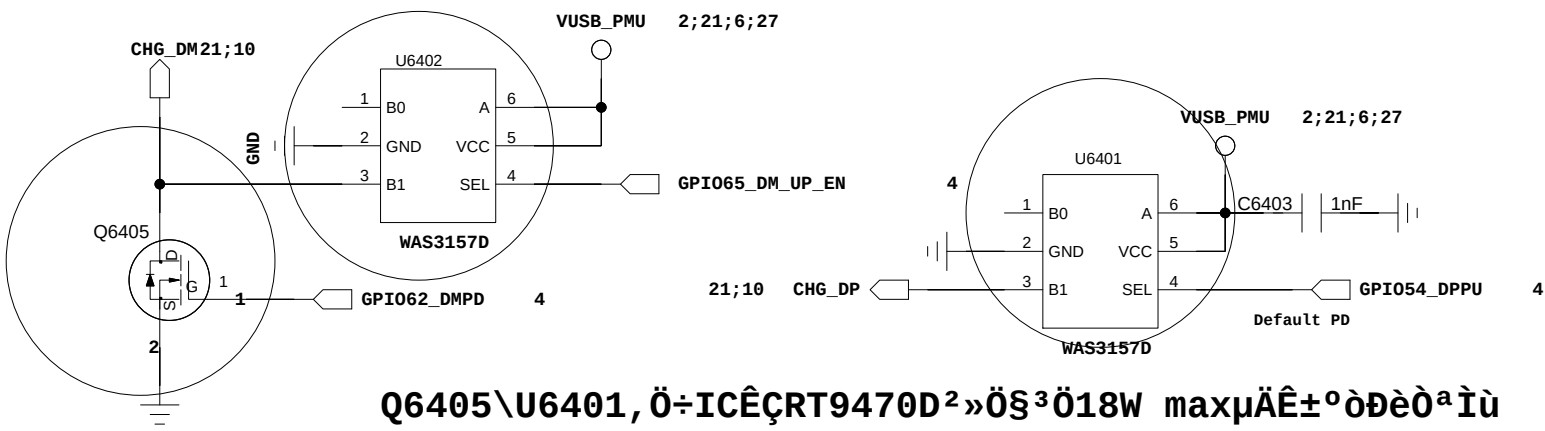

¼ì²âSBUÓëVBUS¶ÌÂ·£-ÊÛµ½ÖÐ¶Ï°ó½ÐÐÐÌáÐÑ²ÇÇÒÇÐ»»¶ÌÂ·SBUÍ¨µÀµ½µØ
ÔÚ¶ú»úÃ»²âÊëµÄÇé¿öÌÂ£-ÀûÓÃMIC&GNDµÄ¿^{a1}ØÃÕÑ´ì³É¶ÔÁ½, öSBUµÄ¼ì²â
¶ú»ú²âÊë°ó²»»Ö´ÐÐÃÐ¶¨

FINGER PRINT

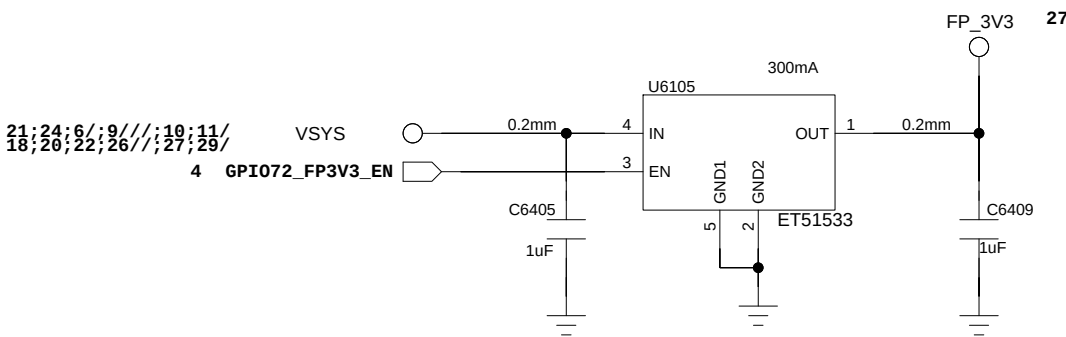


COMPANY: TRANSSION HOLDINGS				MODEL: G99_STD_MAIN		Modified Date: 05/09/2023:16:23	
DRAWN		DATED		TITLE: 64_PERI_EXCH_IO		VERSION:	SHEET: 27 OF 29
CHECKED		DATED	< >	Confidentiality	CONFIDENTIAL		

PERI_SIM_SD_KEYPAD

REVISION RECORD			
LTR	ECO NO:	APPROVED:	DATE:

SIDEKEY

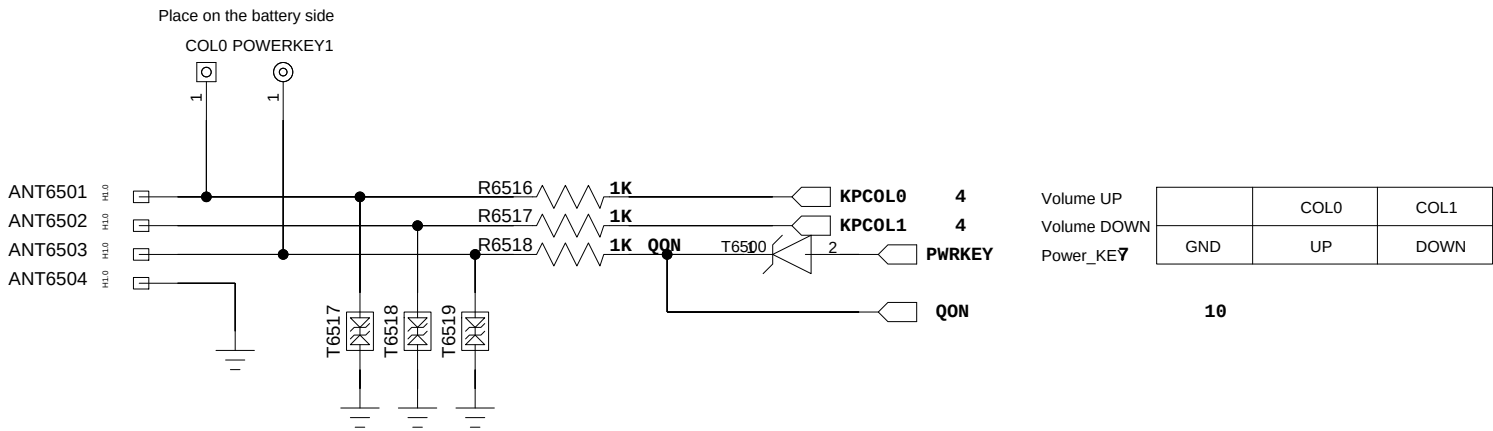



COMPANY: TRANSSION HOLDINGS				MODEL:G99_STD_MAIN		Modified Date: 05/09/2023:16:23	
DRAWN		DATED		TITLE: 65_SD_SIM_KEY		VERSION:	SHEET: 28 OF 29
CHECKED		DATED	< >	Confidentiality	CONFIDENTIAL		

PERI_NFC

REVISION RECORD			
LTR	ECO NO:	APPROVED:	DATE:

7

4

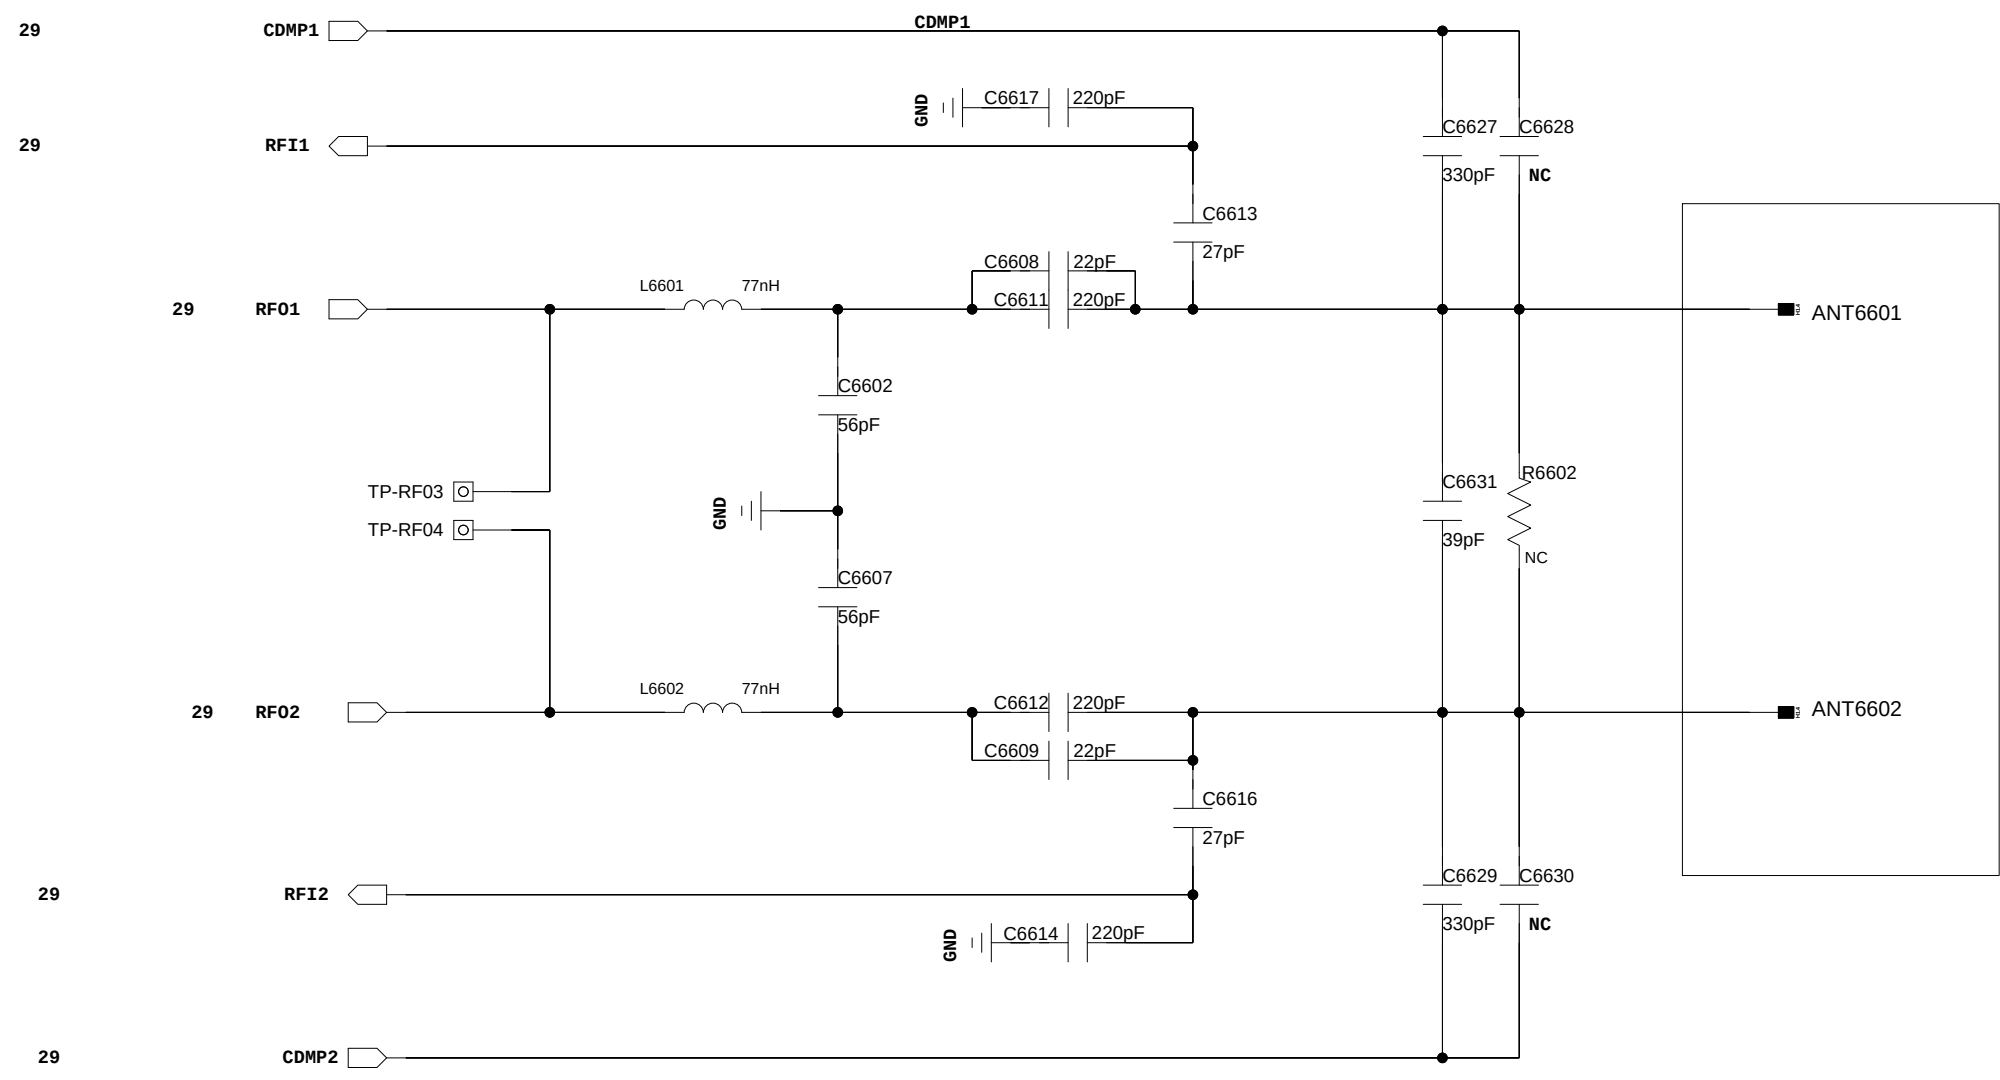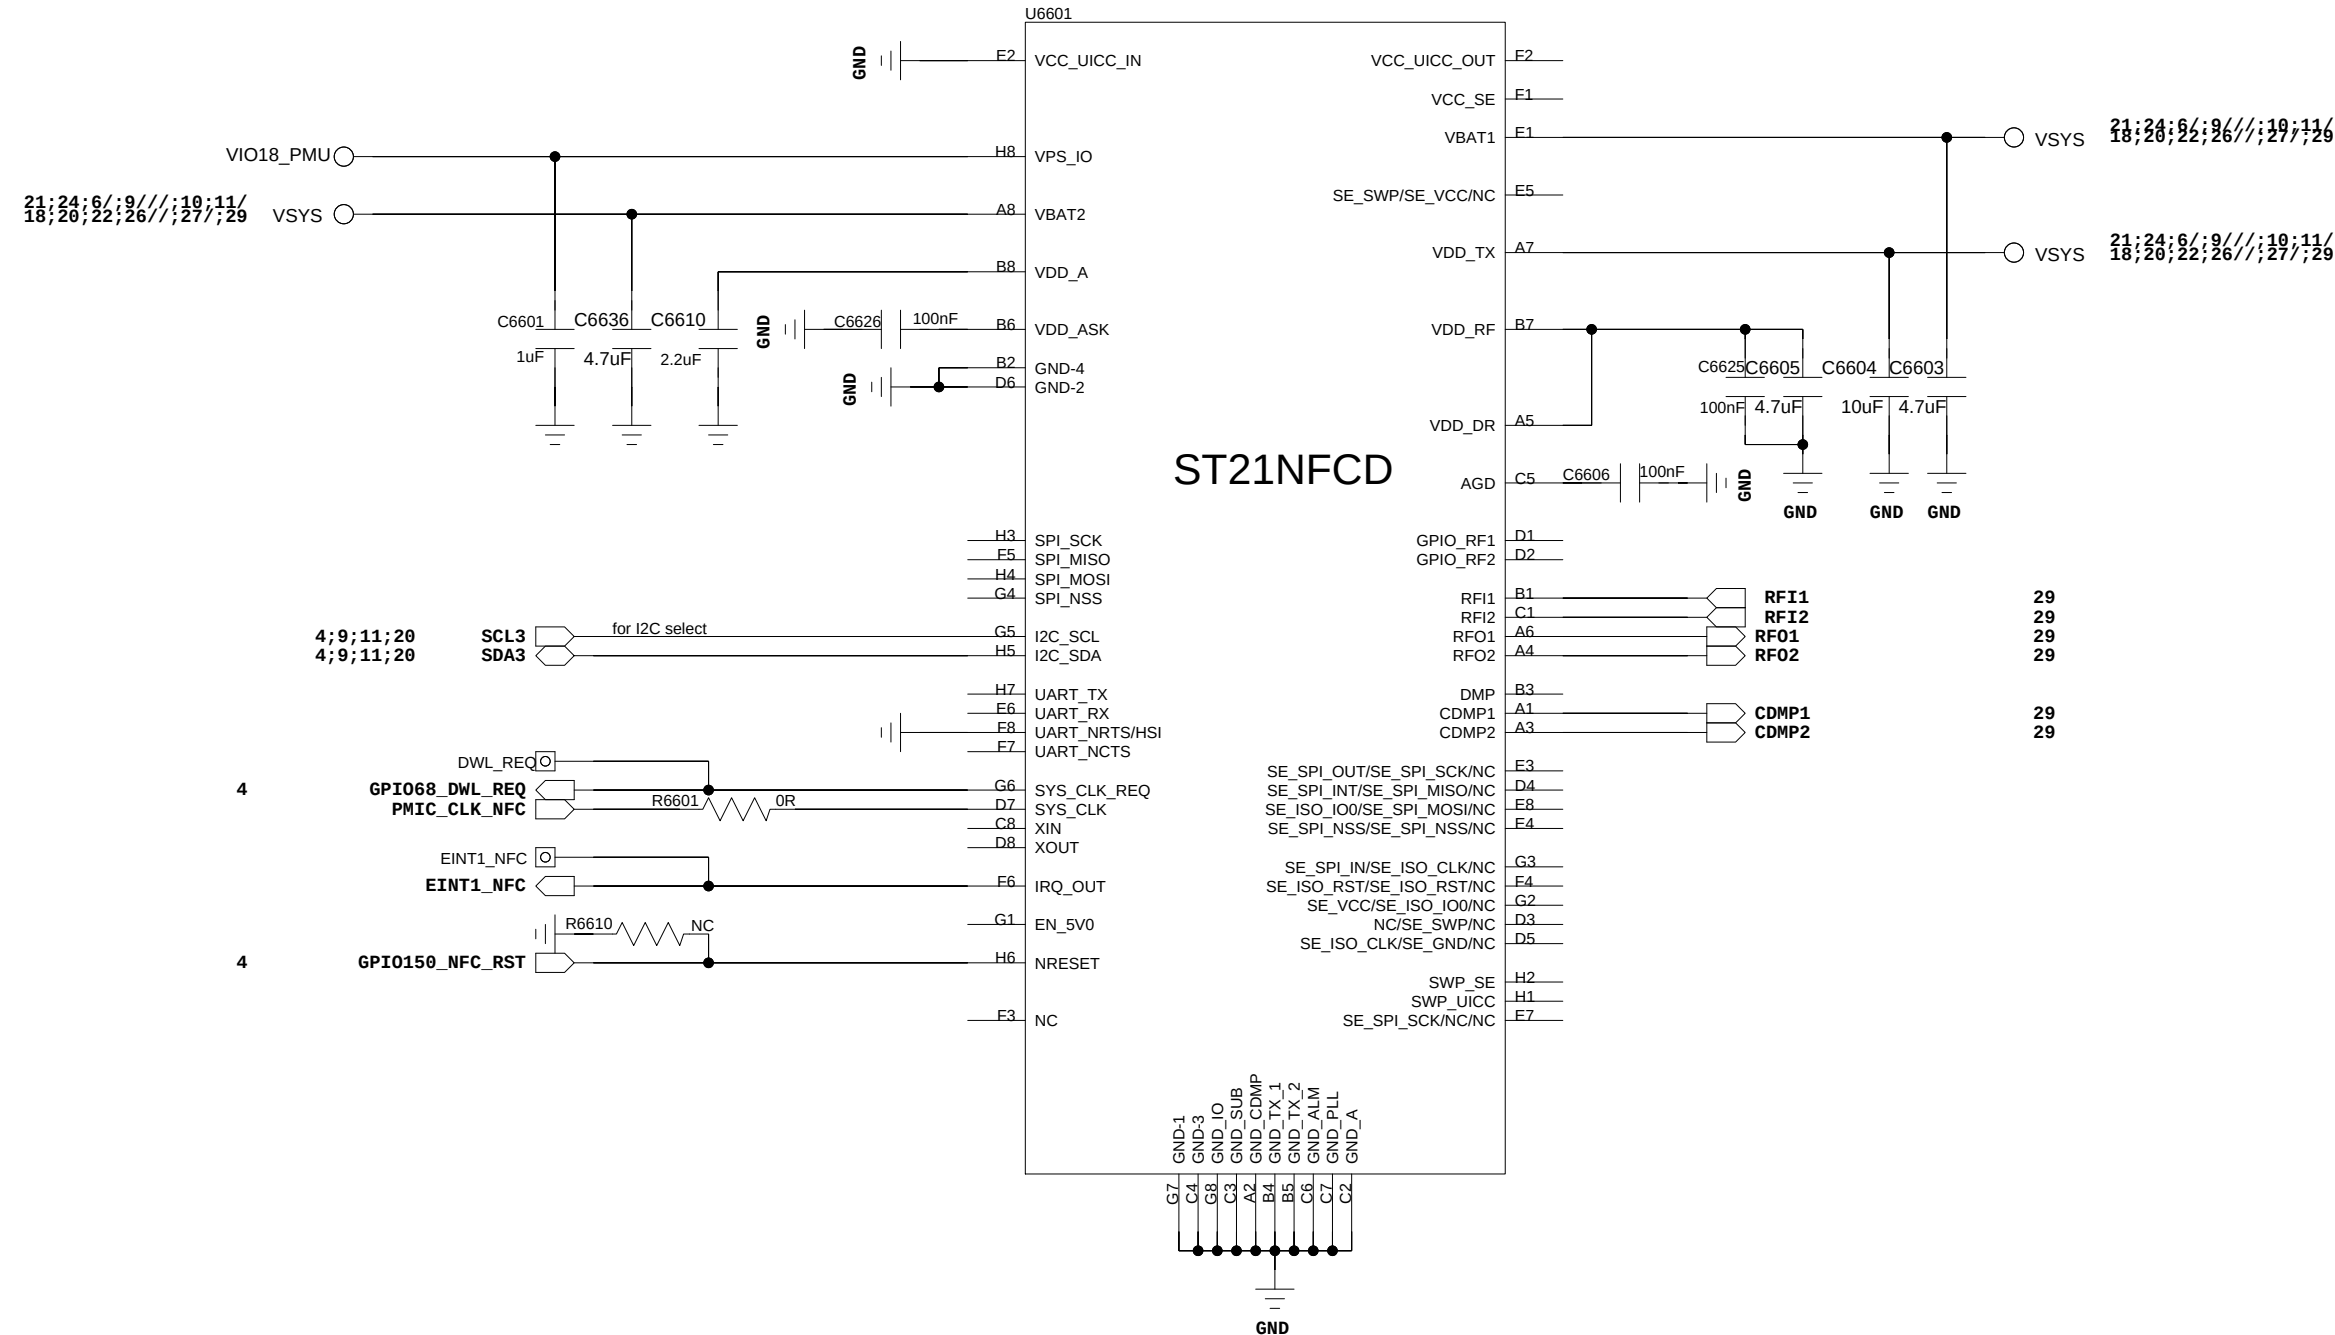

COMPANY: TRANSSION HOLDINGS				MODEL:G99_STD_MAIN		Modified Date: 05/09/2023:16:23	
DRAWN		DATED		TITLE: 66_NFC		VERSION:	SHEET: 29 OF 29
CHECKED		DATED	< >	Confidentiality	CONFIDENTIAL		