

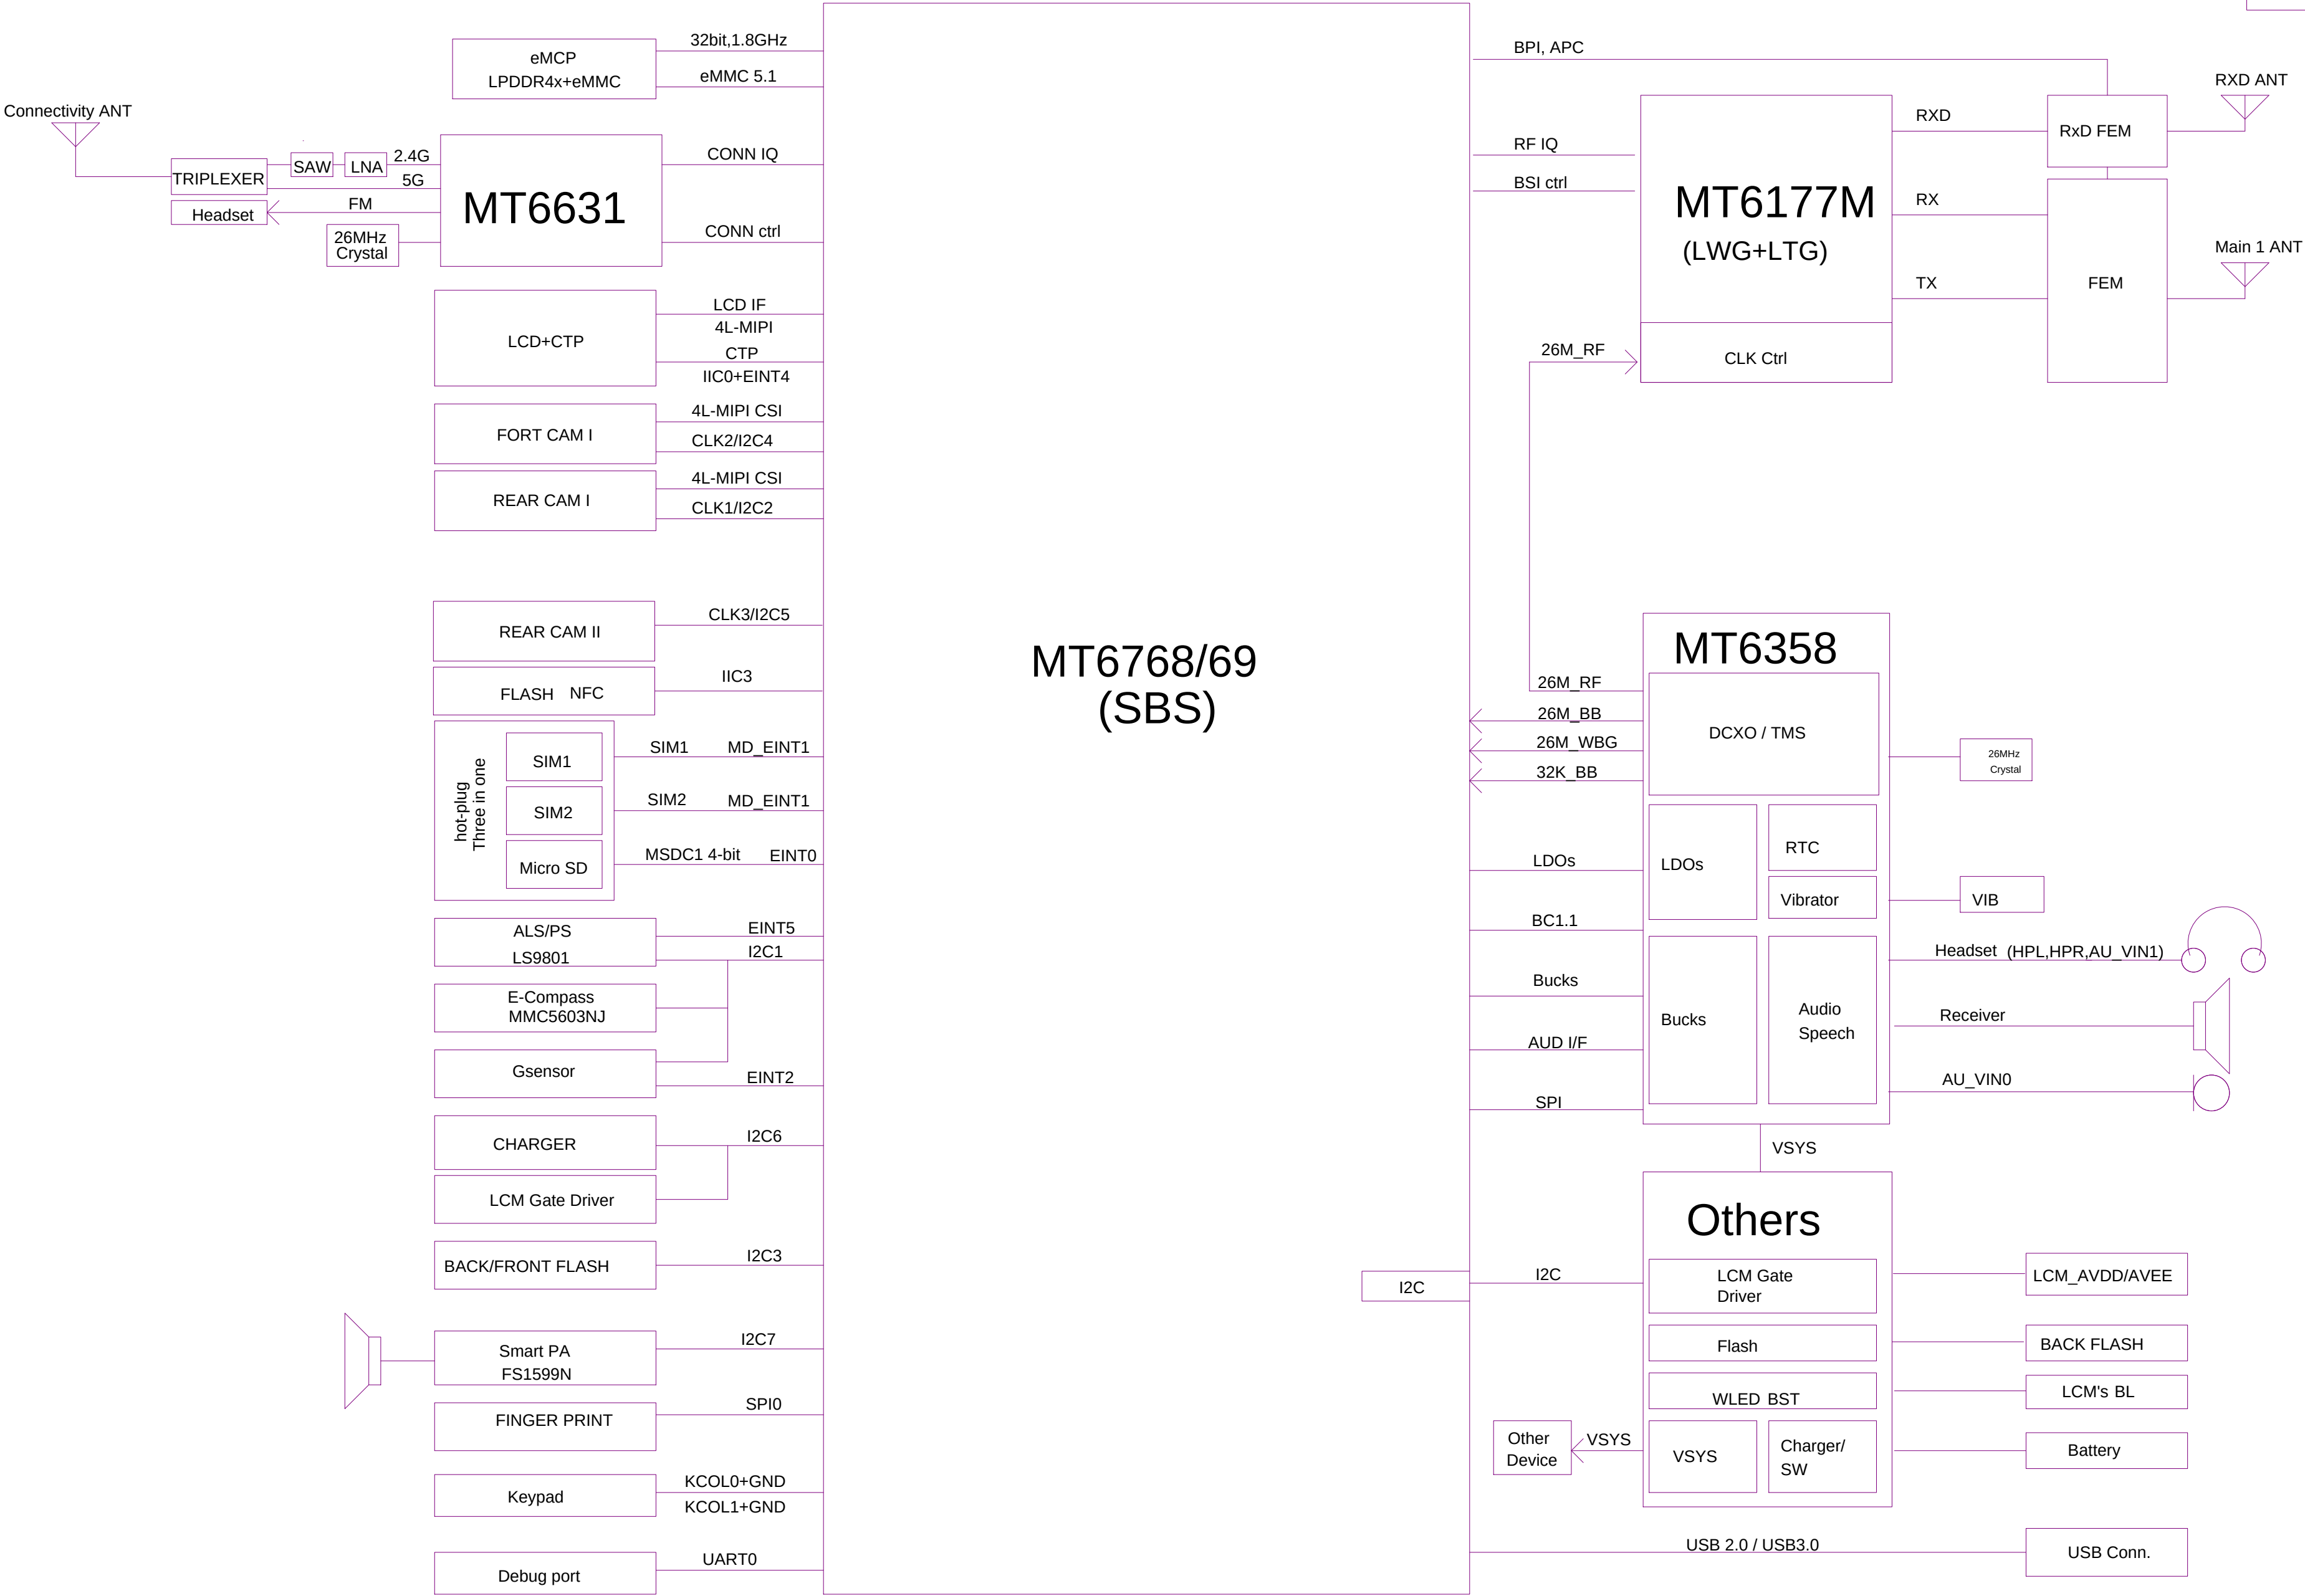
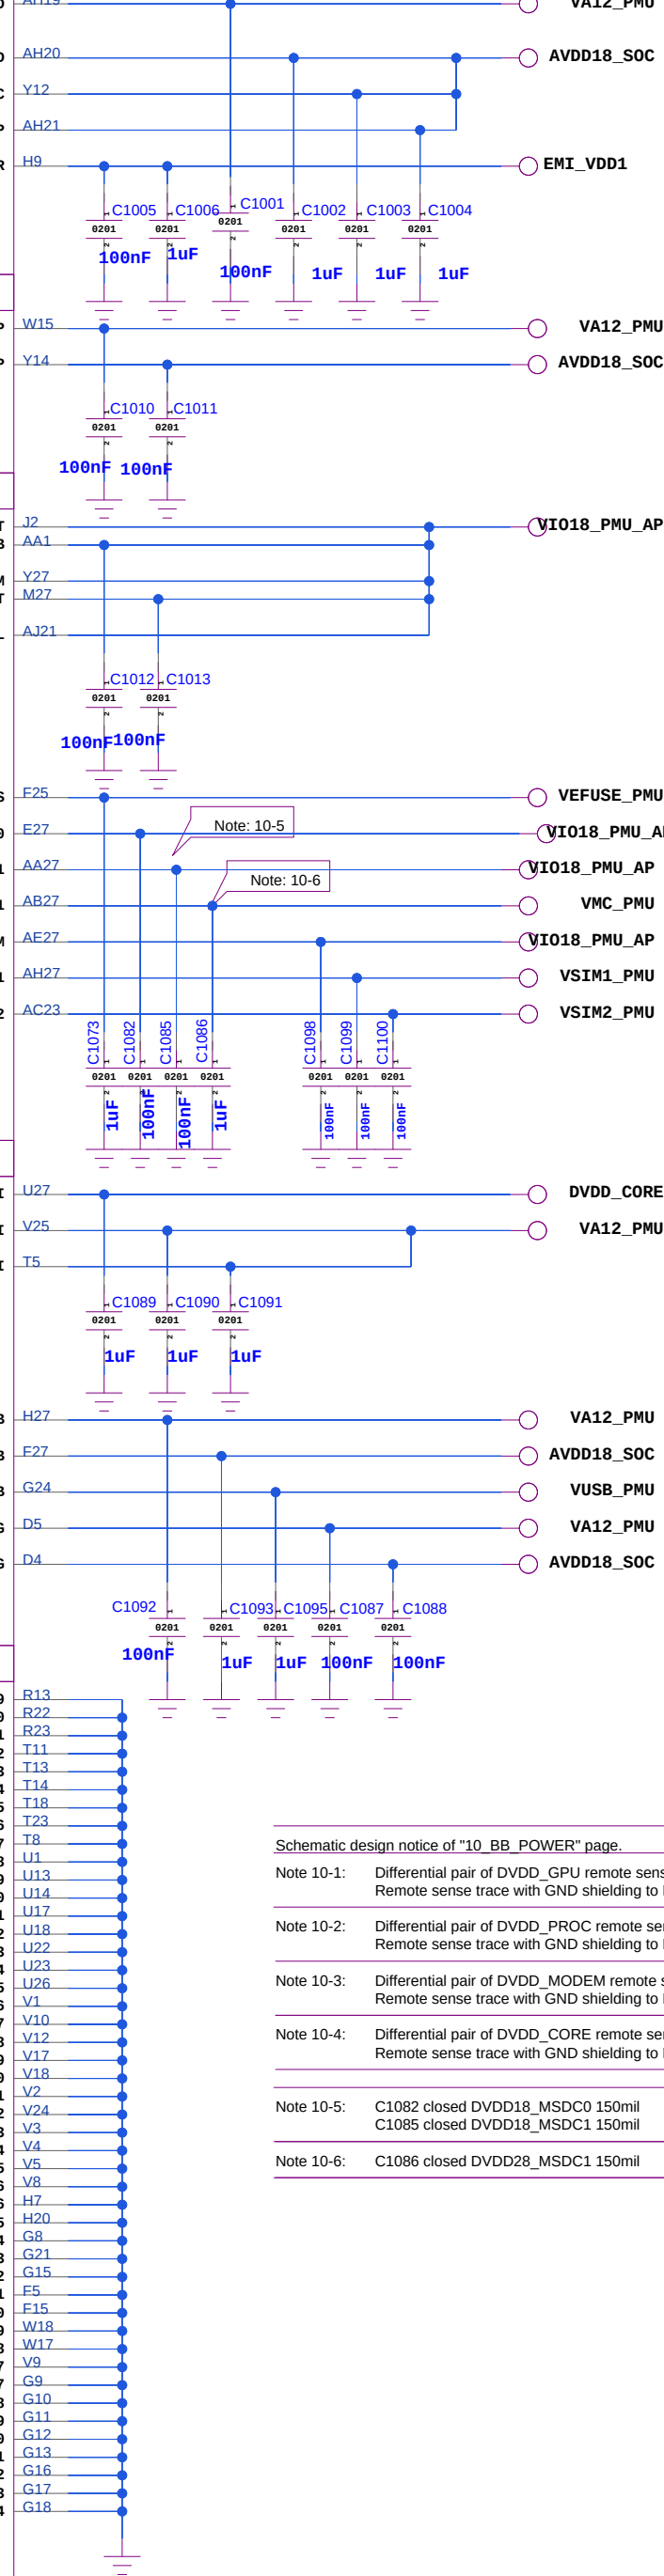
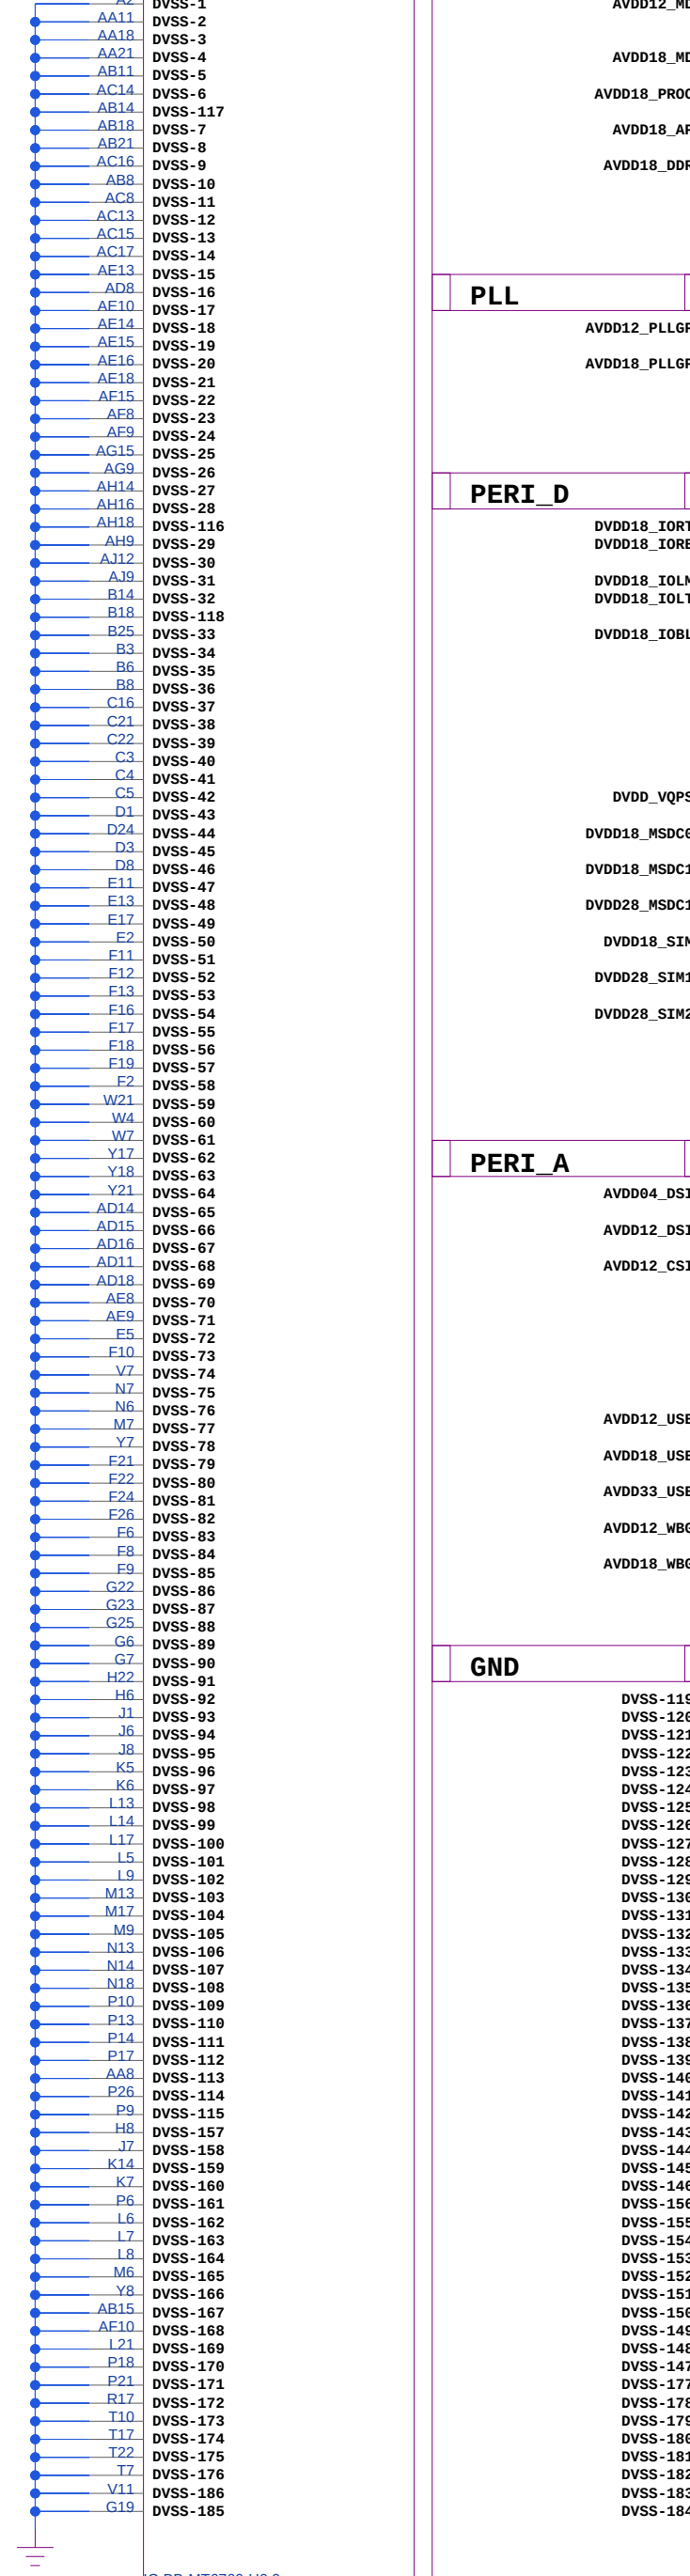

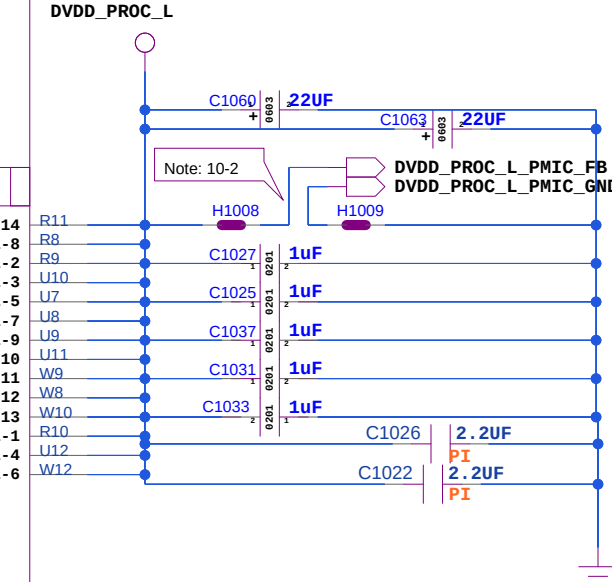
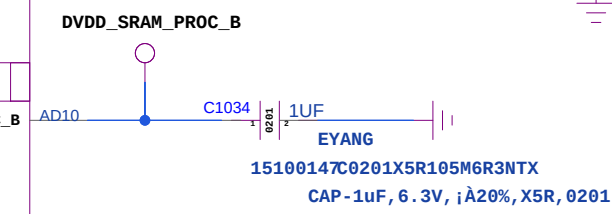
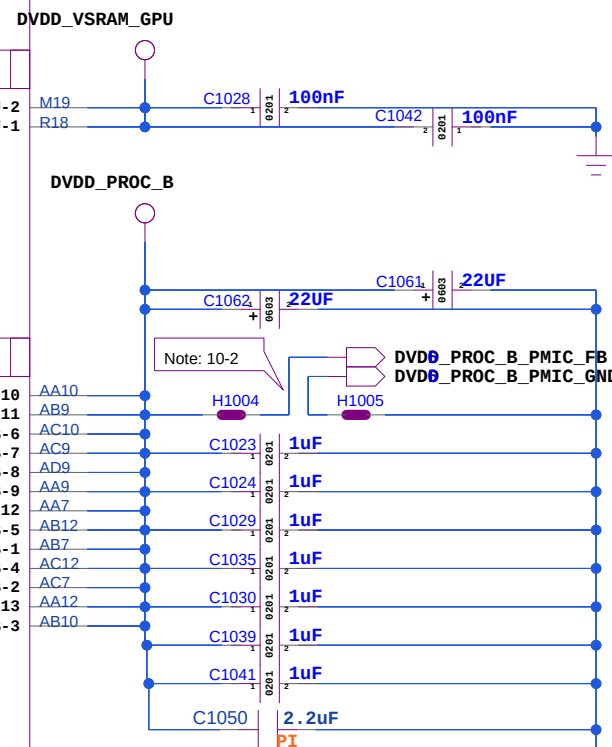
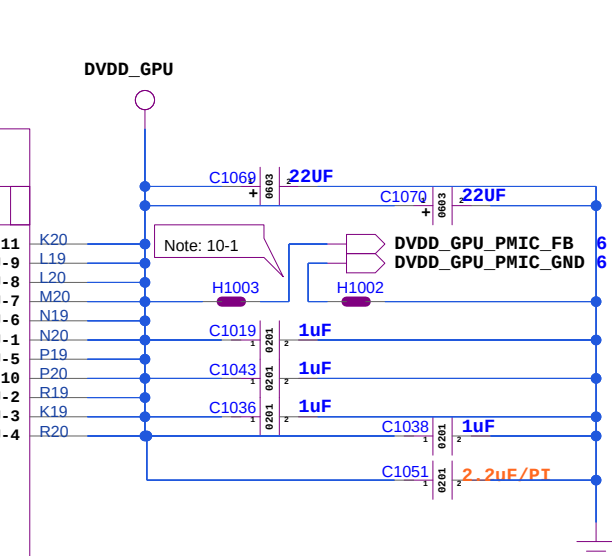
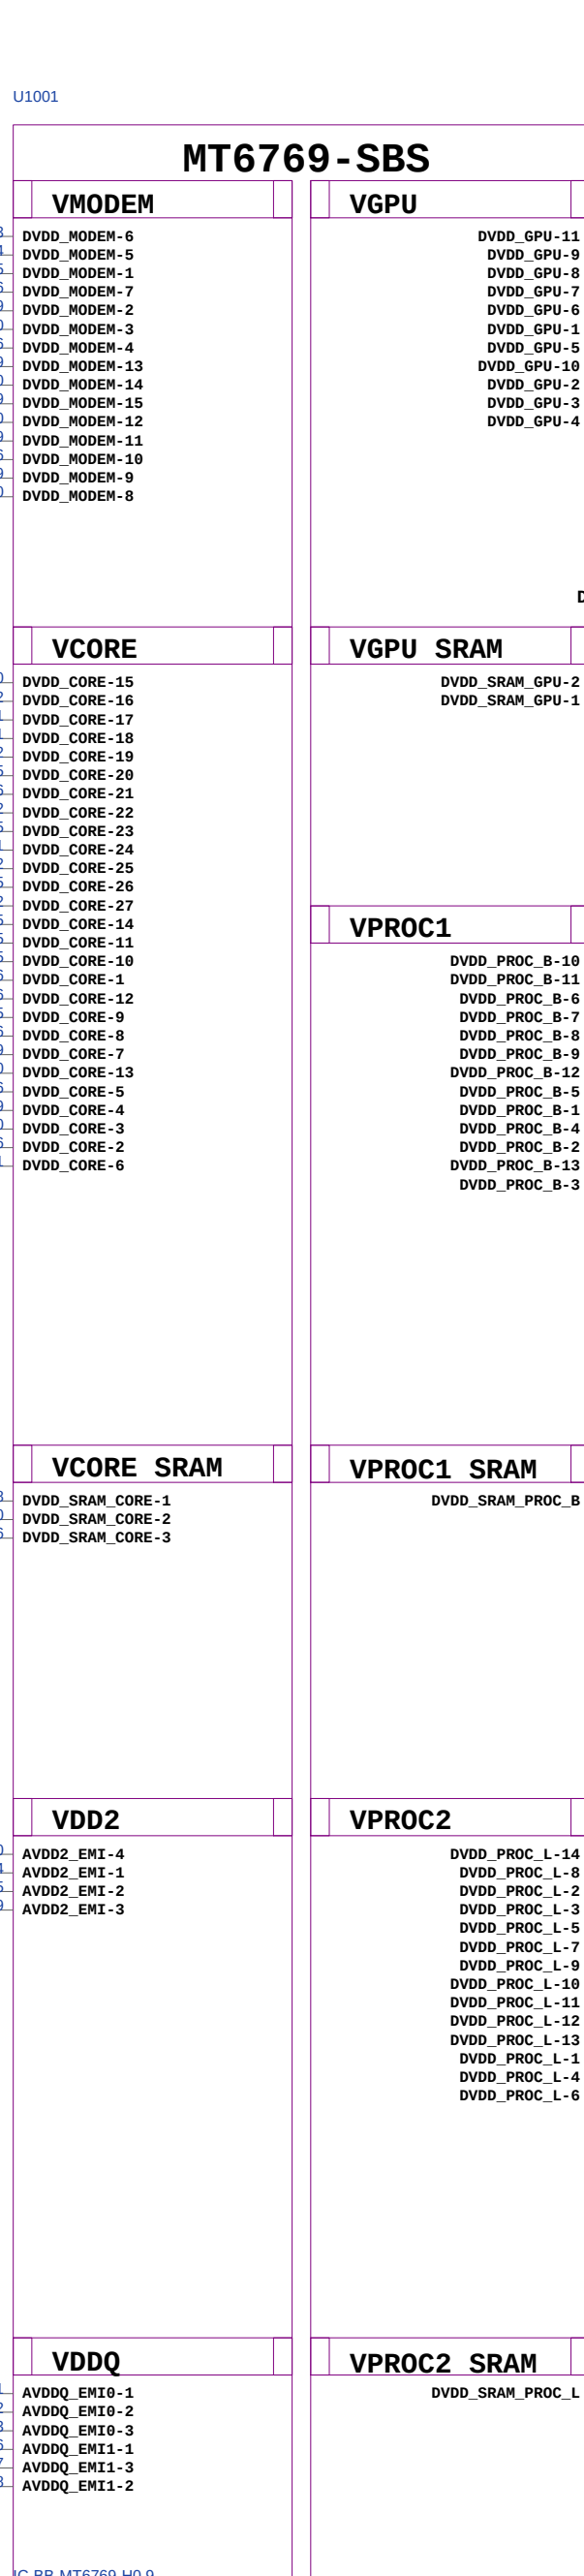
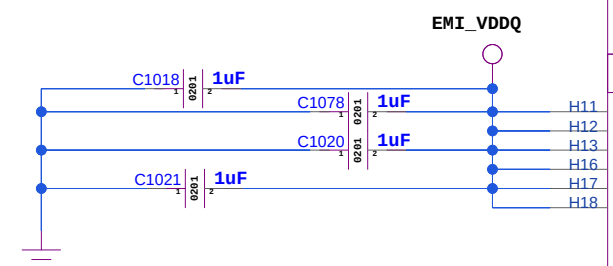
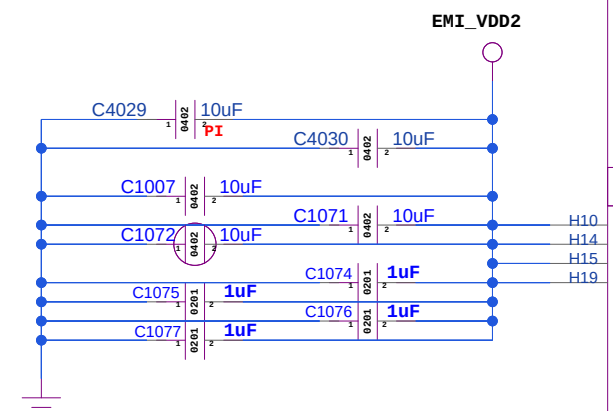
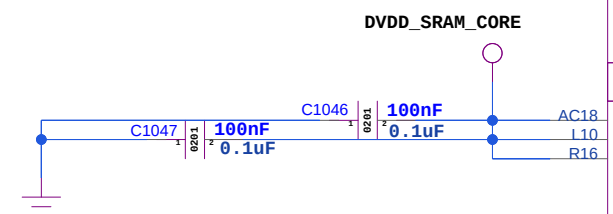



REVISION RECORD			
LTR	ECO NO:	APPROVED:	DATE:

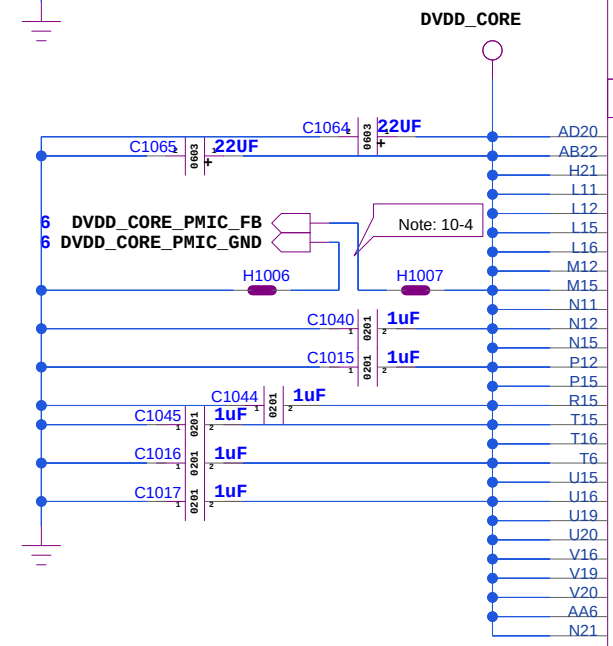

BB_POWER

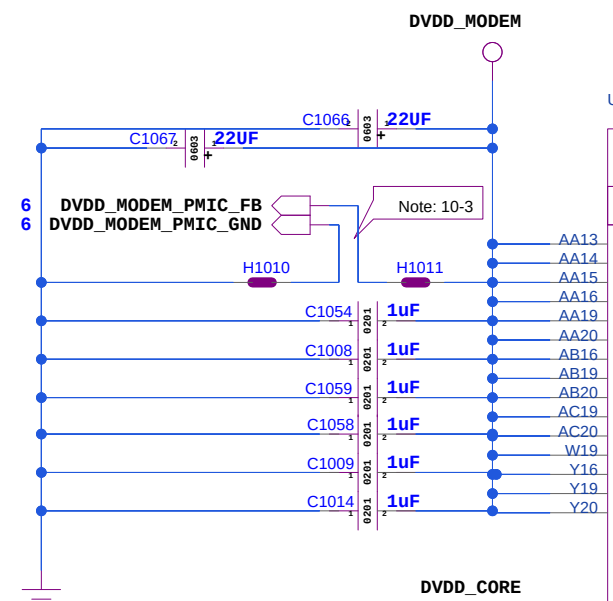

REVISION RECORD			
LTR	ECO NO:	APPROVED:	DATE:

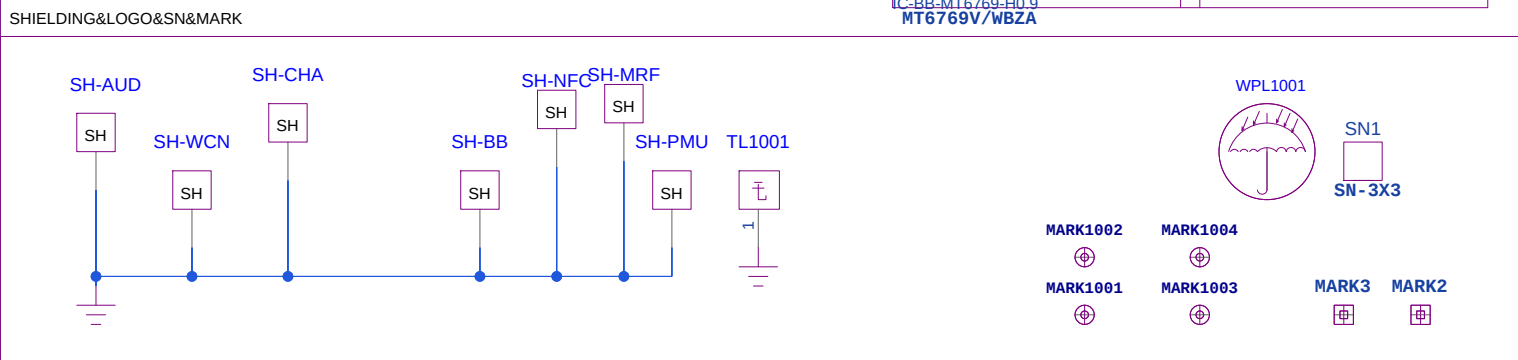

COMPANY: TRANSSION HOLDINGS

CPU-2G/W/TD/LTE/TLTE.2-A75@2.0.6-A55@1.7.FHD+.Cat-4.H0.9

MODEL: **G85_STD_MAIN**

DRAWN

DATED

CHECKED

DATED

TITLE: 10_1

POWER



Modified Date:

04/01/2025:20:39

VERSION:

SHEET: 2 OF 28

REVISION RECORD			
LTR	ECO NO:	APPROVED:	DATE:

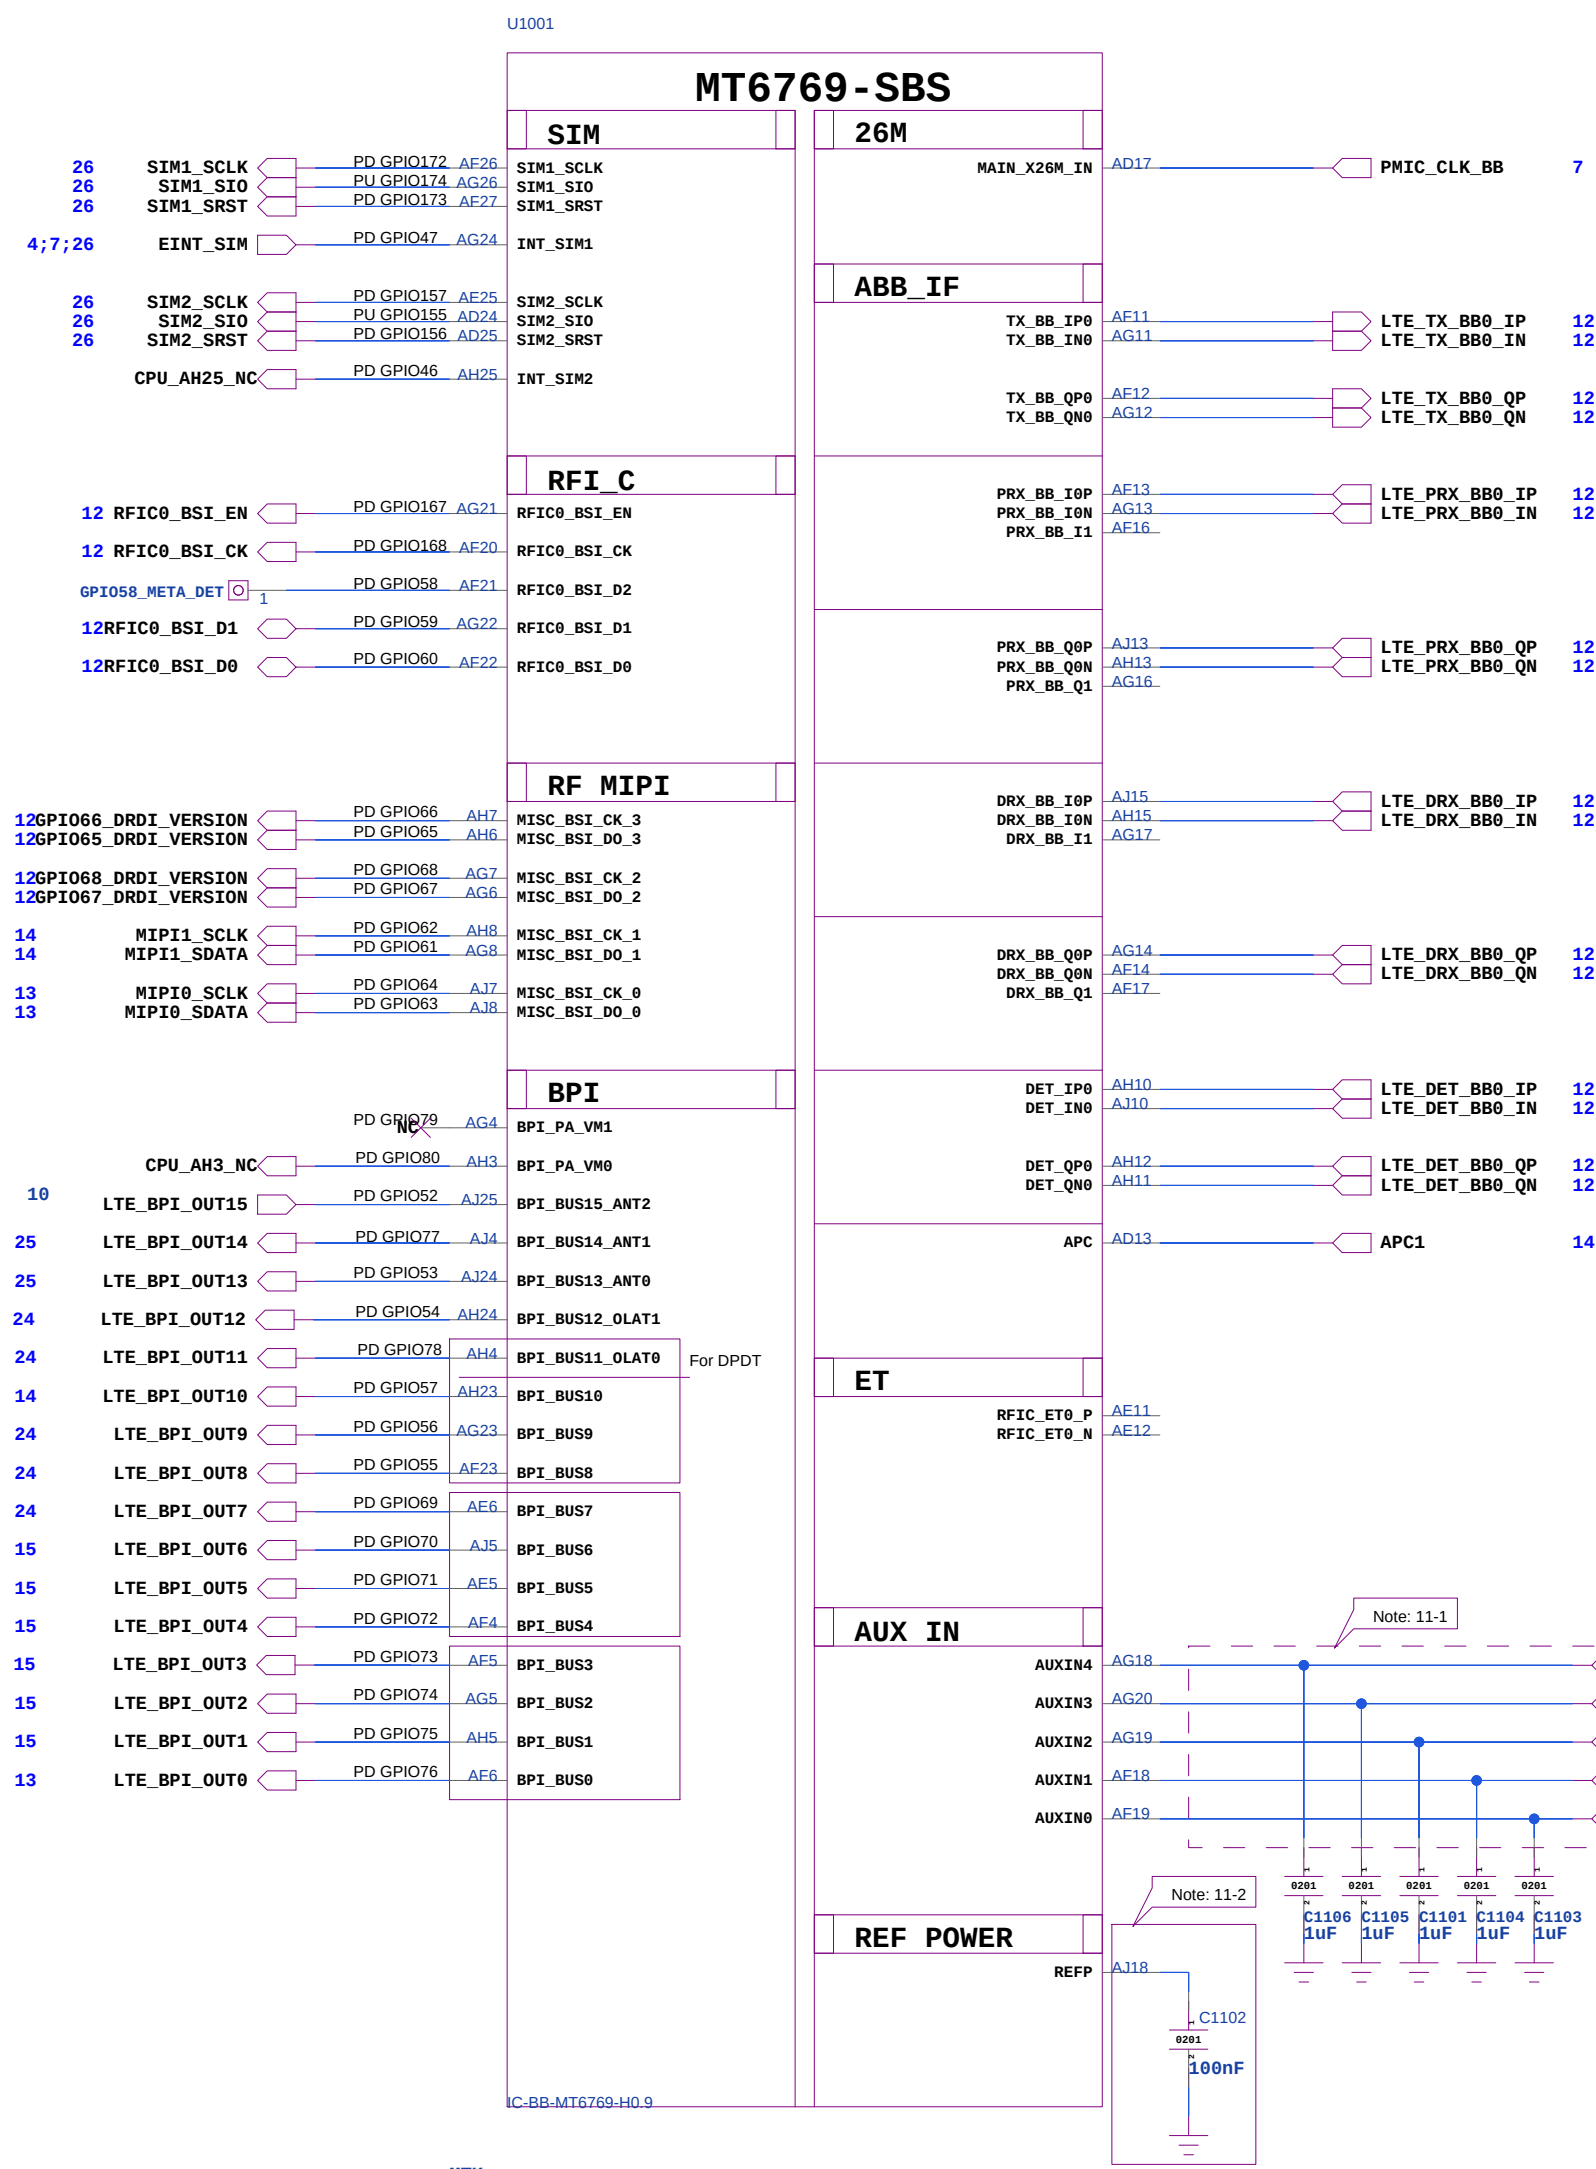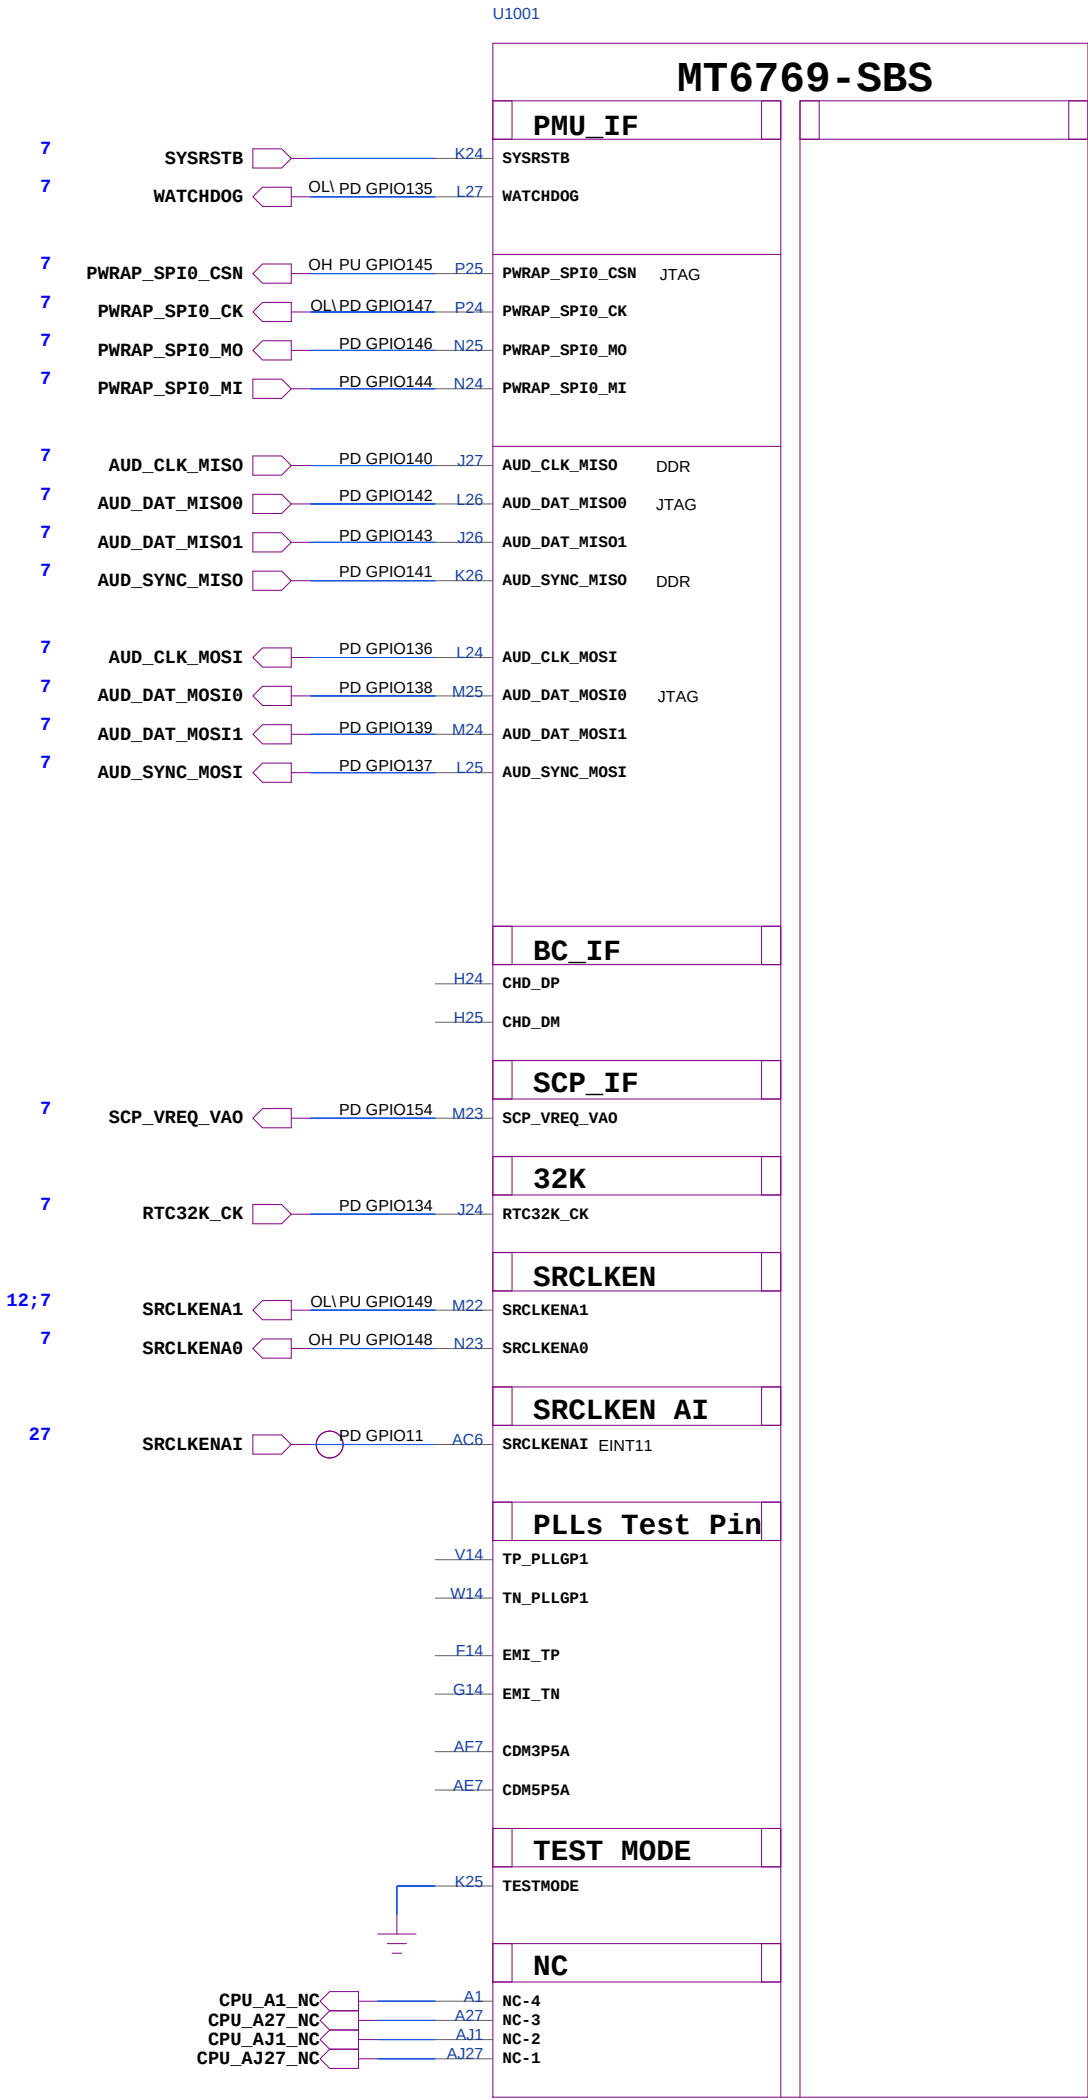


MT6769V/WBZA			
"PWRAP_SPI0_CSN" and "AUD_DAT_MOSIO" are bootstrap pin to select which interface will be the JTAG pin out.			
Default	PWRAP_SPI0_CSN	AUD_DAT_MOSIO	AP_JTAG
	HI	LO	N/A
	HI	HI	SPIO+EINT8
	LO (default)	LO (default)	SPIO+EINT8
	LO (default)	HI (default)	N/A
	LO (default)	HI (default)	N/A
AUD_SYNC_MISO and AUD_CLK_MISO are DDR type feature in bootstrap			
Default	AUD_SYNC_MISO	AUD_CLK_MISO	DDR Type
	LO	LO	LP4X eMCP
	LO	HI (default)	Reserved
	HI (default)	LO	LP3 eMCP
	HI (default)	HI (default)	Reserved

COMPANY: TRANSSION HOLDINGS				MODEL:G85_STD_MAIN		Modified Date: 04/01/2025:20:41	
DRAWN		DATED		TITLE: 11_BB_I		VERSION:	SHEET: 3 OF 28
CHECKED		DATED	< >	Confidentiality	CONFIDENTIAL		

Schematic design notice of "11_BB_I" page.

Note 11-1: To shunt a 1uF capacitor in the AUXIN ADC input to prevent noise coupling. It should be placed as close to BB as possible. Connect the unused AUX ADC input to GND.

Note 11-2: The de-coupling cap. for REFP (AJ21 ball) have to be placed as close to BB as possible.

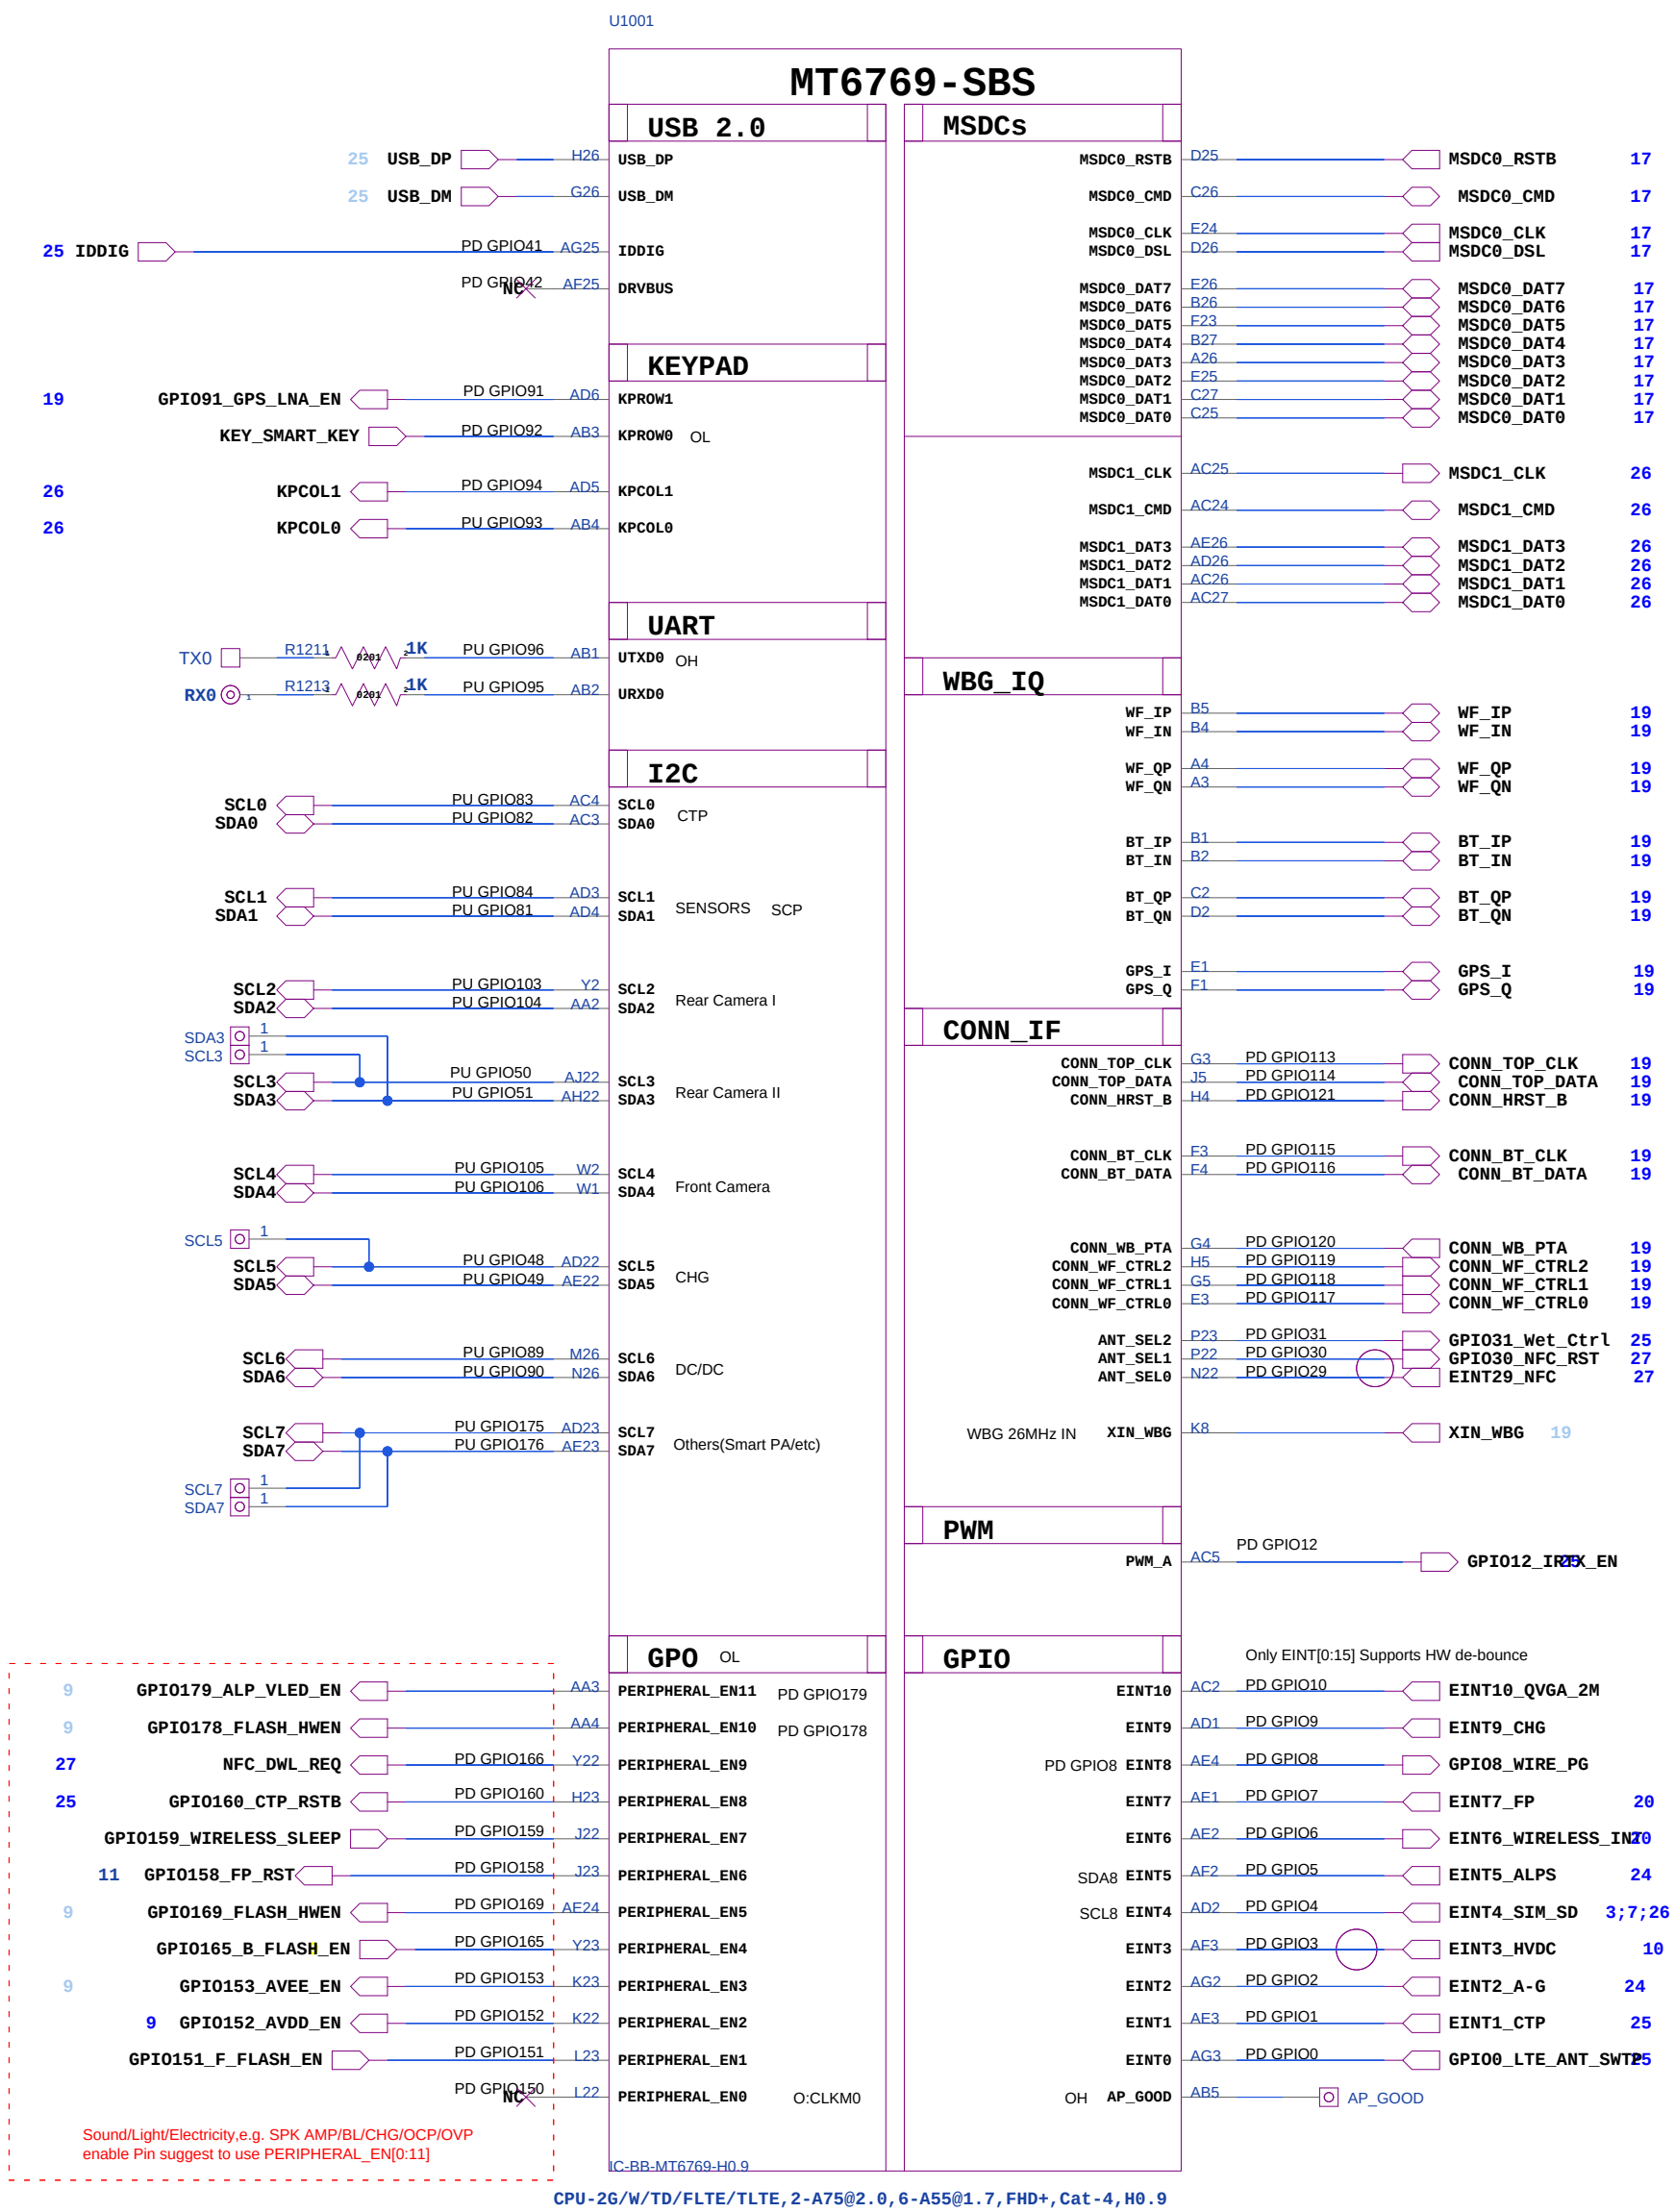

REVISION RECORD			
LTR	ECO NO:	APPROVED:	DATE:

LPDDR4X_EMI_IF



1%

R1301

60.4R

1%

60.4R


1%

The resistor of EMI_EXTR for DRAM has to be placed near to BB as close as possible, please select 60.4 ohm 1% resistor


COMPANY: TRANSSION HOLDINGS				MODEL:G85_STD_MAIN		Modified Date: 20/12/2024:13:08	
DRAWN		DATED		TITLE: 13_BB_III		VERSION:	SHEET: 5 OF 28
CHECKED		DATED	< >	Confidentiality	CONFIDENTIAL		

POWER_MT6358_I

PMU_BUCK

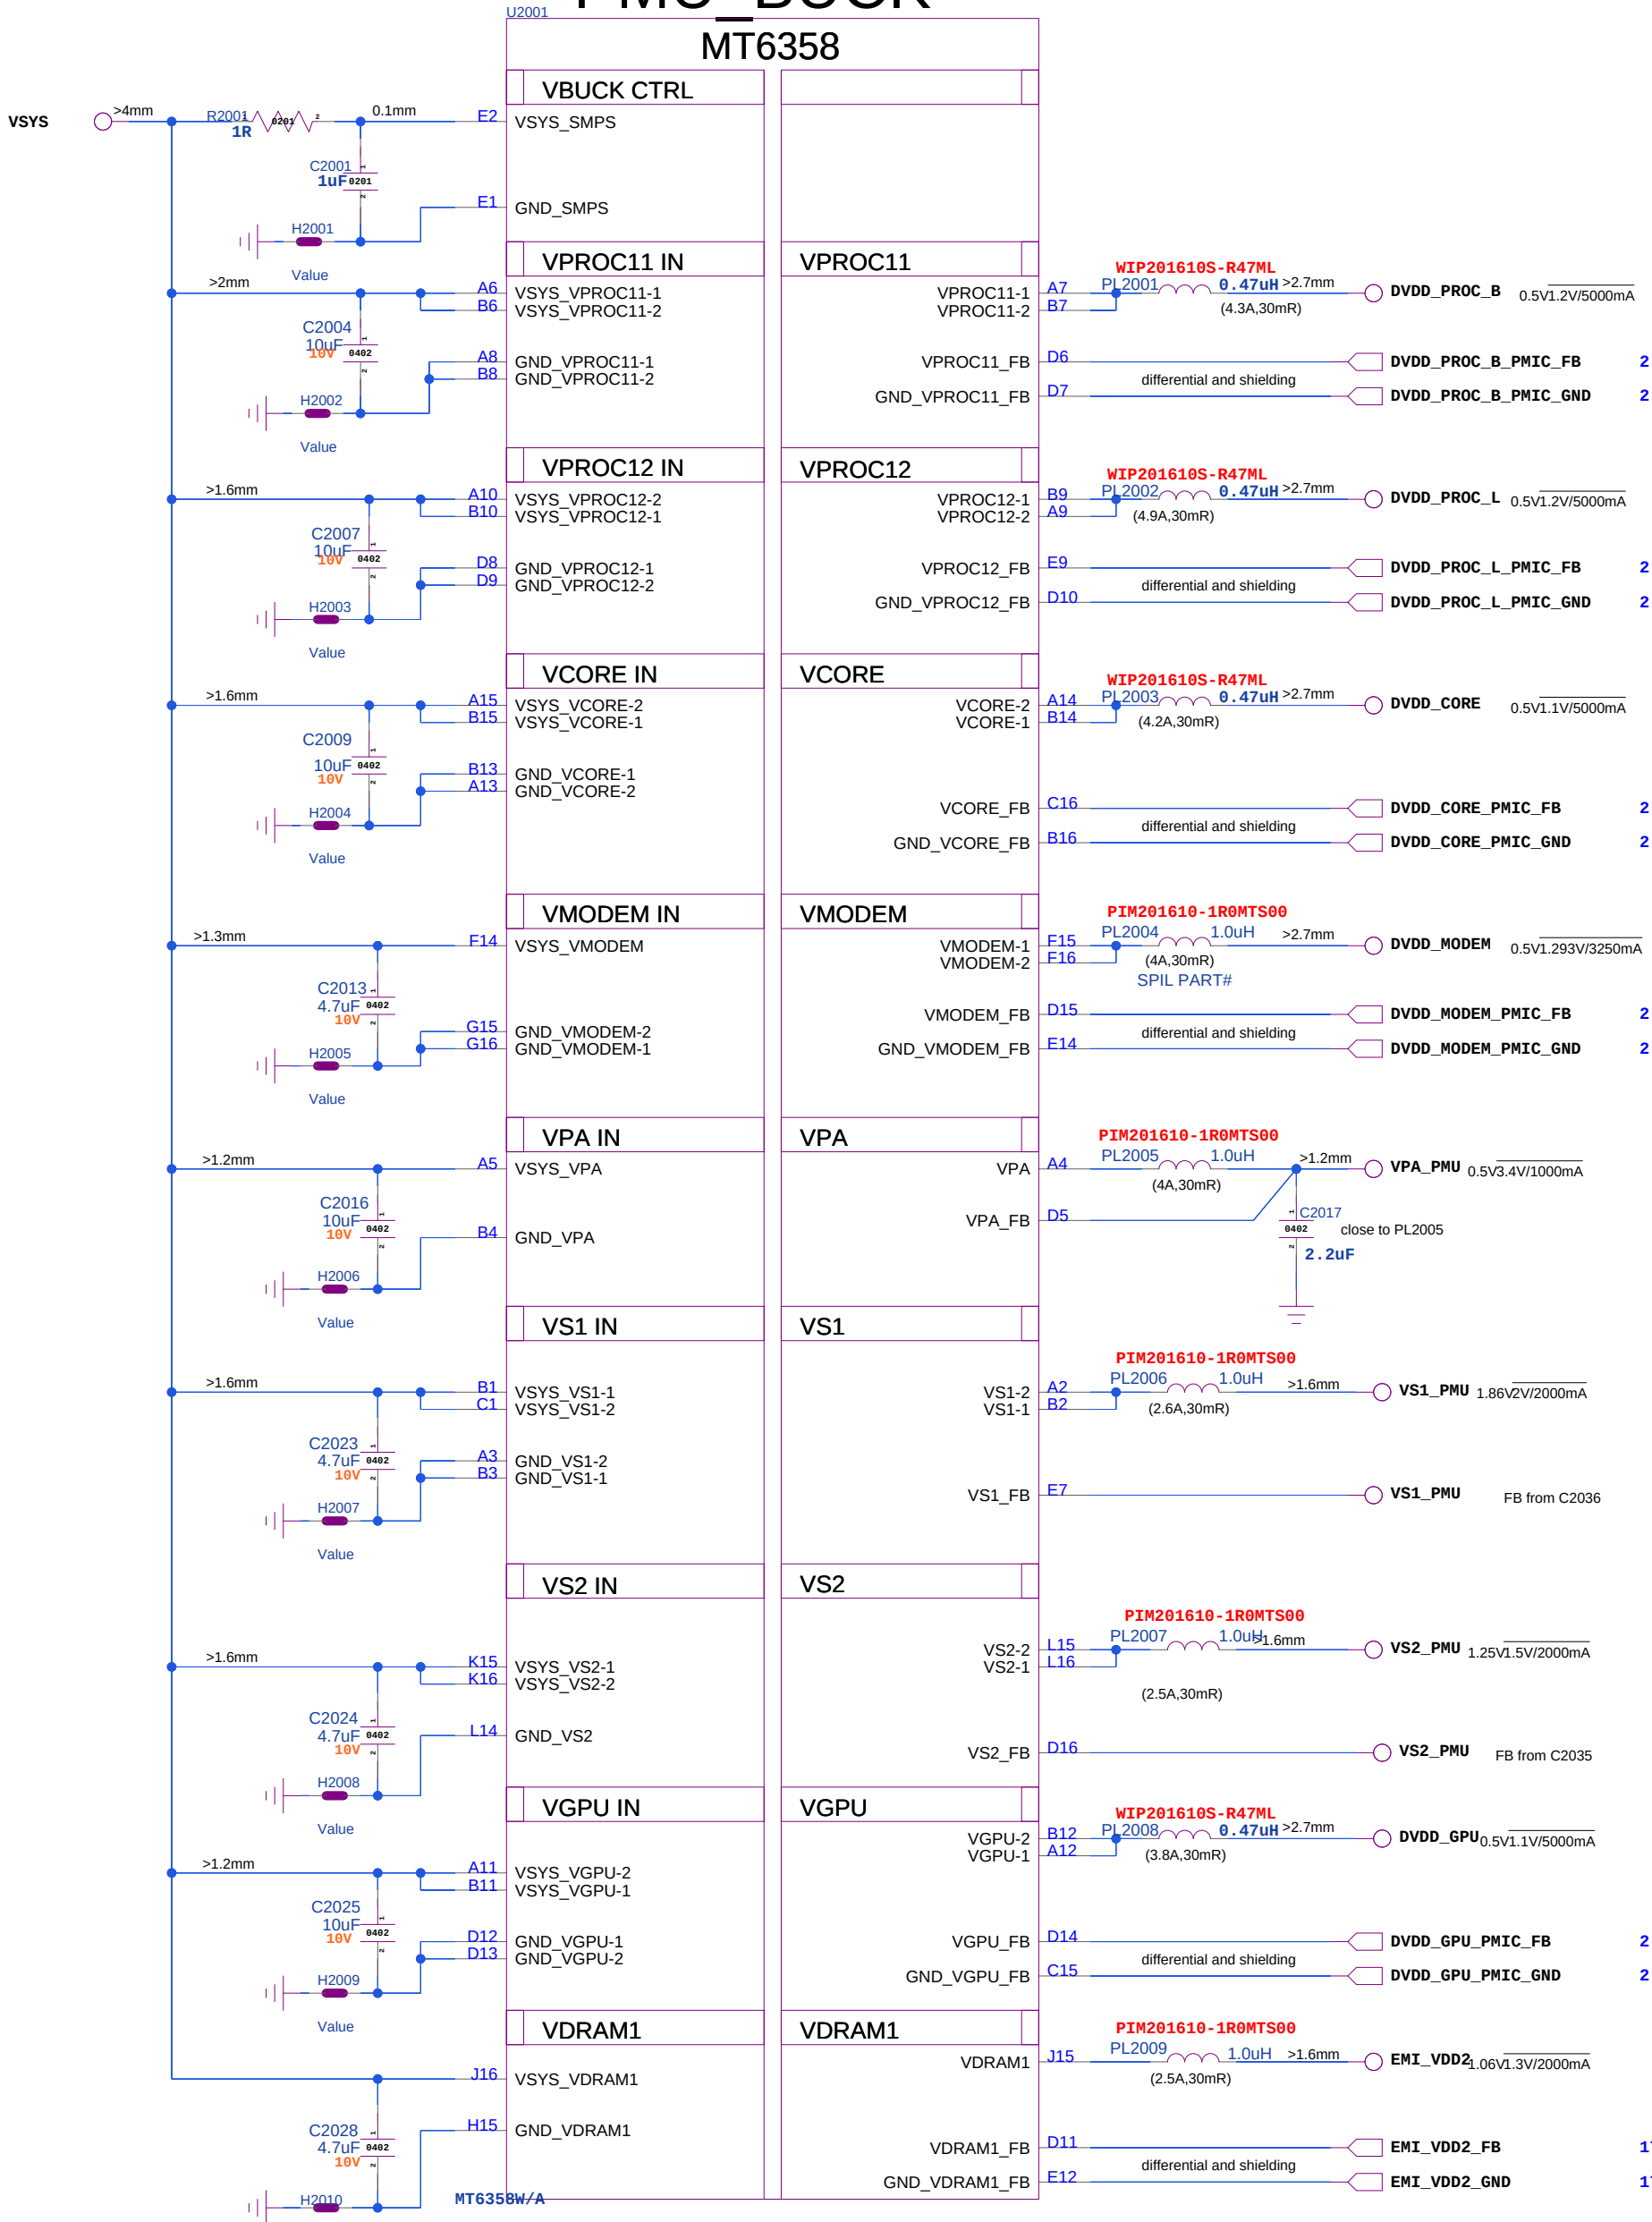

PMU_LDO

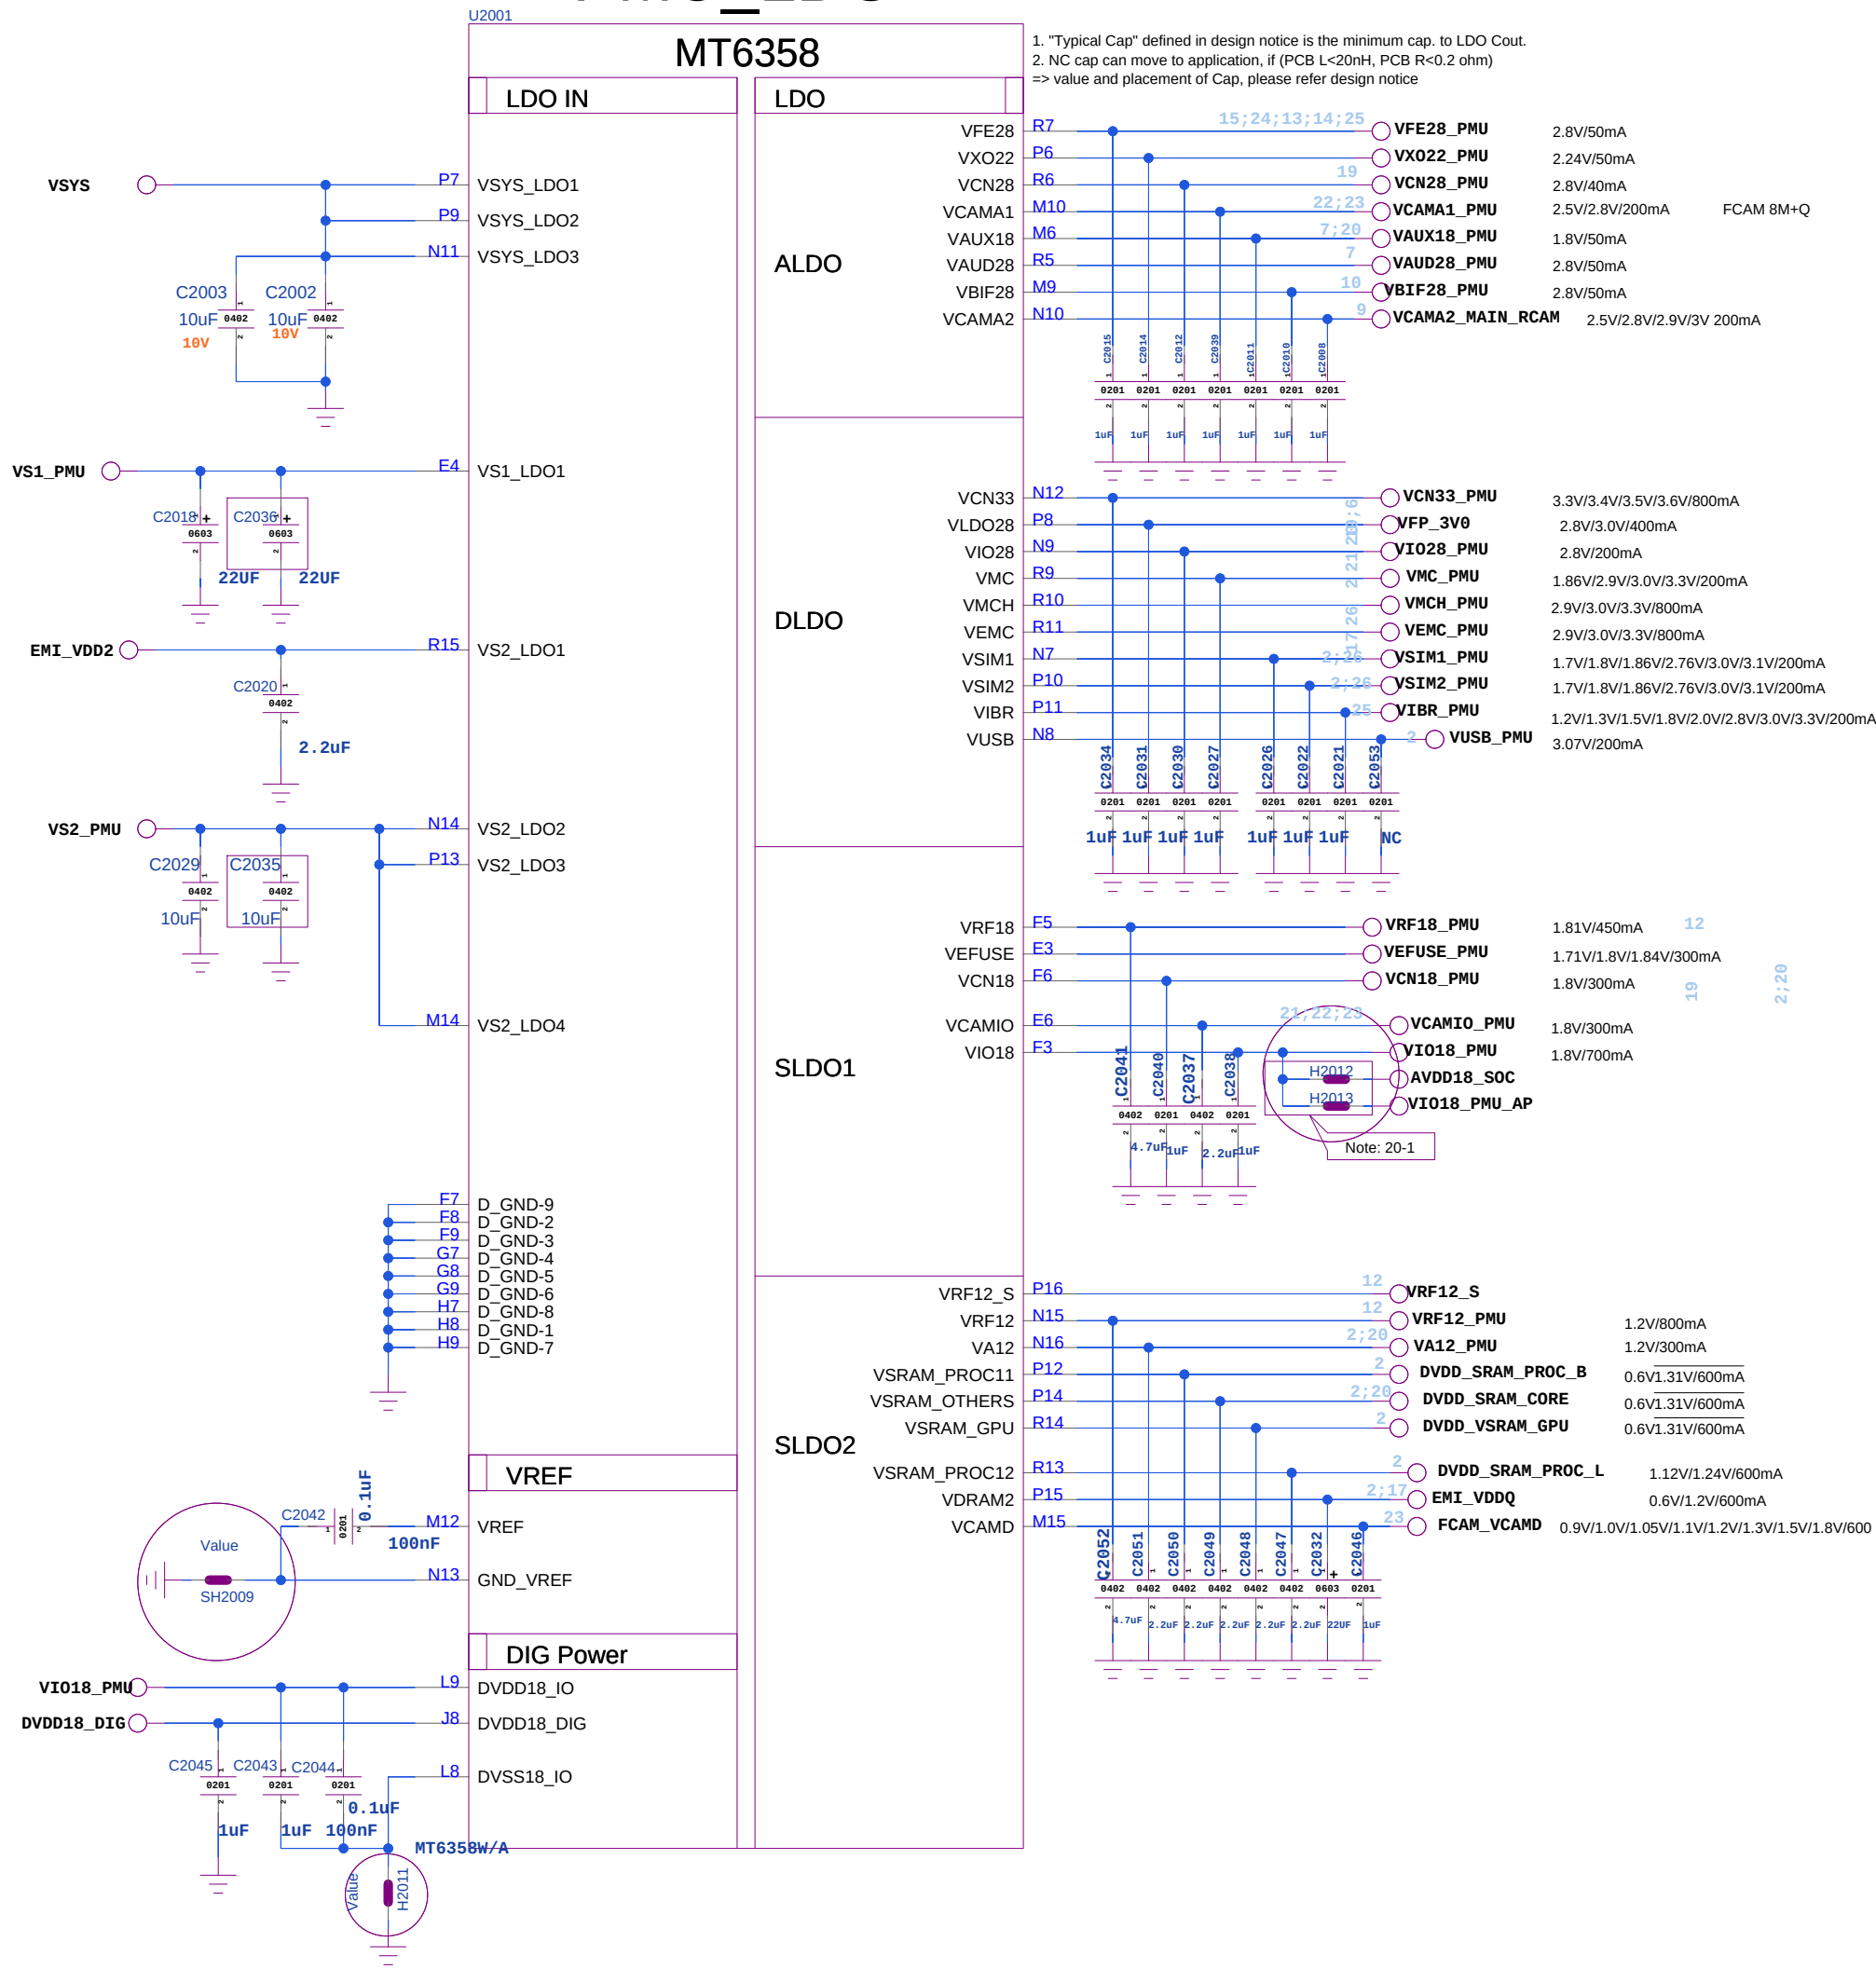

Schematic design notice of "21_POWER_MT6358-LDO" page.

Note 21-1: Please set H2012/H2013 close to C2038, making star connection between VIO18_PMU and AVDD18_SOC/VIO18_PMU_AP near to LDO cap. C2038
Please also refer to MT6358 design notice for further detail design information

COMPANY: TRANSSION HOLDINGS

MODEL:G85_STD_MAIN

Modified Date: 04/01/2025:13:53

DRAWN

DATED

TITLE: 20_POWER_MT6358_I

CHECKED

DATED

< >

Confidentiality








CONFIDENTIAL

VERSION:

SHEET: 6 OF 28

POWER_MT6358_II

REVISION RECORD			
LTR	ECO NO:	APPROVED:	DATE:

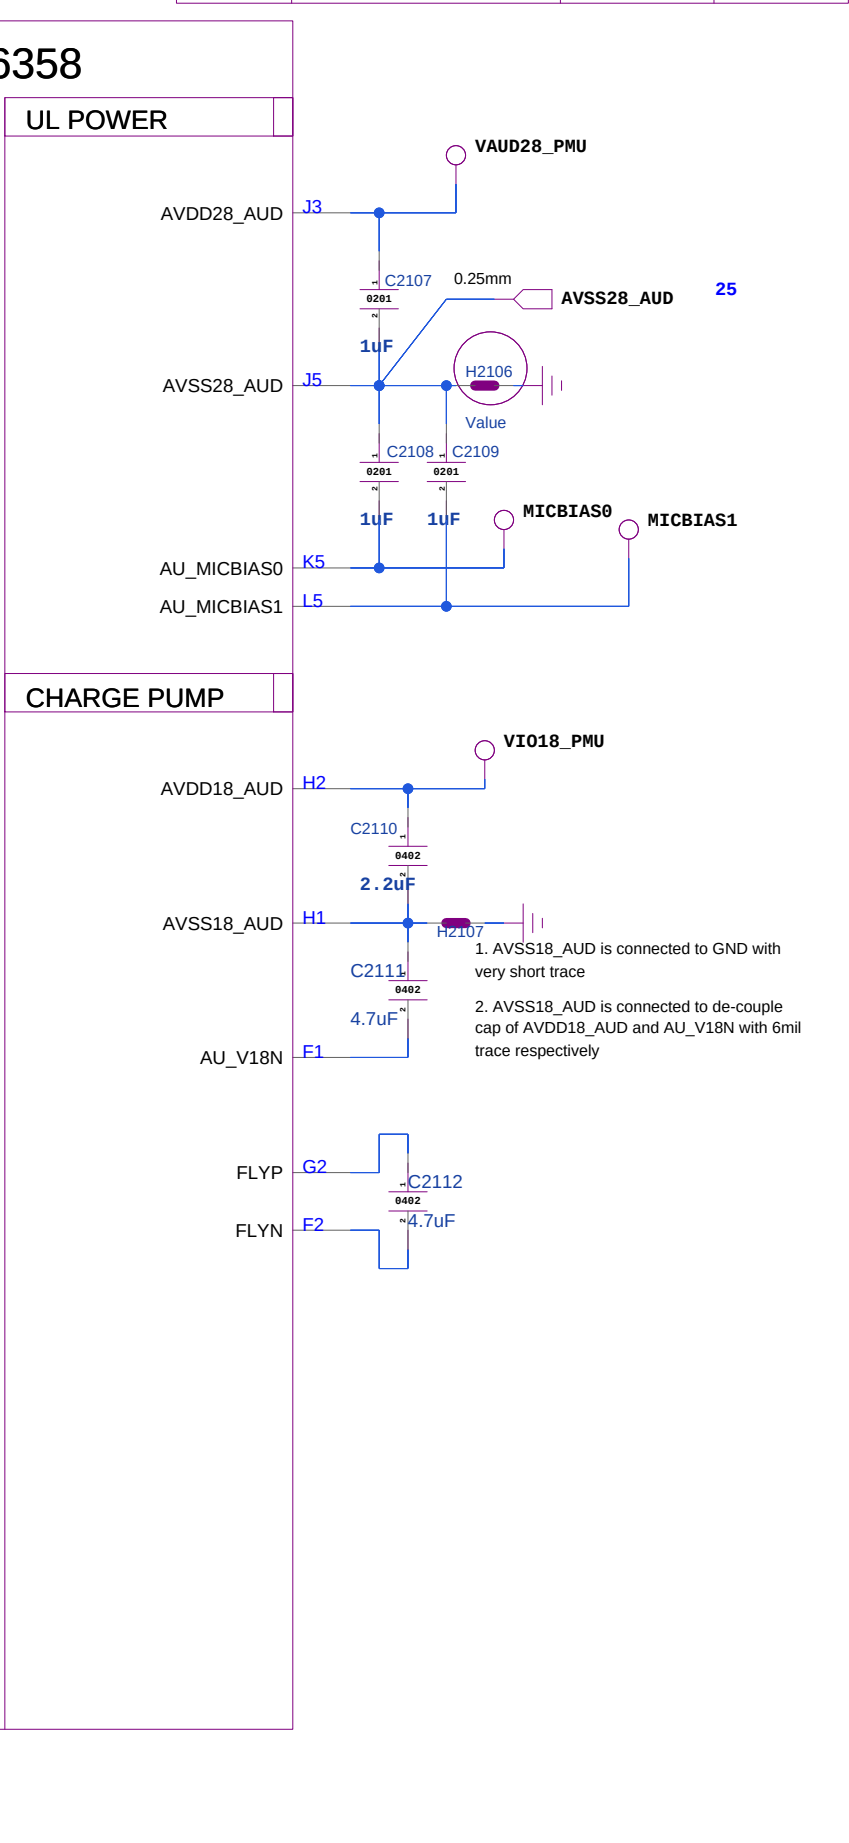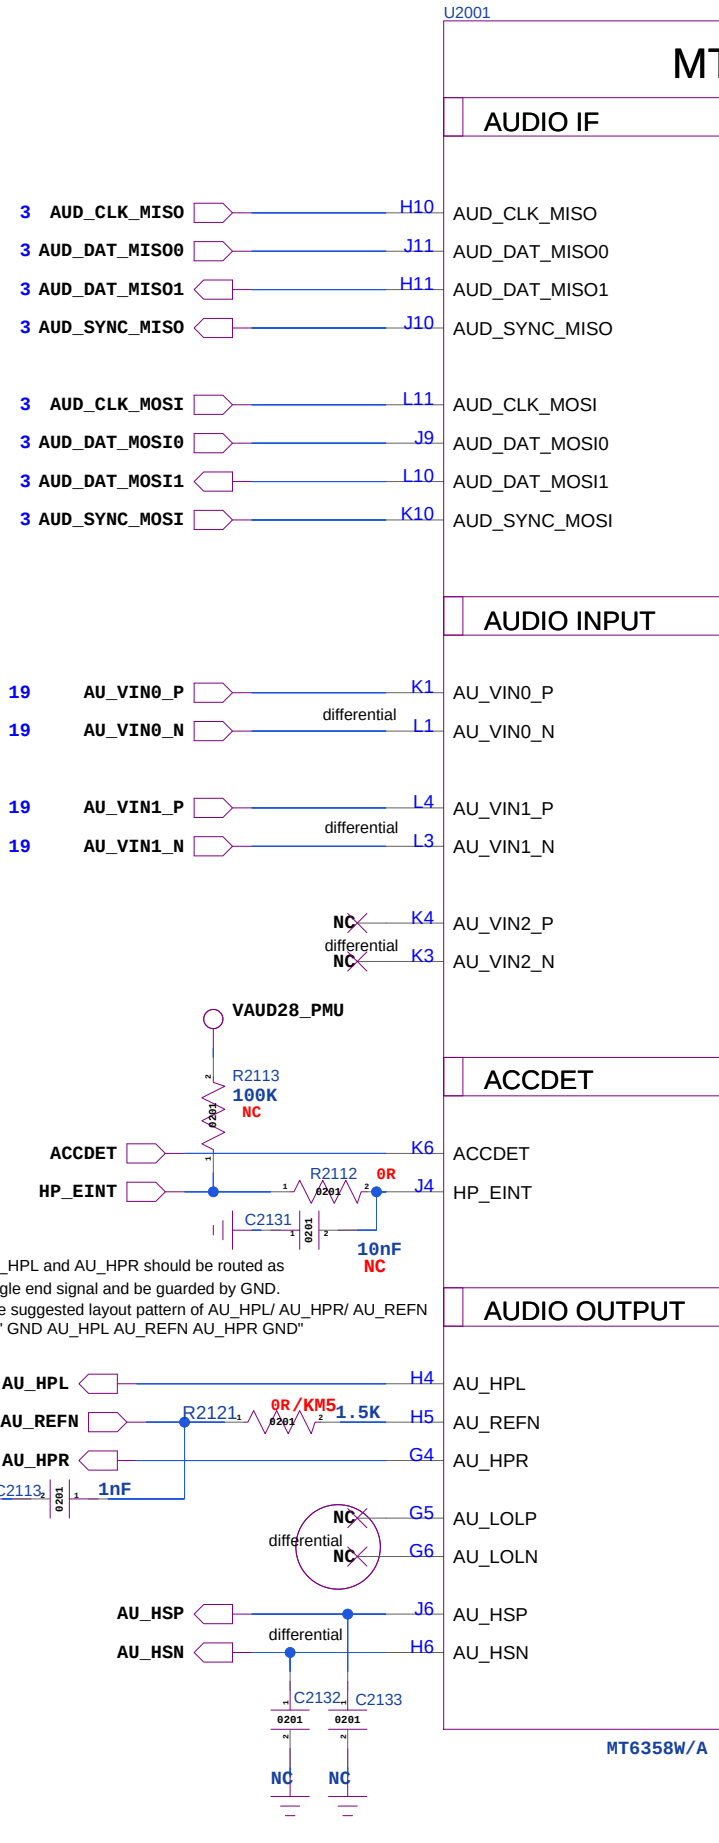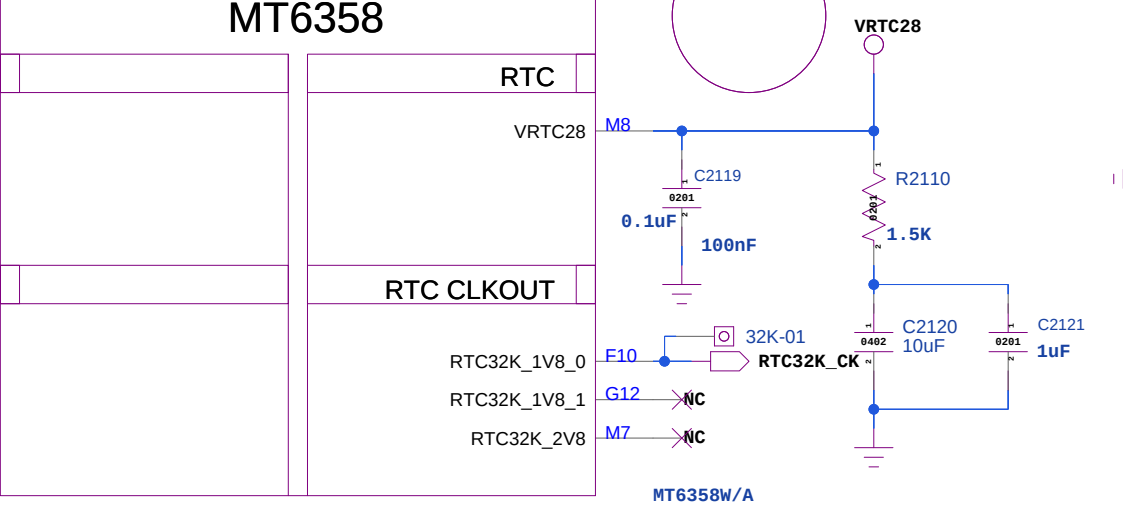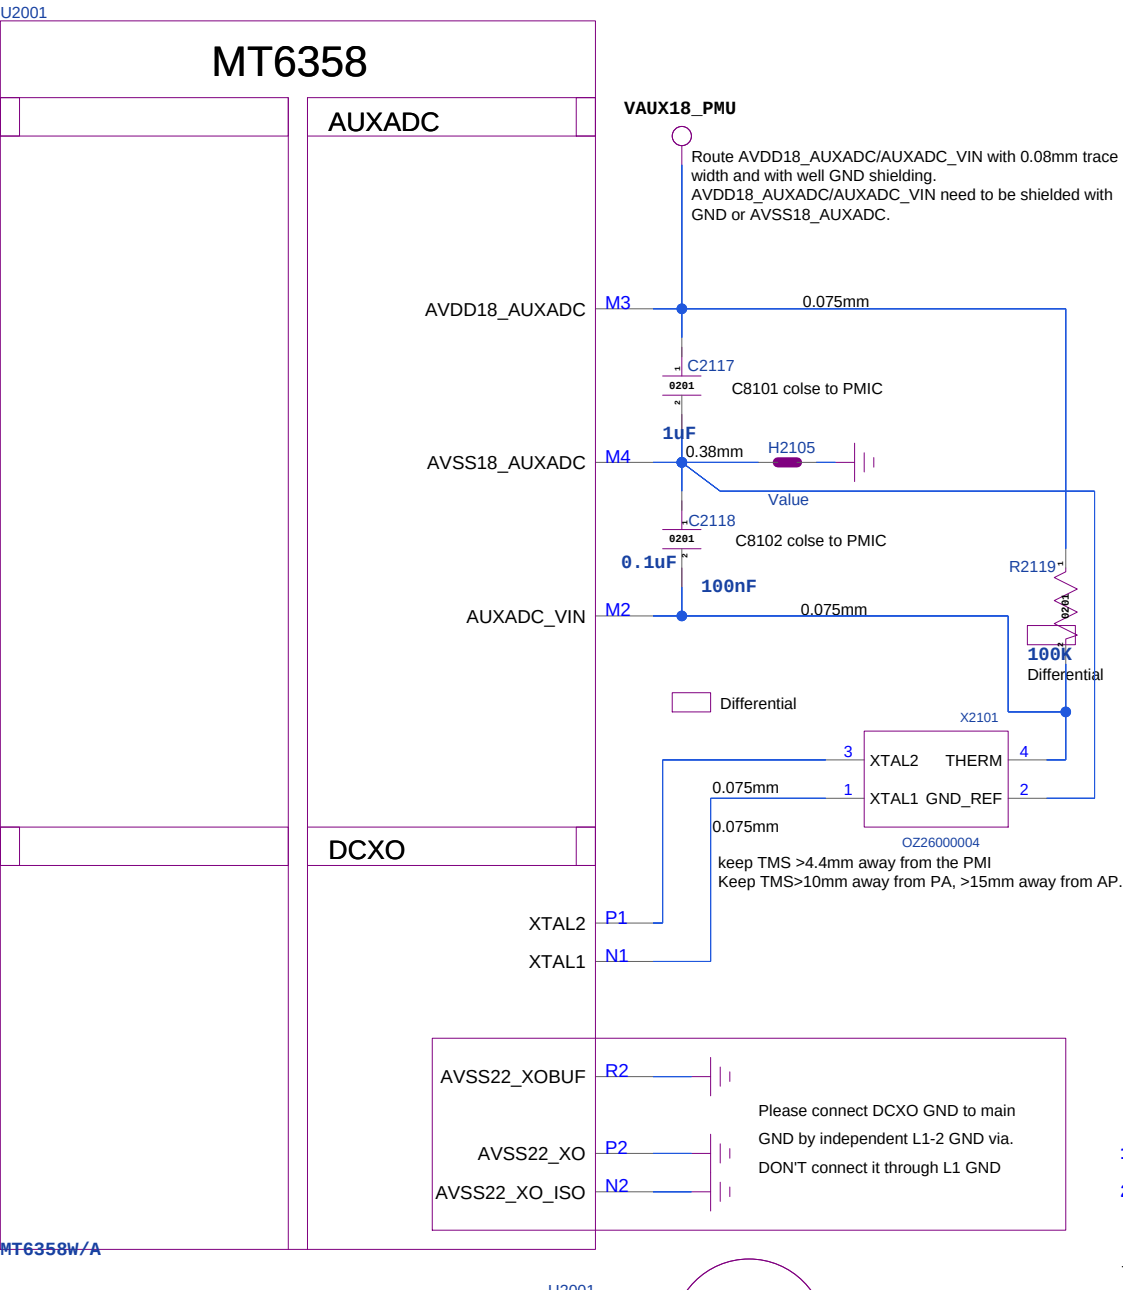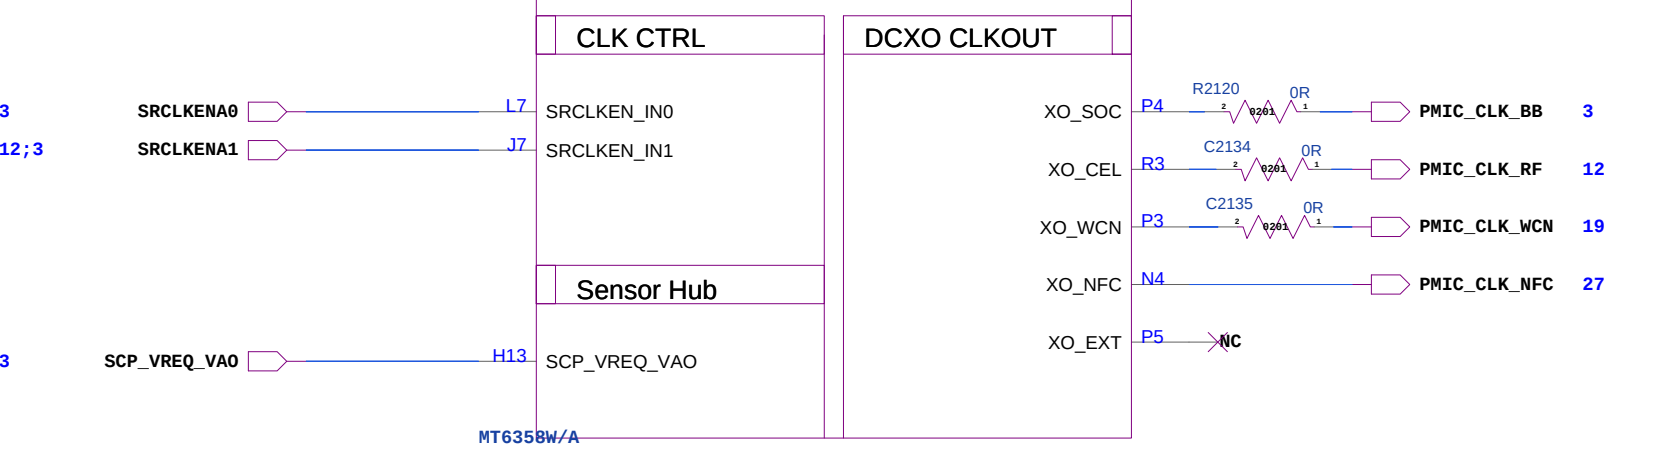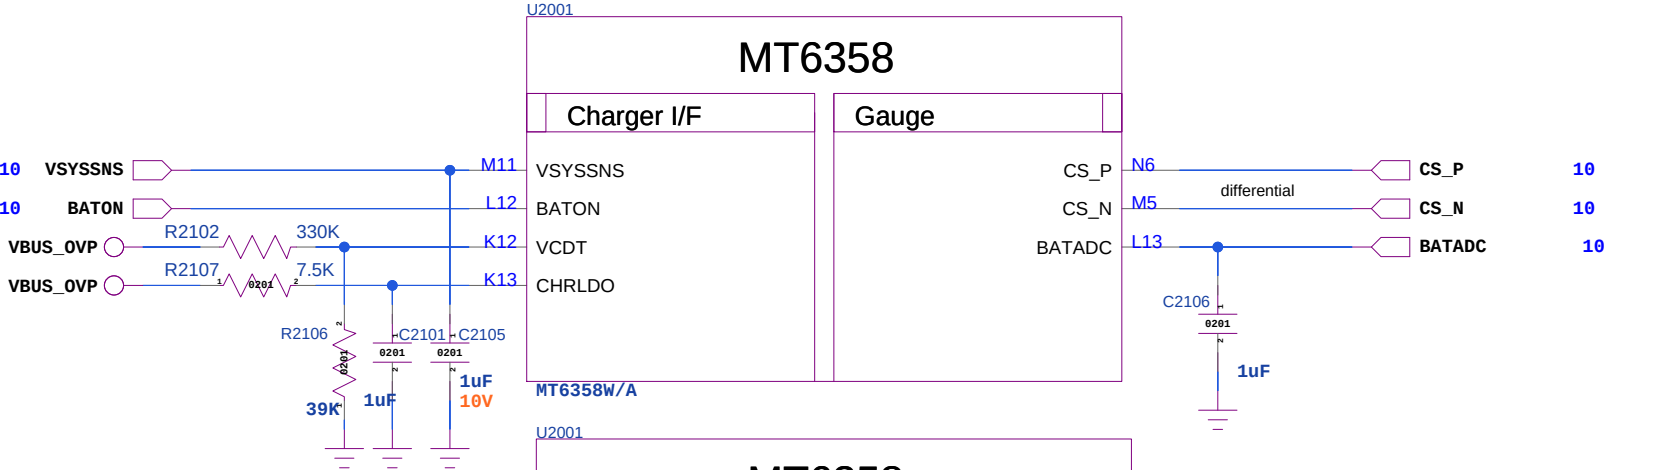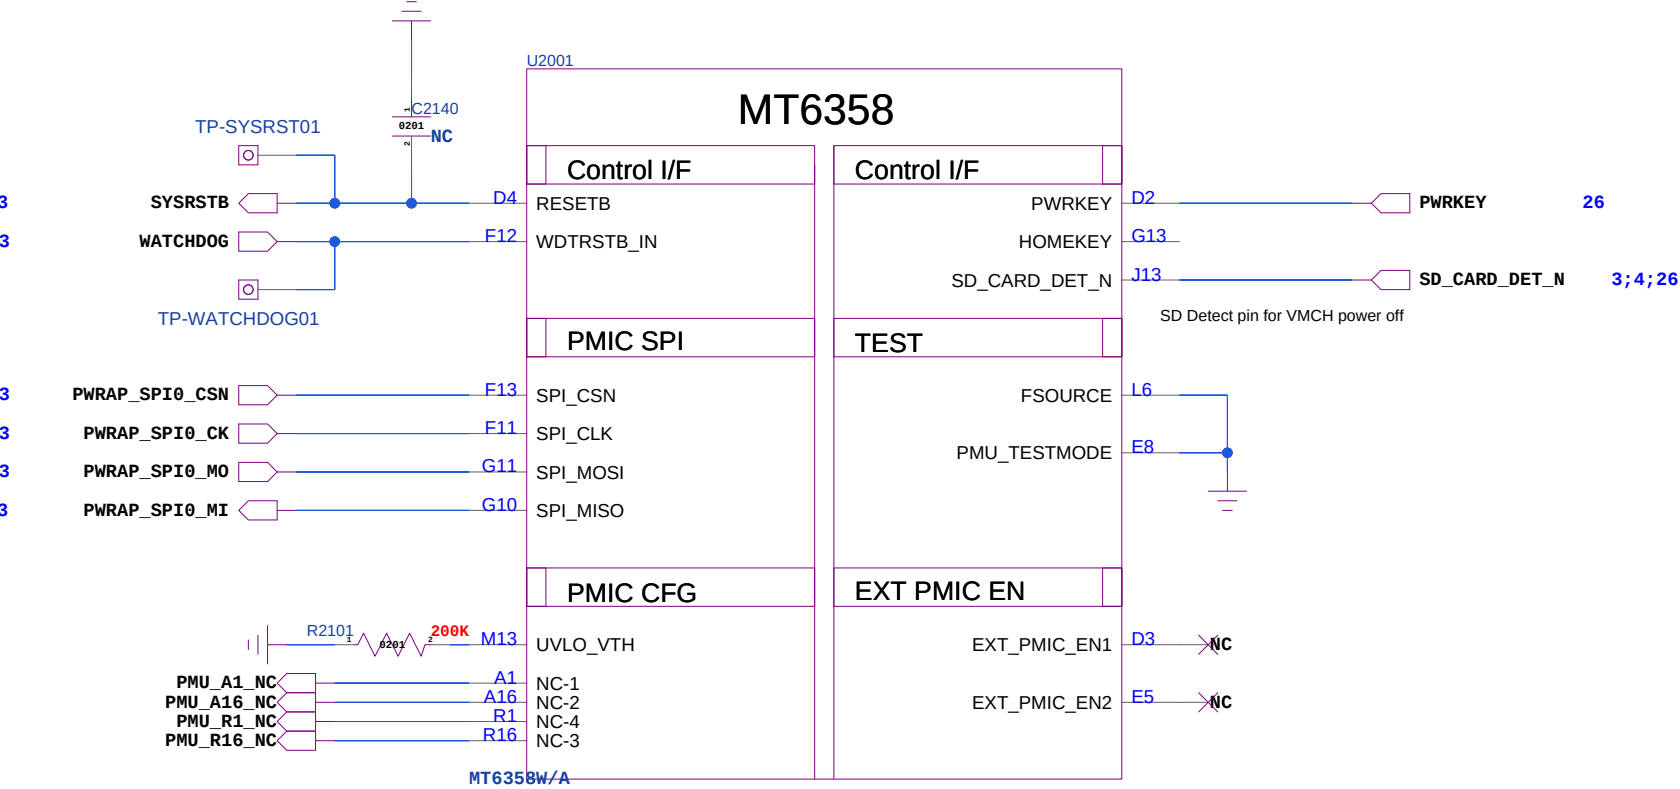

COMPANY: TRANSSION HOLDINGS

MODEL:G85_STD_MAIN

Modified Date: 20/02/2025:15:58

DRAWN

DATED

TITLE: 21_POWER_MT6358_II

VERSION:

SHEET: 7 OF 28

CHECKED

DATED


< >

Confidentiality


CONFIDENTIAL

POWER_THIRD-PARTY_I
FRONT CAMERA FLASH LED


REVISION RECORD			
LTR	ECO NO:	APPROVED:	DATE:

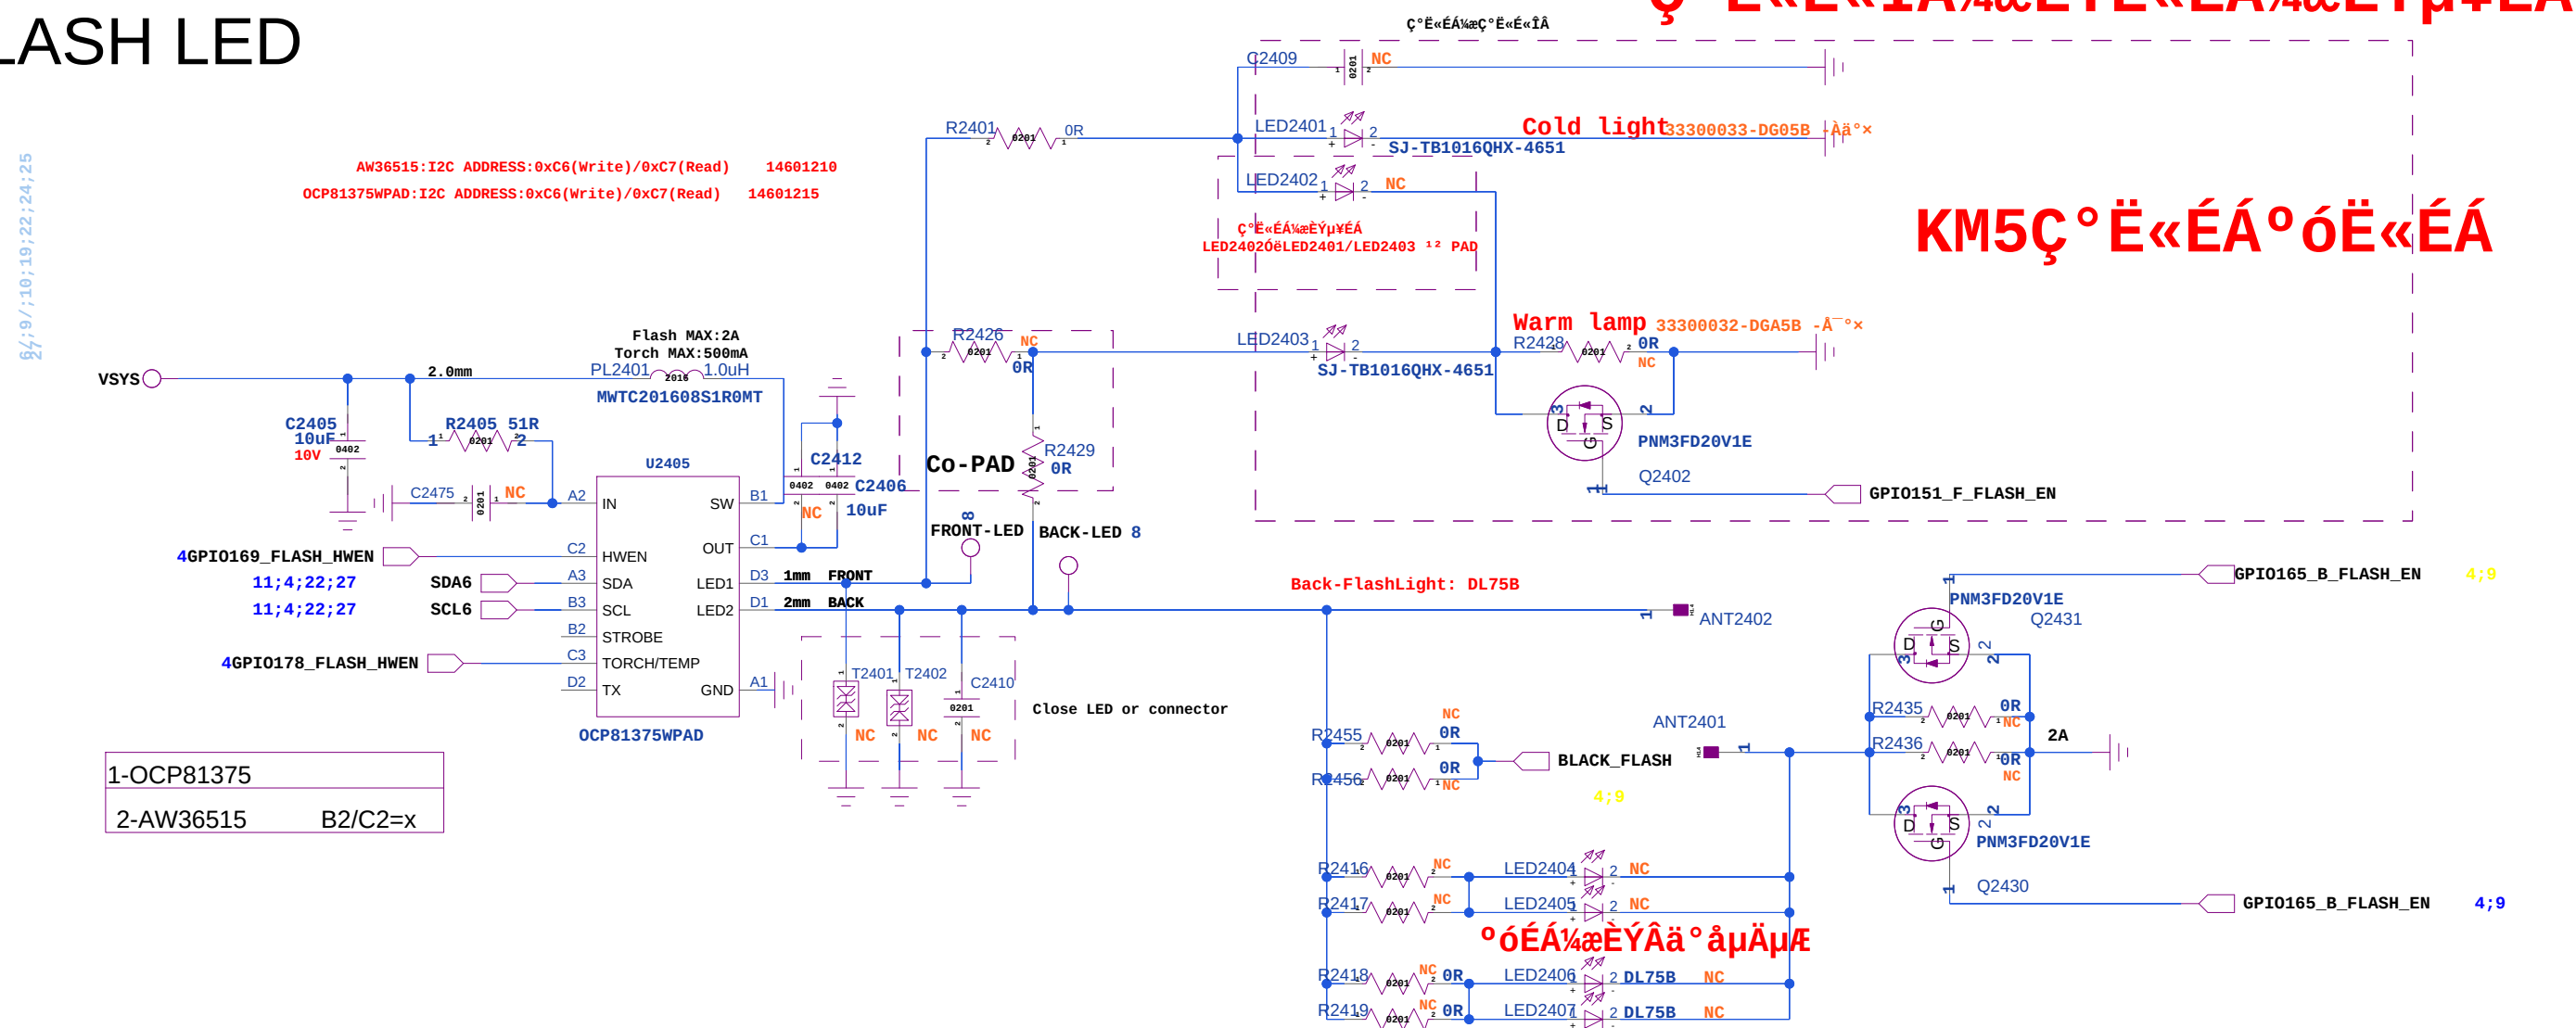


LCM BIAS

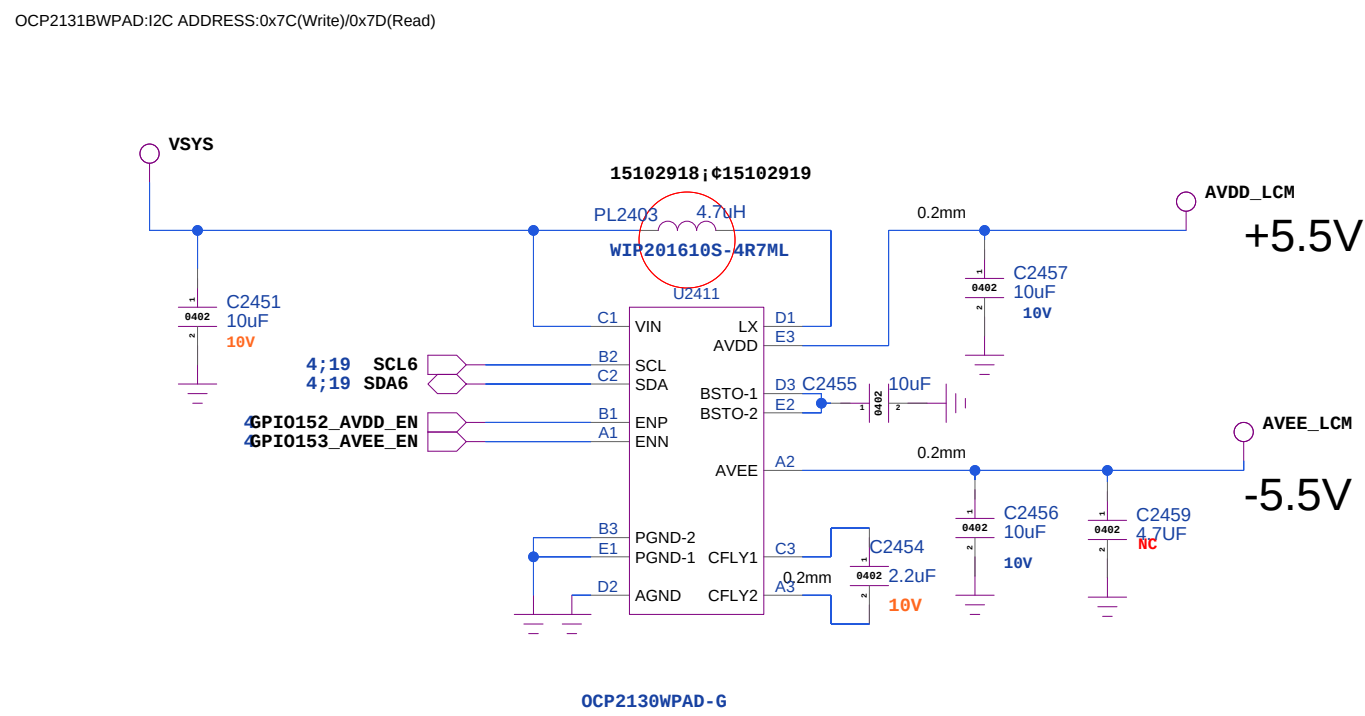

Rearcam AFDD(2.8V)

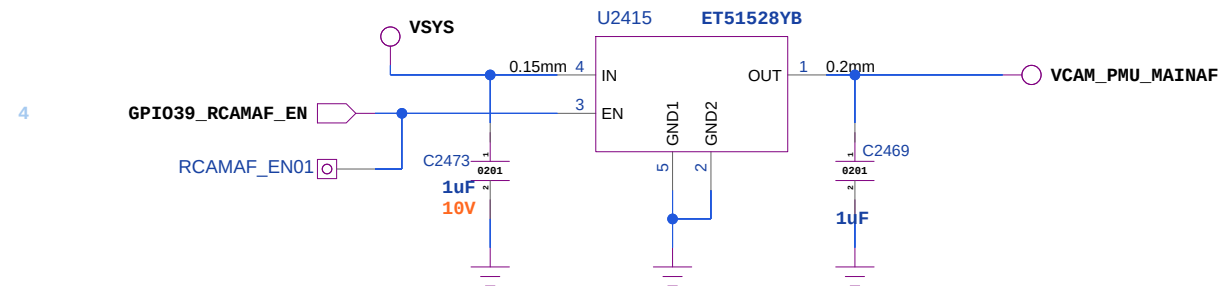


Forcam DVDD(1.2V)

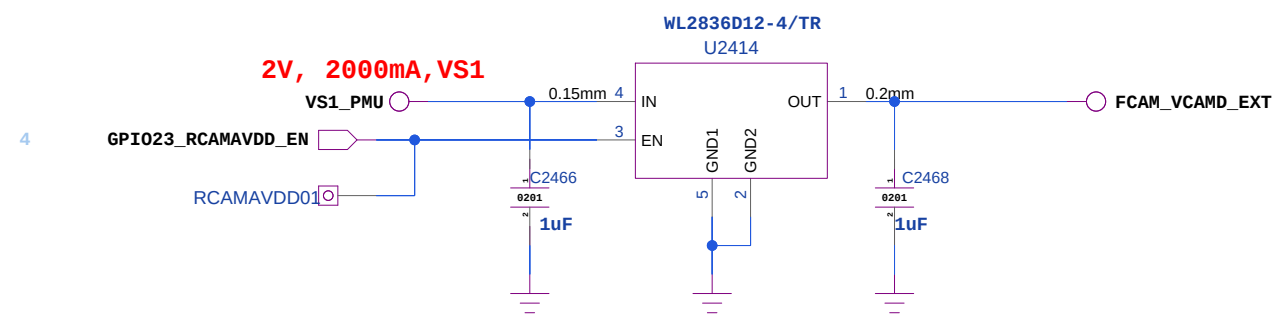

LCM LED

Change to AW9962

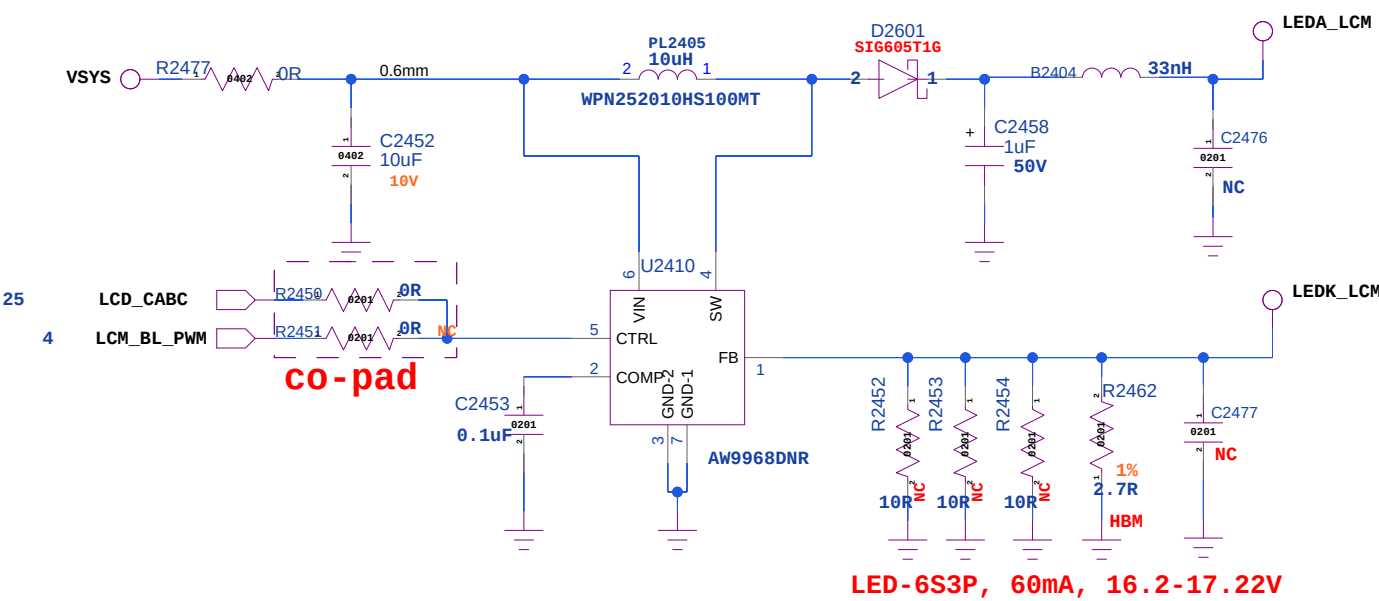


COMPANY: TRANSSION HOLDINGS				MODEL:G85_STD_MAIN		Modified Date: 09/01/2025:11:29	
DRAWN		DATED		TITLE: 24_POWER_THIRD-PARTY_II		VERSION: SHEET: 9 OF 27	
CHECKED		DATED	< >	Confidentiality	CONFIDENTIAL		

POWER_THIRD-PARTY_II


KM5- -18W³âµç5200mAh+20Wİİİ³ä

REVISION RECORD			
LTR	ECO NO:	APPROVED:	DATE:


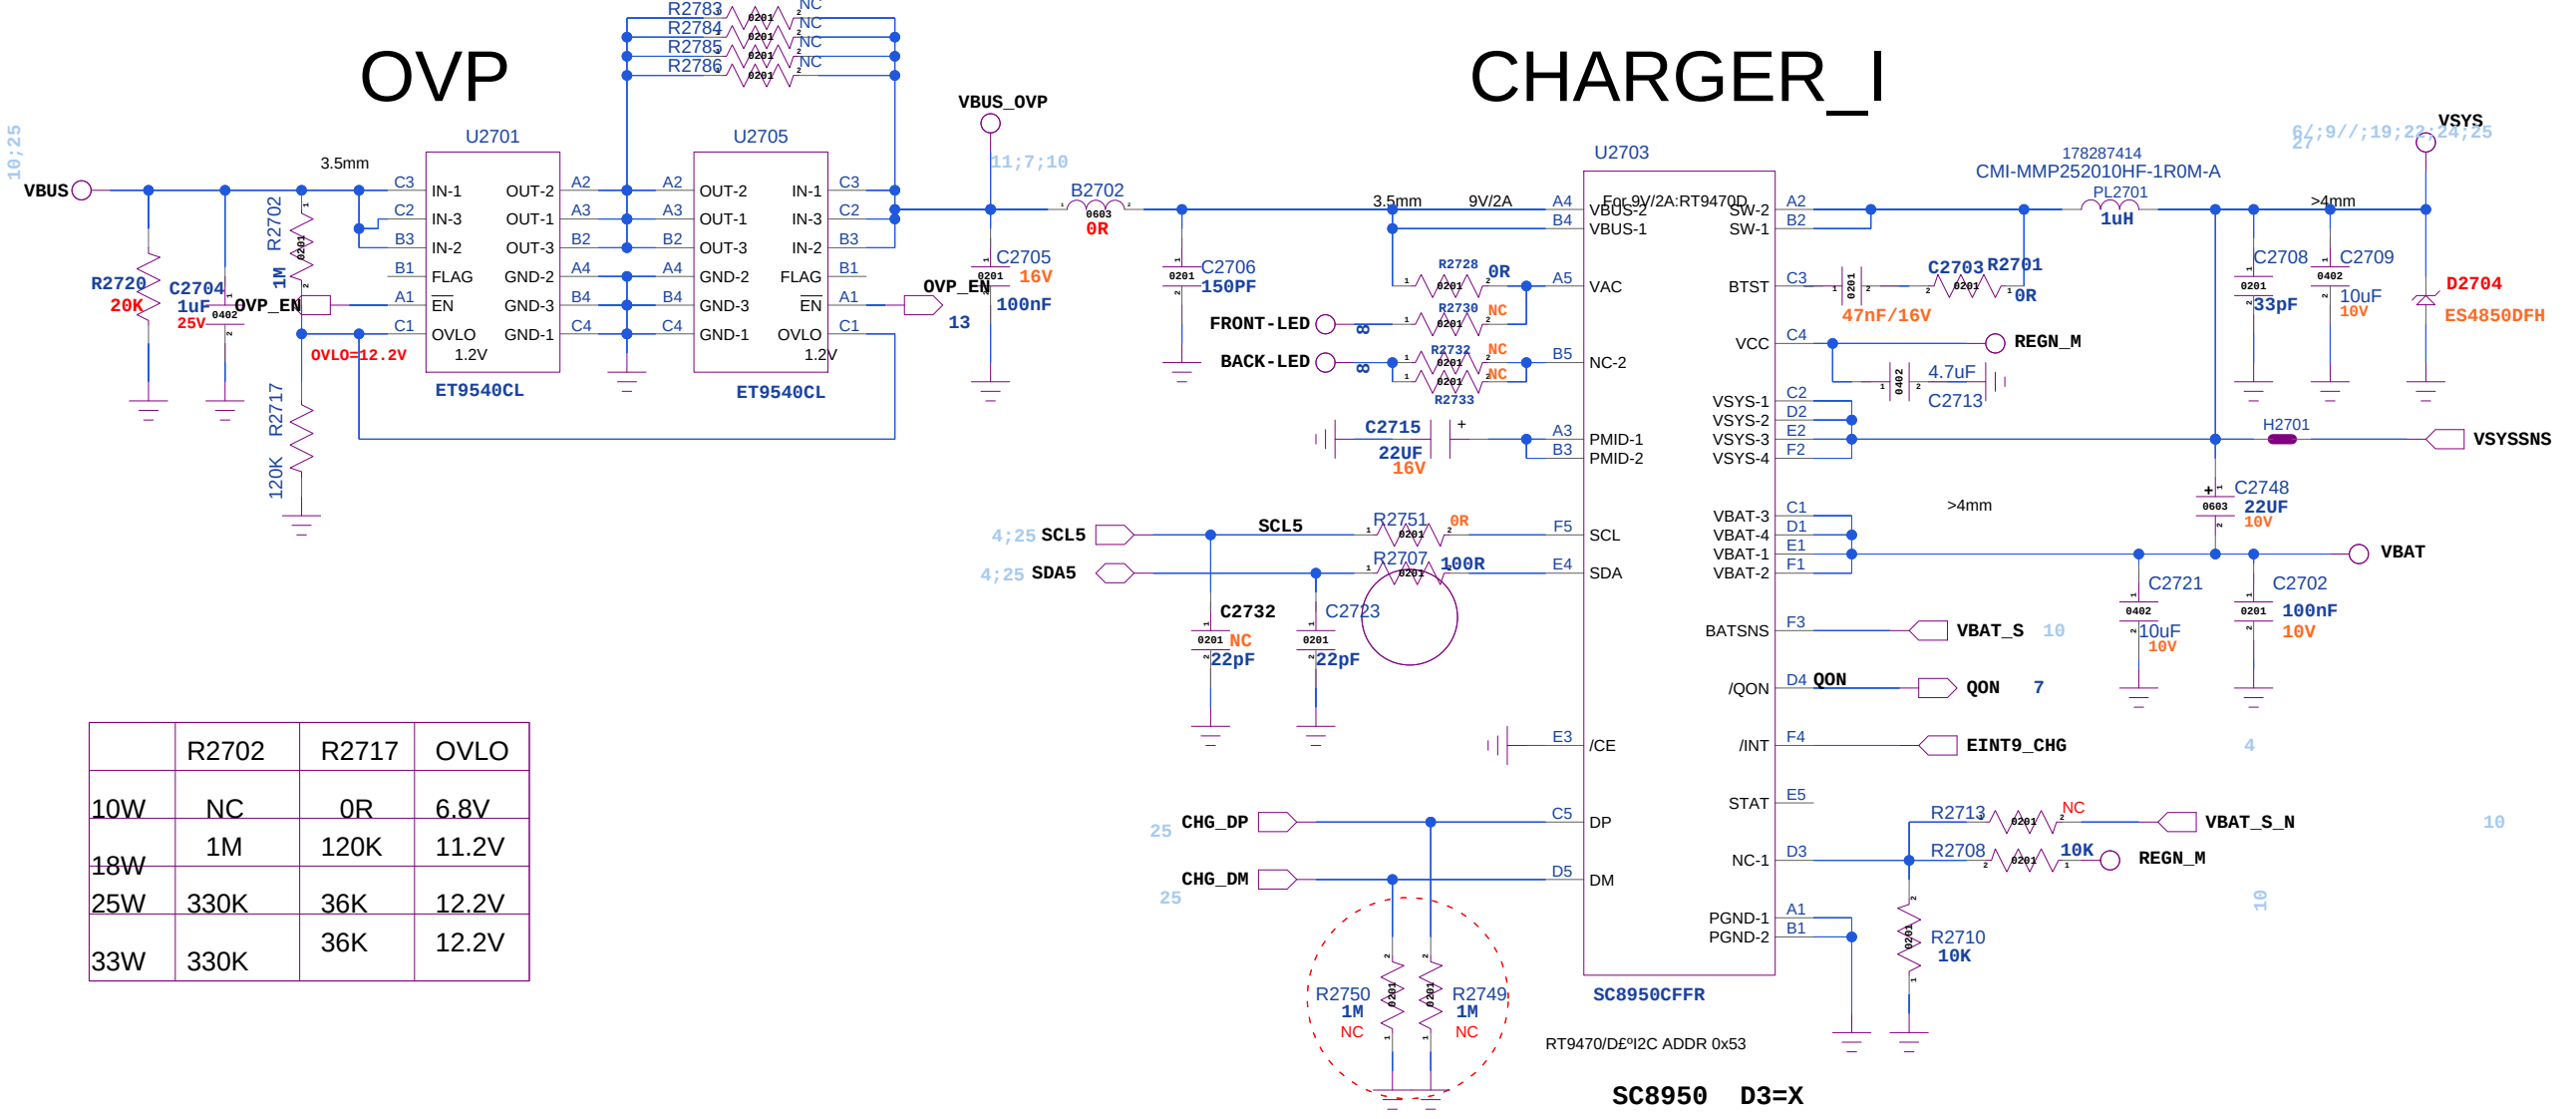


Thermistor to sense U2703 temperature

OVP+Wireless detect

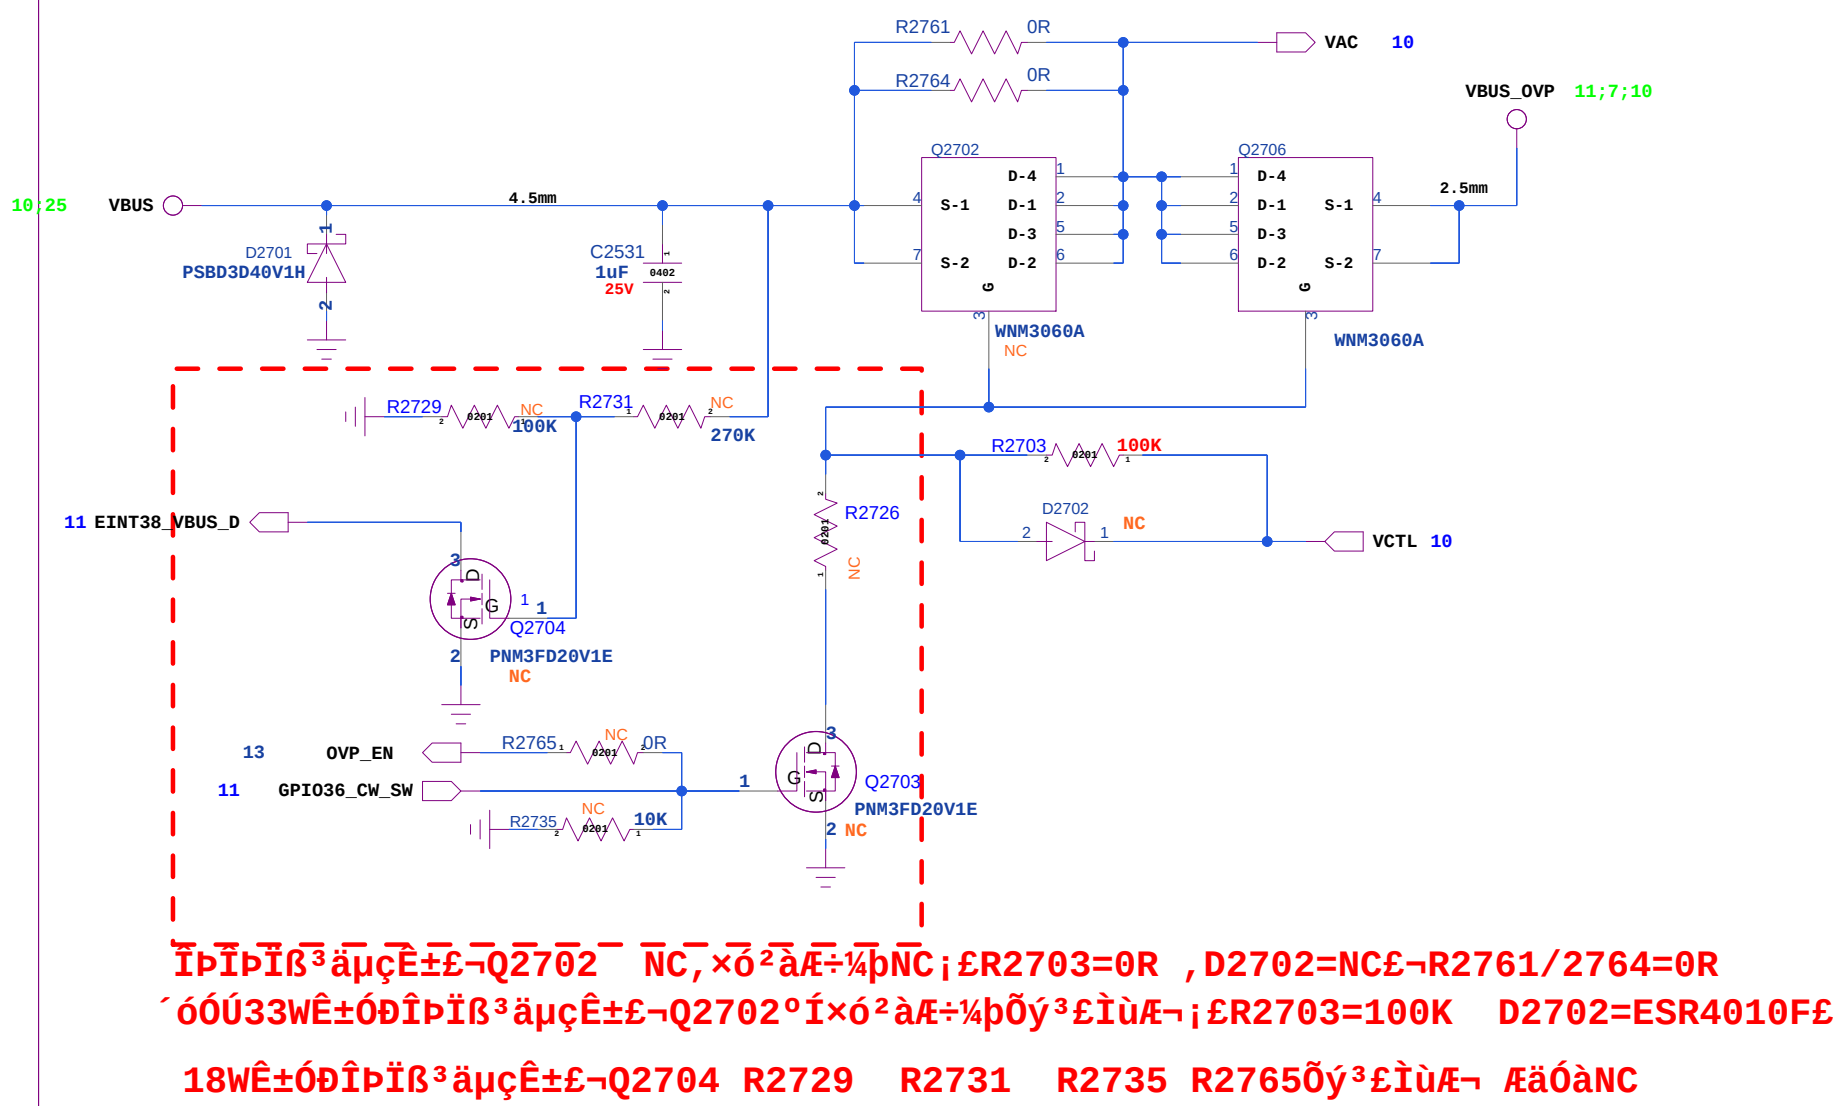


BATTERY CONNECTOR

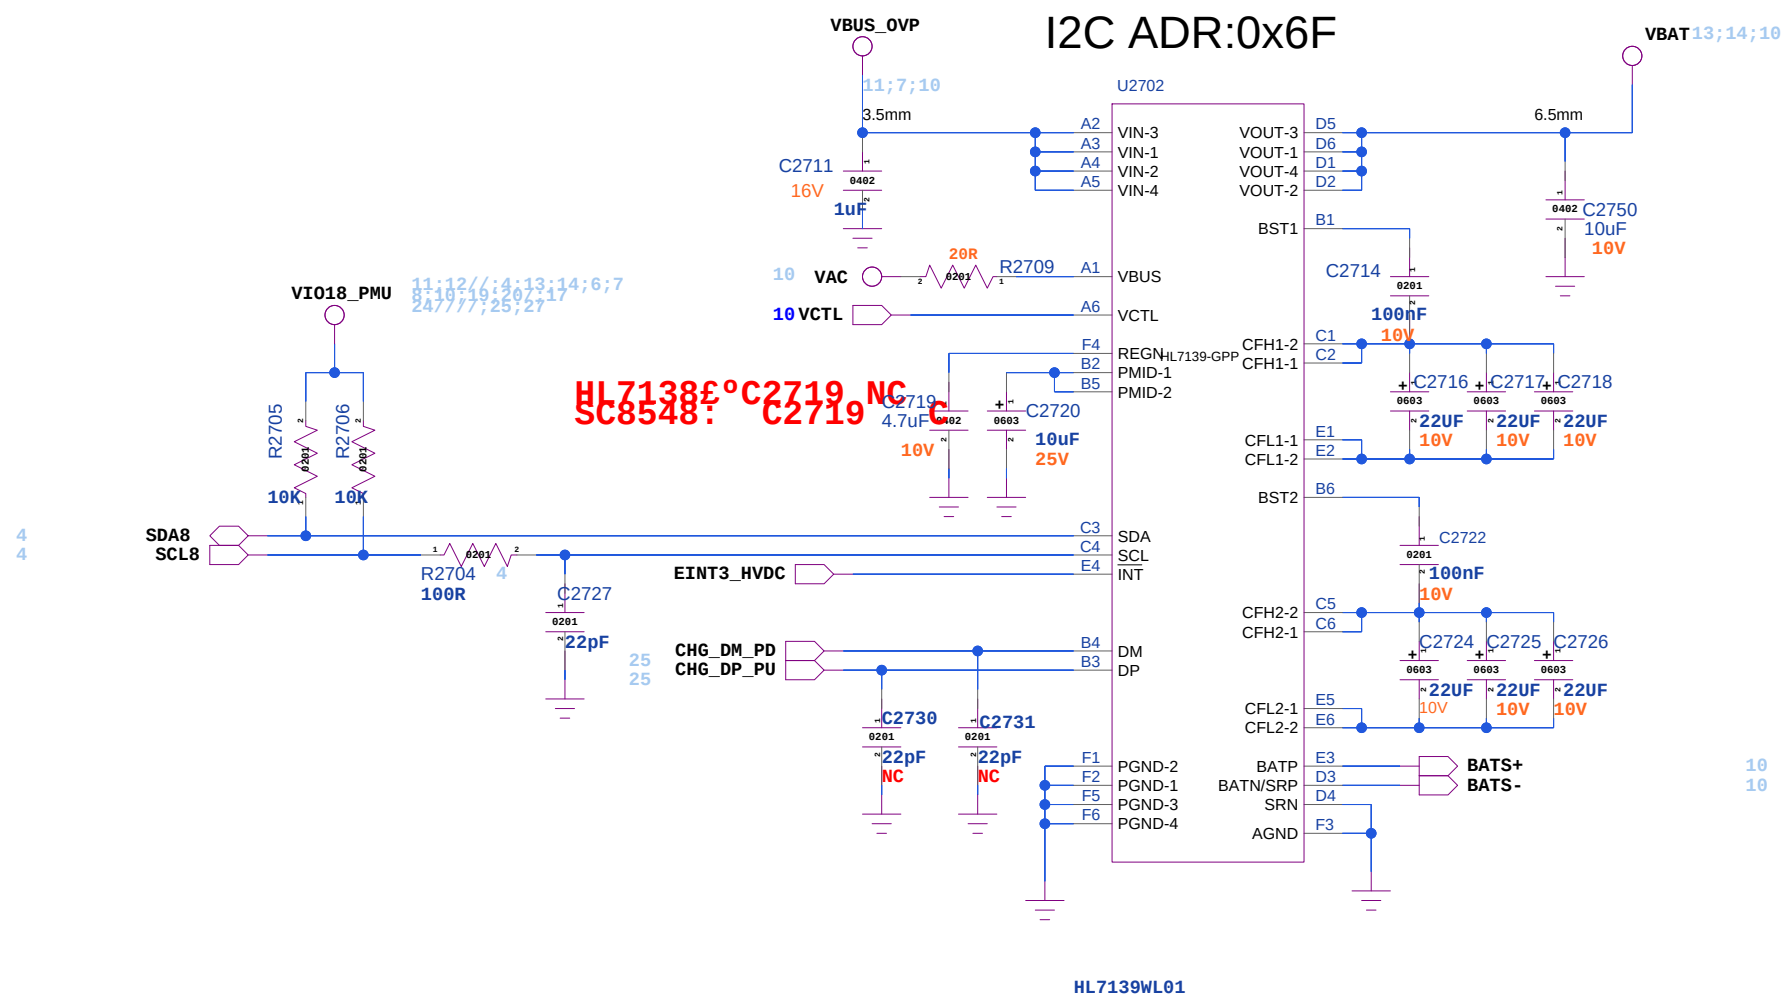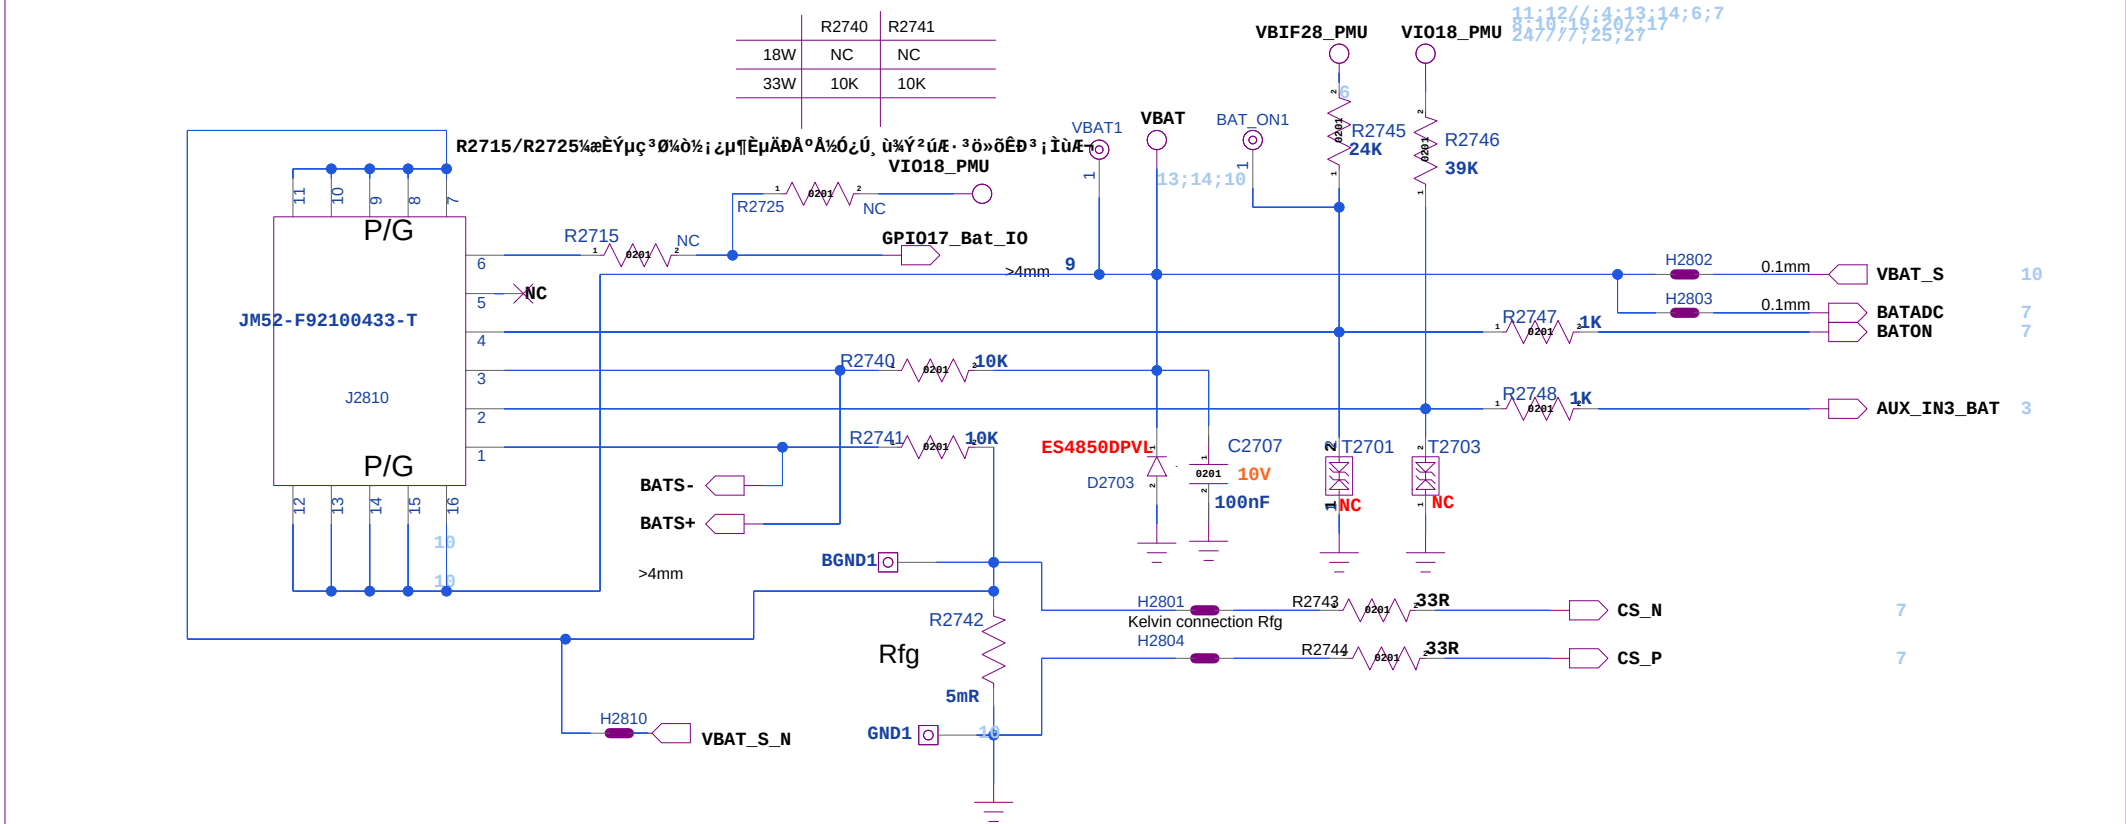

COMPANY: TRANSSION HOLDINGS				MODEL:G85_STD_MAIN		Modified Date: 08/01/2025:16:36	
DRAWN		DATED		TITLE: 27_POWER_THIRD-PARTY_III		VERSION: SHEET: 10 OF 28	
CHECKED		DATED	< >	Confidentiality	CONFIDENTIAL		

KL6 - - 2»ÖŞ³ÖİPİß20W³äµç




REVISION RECORD			
LTR	ECO NO:	APPROVED:	DATE:

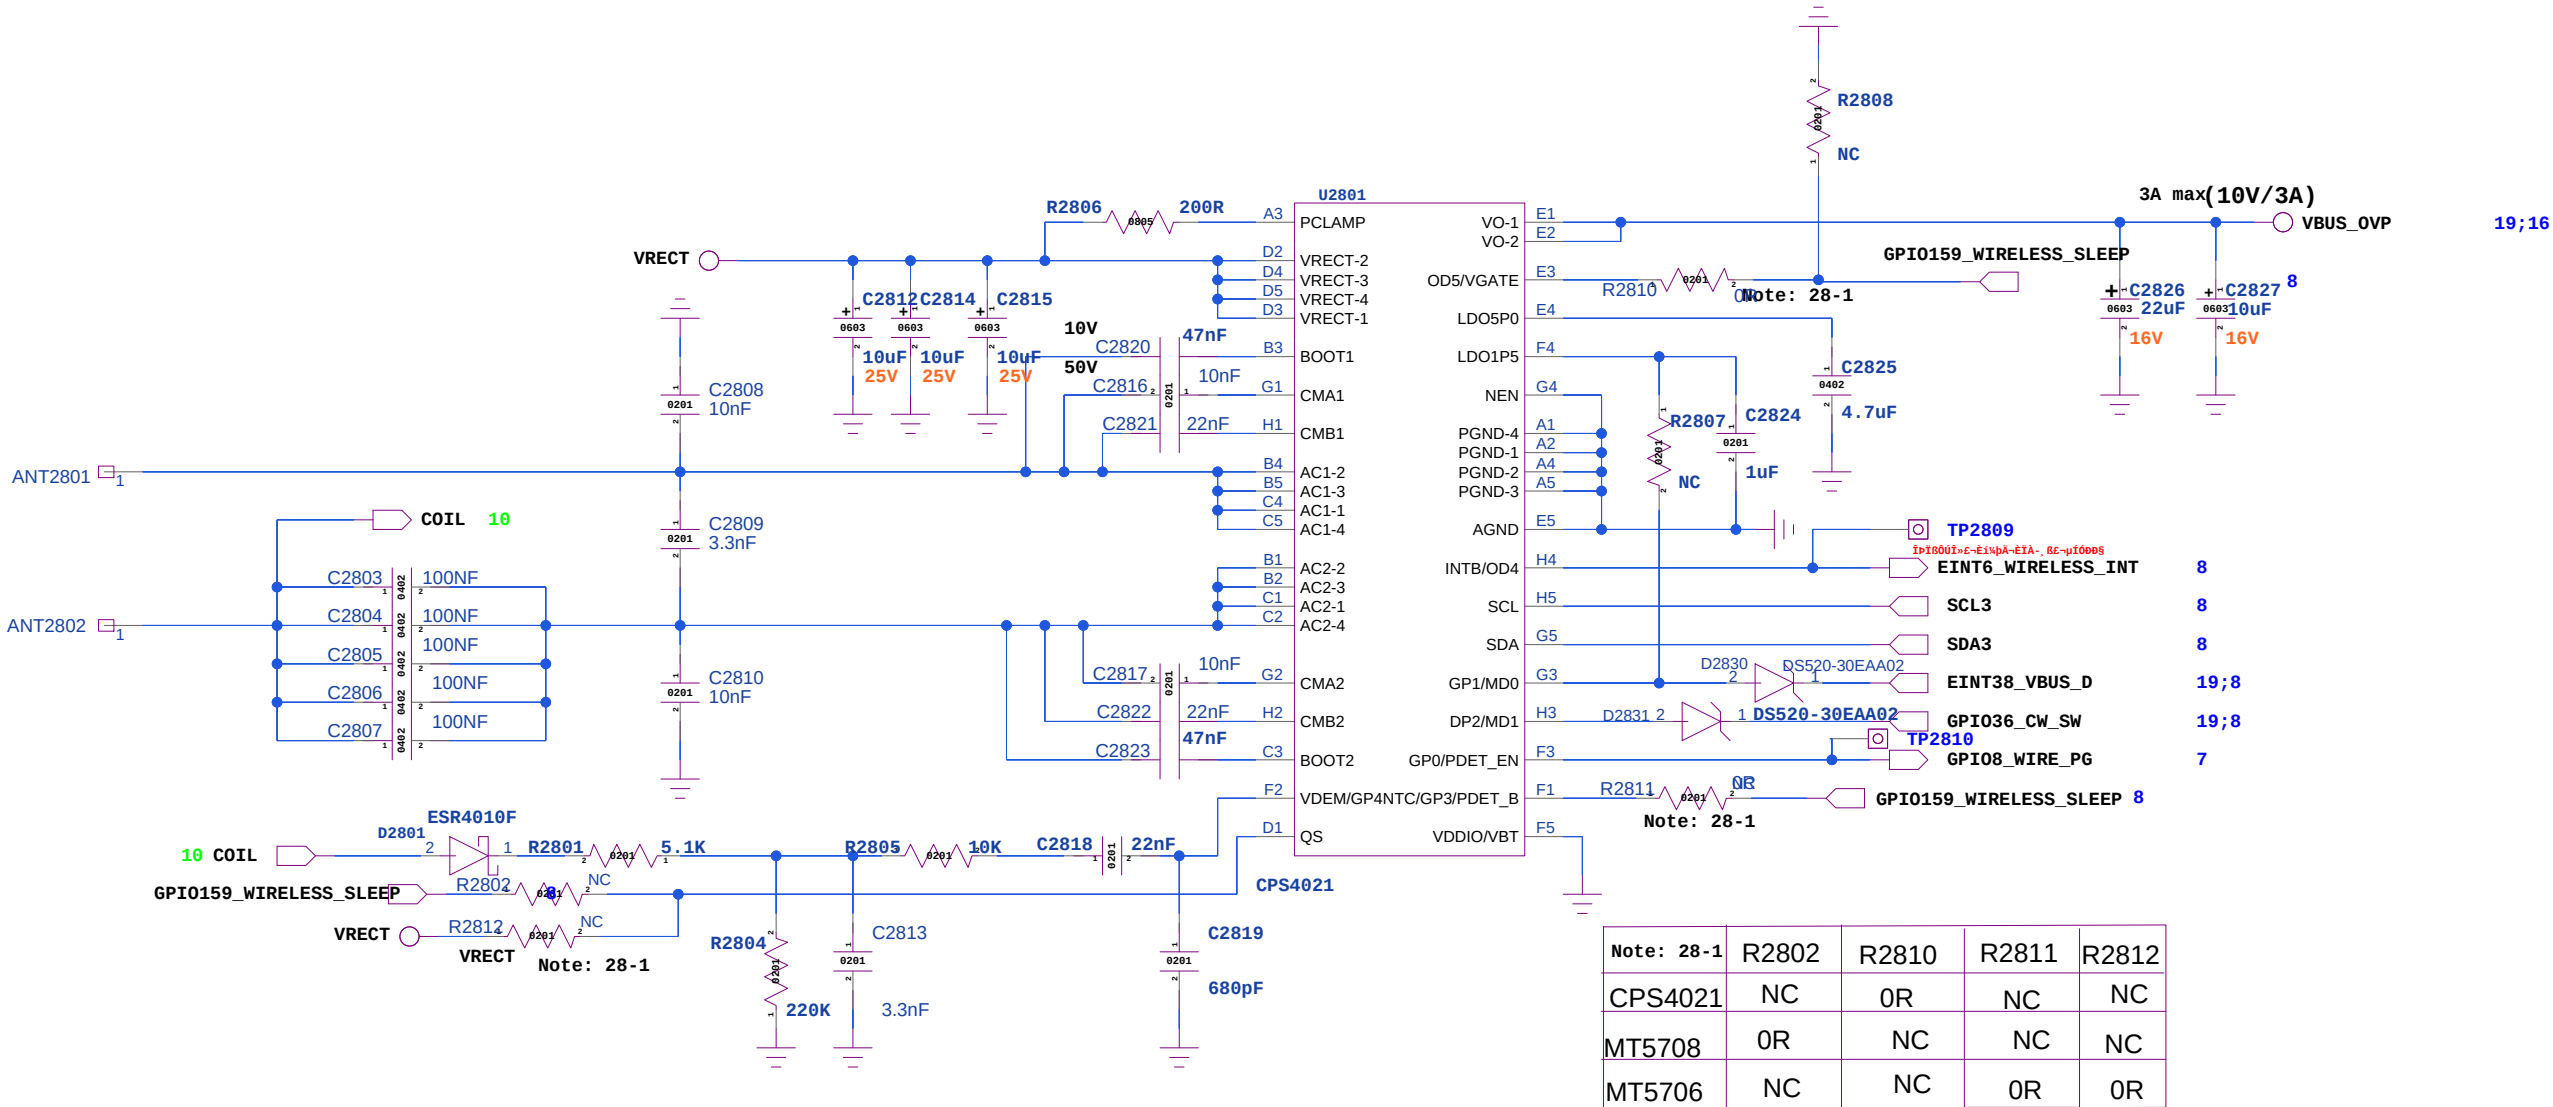

COMPANY: TRANSSION HOLDINGS				MODEL:G85_STD_MAIN		Modified Date: 04/01/2025:11:05	
DRAWN		DATED		TITLE: 28_POWER_THIRD-PARTY-IV		VERSION:	SHEET: 11 OF 28
CHECKED		DATED	< >	Confidentiality	CONFIDENTIAL		


RF_MT6177M_PIN_OUT

REVISION RECORD			
LTR	ECO NO:	APPROVED:	DATE:

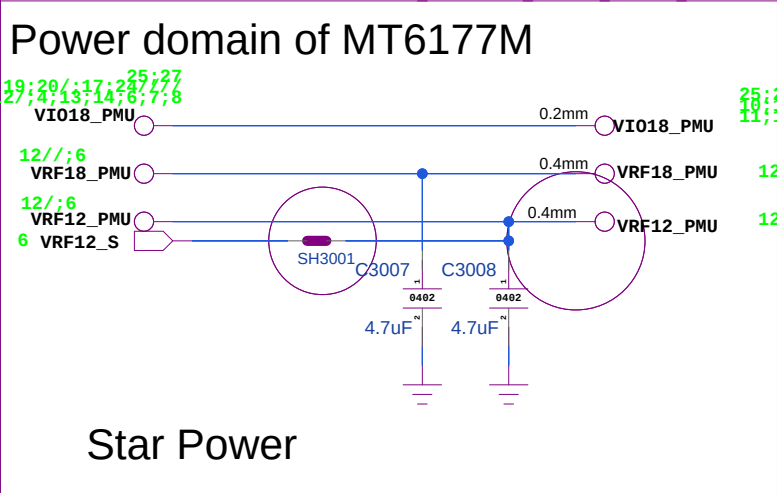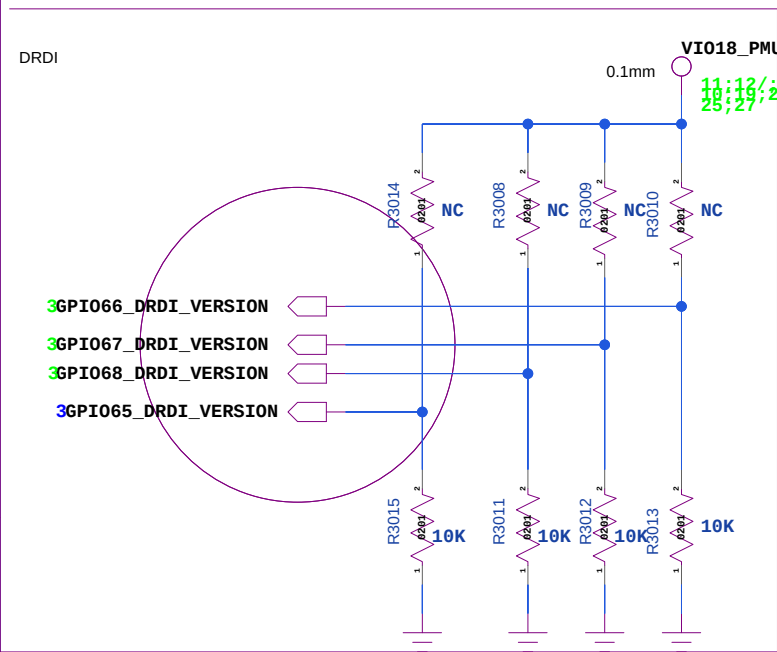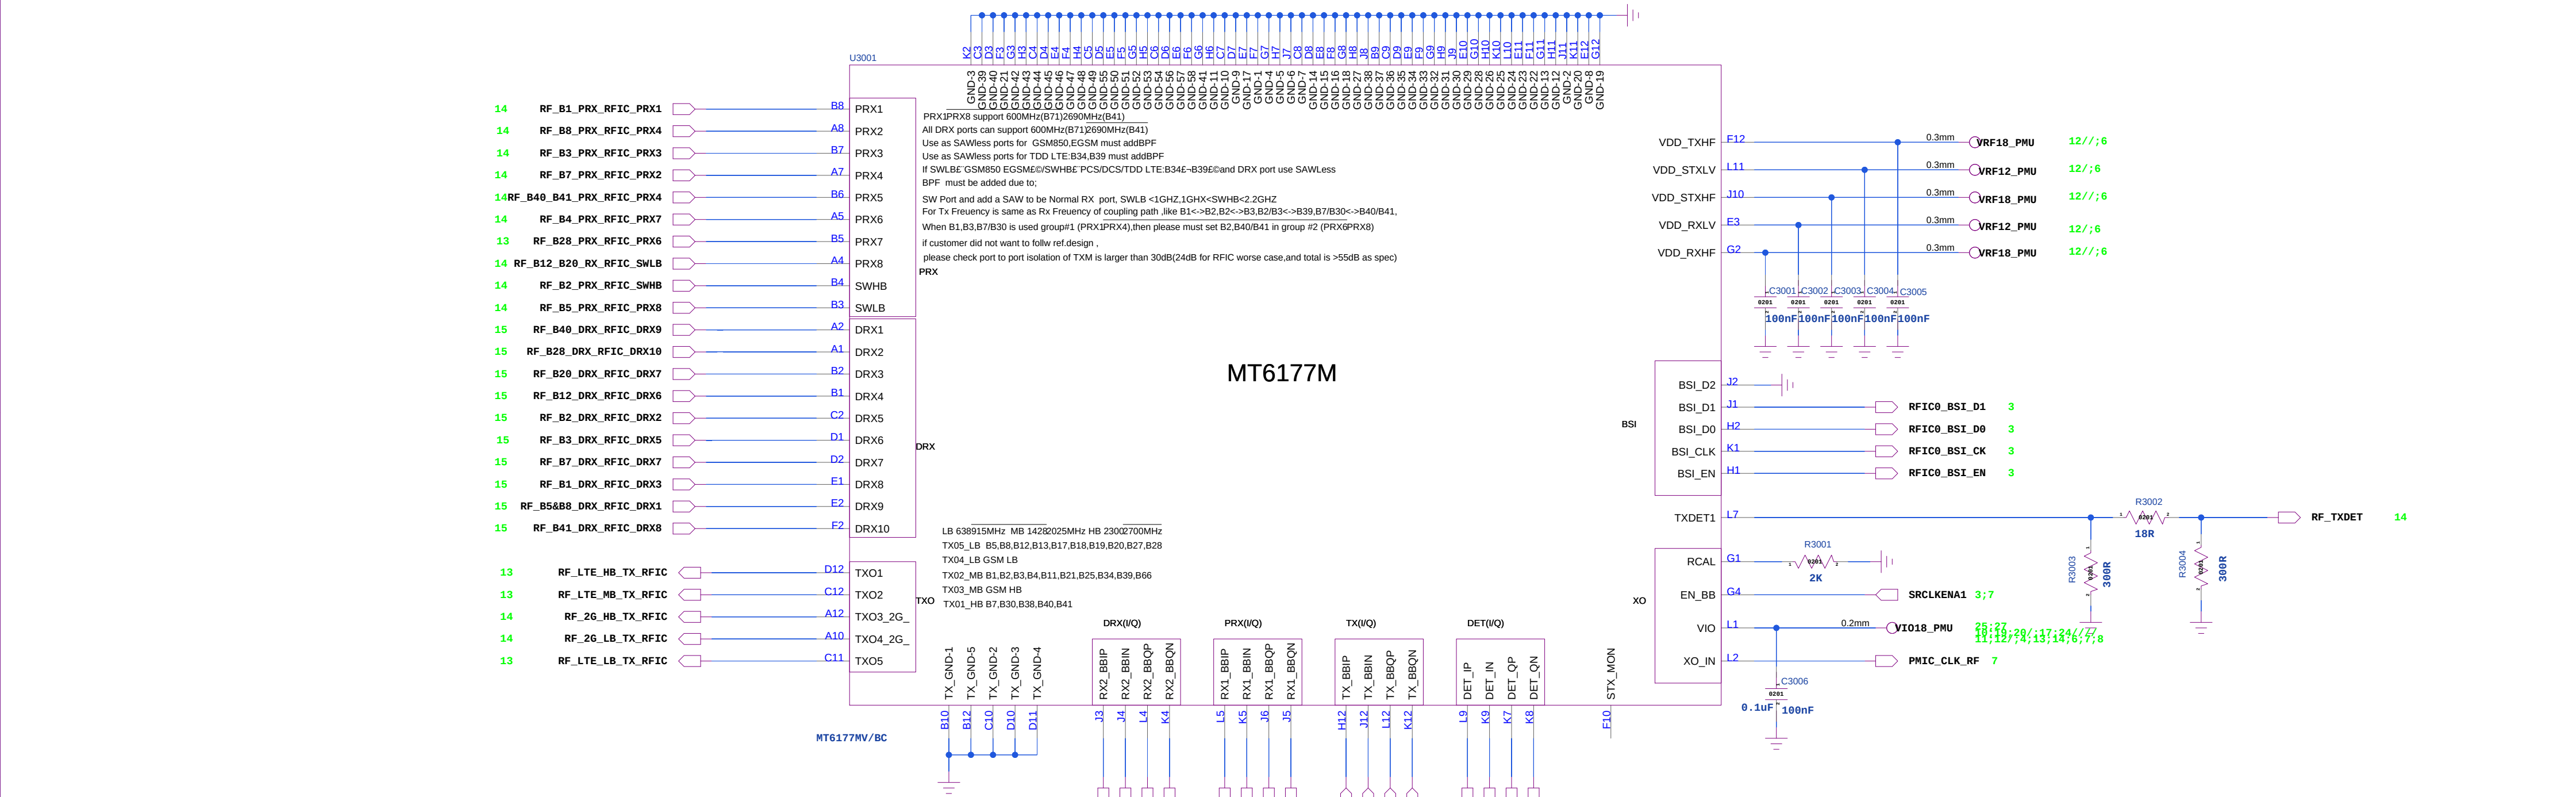

COMPANY: TRANSSION HOLDINGS				MODEL: G85_STD_MAIN		Modified Date: 03/01/2025:14:26	
DRAWN		DATED		TITLE: 30_RF_MT6177M_PIN_OUT		VERSION:	SHEET: 12 OF 28
CHECKED		DATED	< >	Confidentiality	CONFIDENTIAL		

REVISION RECORD			
LTR	ECO NO:	APPROVED:	DATE:








Modified Date: **04/01/2025:13:57**







SHEET: 13 OF 28

SHEET: 13 OF 28

REVISION RECORD			
LTR	ECO NO:	APPROVED:	DATE:

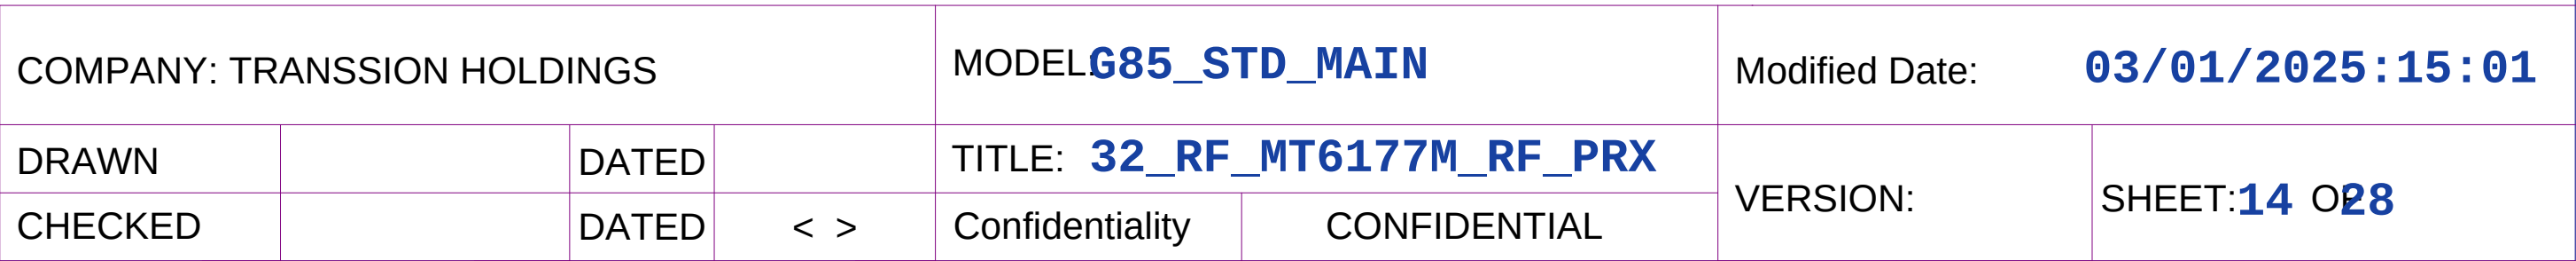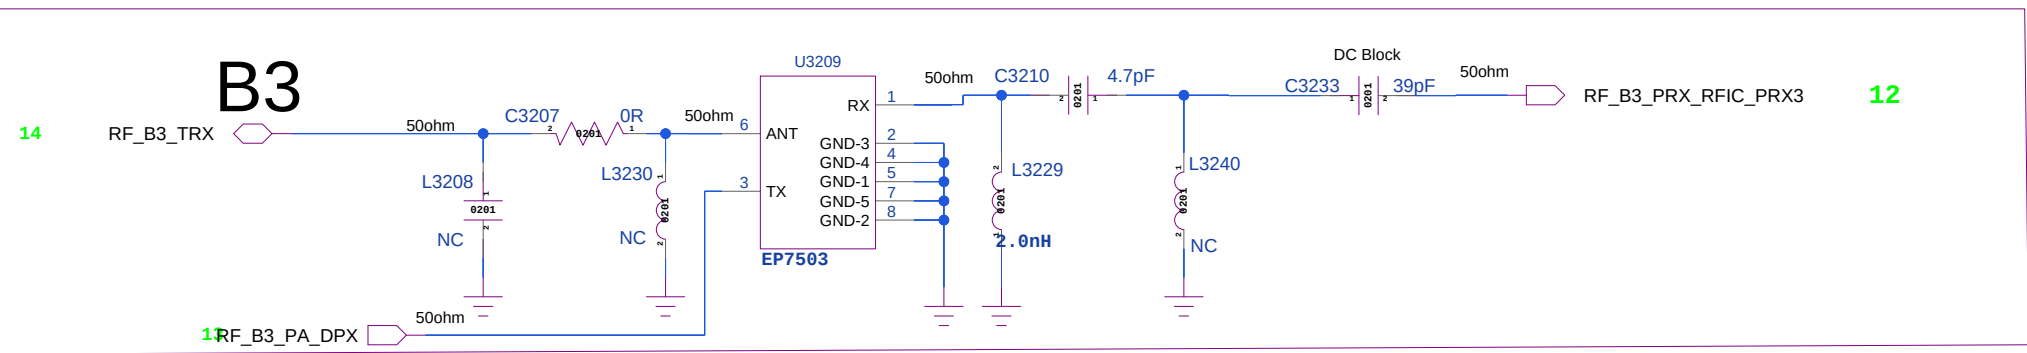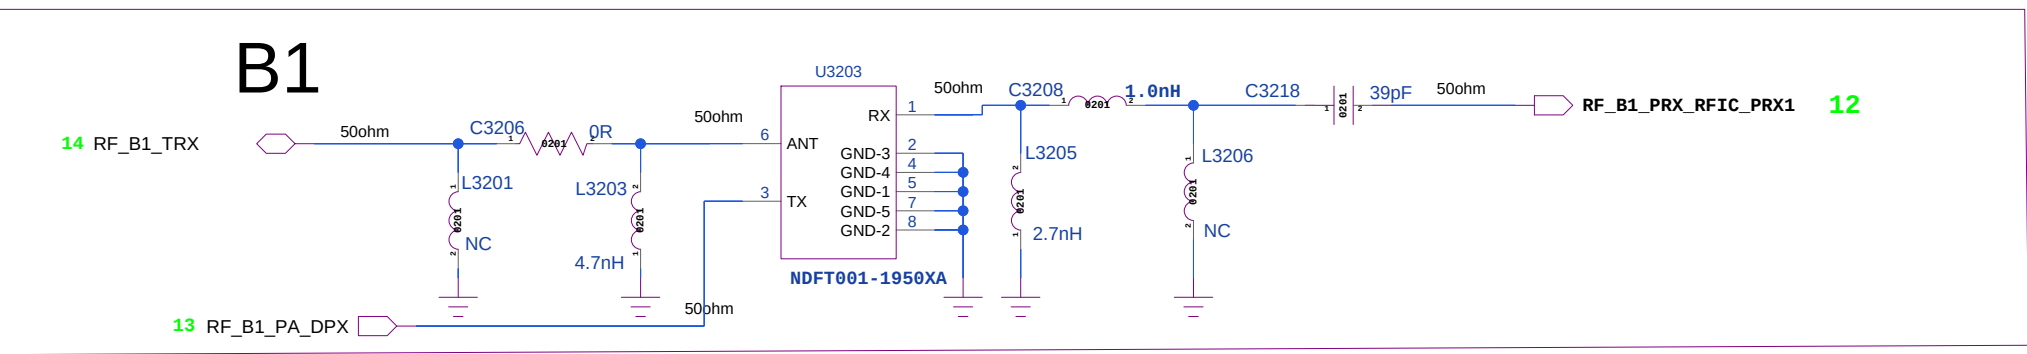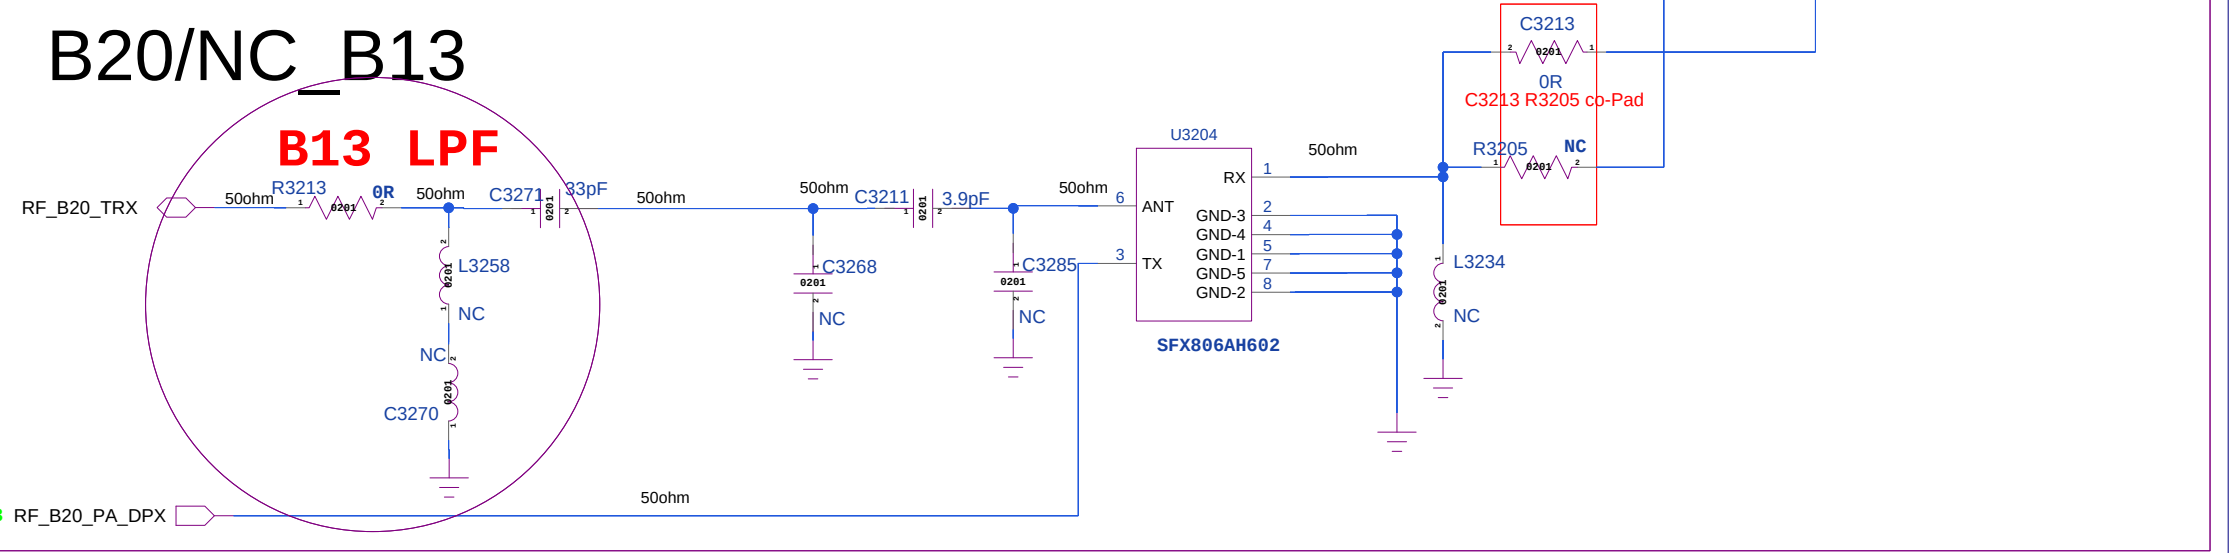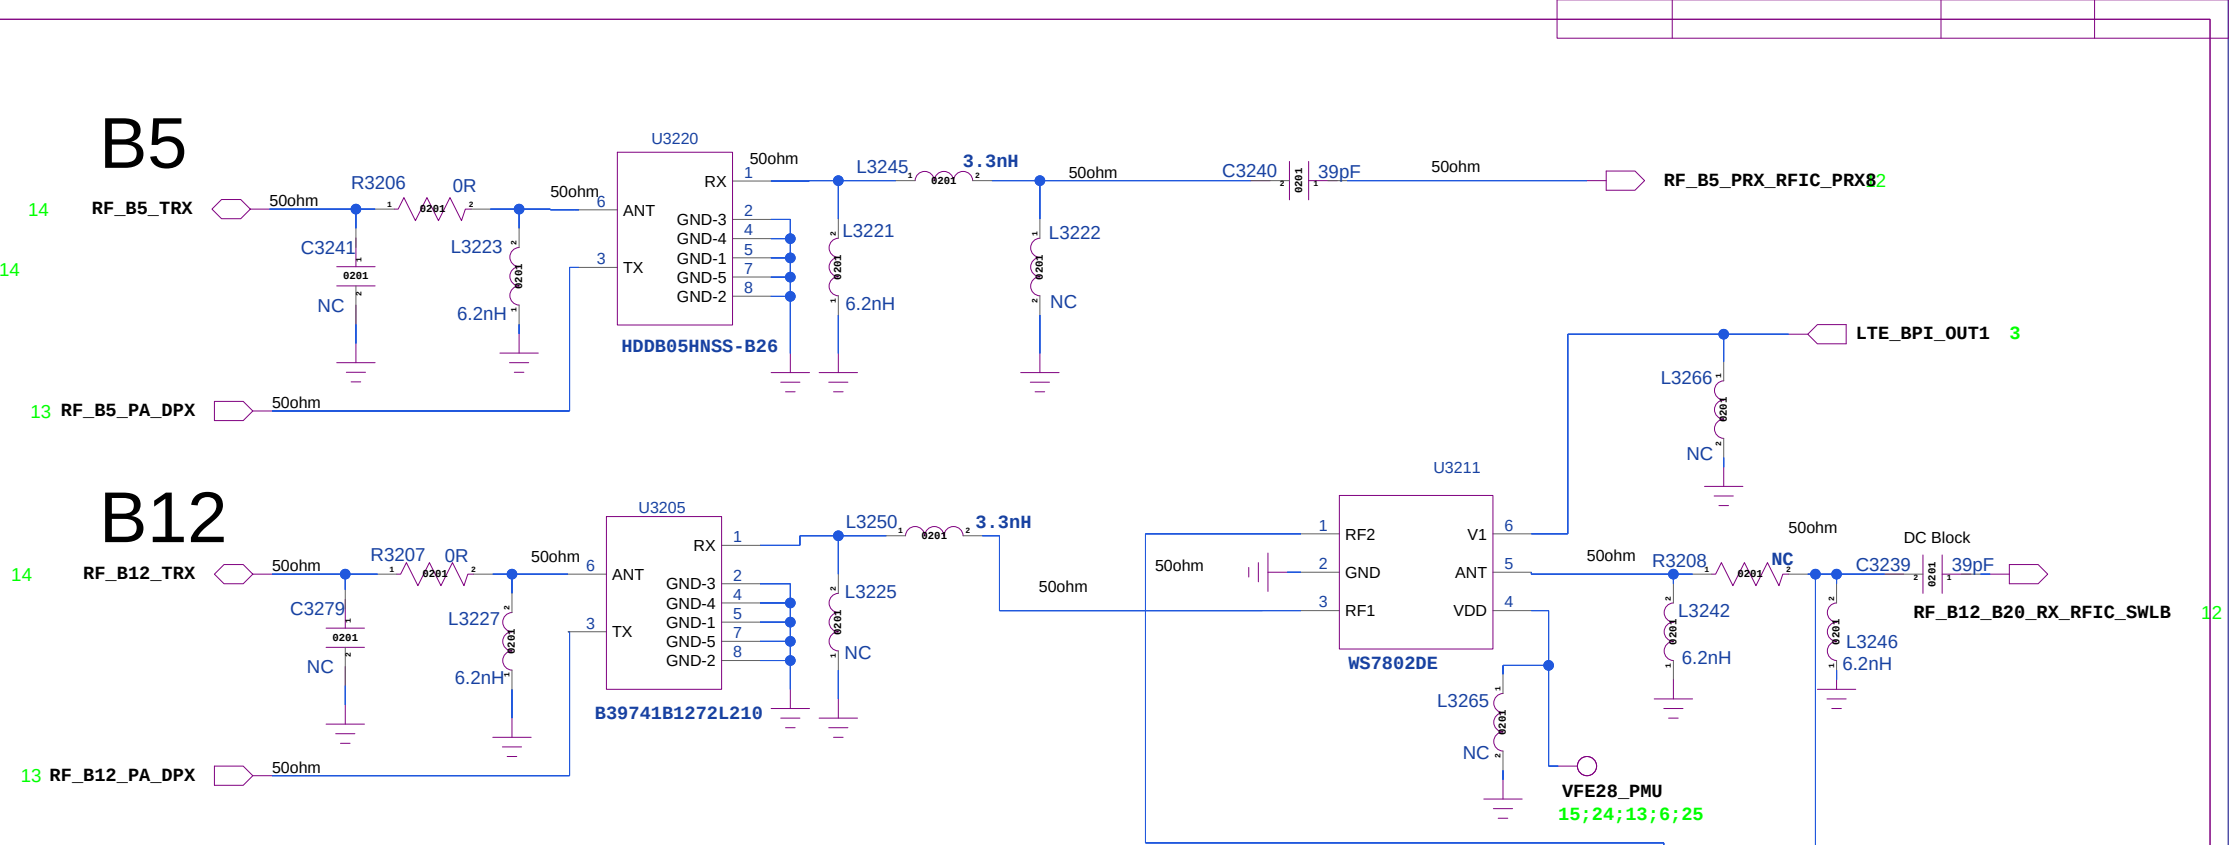

RF_MT6177M_RF_DRX

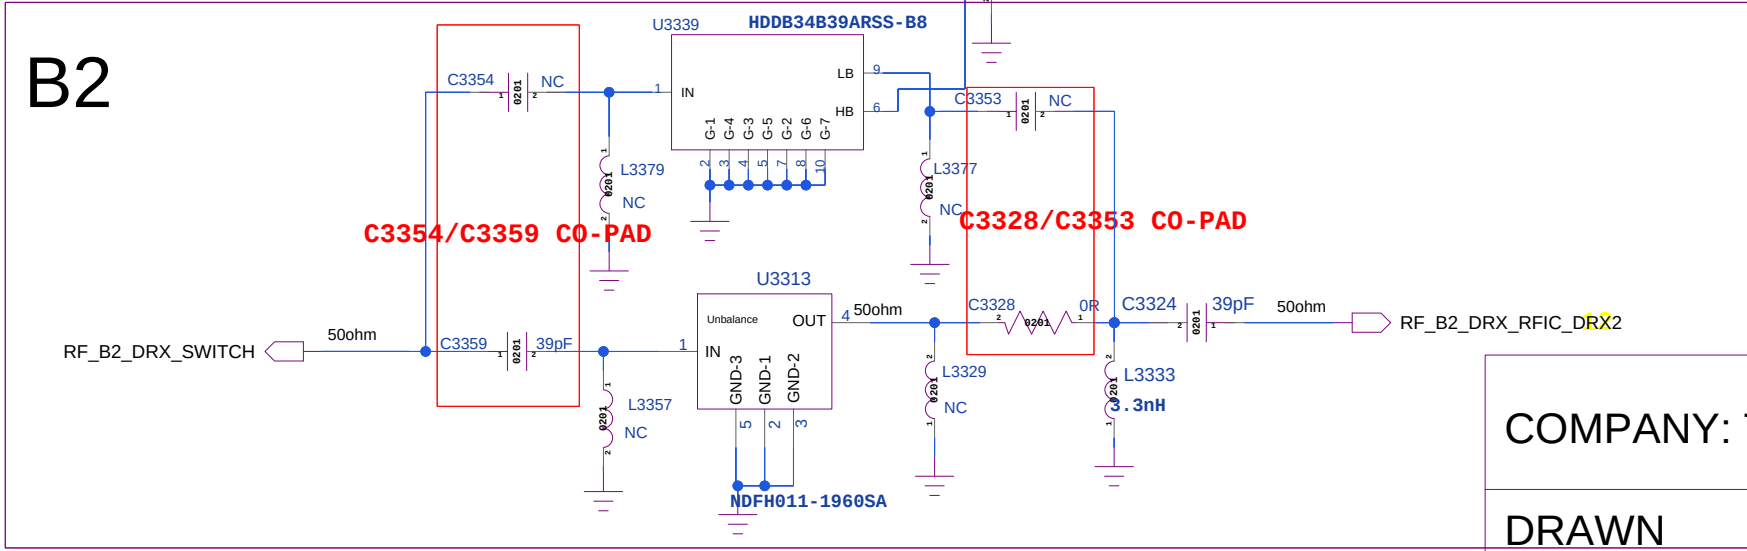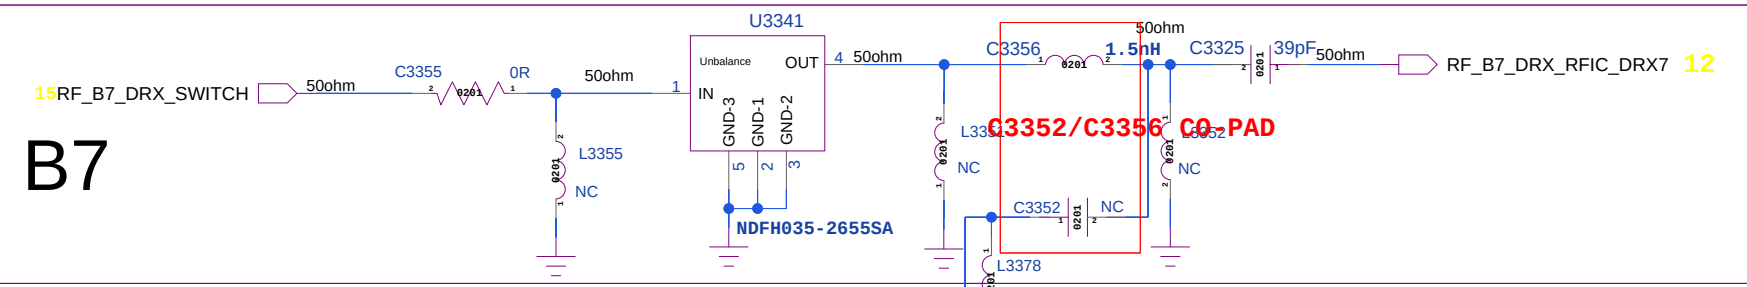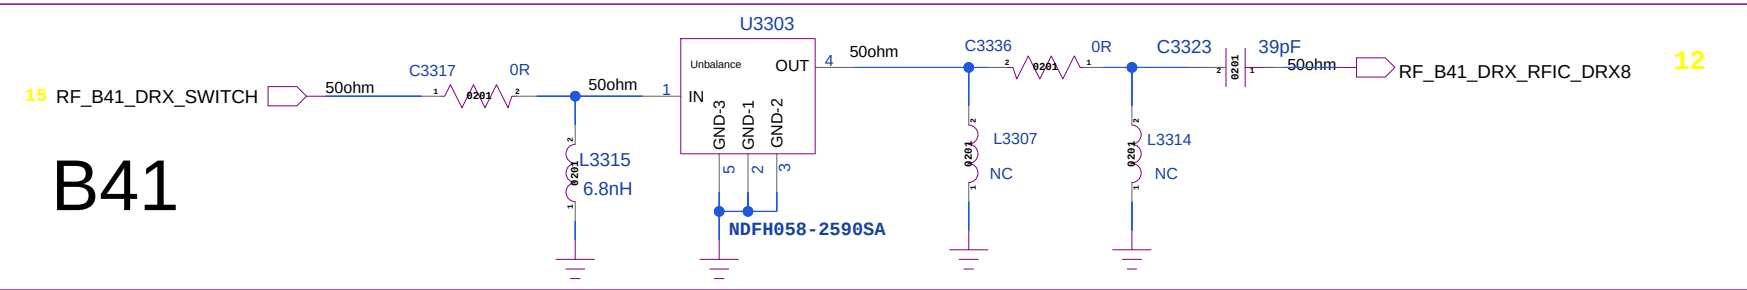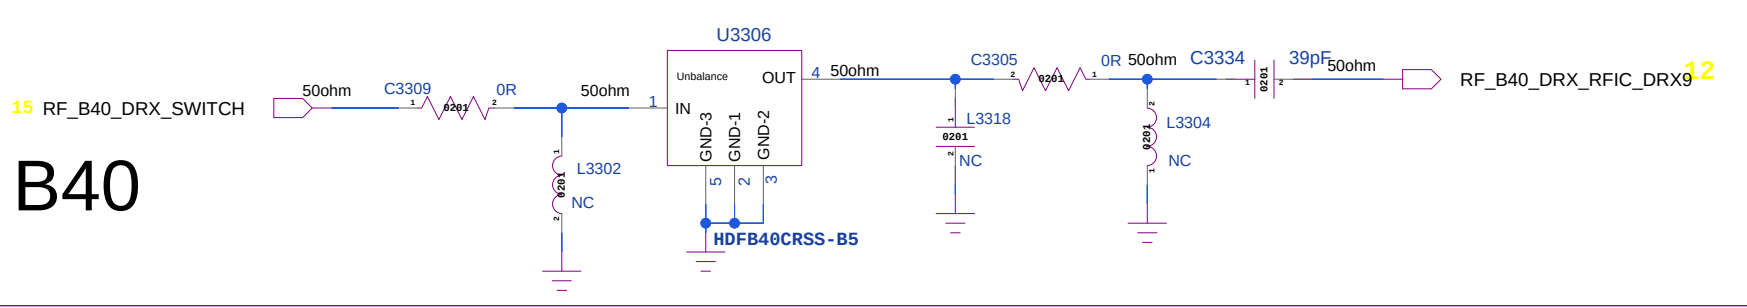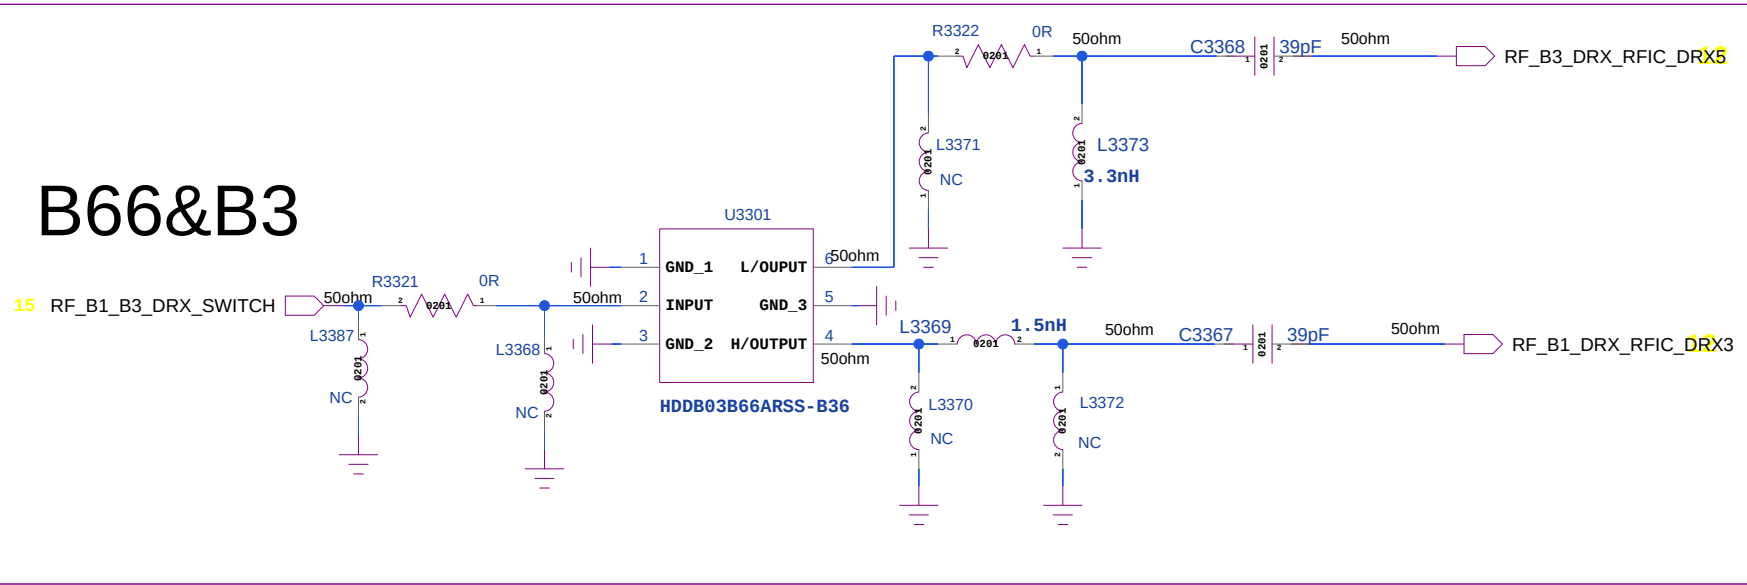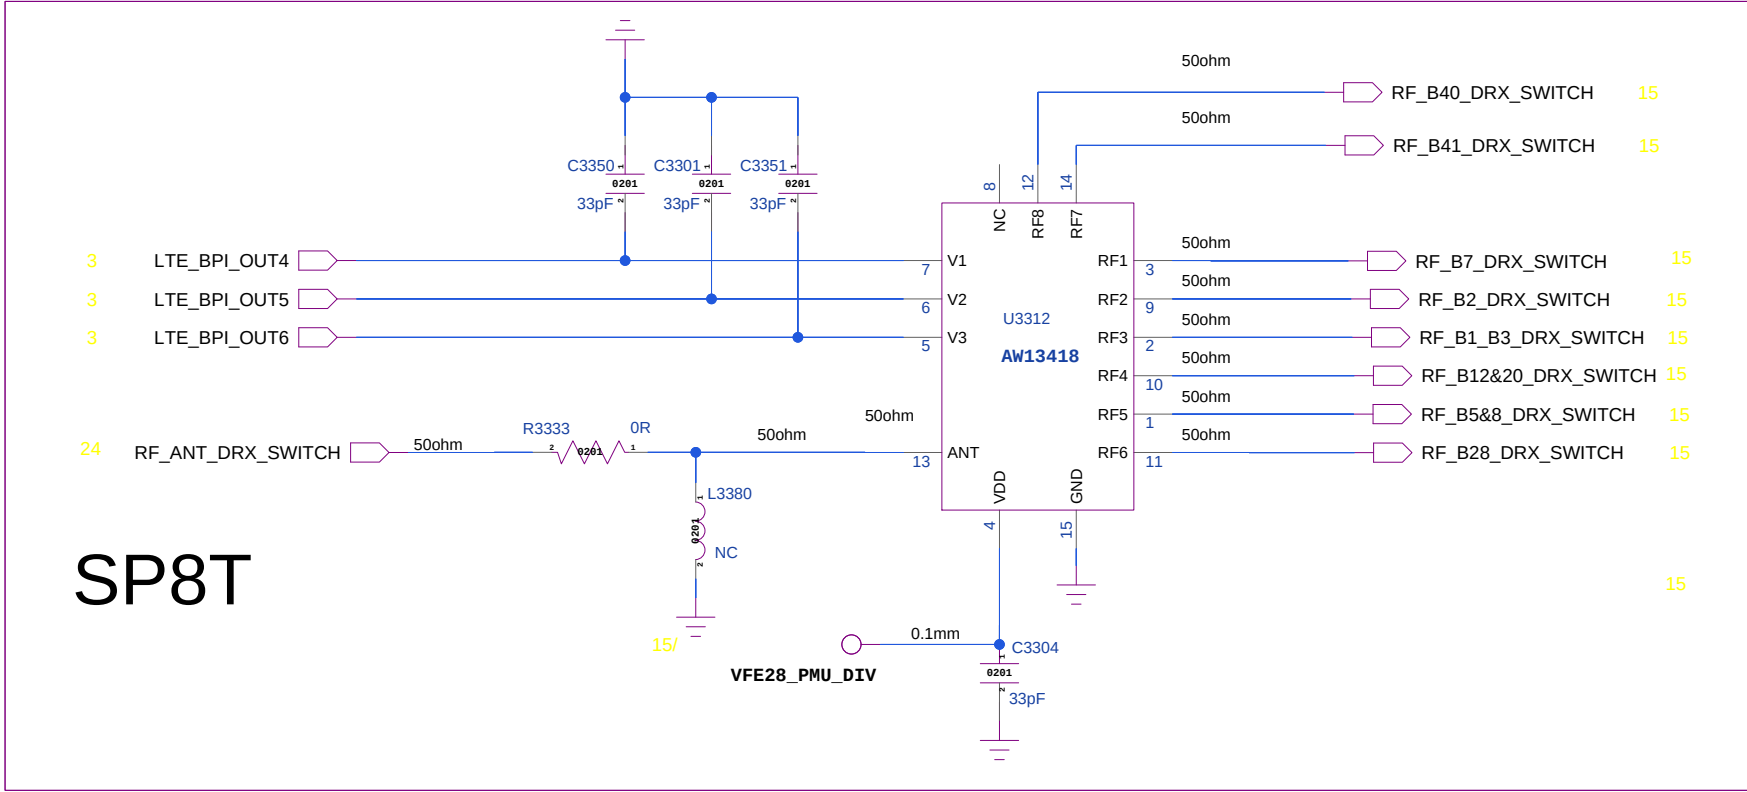

COMPANY: TRANSSION HOLDINGS

DRAWN

CHECKED

DATED

DATED

< >

MODEL:G85_STD_MAIN

TITLE: 33_RF_MT6177M_RF_DRX

Confidentiality

CONFIDENTIAL


Modified Date:

20/02/2025:16:06


VERSION:

SHEET: 15 OF 28


B12&B20

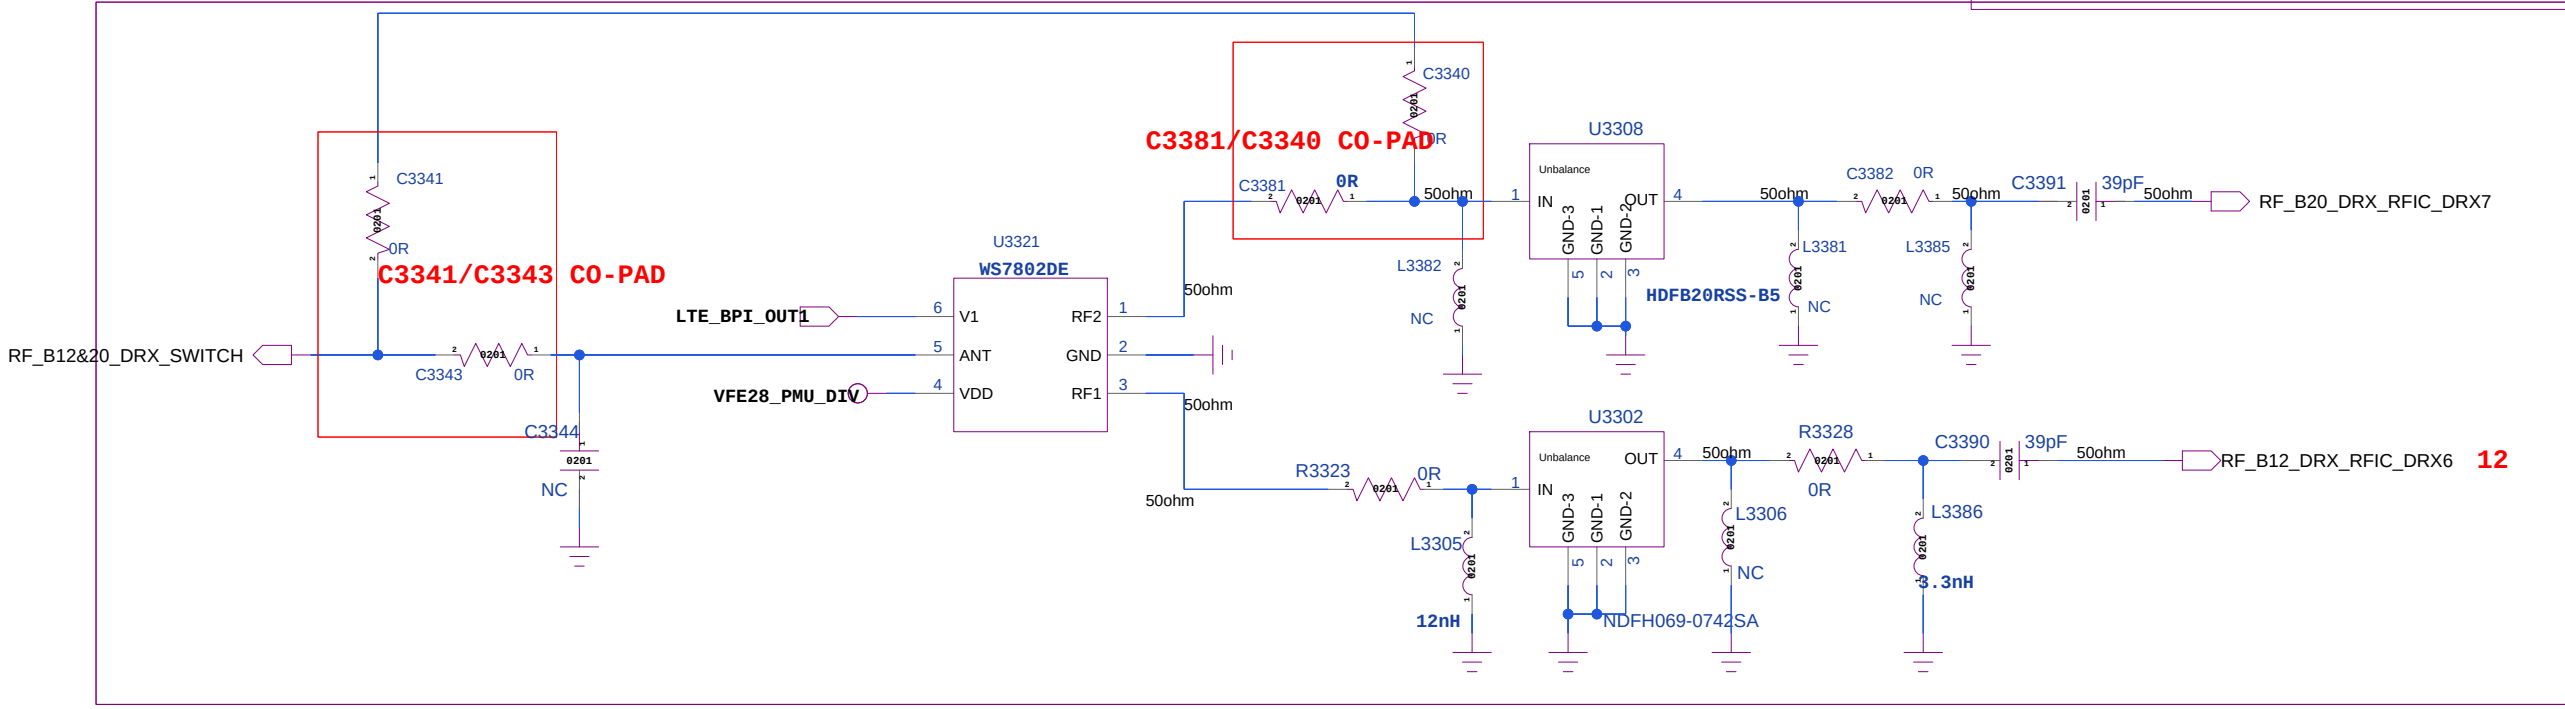

B28

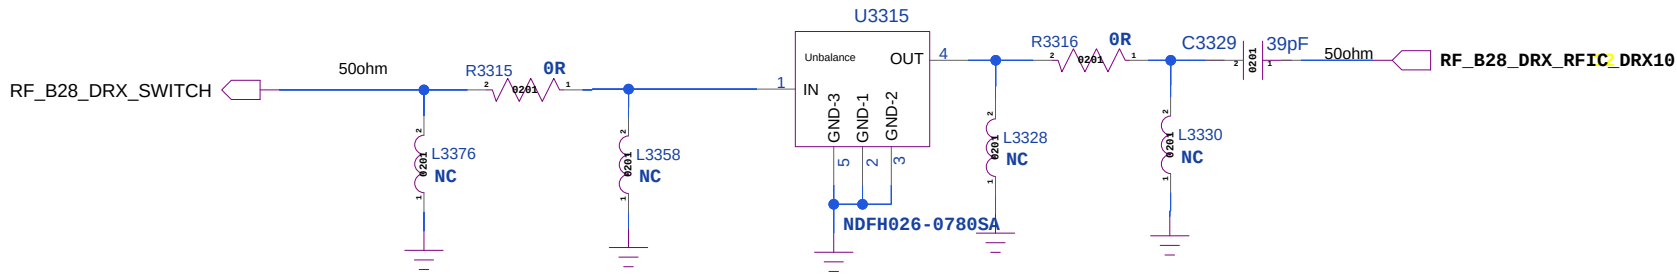

B5&B8

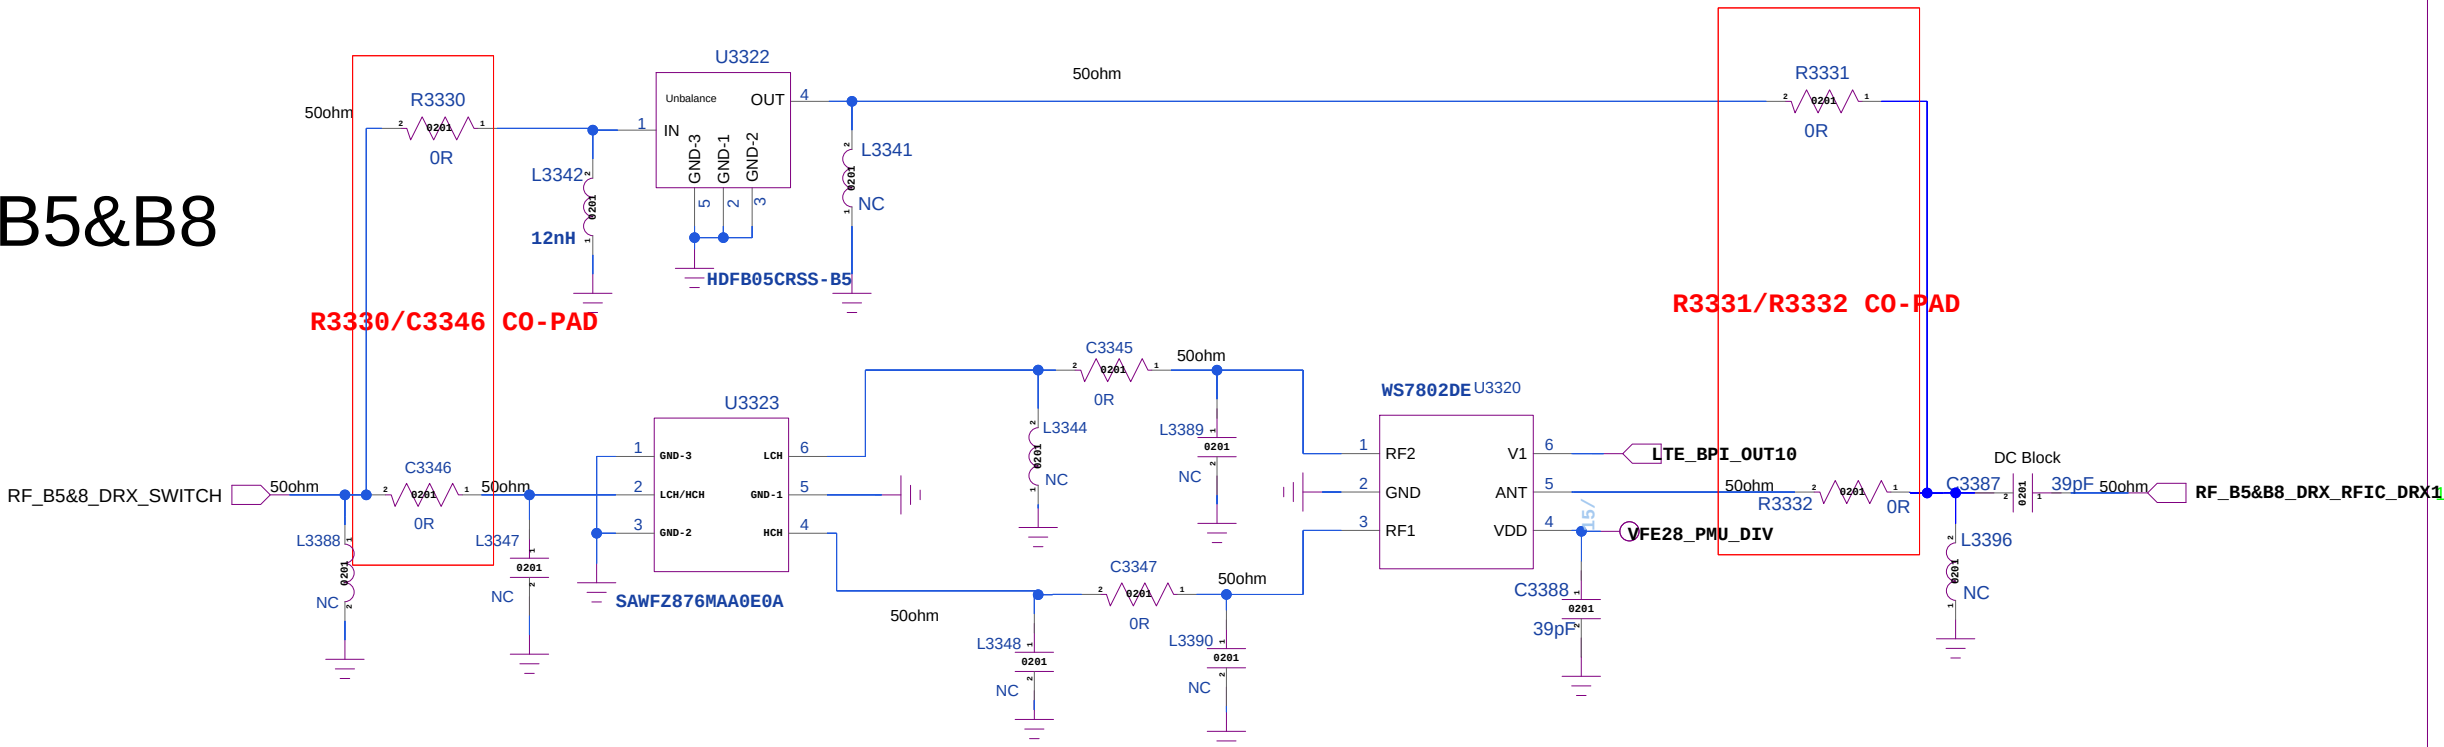

MEMORY_eMCP_LPDDR4X**KM5-128+4/128+6/256+4/256+8**

REVISION RECORD			
LTR	ECO NO:	APPROVED:	DATE:




COMPANY: TRANSSION HOLDINGS				MODEL:G85_STD_MAIN		Modified Date: 04/01/2025:19:10	
DRAWN		DATED		TITLE: 40_MEMORY_EMCP_LPDDR4X		VERSION:	SHEET: 17 OF 28
CHECKED		DATED	< >	Confidentiality	CONFIDENTIAL		


CONNECTIVITY_MT6631

REVISION RECORD			
LTR	ECO NO:	APPROVED:	DATE:


ANT12(GPS L1)

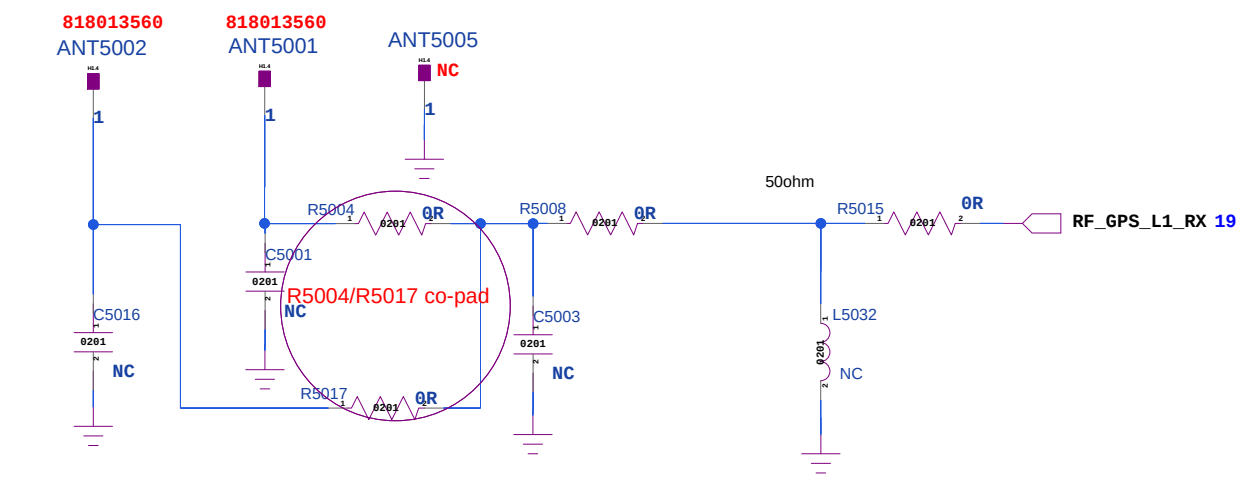

ANT14(WIFI2.4/5G)

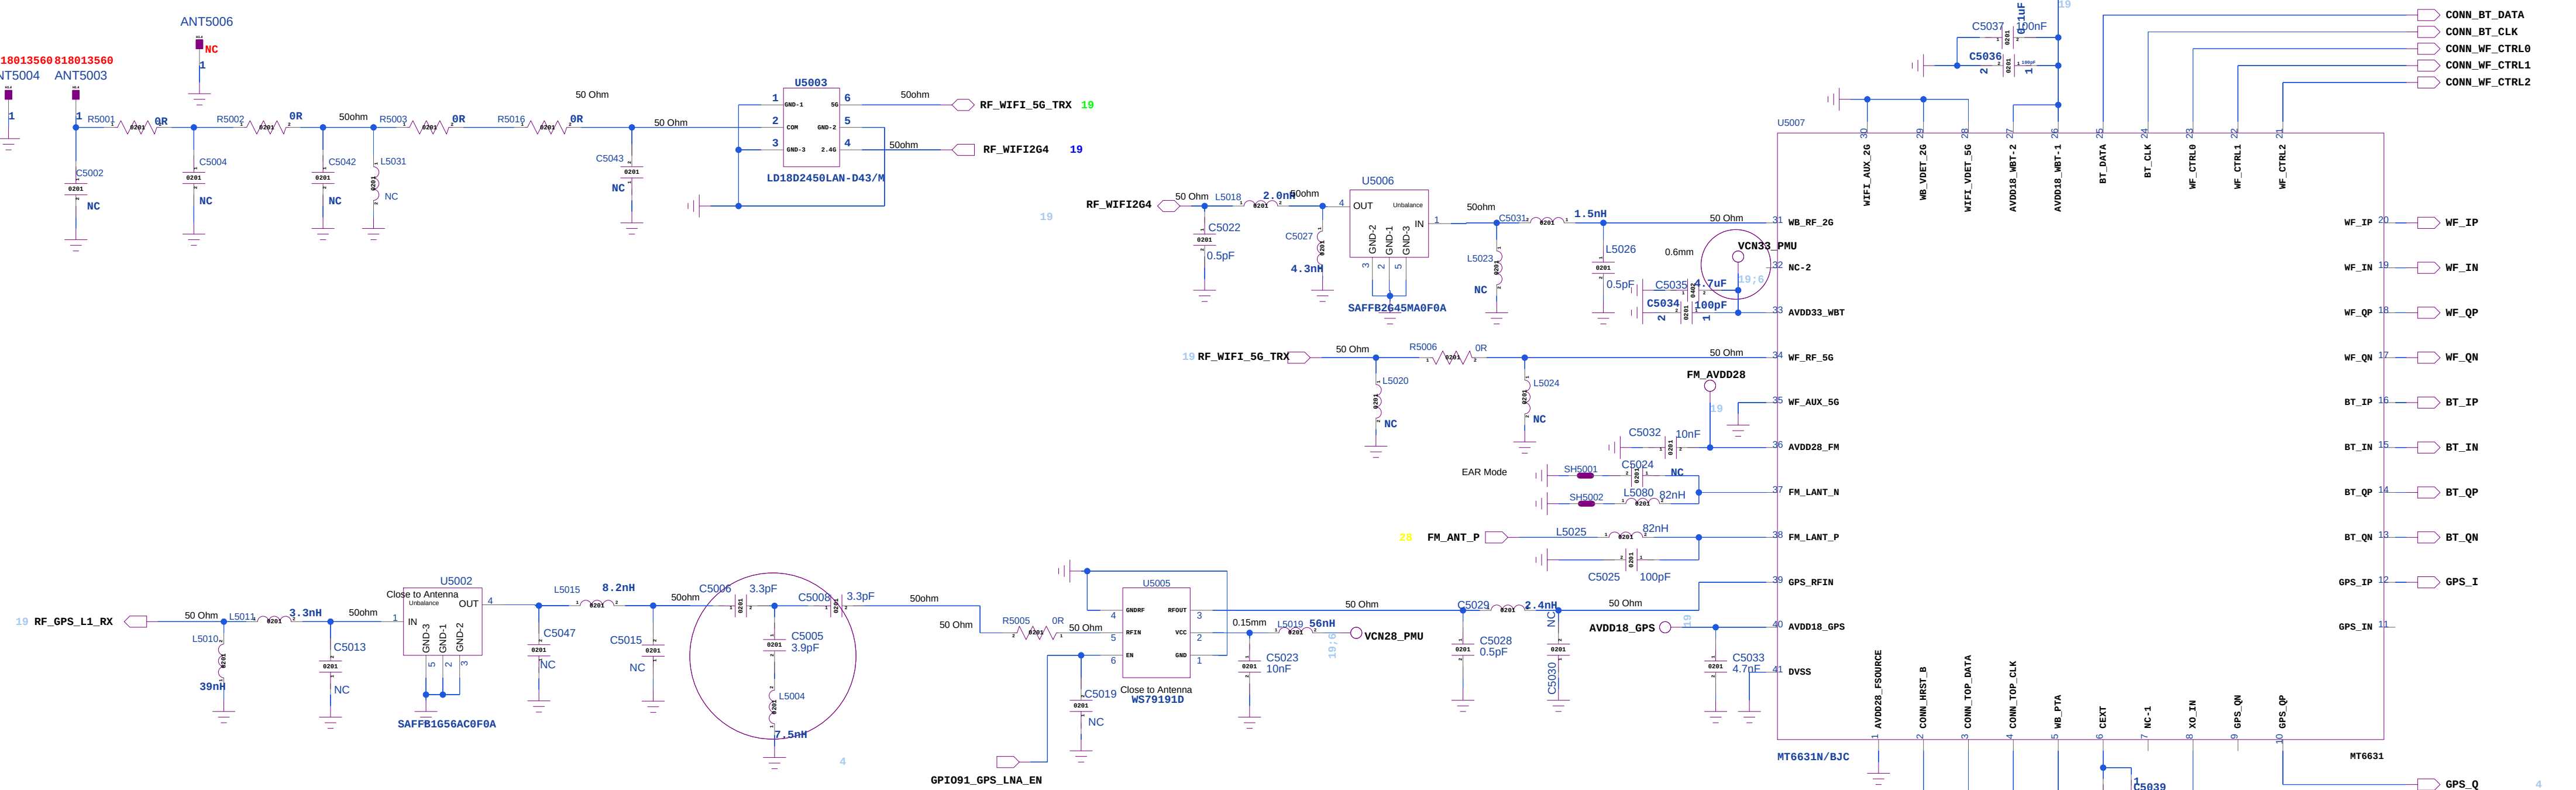

Power domain

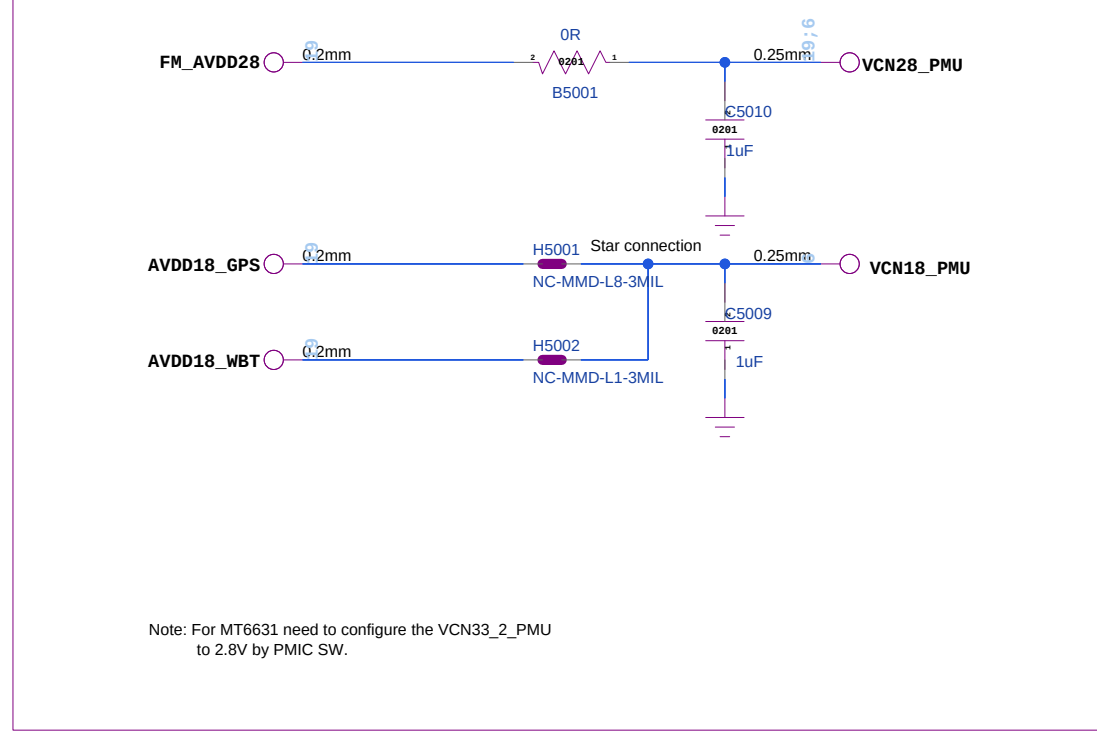


Note: For MT6631 need to configure the VCN33_2_PMU to 2.8V by PMIC SW.

COMPANY: TRANSSION HOLDINGS				MODEL:G85_STD_MAIN		Modified Date: 28/02/2025:17:13	
DRAWN		DATED		TITLE: 50_CONNECTIVITY_MT6631		VERSION:	SHEET: 18 OF 28
CHECKED		DATED	< >	Confidentiality	CONFIDENTIAL		

PERI_AUDIO_IO


Audio PA
UP SPK

KM5 - ÖŞ³ÖË«À®°È

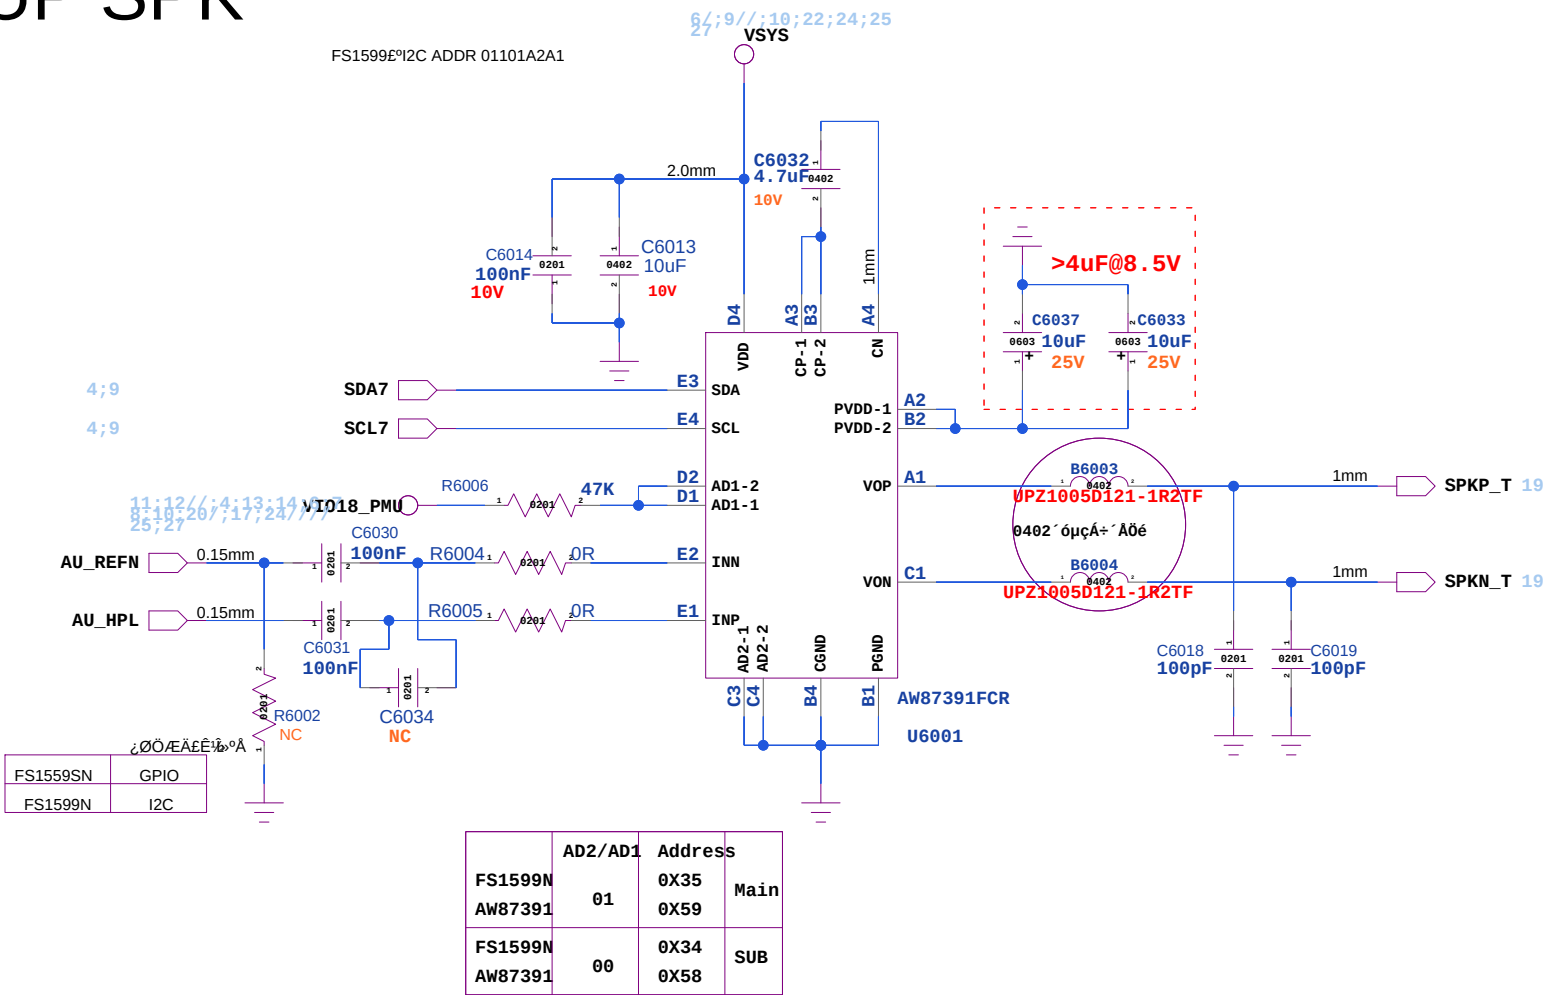


SUB MIC

REC&SPK 2in1

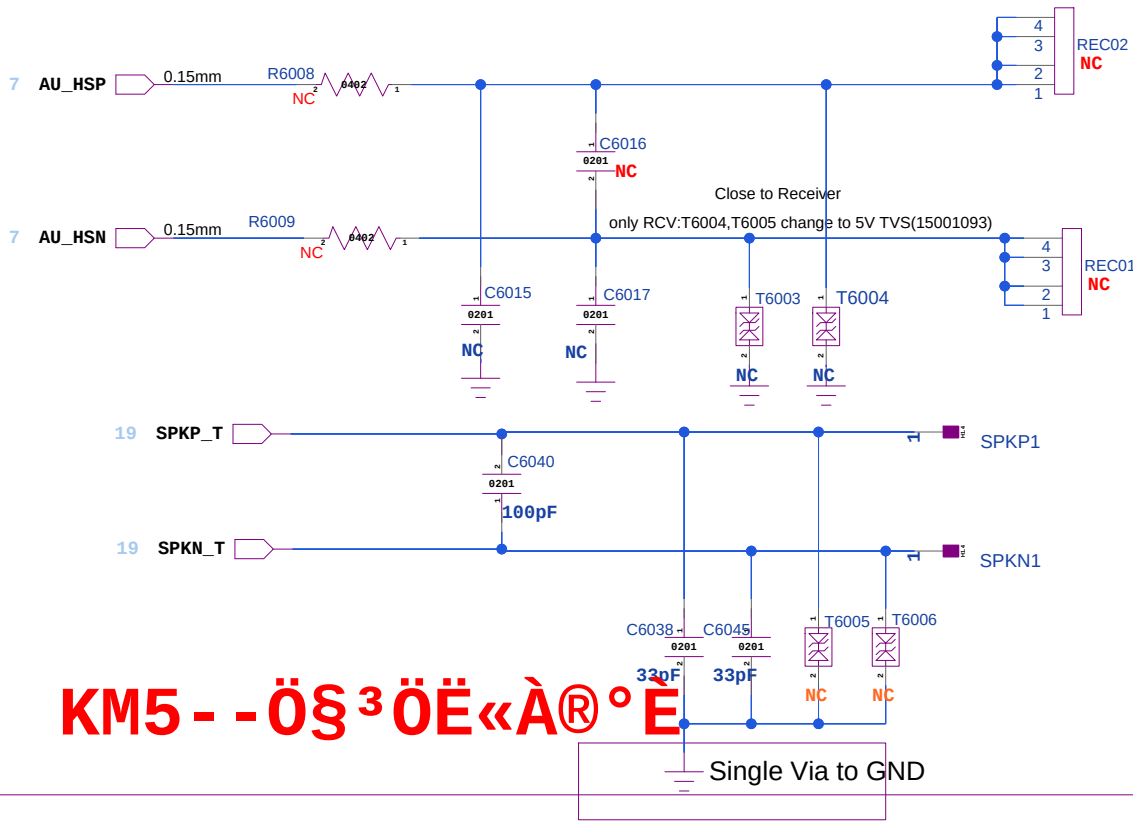


Audio PA

DOWN SPK ON SUB

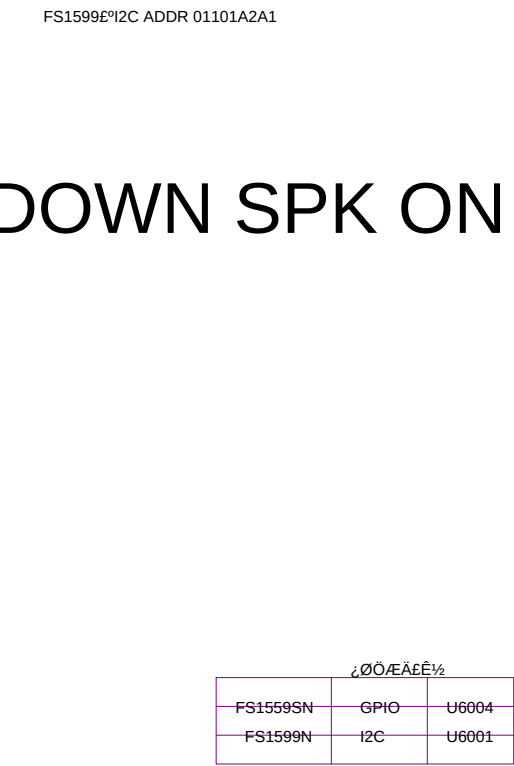


MAIN MIC


KM5 - - ÖŞ³Öµ¥mic

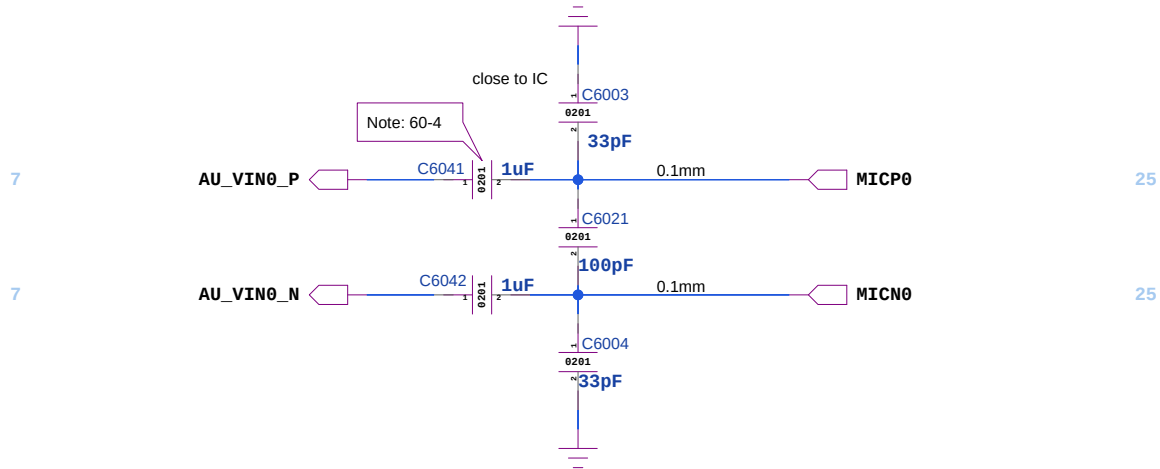

Earphone MICPHONE

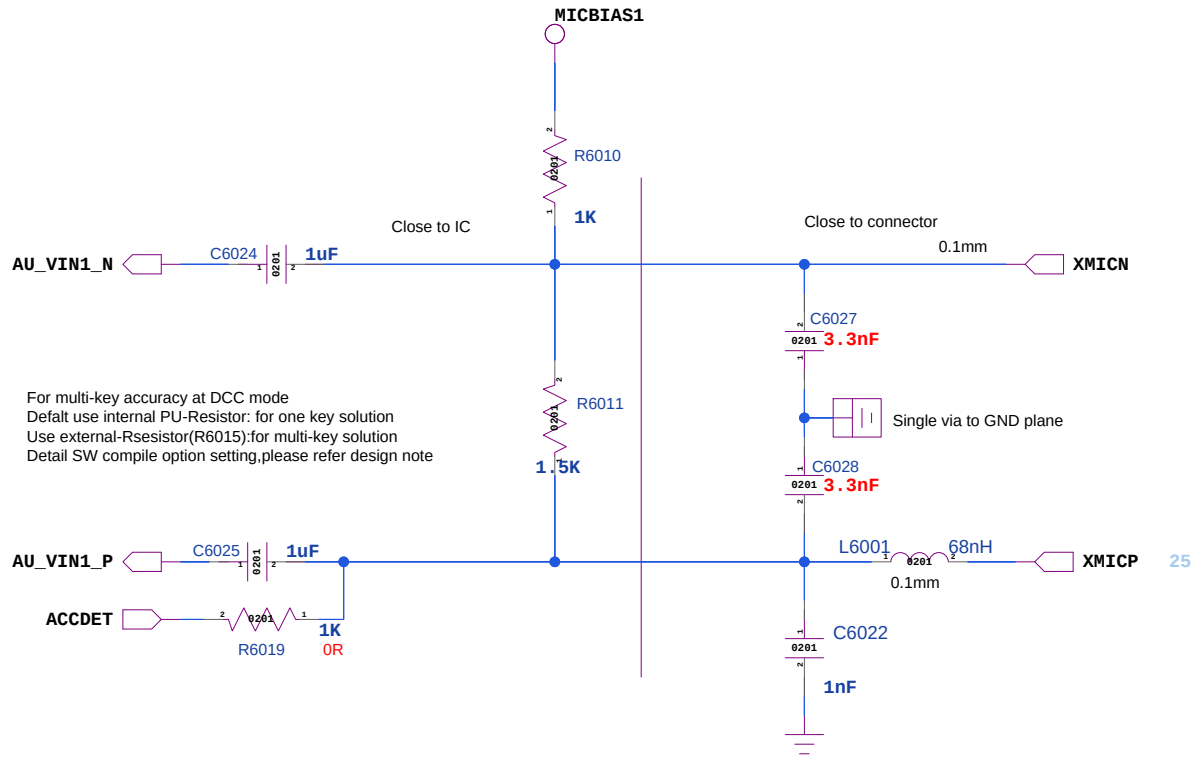

Earphone Receiver

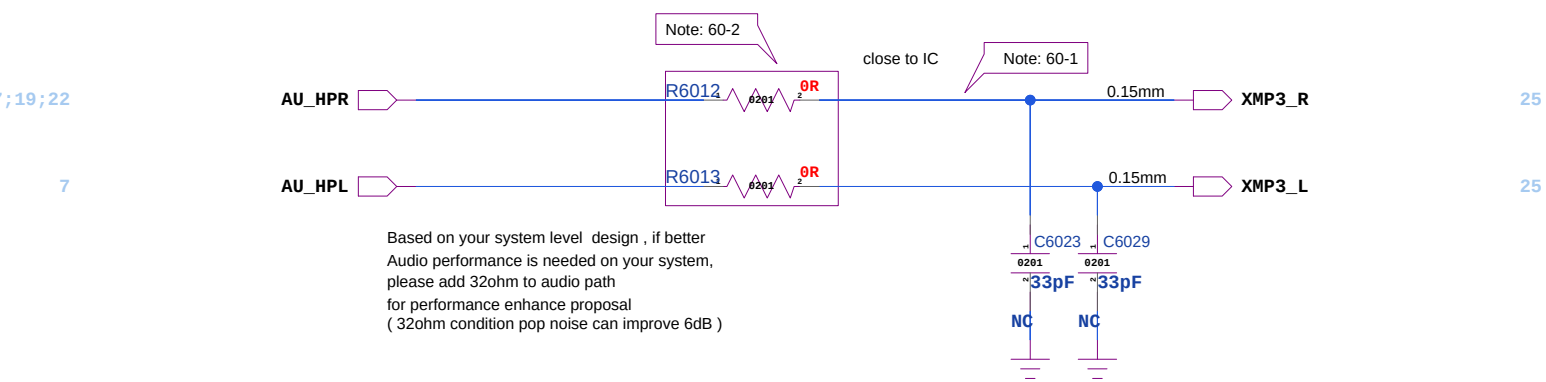

Schematic design notice of "60_PERI_AUDIO_IO" page.

Note 60-1: B6009 B6010 B6013 B6014 needs change to "BLM18BD102SN1" for high THD performance(-90dB), but this BOM change will result in FM RSSI 10dB degraded.

Note 60-2: To reserve a resistor in HPL and HPR in series connection both in order to optimize headphone pop noise. The recommended value of this resistor is 33R.

Note 60-3: Layout trace from MT6353 ball J3 AUDREFN to Audio jack GND must surround shield with GND.

Note 60-4: 0.1/1uF for ACC mode(1uF for WB_AMR Speech/0.1uF for NB_AMR Speech),0R for DCC mode.

COMPANY: TRANSSION HOLDINGS

MODEL:G85_STD_MAIN

Modified Date: 04/01/2025:13:54

DRAWN

DATED

TITLE: 60_PERI_AUDIO

VERSION:

SHEET: 19 OF 28

CHECKED

DATED



< >

Confidentiality

CONFIDENTIAL

PERI_LCM_CTP_FP

REVISION RECORD			
LTR	ECO NO:	APPROVED:	DATE:

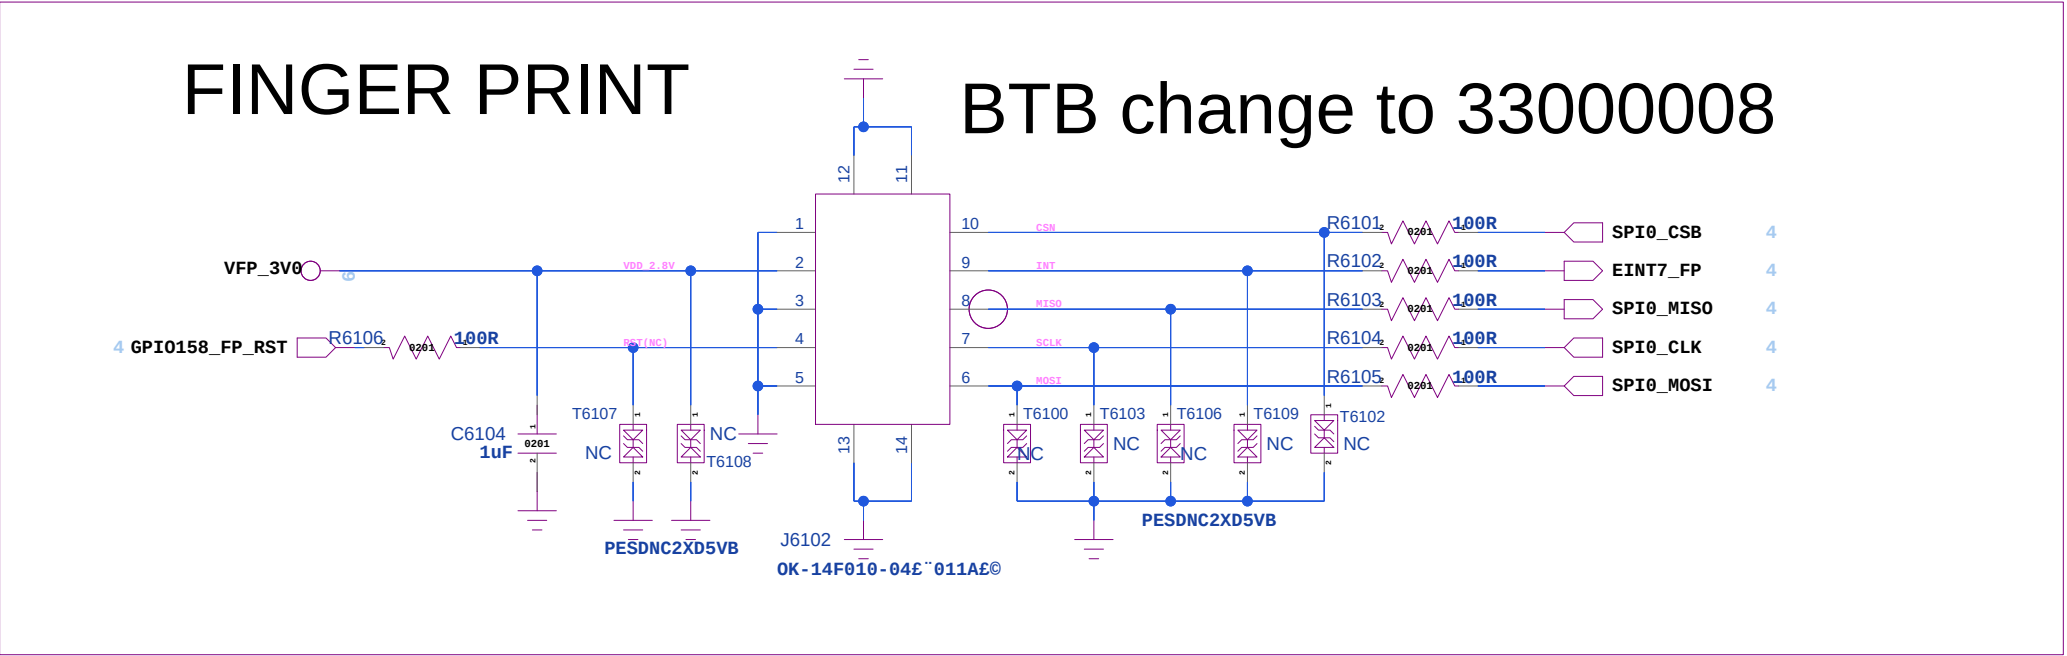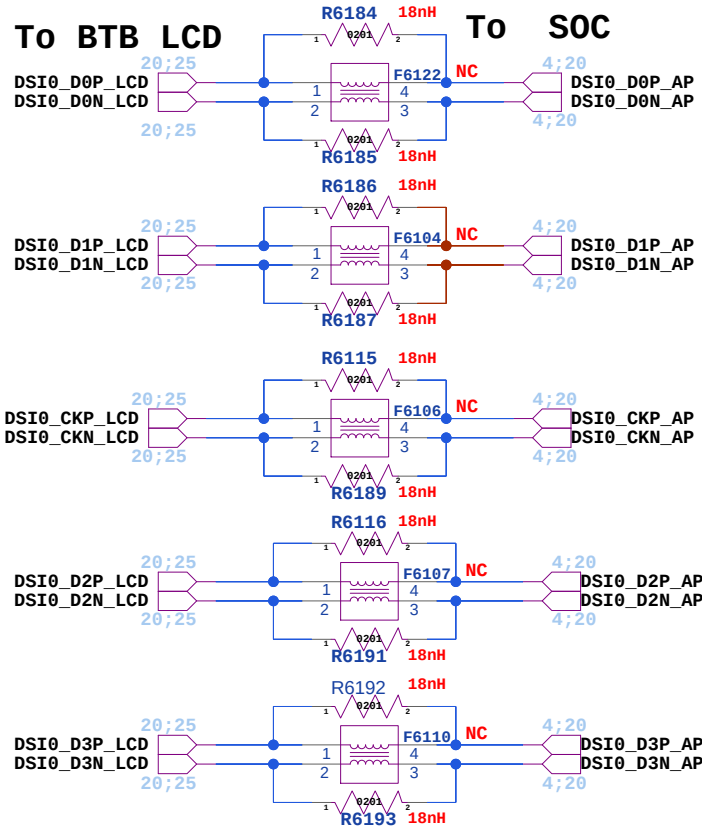


8:78 FHD+H/60/90/120HZ LCD (DA&60Pin)
8:67HD+H60/90/90/120HZ LCD (DA&60Pin)

COMPANY: TRANSSION HOLDINGS				MODEL:G85_STD_MAIN		Modified Date: 20/12/2024:13:56	
DRAWN		DATED		TITLE: 61_PERI_LCM_CTP_FP		VERSION:	SHEET: 20 OF 28
CHECKED		DATED	< >	Confidentiality	CONFIDENTIAL		

PERI_CAMERA_I


KM5-50MAF

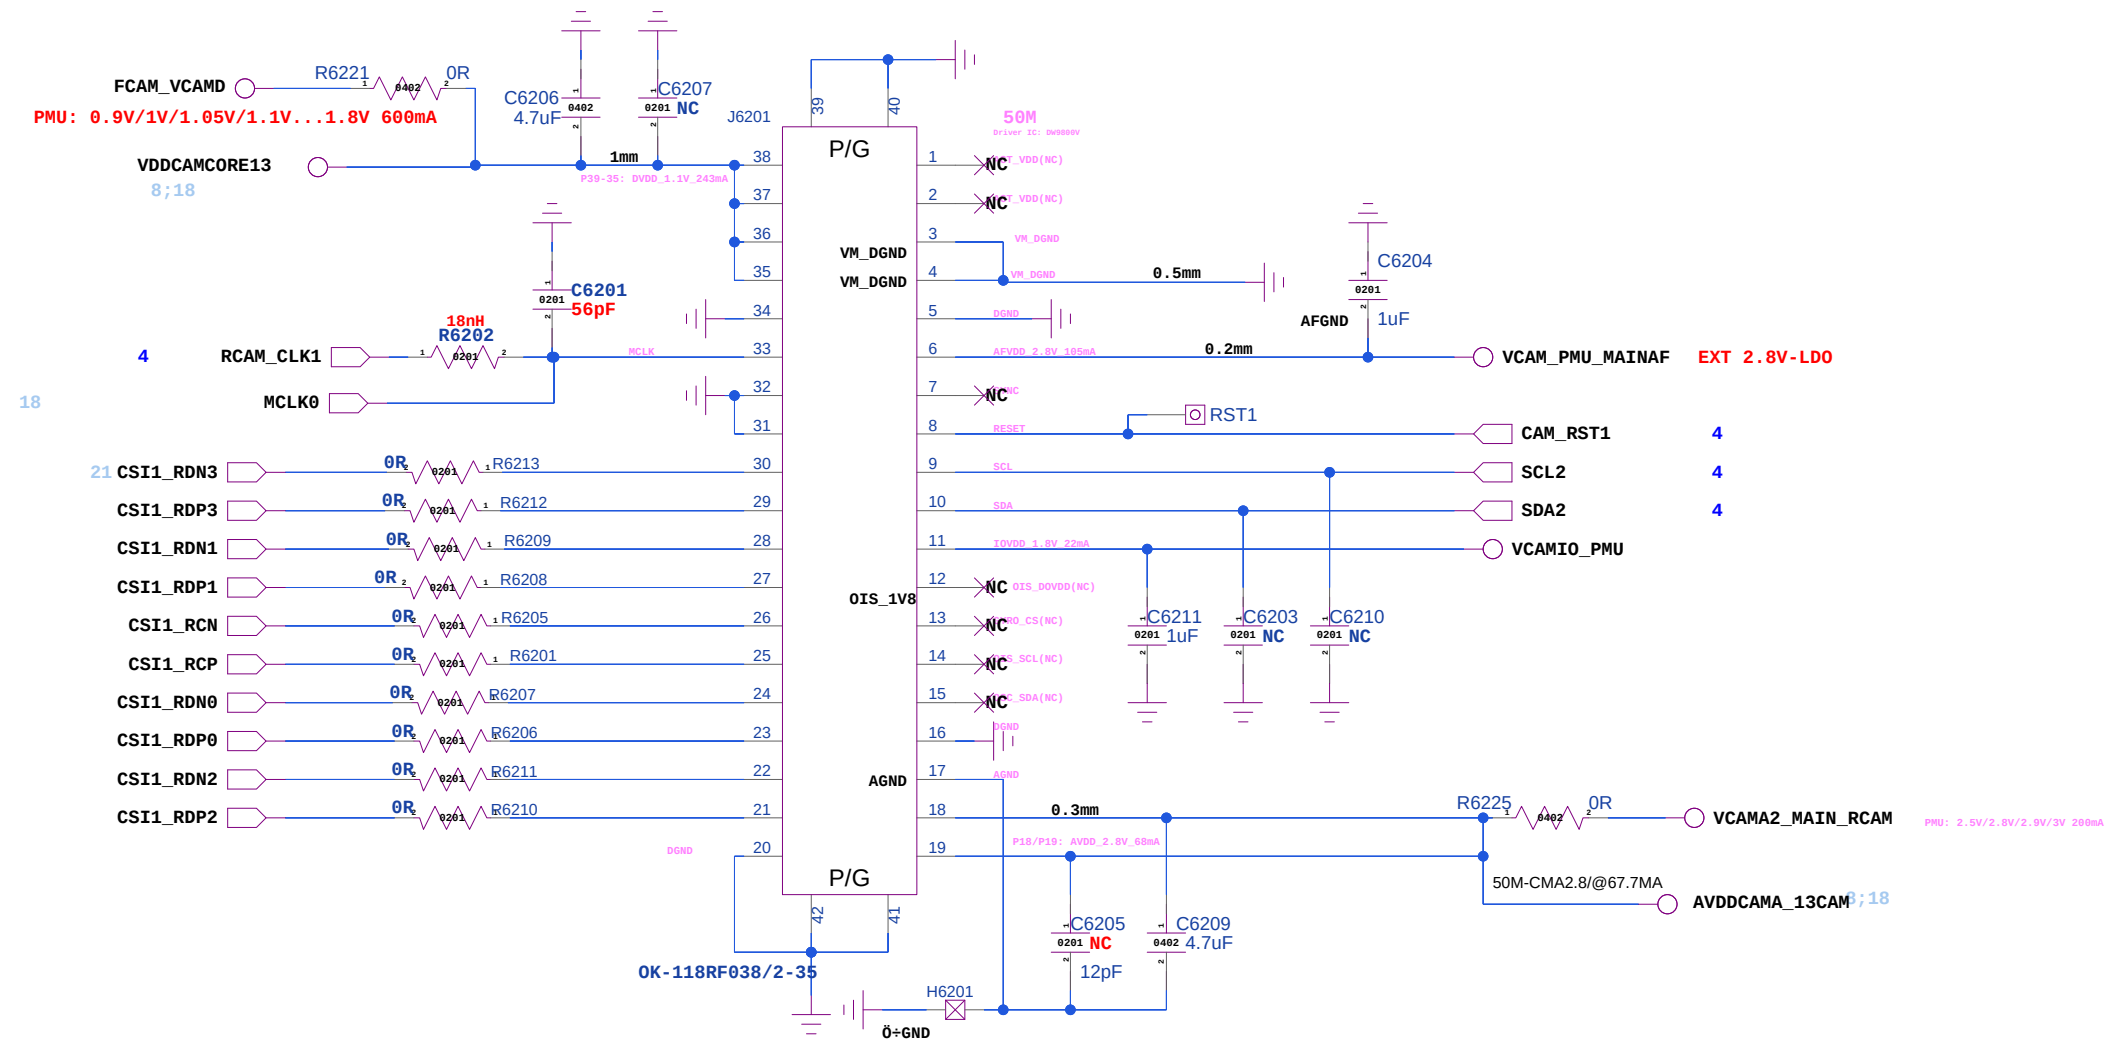

ĐỒ ỨNG DỤNG

17201885_H06_DPHY	CPHY	SENSOR	I2C Address	VCAMA	VCAMD	VCAMIO	AFVDD	SAP	
	50M	SSKJN1SQ03-FGX9	Write:0x20 Read:0x21	2.8V @67.7mA	1.05V @260.7mA	1.8V@ 4mA	2.8V@ 103mA	17201892	38pin
	50M	SSKJN1SQ03-FGX9	Write:0x20 Read:0x21	2.8V @67.7mA	1.05V @260.7mA	1.8V@ 4mA	2.8V@ 105mA	17201906	38pin
	50M	Hi-5022Q	Write:0x44Read:0x45	2.8V @68mA	1.1V @243mA	1.8V@ 22mA	2.8V@ 105mA	17201891	38pin
	13M	OV13B10-GA5A	Write:0x20Read:0x21	2.8V @45mA	1.2V @130mA	1.8V@ 3mA	2.8V@ 125mA	17201941	30pin
	13M	GC13A0-WA1NA	Write:0x20Read:0x21	2.8V @45mA	1.2V @115mA	1.8V@ 5mA	2.8V@ 123mA	17201894	30pin

13M

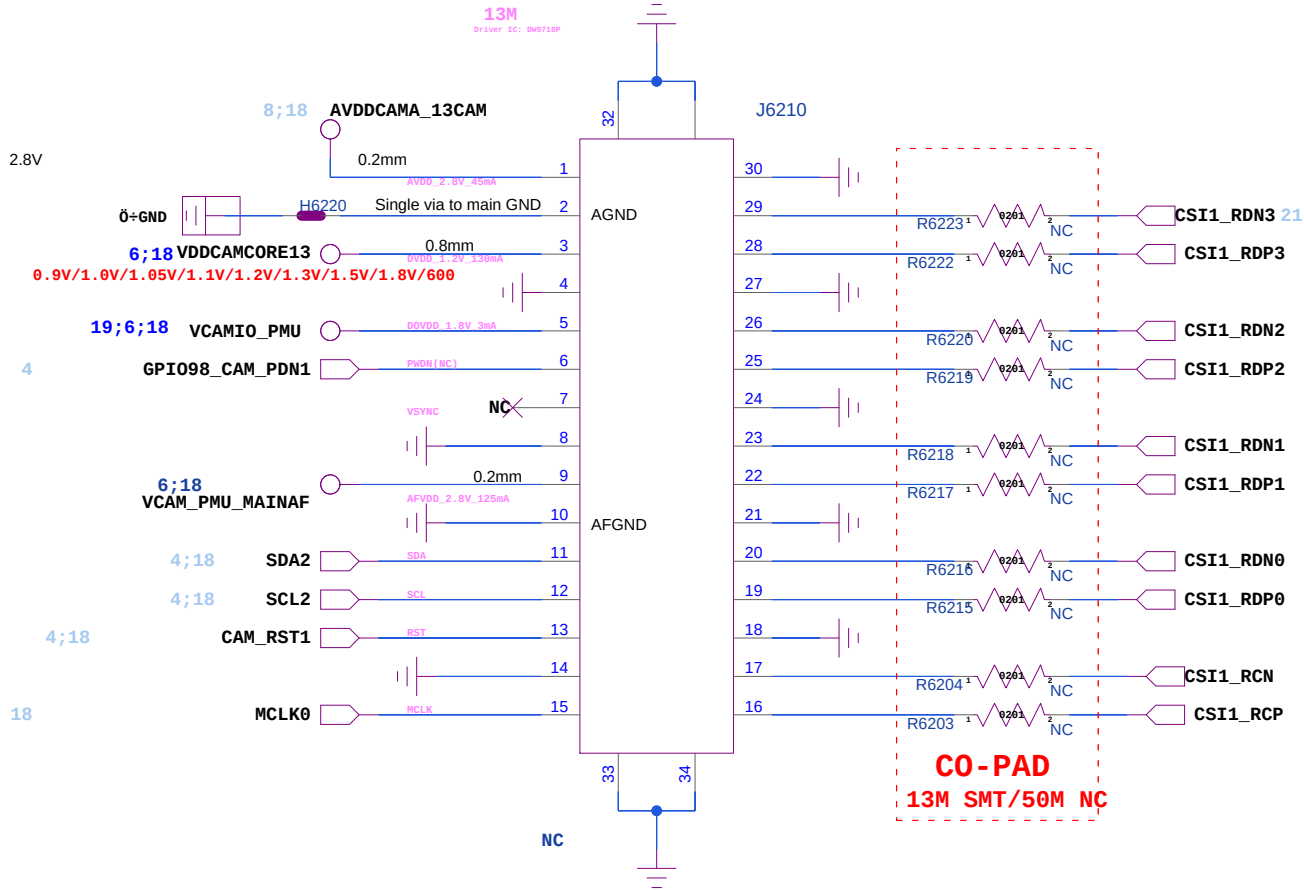


	AVDD	DVDD	IOVDD	AFVDD	ACT-VDD	I2C addr
64M 17201734 SSKGWBSW03-FGX9	2.8V 163.8mA	0.9V 750mA	1.8V 18.55mA	2.8V 105mA		Sensor:0x20(W)/0x21(R) VCM:0x18(W)/0x19(R) EEPROM:0xA0(W)/0xA1(R)
64M OIS SSKGWBSW03-FGX9	2.8V 164mA	0.9V 750mA	1.8V 17.6mA	3.3V 30mA	3.3V 300mA	Sensor:0x20(W)/0x21(R) VCM:0xE4(W)/0xE5(R) EEPROM:0xA0(W)/0xA1(R)

COMPANY: TRANSSION HOLDINGS				MODEL:G85_STD_MAIN		Modified Date: 30/12/2024:17:22	
DRAWN		DATED		TITLE: 62_PERI_CAMERA_I		VERSION:	SHEET: 21 OF 28
CHECKED		DATED	< >	Confidentiality	CONFIDENTIAL		

CAM III (2M)

REVISION RECORD			
LTR	ECO NO:	APPROVED:	DATE:

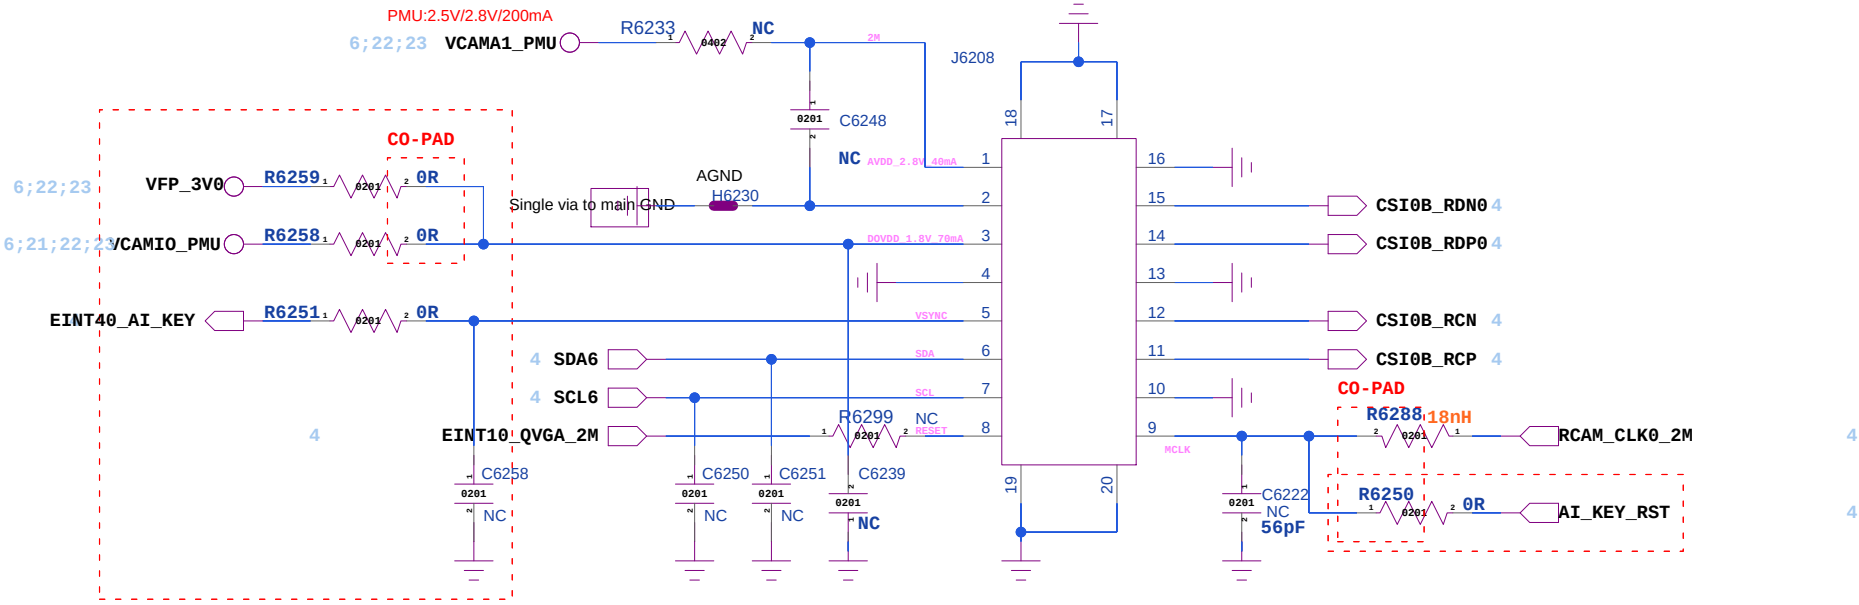

08/01/2025:15:35

			VCAMA	PIN5	PIN8		SAP
1			2.8V@400UA	NC	OUT		17201873
			2.8V@400UA	NC	OUT		17201874
			2.8V@400UA	NC	OUT		17201889

08/01/2025:15:35

	VCAMA	VCAMIO					SAP
1	2.8V@40MA	1.8V@70MA					17201867
	2.8V@40MA	1.8V@70MA					17201868

2M


	AVDD	DVDD	IOVDD	I2C addr
2M(17201868) GC02M3-C24YA	2.8V,40mA	/	1.8V,70mA	sensor:0x20(W)/0x21(R)
2M(17201867) GC02M3-C24YA	2.8V,40mA	/	1.8V,70mA	sensor:0x20(W)/0x21(R)

COMPANY: TRANSSION HOLDINGS				MODEL:G85_STD_MAIN		Modified Date: 08/01/2025:15:35	
DRAWN		DATED		TITLE: 62_PERI_CAMERA_II		VERSION:	SHEET: 22 OF 28
CHECKED		DATED	< >	Confidentiality	CONFIDENTIAL		

PERI_CAMERA_III

FRONT MAIN CAMERA (8M/16M)

KM5°Ë¼ÛÖ§³Öμ¥Ç°ÉãFF 8M

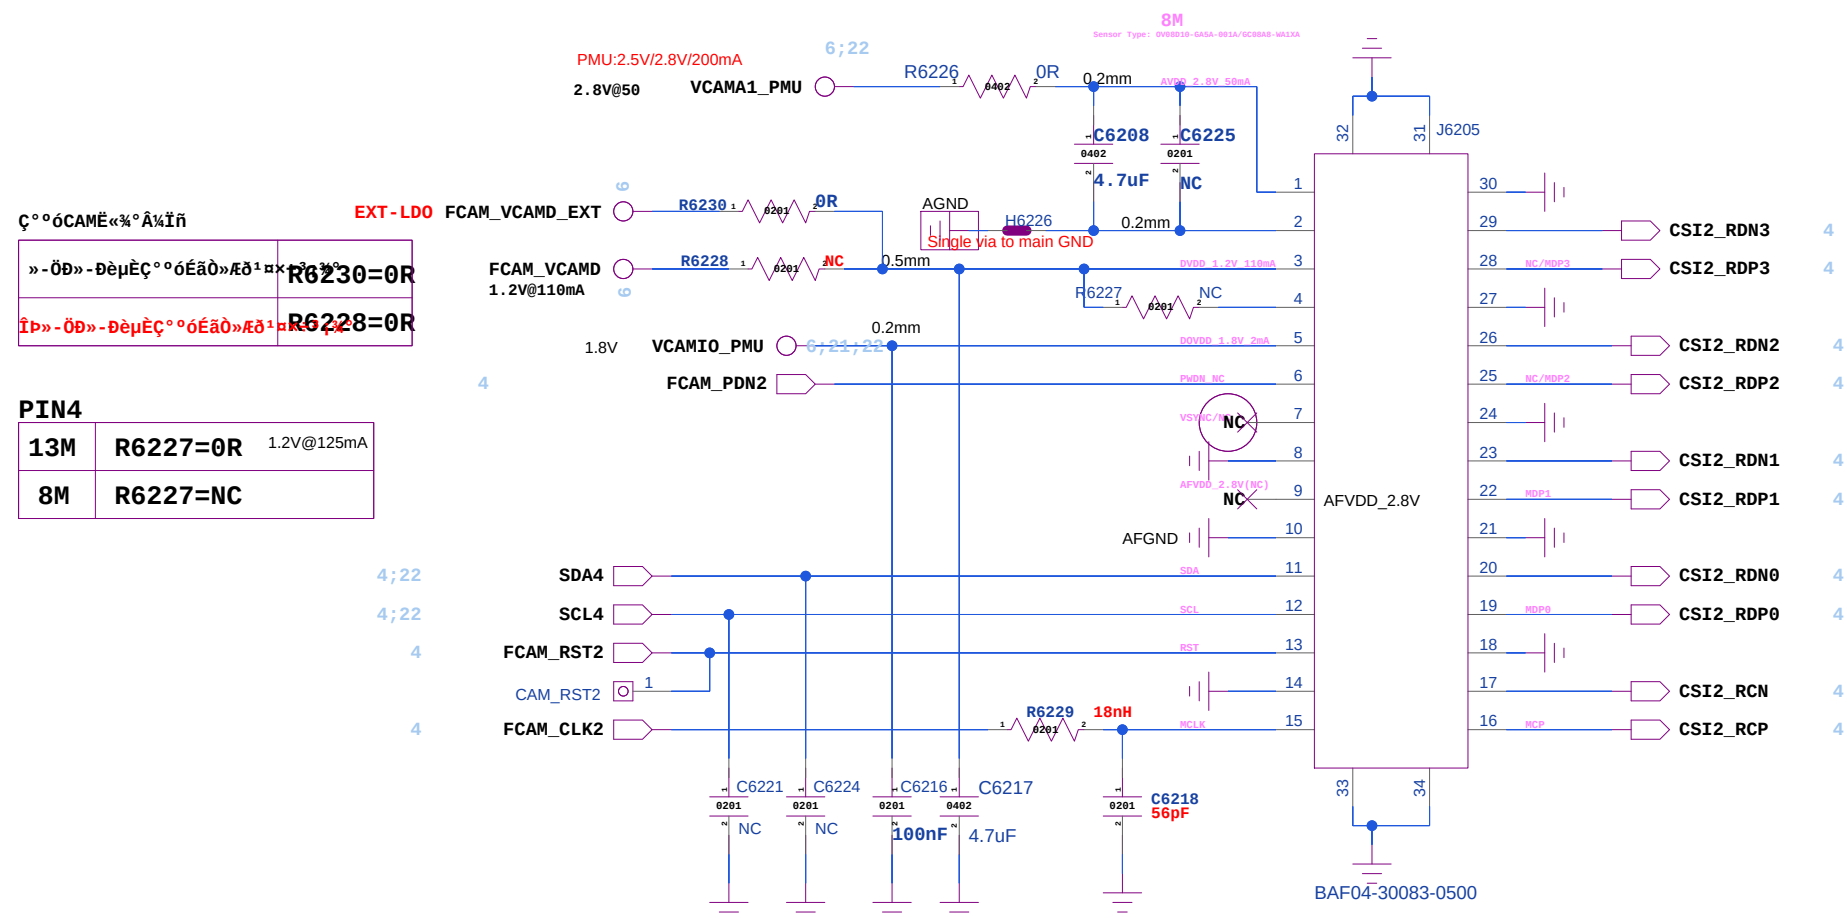

REVISION RECORD			
LTR	ECO NO:	APPROVED:	DATE:

	SENSOR	I2C Address	VCAMA	VCAMD	VCAMIO	SAP	
13M	GC13AO-WALNA	Write: 0x74 Read: 0x73	2.8V @45mA	1.2V @115mA	1.8V @5mA	17201959	30pin
	GC08AB-MDDO	Write: 0x24 Read: 0x25	2.8V @40mA	1.2V @110mA	1.8V @2mA	17201890	30pin
8M	OV08D01-GASA	Write: 0x6C Read: 0x6D	2.8V @50mA	1.2V @90mA	1.8V @1mA	17201885	30pin
	GC08AB-WALXA	Write: 0x24 Read: 0x25	2.8V @40mA	1.2V @110mA	1.8V @2mA	172003.960	30pin

CAM VII (QVGA)

CAM VIII (QVGA)

COMPANY: TRANSSION HOLDINGS				MODEL:G85_STD_MAIN		Modified Date: 30/12/2024:19:09	
DRAWN		DATED		TITLE: 62_PERI_CAMERA_III		VERSION:	SHEET: 23 OF 28
CHECKED		DATED	< >	Confidentiality	CONFIDENTIAL		


LCM



1-RT1715 R6405=1K

2-AW35616 R6405=1K

IC-CCLOGIC-RT1715WSC-H0.6

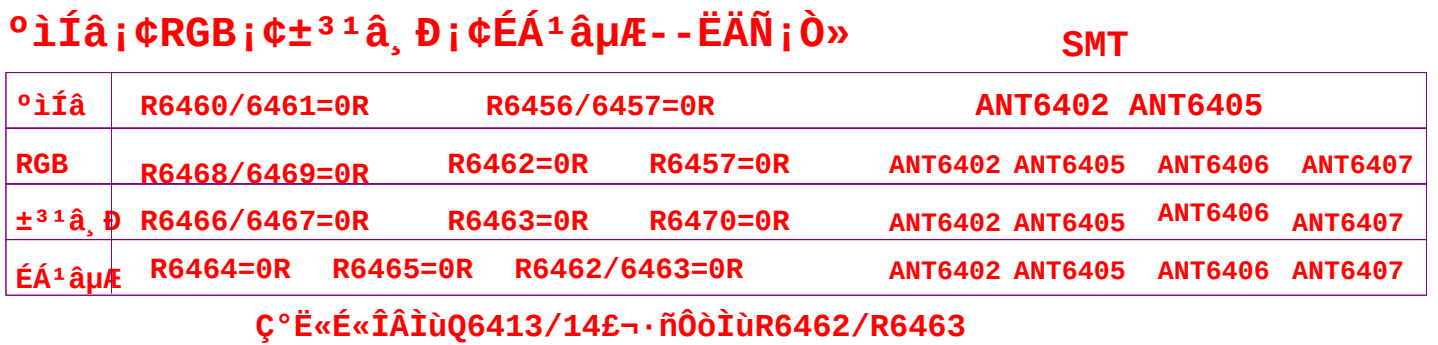


COMPANY: TRANSSION HOLDINGS				MODEL:G85_STD_MAIN		Modified Date: 28/02/2025:16:55	
DRAWN		DATED		TITLE: 64_PERI_EXCH_IO		VERSION:	SHEET: 25 OF28
CHECKED		DATED	< >	Confidentiality	CONFIDENTIAL		

PERI_SIM_SD_KEYPAD


REVISION RECORD			
LTR	ECO NO:	APPROVED:	DATE:

SIM1/2-SD-CARD

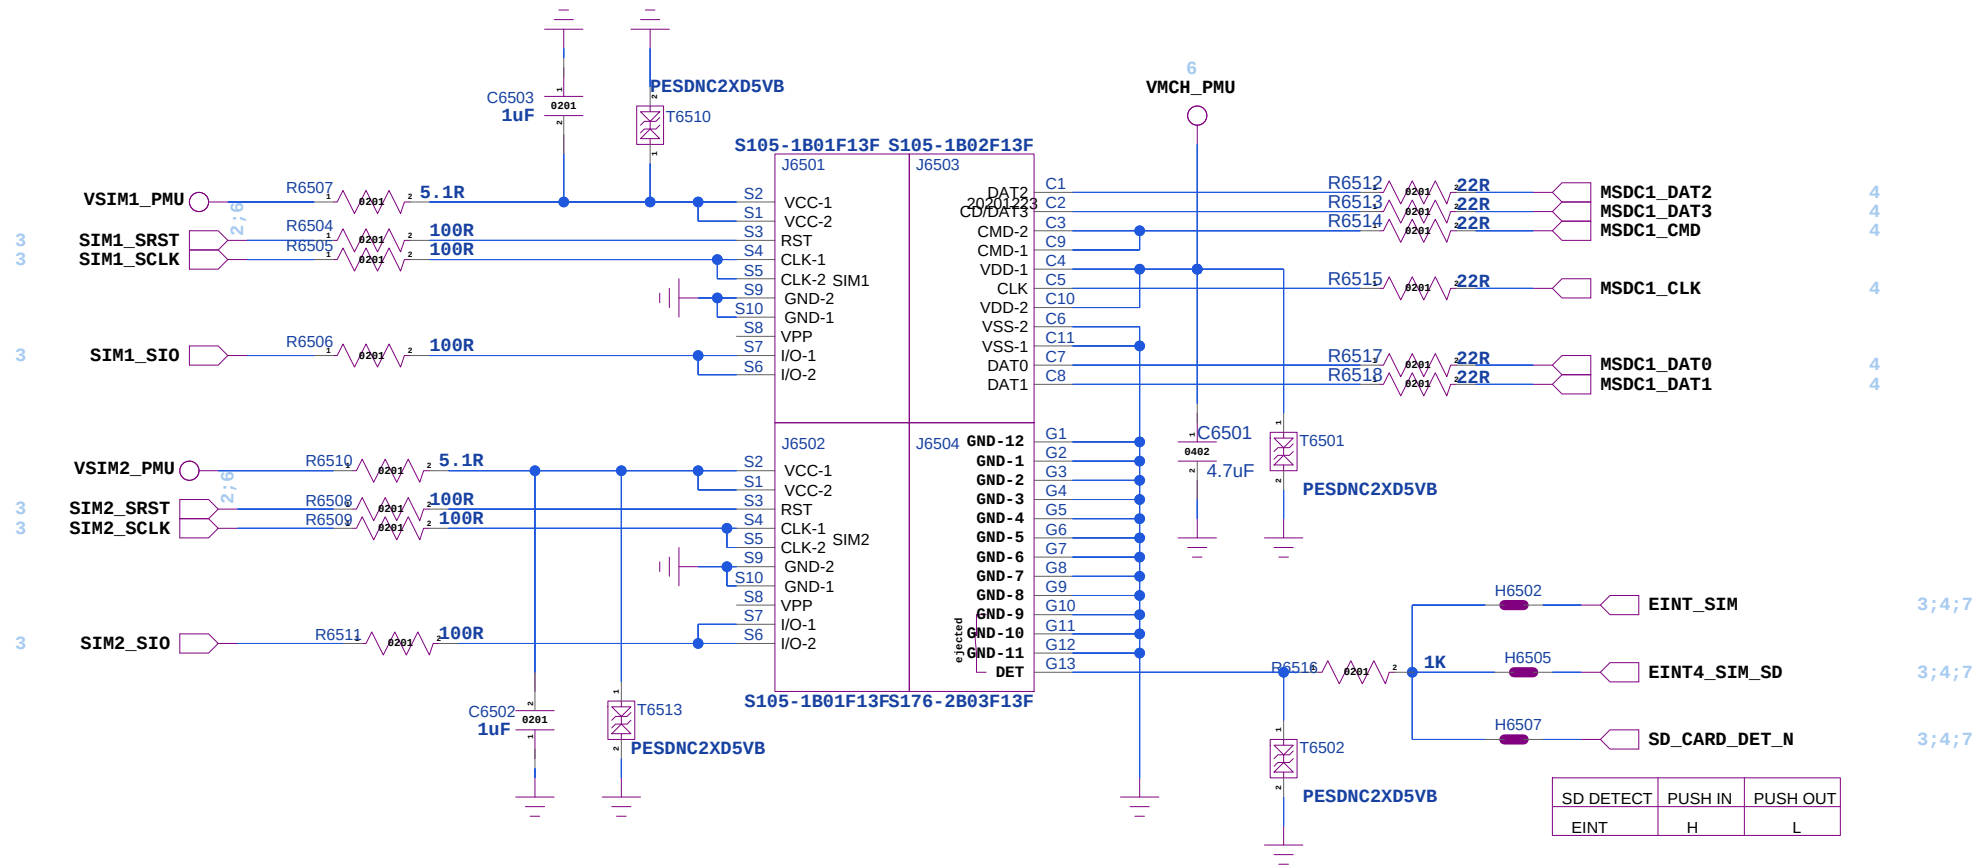

SD POWER CONTROL

SIDEKEY

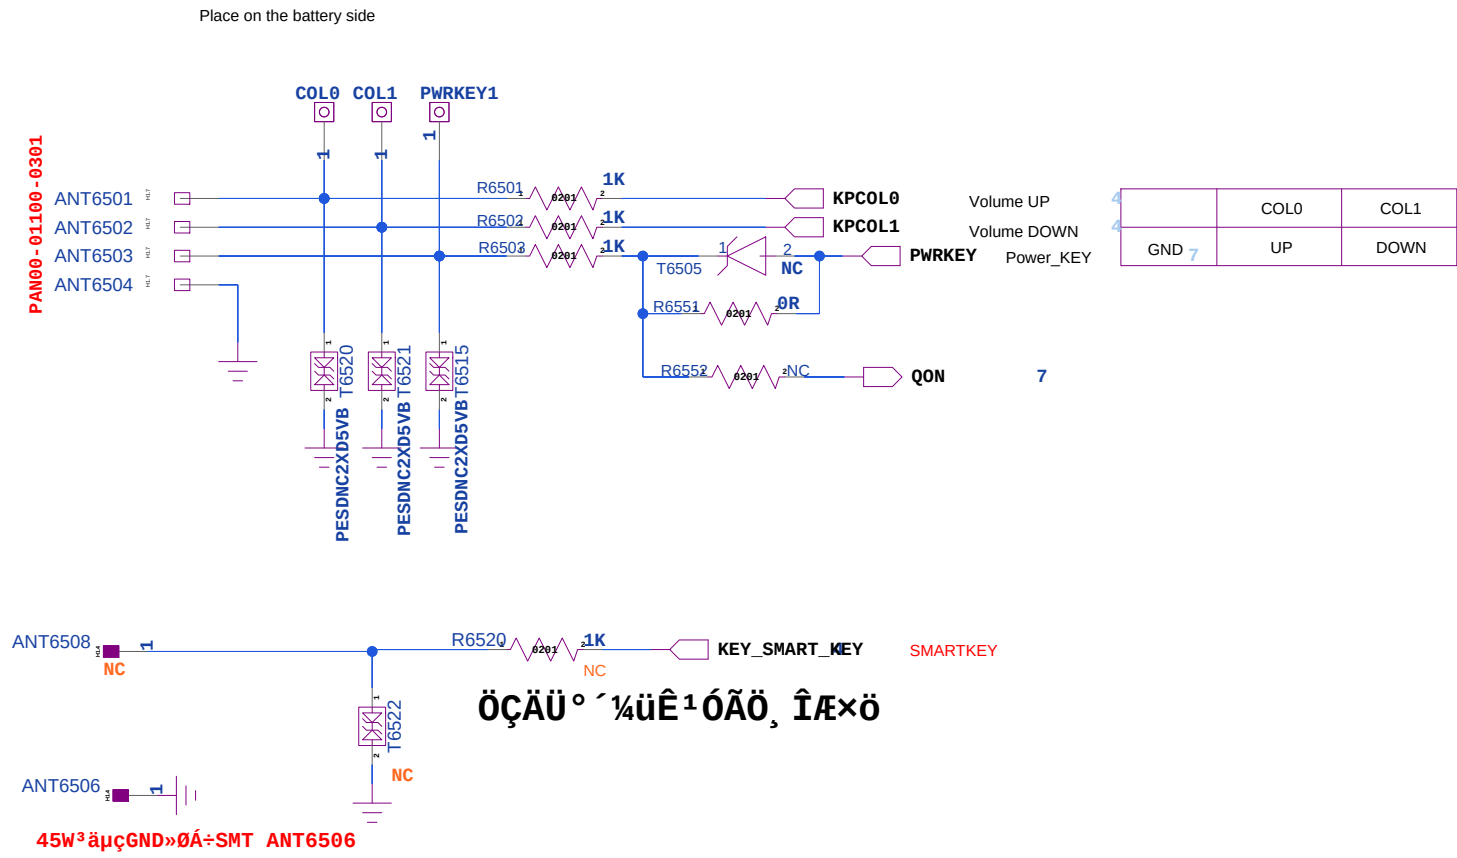


COMPANY: TRANSSION HOLDINGS				MODEL:G85_STD_MAIN		Modified Date: 03/01/2025:14:01	
DRAWN		DATED		TITLE: 65_PERI_SIM_SD_KEYPAD		VERSION:	SHEET: 26 OF 28
CHECKED		DATED	< >	Confidentiality	CONFIDENTIAL		

PERI_NFC


REVISION RECORD			
LTR	ECO NO:	APPROVED:	DATE:

KM5 - - 2»ÖŞ 3ÖNFC

HIF2	HIF1	Write	Read	Address
0	0	0x50	0x51	0x28
0	1	0x52	0x53	0x29
1	0	0x54	0x55	0x2A
1	1	0x56	0x57	0x2B

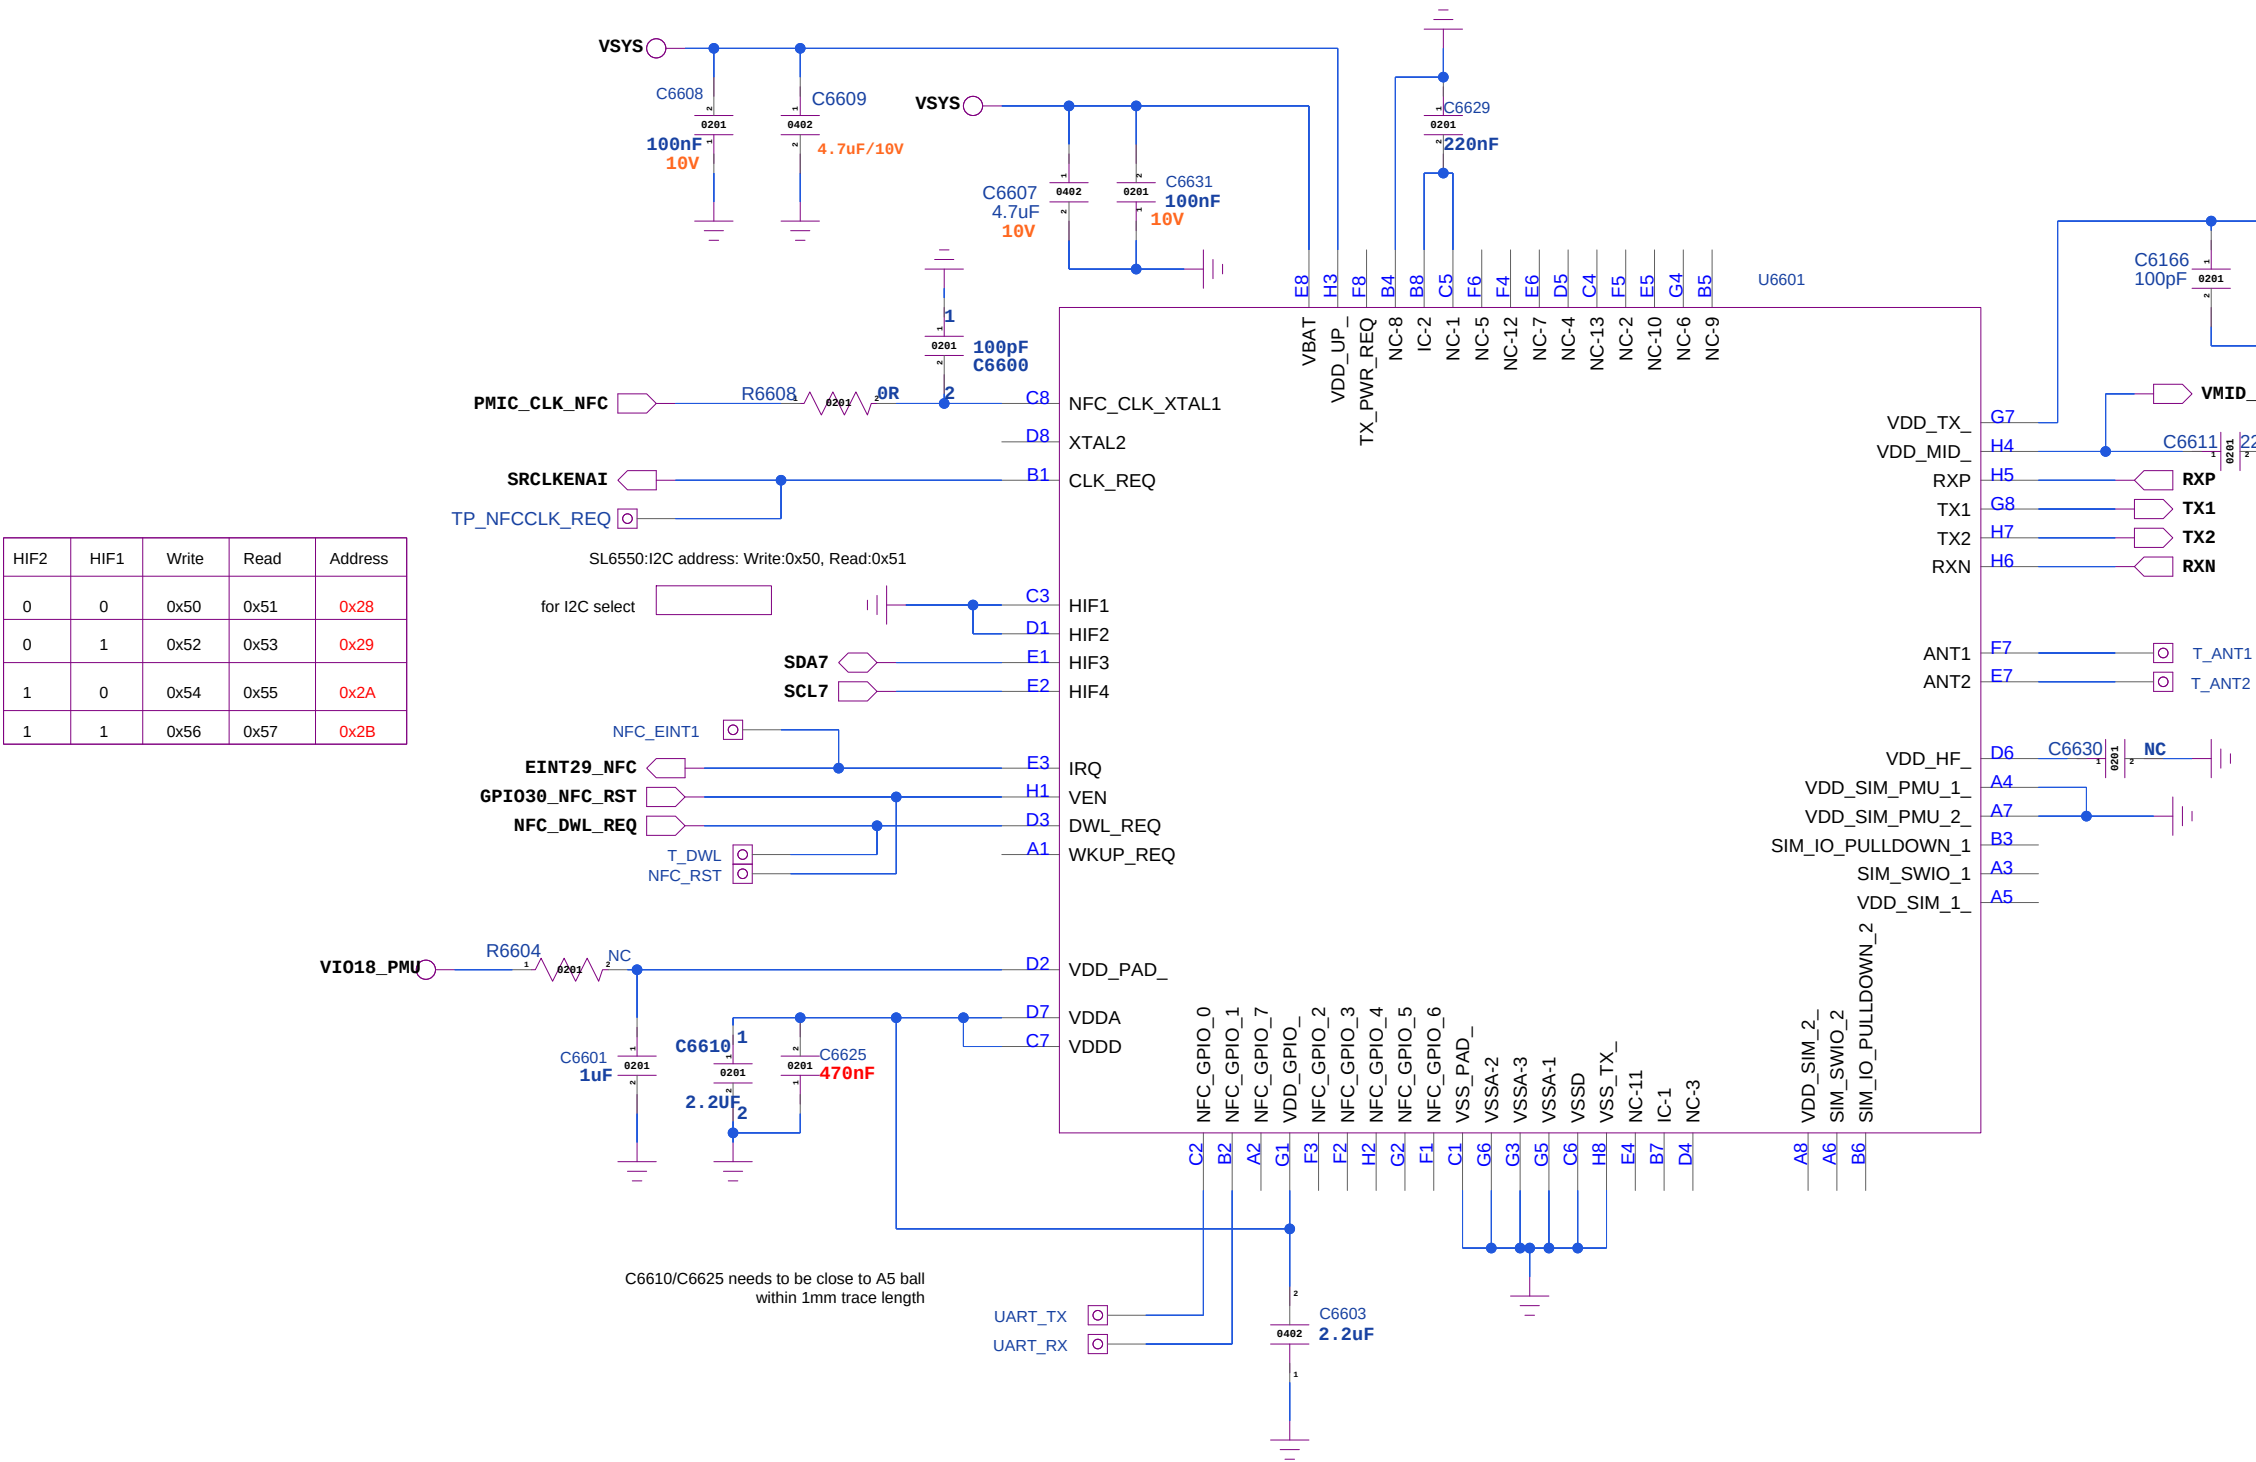


	PN557	SL6550
C6630	470nF	NC

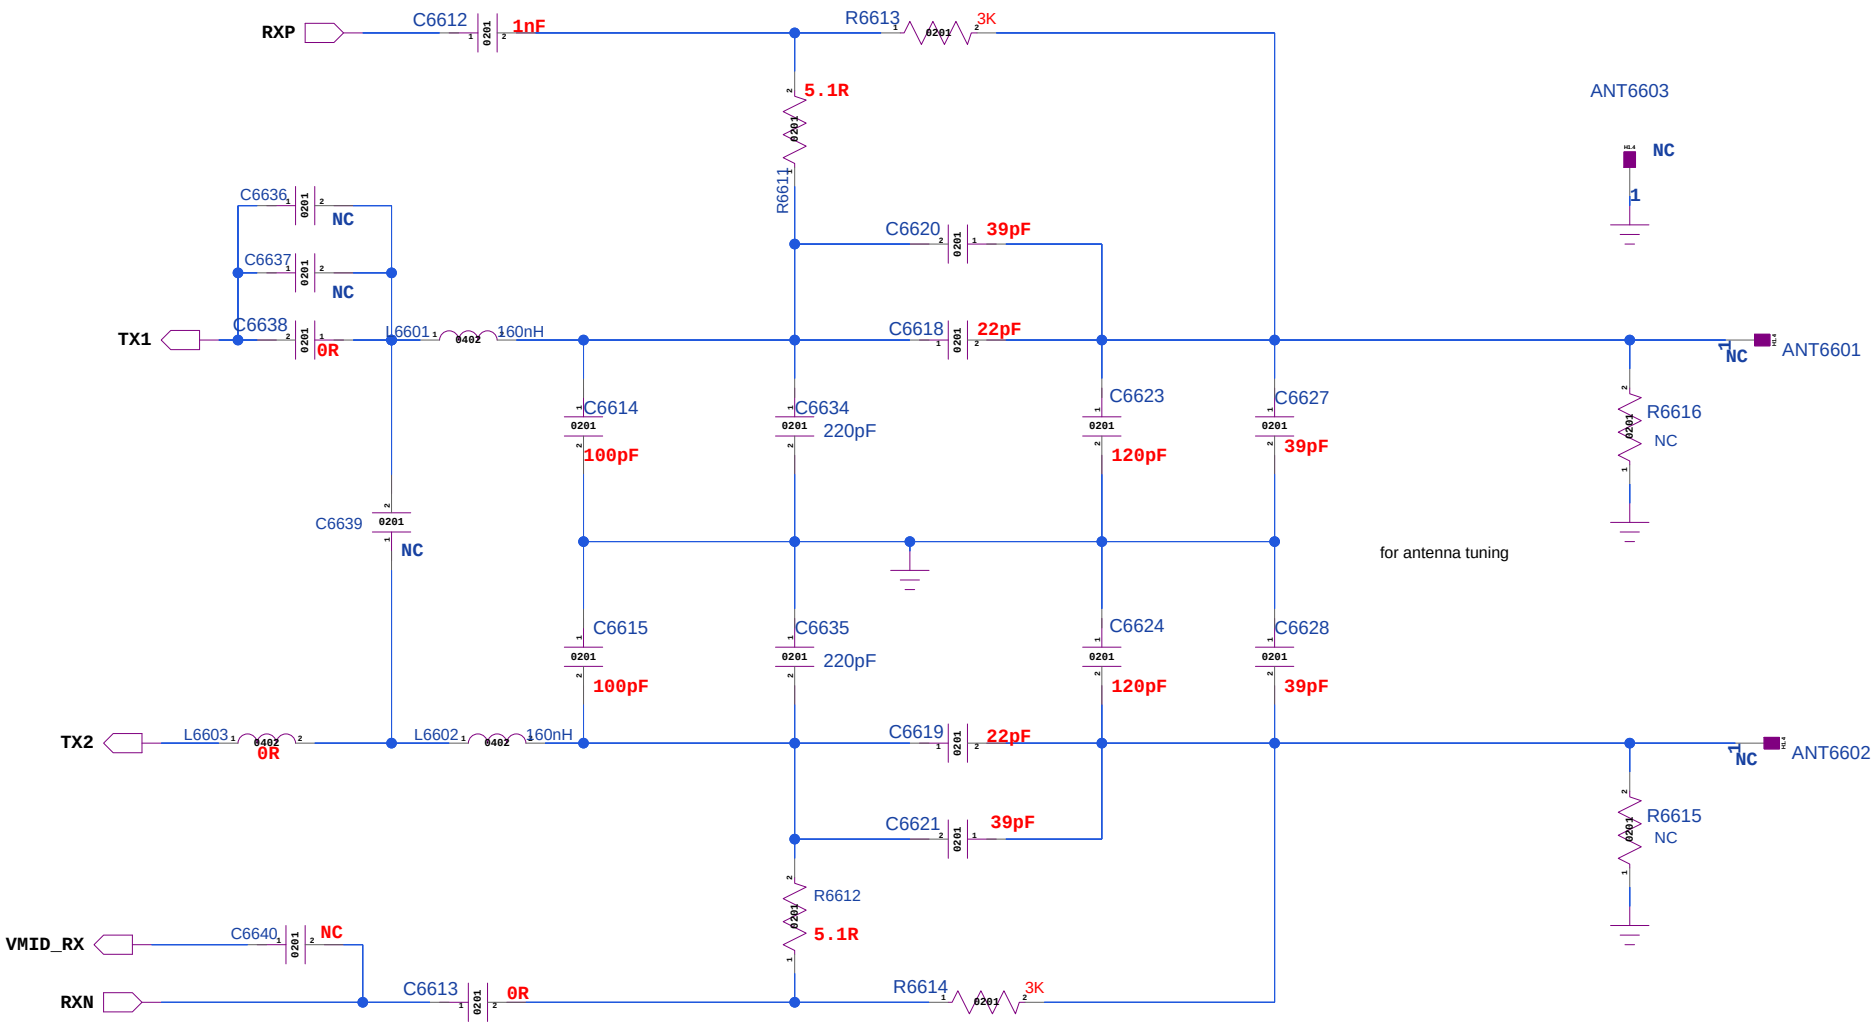


COMPANY: TRANSSION HOLDINGS				MODEL:G85_STD_MAIN		Modified Date: 20/02/2025:16:04	
DRAWN		DATED		TITLE: 66_PERI_NFC		VERSION:	SHEET: 27 OF 28
CHECKED		DATED	< >	Confidentiality	CONFIDENTIAL		

REVISION RECORD			
LTR	ECO NO:	APPROVED:	DATE:


ANT0(LMHB_TRX)

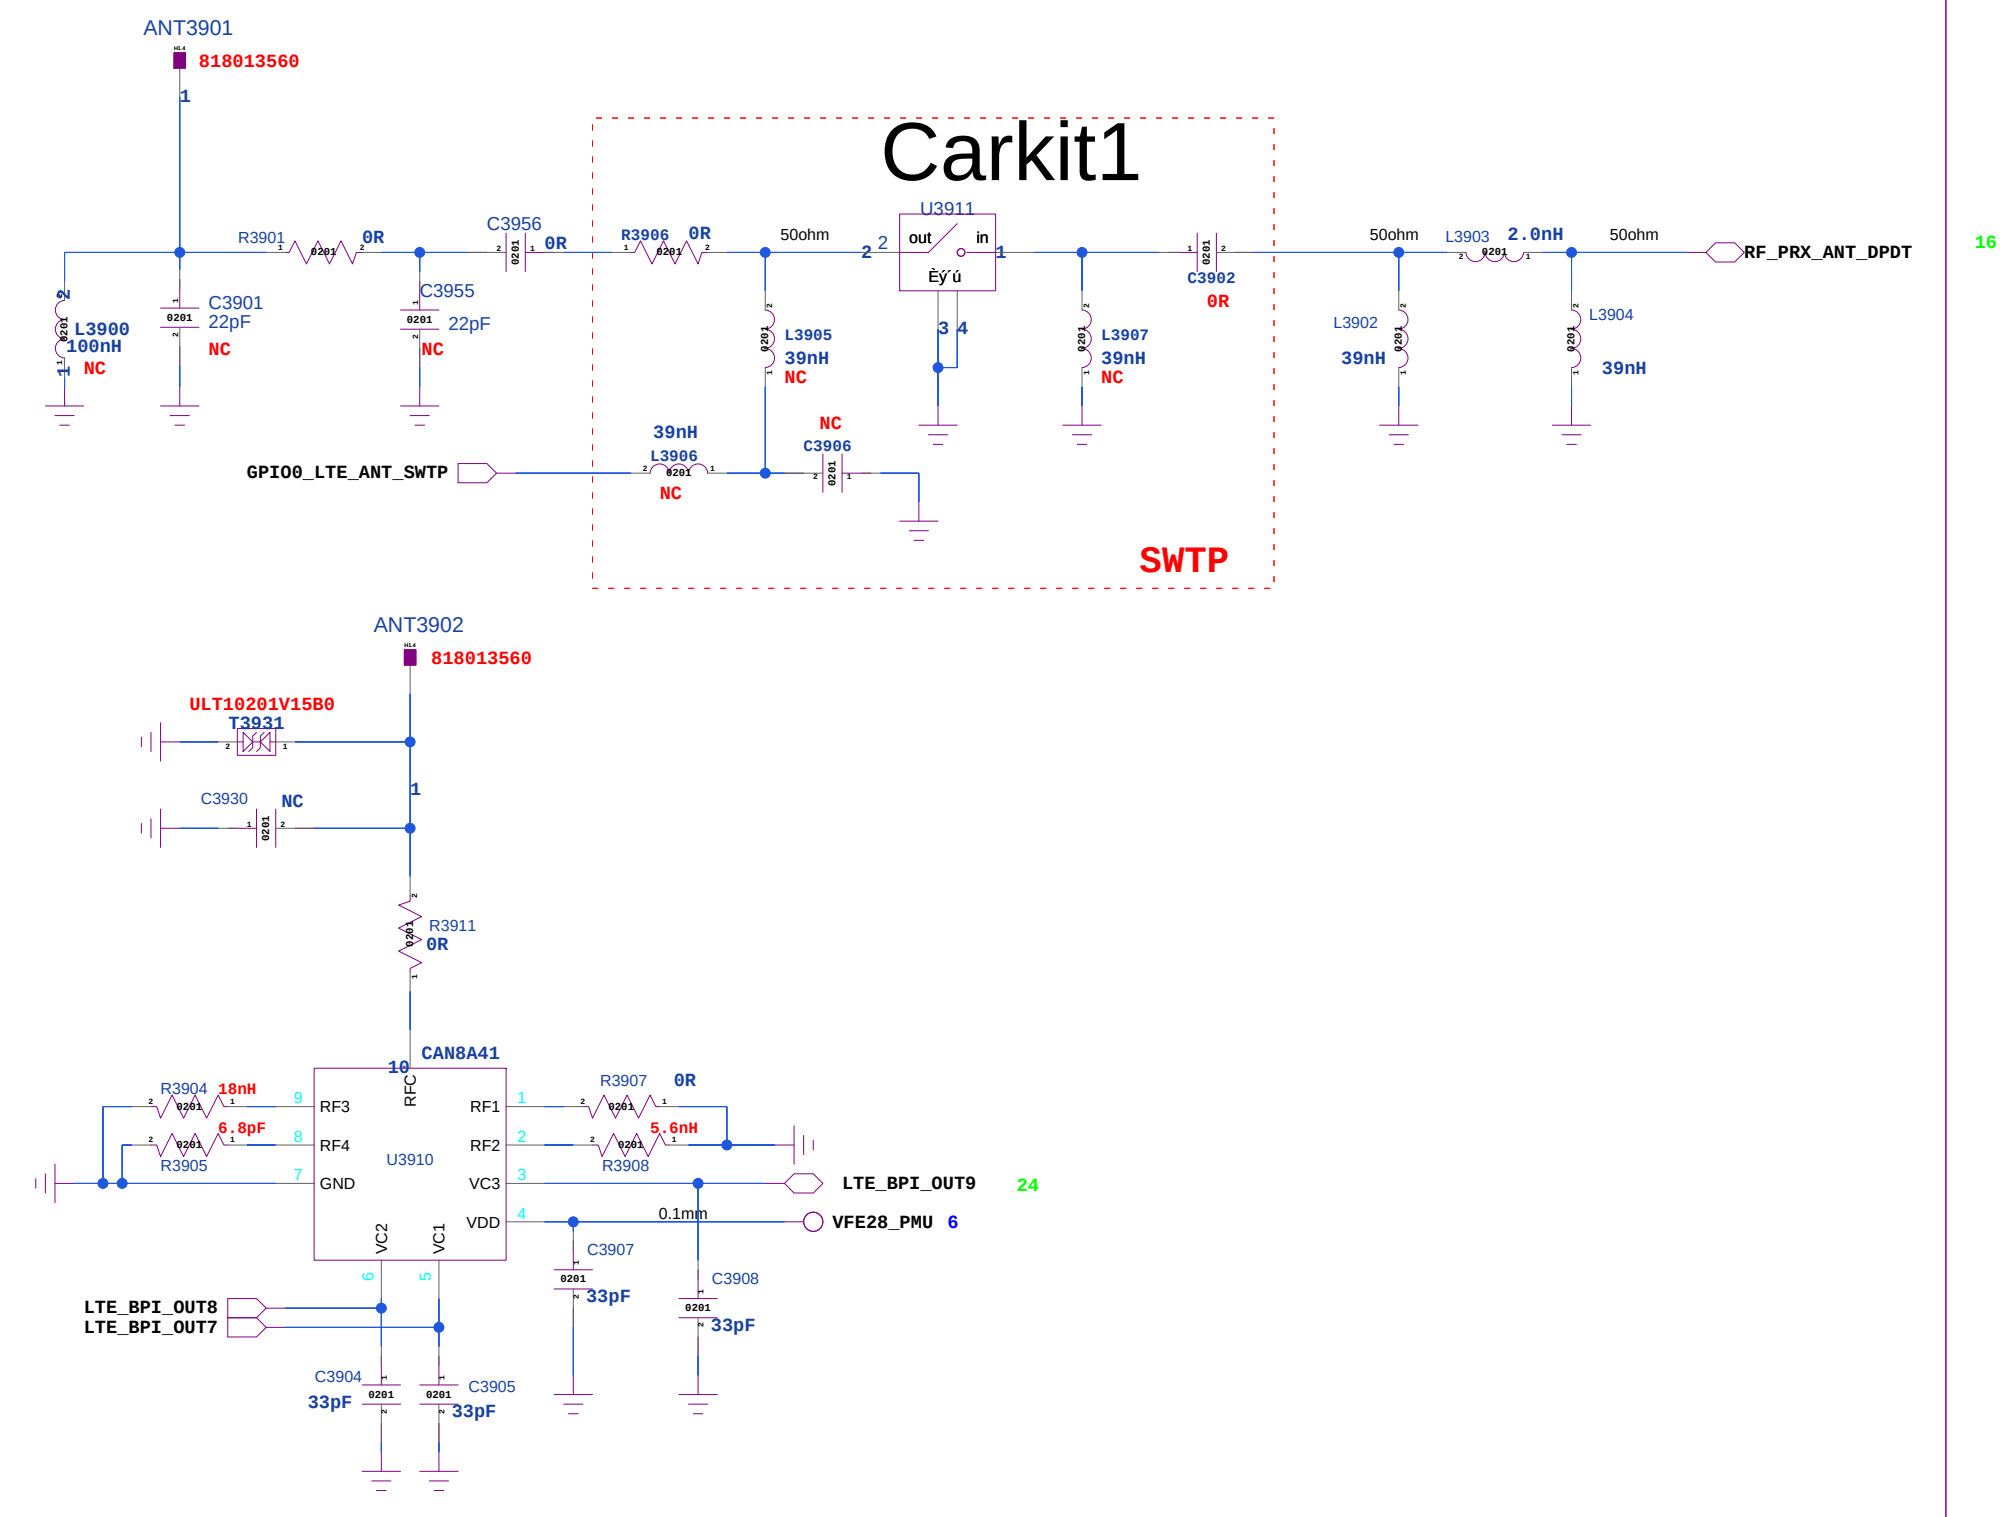



ANT1(LMHB_DRX)

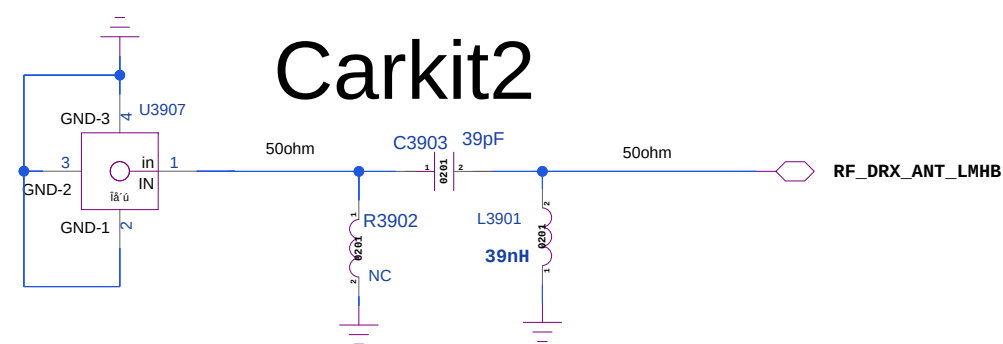

Ground Spring

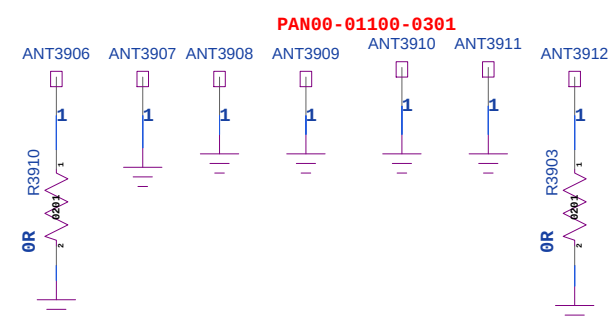

HOLE

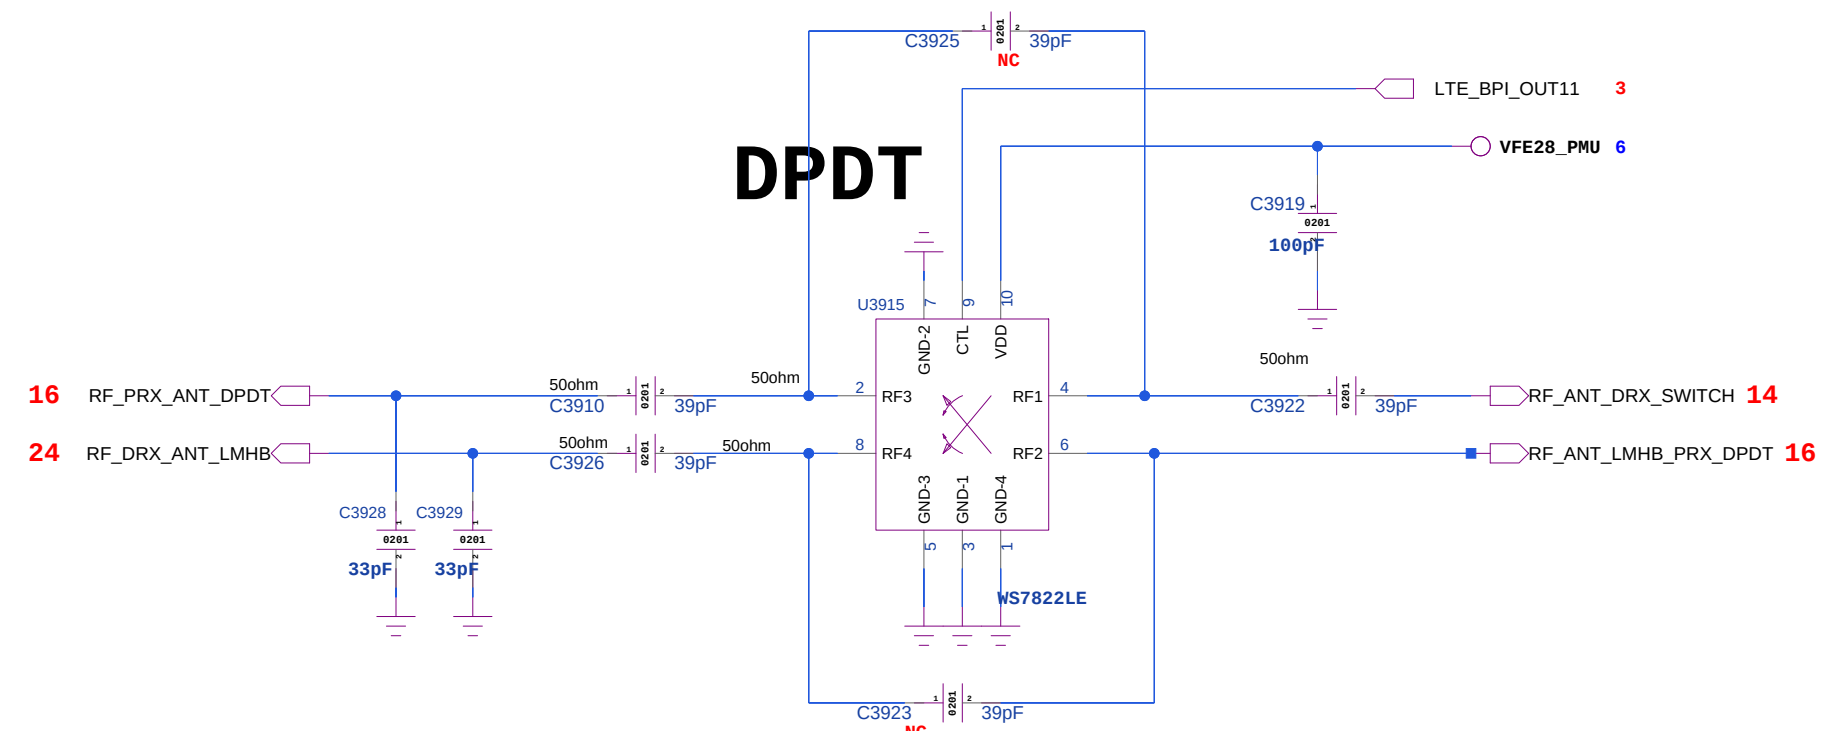

COMPANY: TRANSSION HOLDINGS				MODEL G85_STD_MAIN		Modified Date: 21/02/2025:18:02	
DRAWN		DATED		TITLE: 39_RF_ANT_1		VERSION:	SHEET: 16 O 28
CHECKED		DATED	< >	Confidentiality	CONFIDENTIAL		