


BLOCK_DIAGRAM



Project : MT6768/69 LPDDR4x

REVISION RECORD			
LTR	ECO NO:	APPROVED:	DATE:

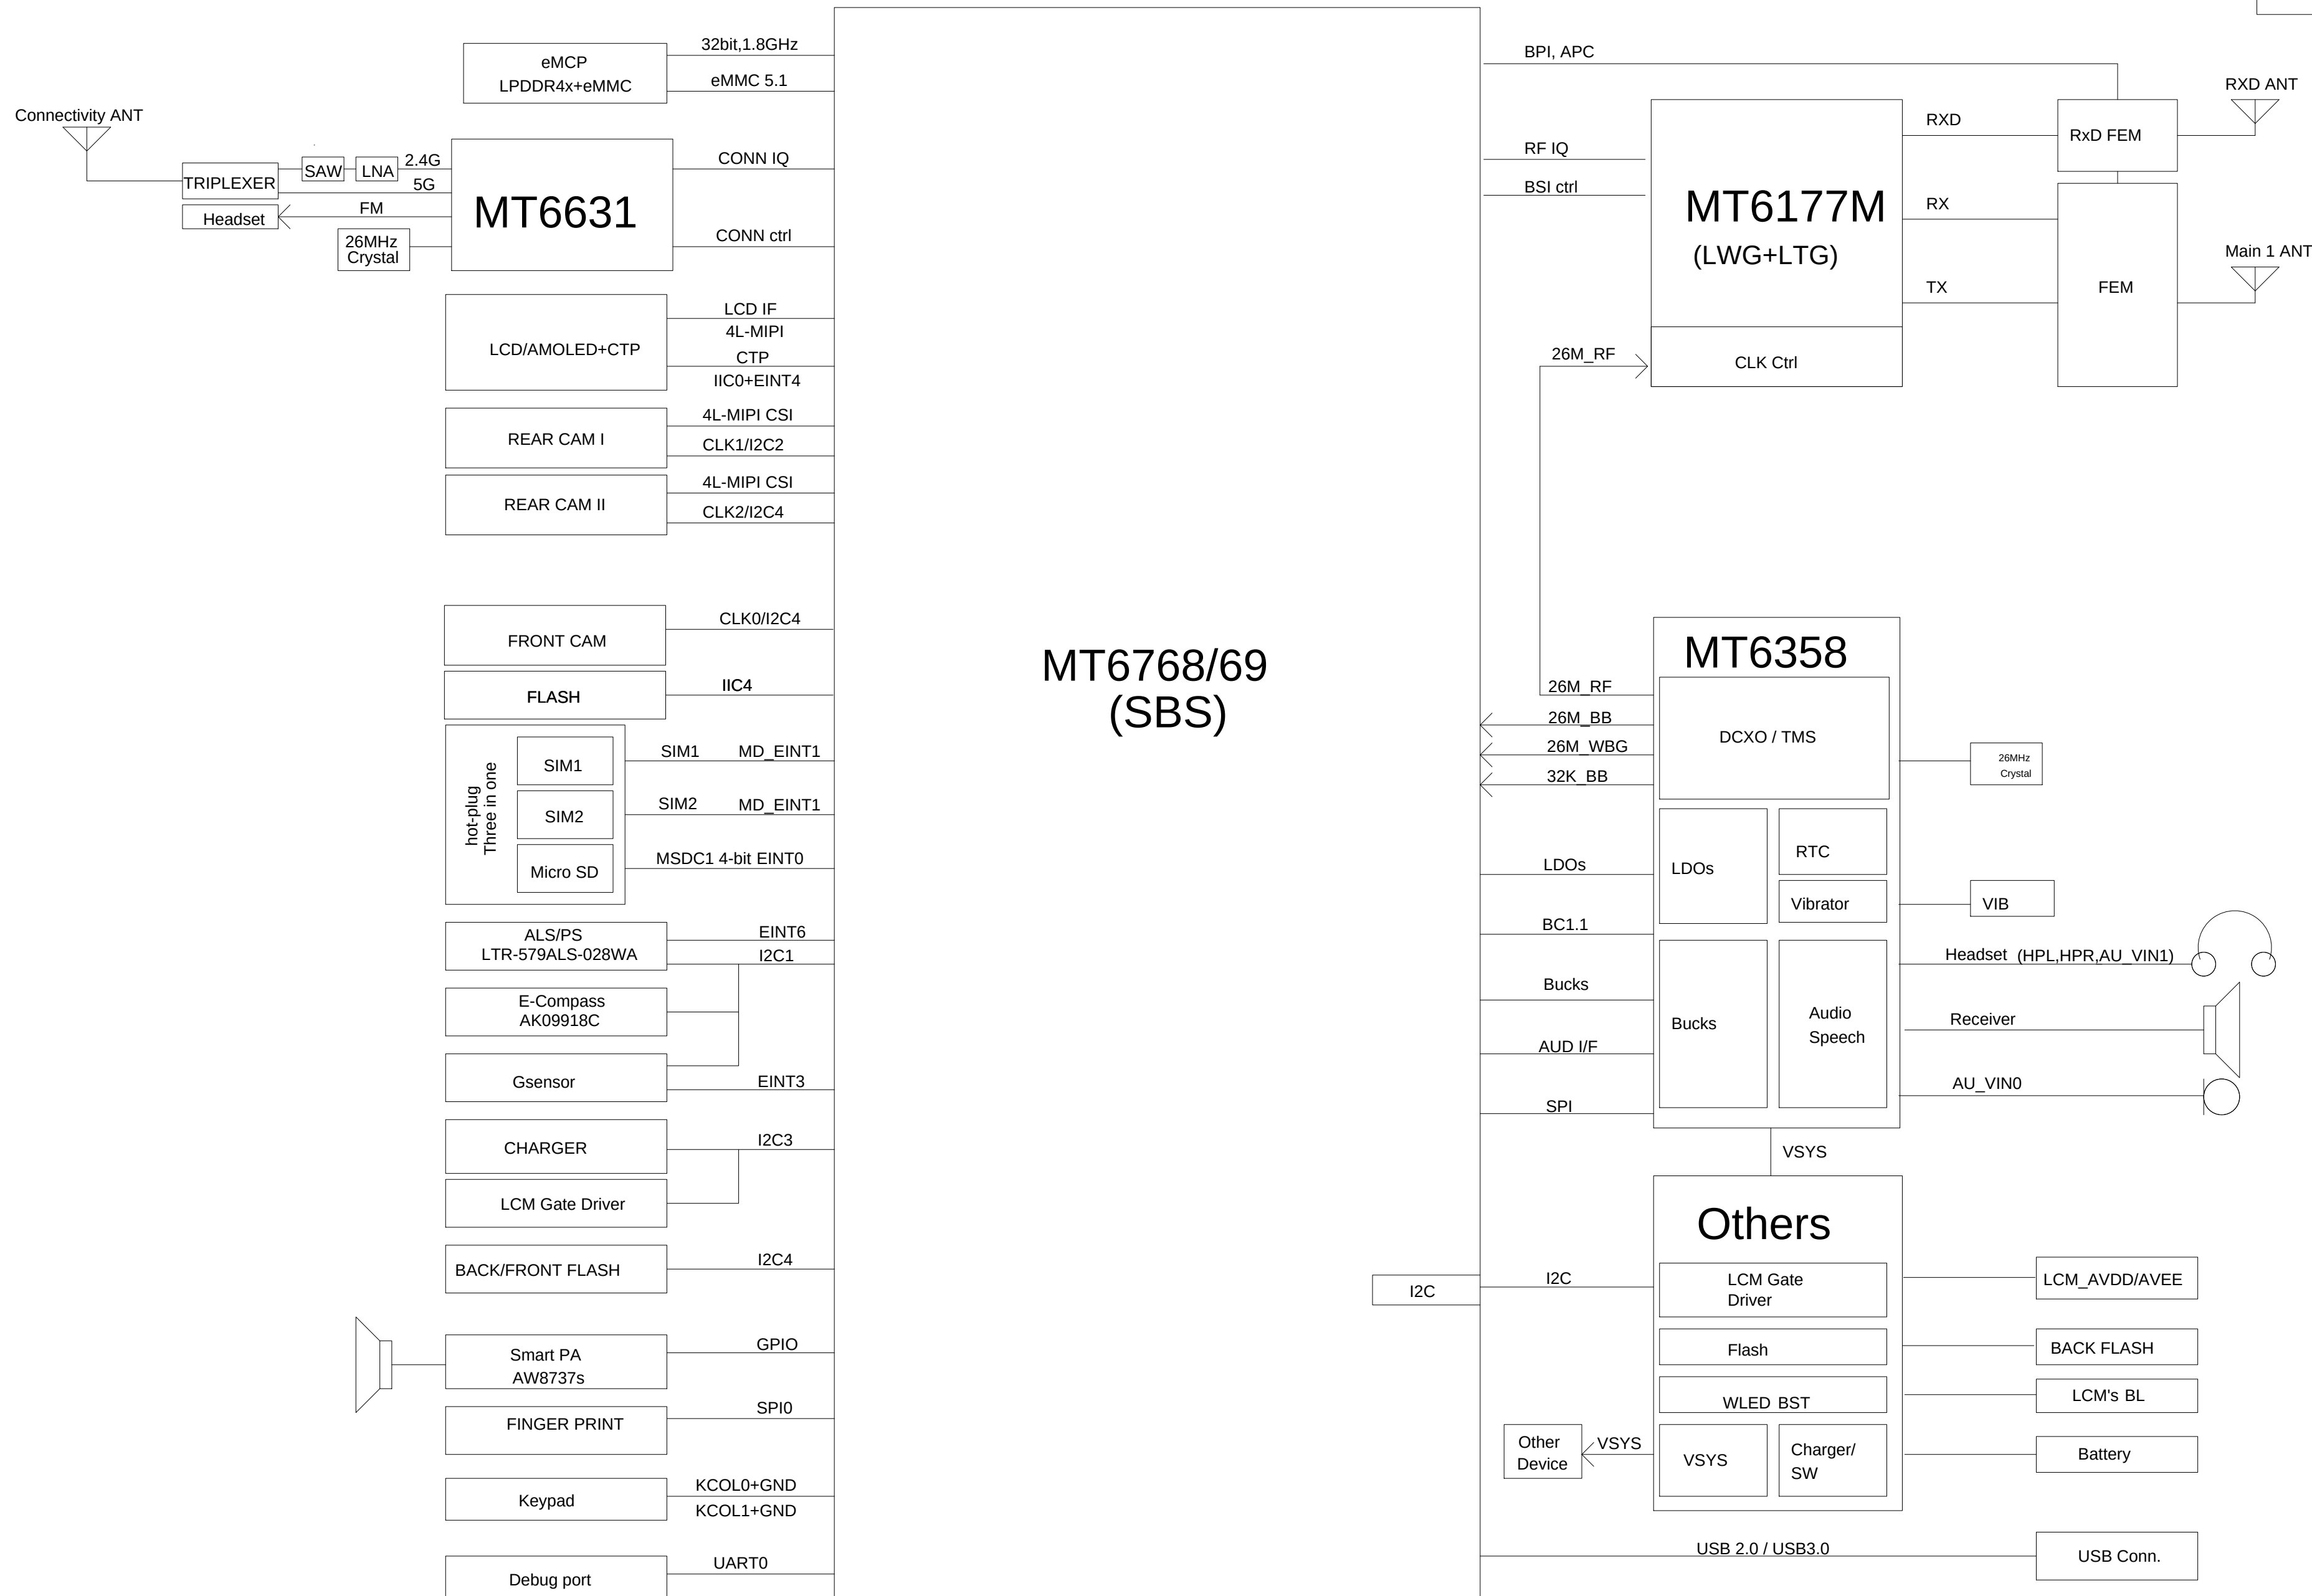


COMPANY: TRANSSION HOLDINGS				MODEL: H6929		Modified Date: 28/09/2022:16:58	
DRAWN		DATED		TITLE: 00_BLOCK_DIAGRAM		VERSION:	SHEET: 1 OF 27
CHECKED		DATED	< >	Confidentiality	CONFIDENTIAL		

BB_POWER

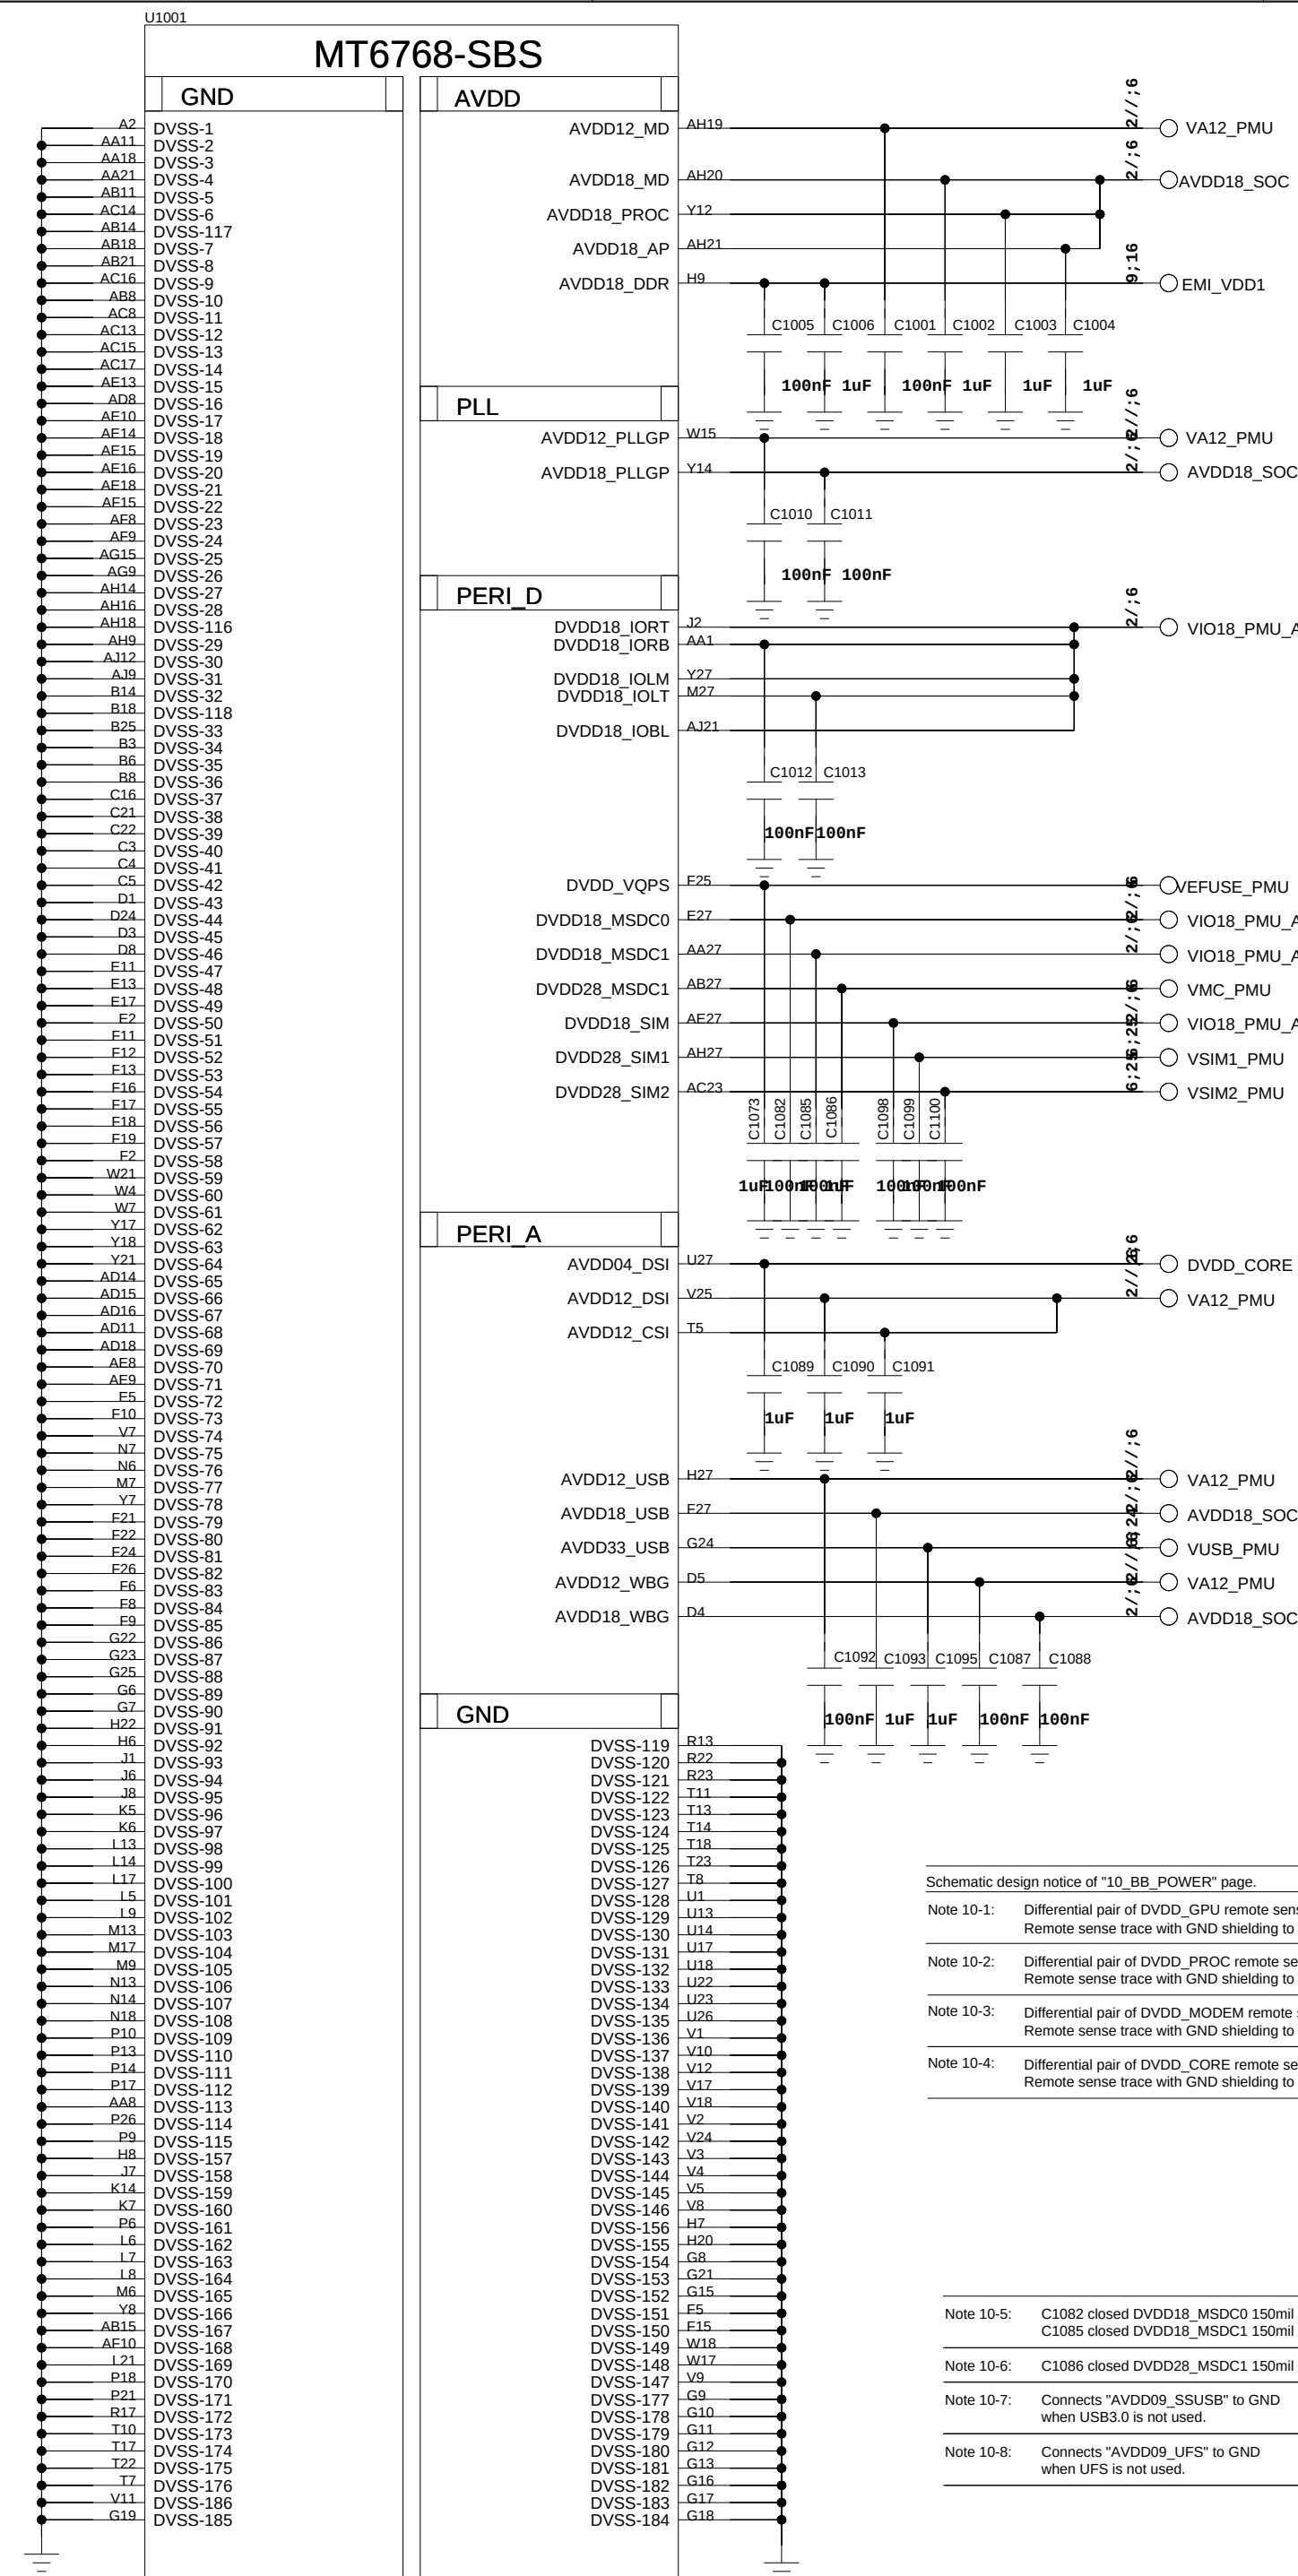
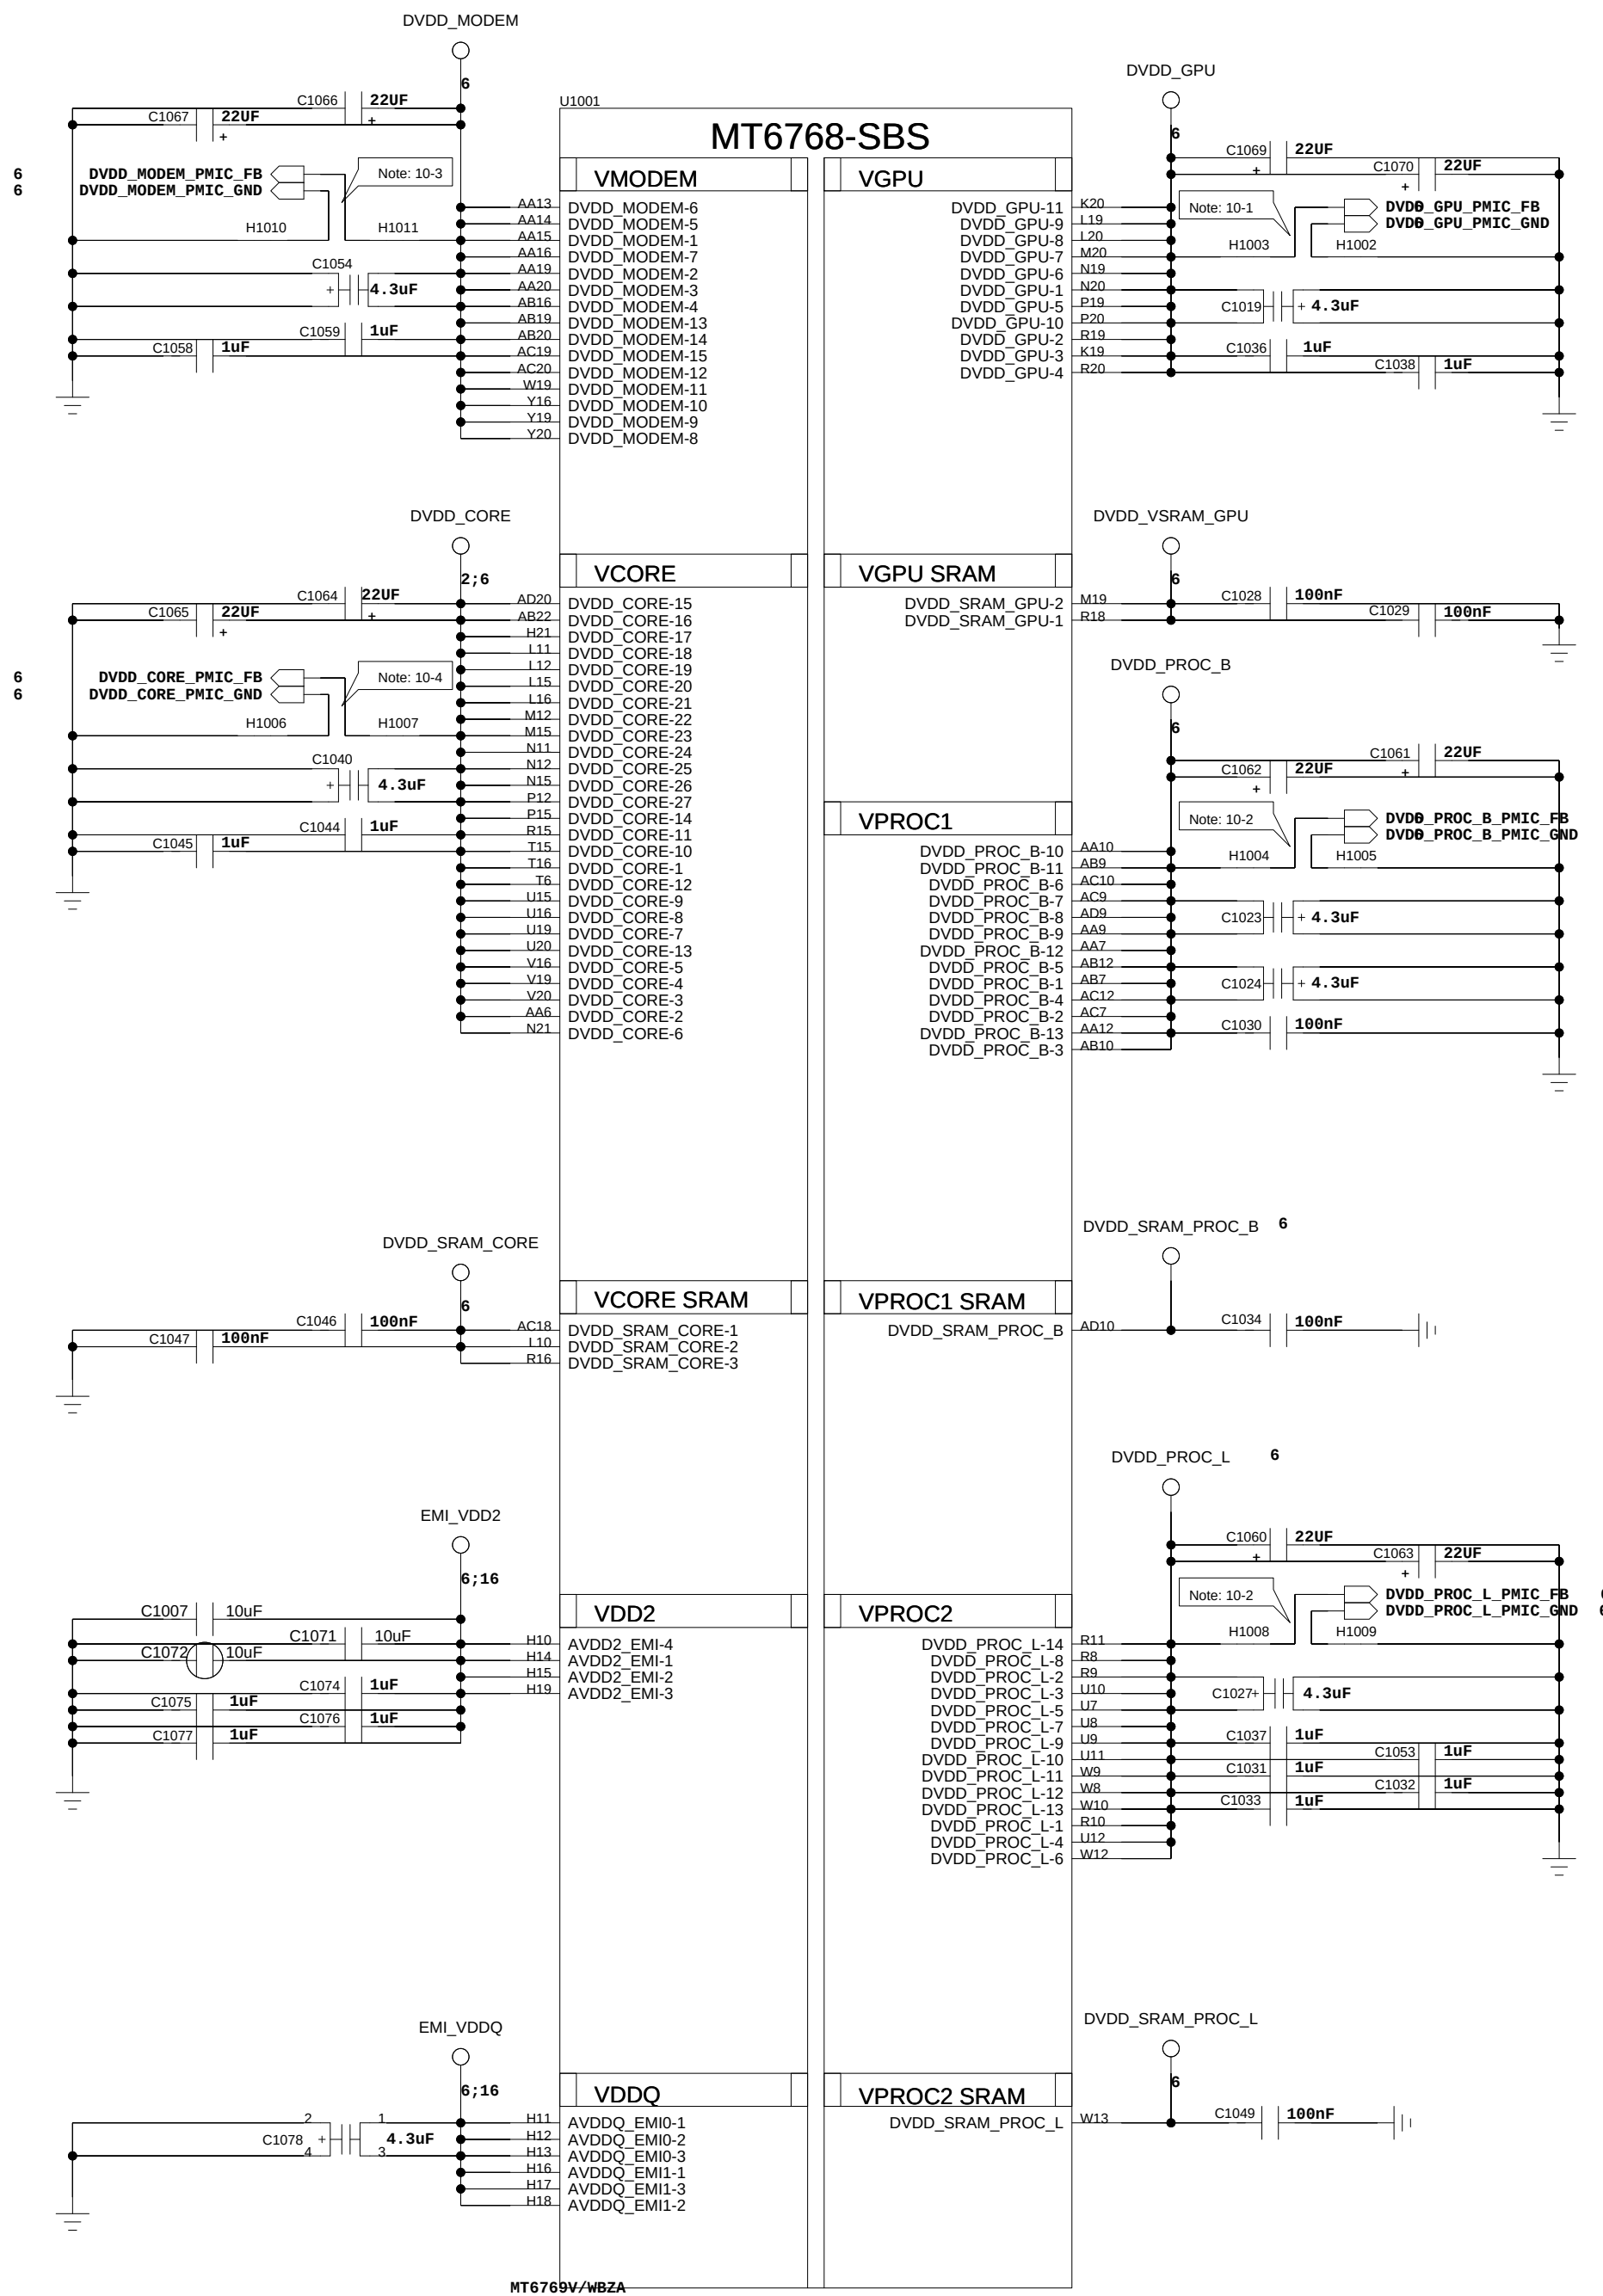


REVISION RECORD			
LTR	ECO NO:	APPROVED:	DATE:

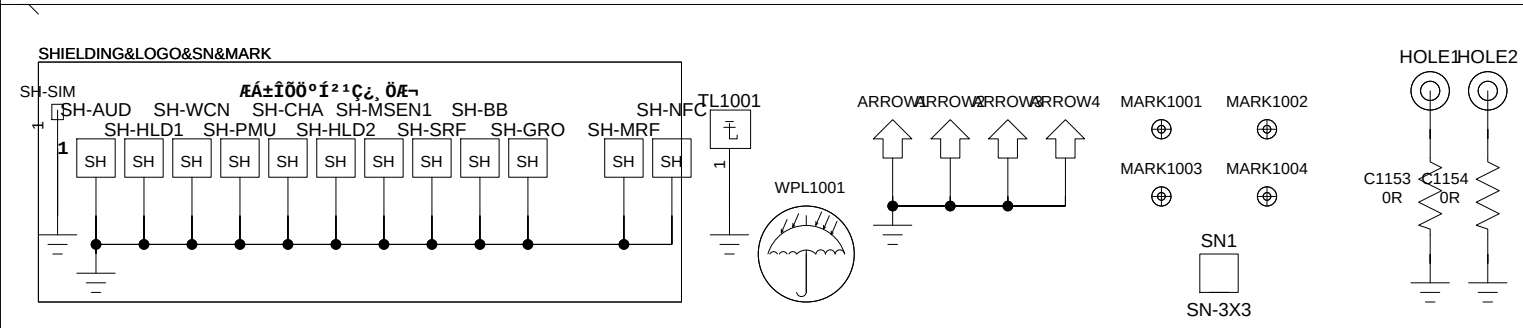

COMPANY: TRANSSION HOLDINGS				MODEL: H6929		Modified Date: 21/10/2022:10:37	
DRAWN		DATED		TITLE: 10_BB_POWER		VERSION:	SHEET: 2 OF 27
CHECKED		DATED	< >	Confidentiality	CONFIDENTIAL		

REVISION RECORD			
LTR	ECO NO:	APPROVED:	DATE:

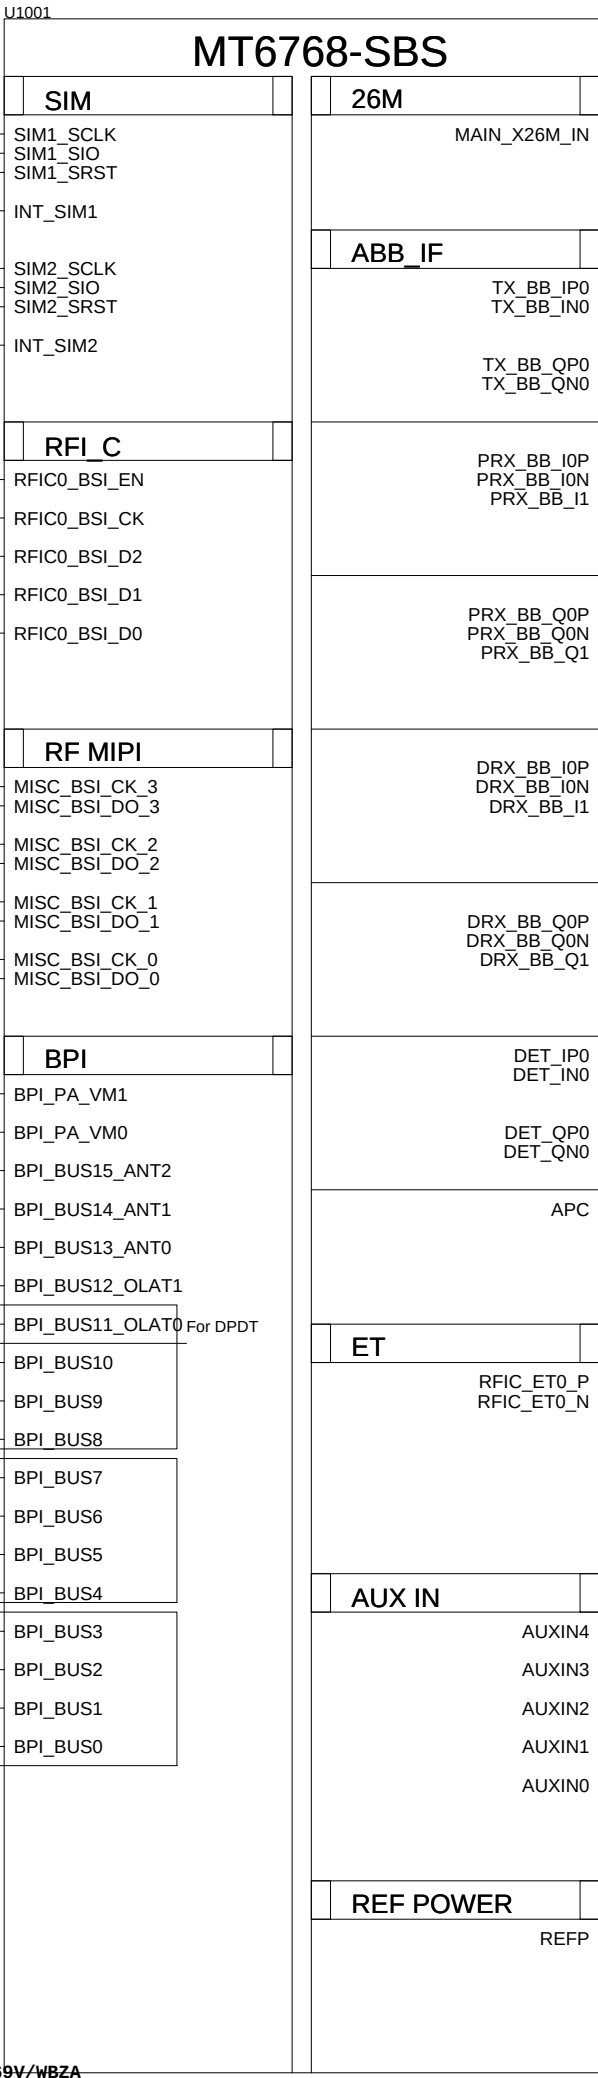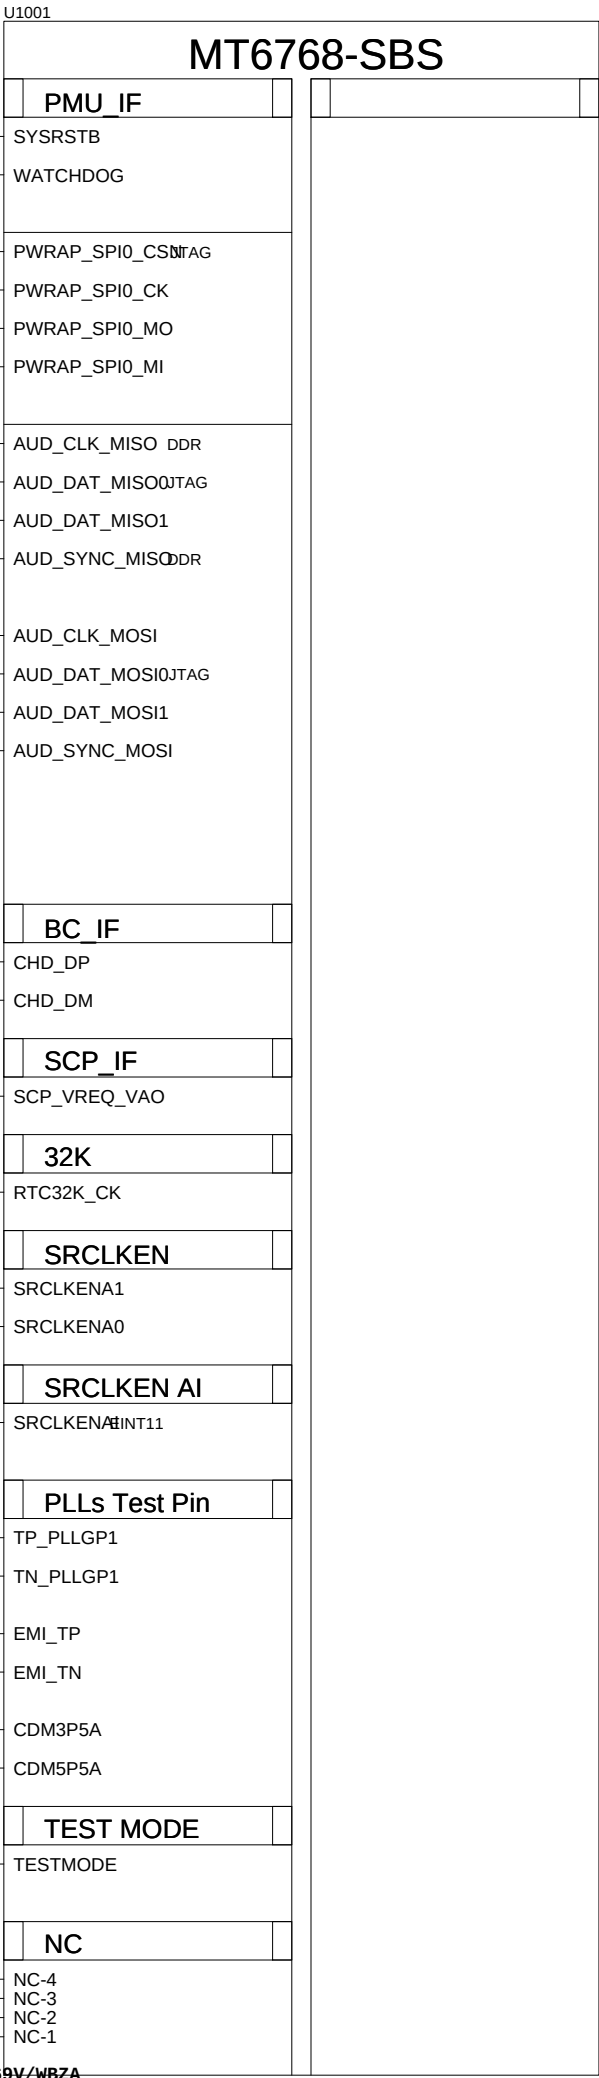

"PWRAP_SPI0_CSN" and "AUD_DAT_MOSI0" are bootstrap pin to select which interface will be the JTAG pin out.			
PWRAP_SPI0_CSN	AUD_DAT_MOSI0	AP_JTAG	MD_JTAG
HI	LO	N/A	N/A
HI	HI	SPI0+EINT8	SPI2+SPI3
LO (default)	LO (default)	SPI0+EINT8	N/A
LO (default)	HI (default)	N/A	N/A

AUD_SYNC_MISO and AUD_CLK_MISO are DDR type feature in bootstrap			
AUD_SYNC_MISO	AUD_CLK_MISO	DDR Type	VDRAM1 / VDRAM2 (PMU)
LO	LO	LP4X eMCP	1.125V/ 0.6V
LO	HI (default)	Reserved	OFF/1.8V
HI (default)	LO	LP3 eMCP	1.225V/OFF
HI (default)	HI (default)	Reserved	1.125V/1.8V



Schematic design notice of "11_BB_I" page.

Note 11-1: To shunt a 1uF capacitor in the AUXIN ADC input to prevent noise coupling. It should be placed as close to BB as possible. Connect the unused AUX ADC input to GND.

Note 11-2: The de-coupling cap. for REFP (AJ21 ball) have to be placed as close to BB as possible.

COMPANY: TRANSSION HOLDINGS				MODEL: H6929		Modified Date: 17/11/2022:20:50	
DRAWN		DATED		TITLE: 11_BB_I		VERSION:	SHEET: 3 OF 27
CHECKED		DATED	< >	Confidentiality	CONFIDENTIAL		


REVISION RECORD			
LTR	ECO NO:	APPROVED:	DATE:

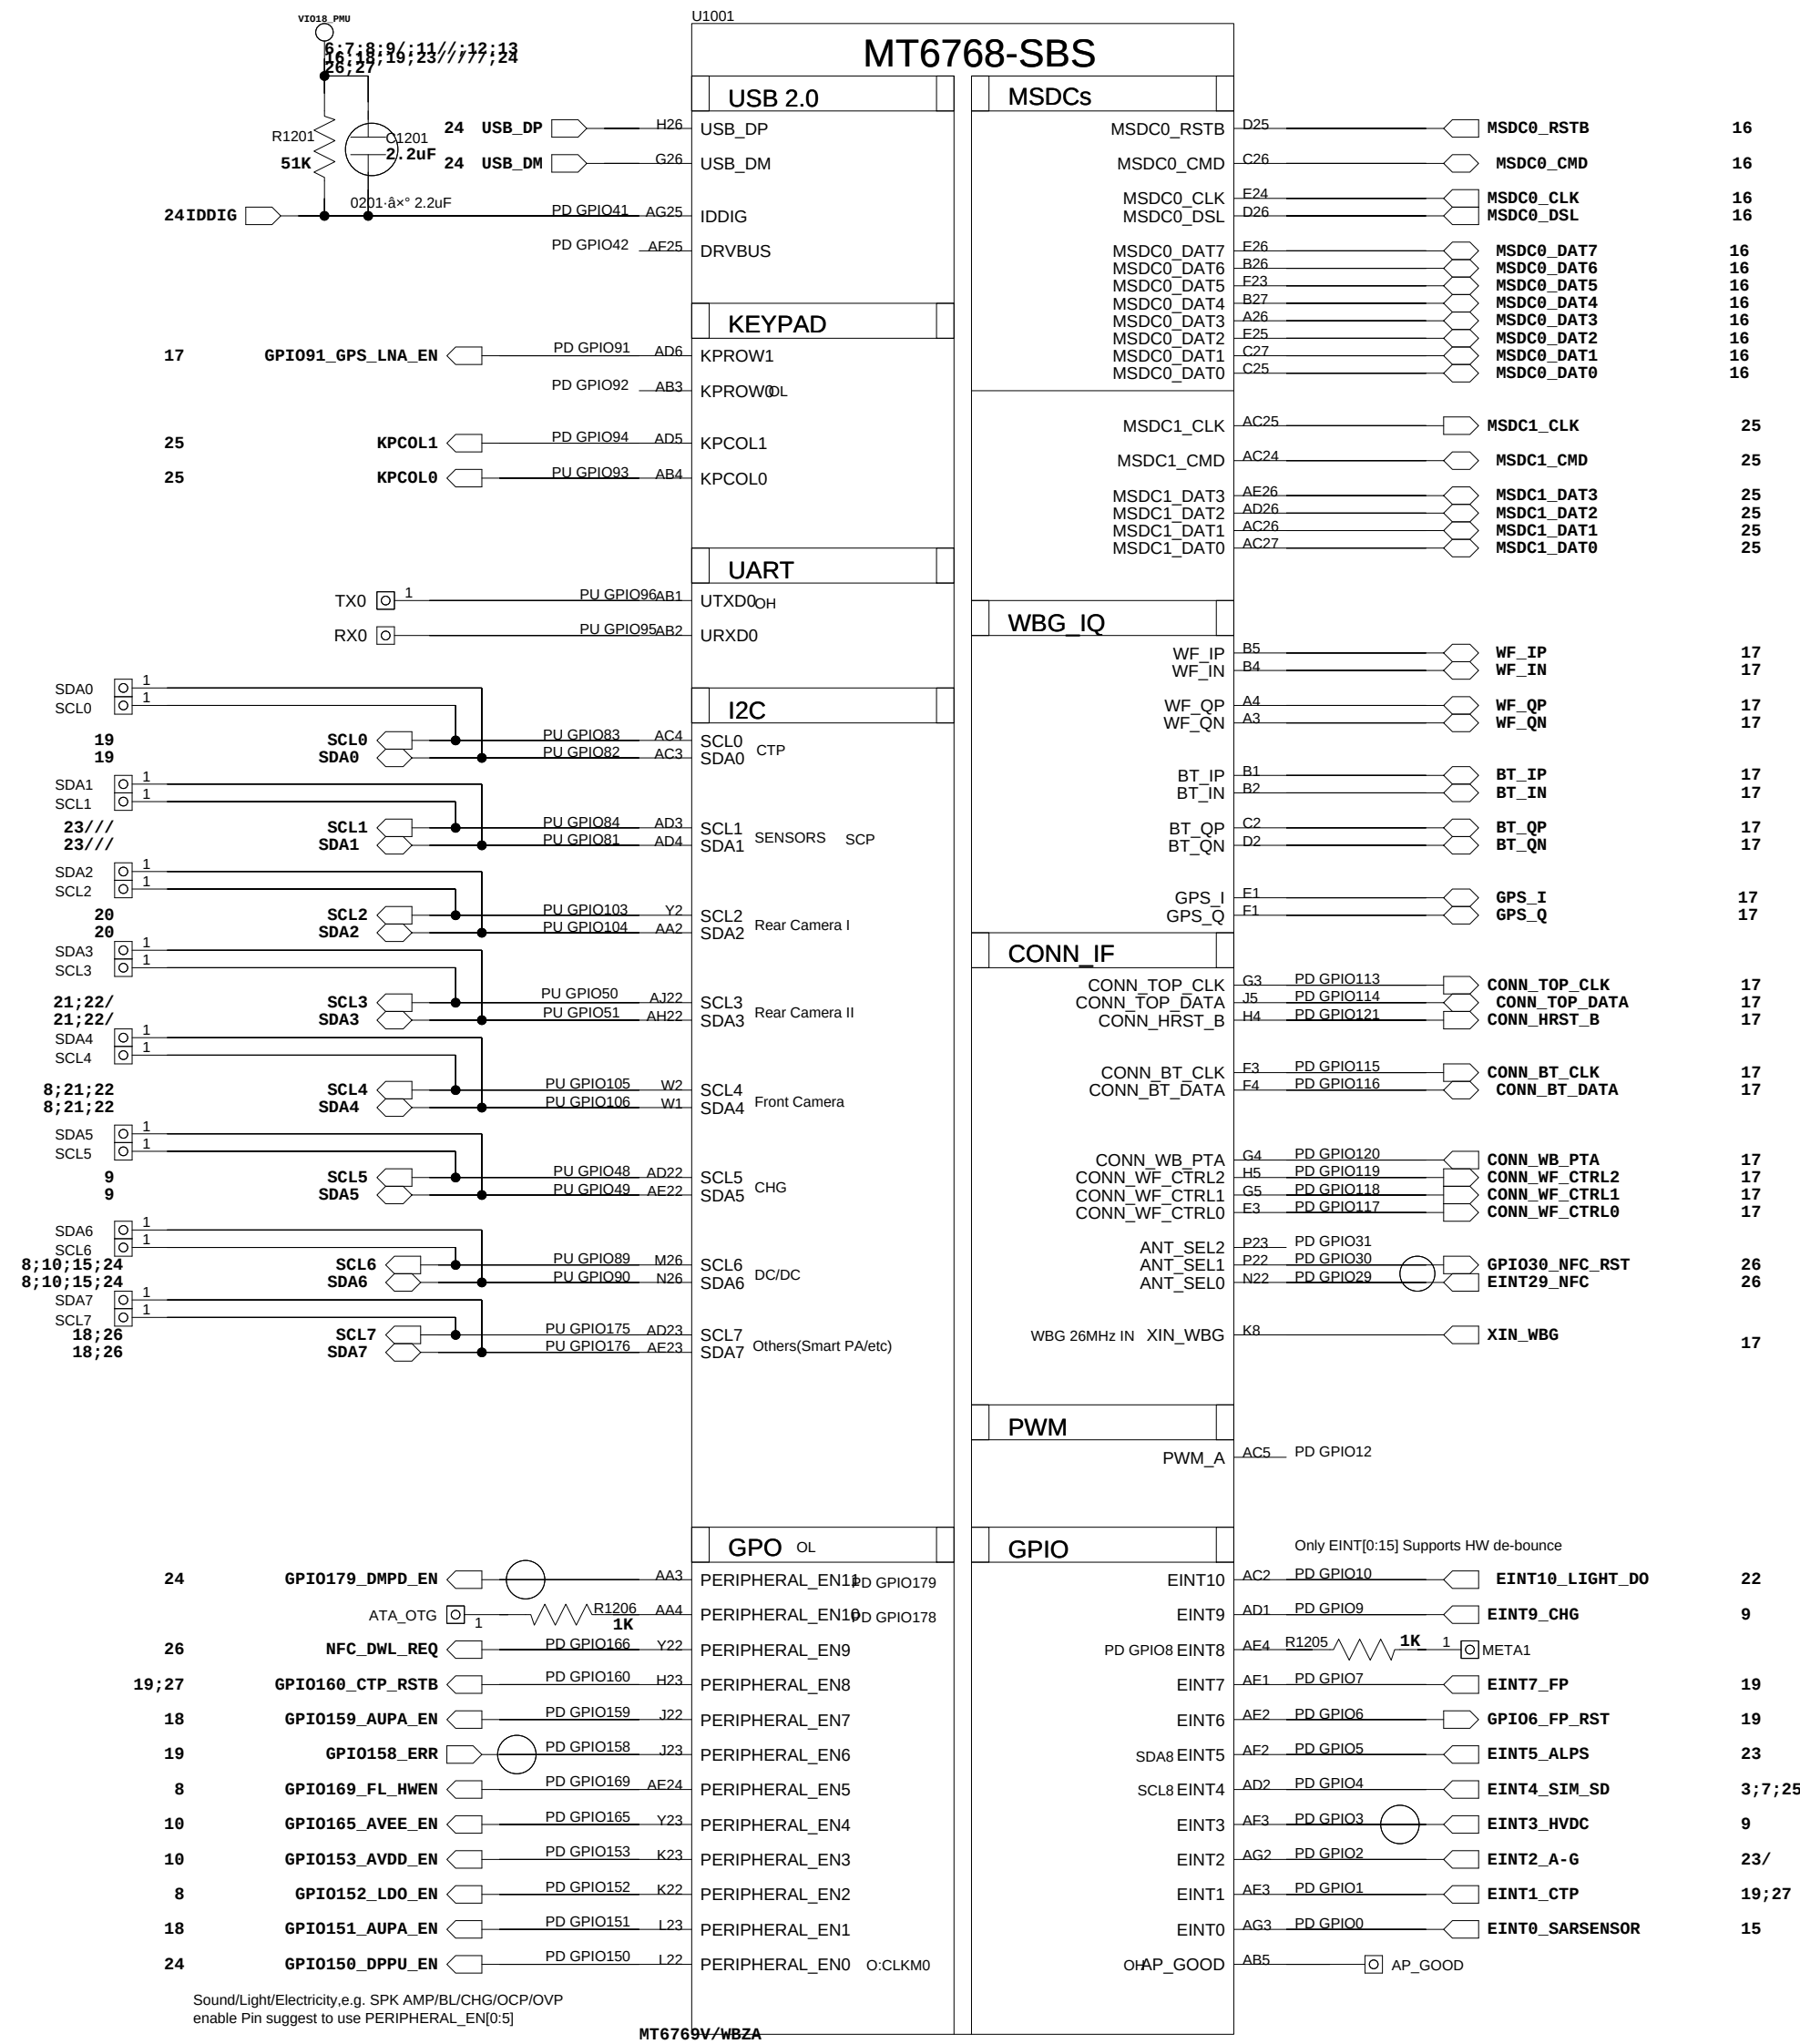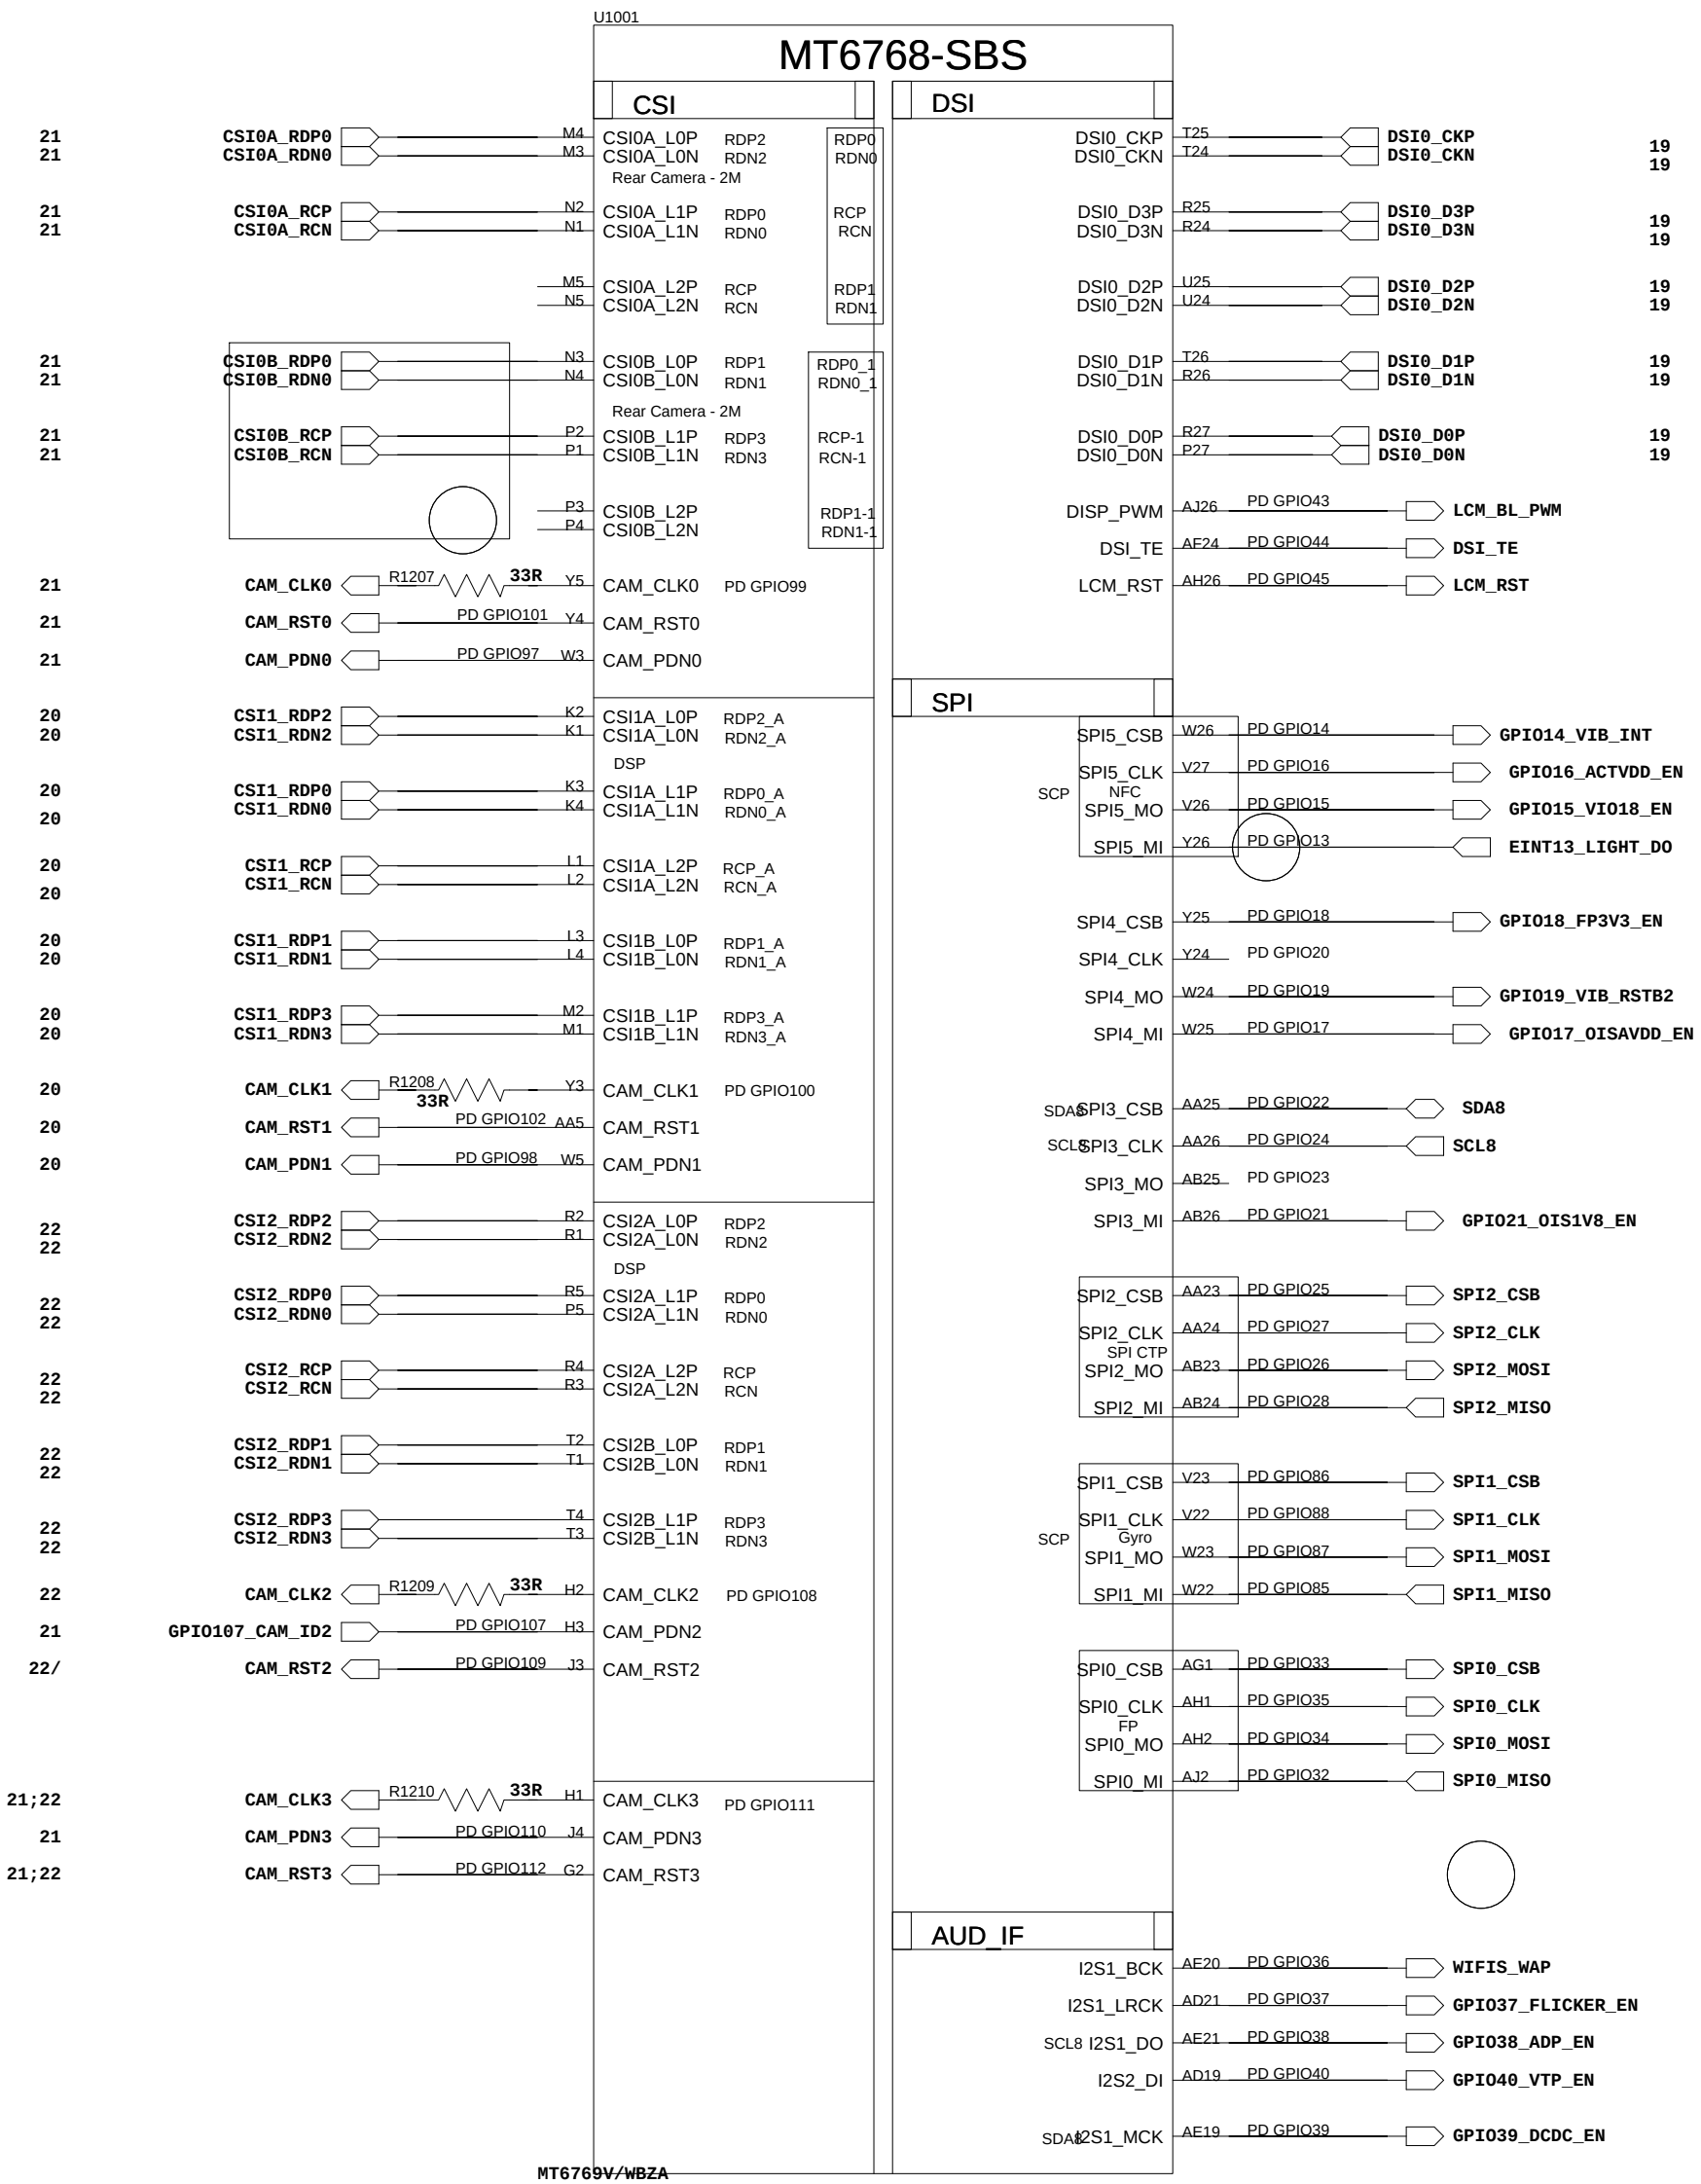

COMPANY: TRANSSION HOLDINGS				MODEL: H6929		Modified Date: 17/11/2022:20:48	
DRAWN		DATED		TITLE: 12_BB_II		VERSION:	SHEET: 4 OF 27
CHECKED		DATED	< >	Confidentiality	CONFIDENTIAL		

REVISION RECORD			
LTR	ECO NO:	APPROVED:	DATE:

LPDDR4X_EMI_IF


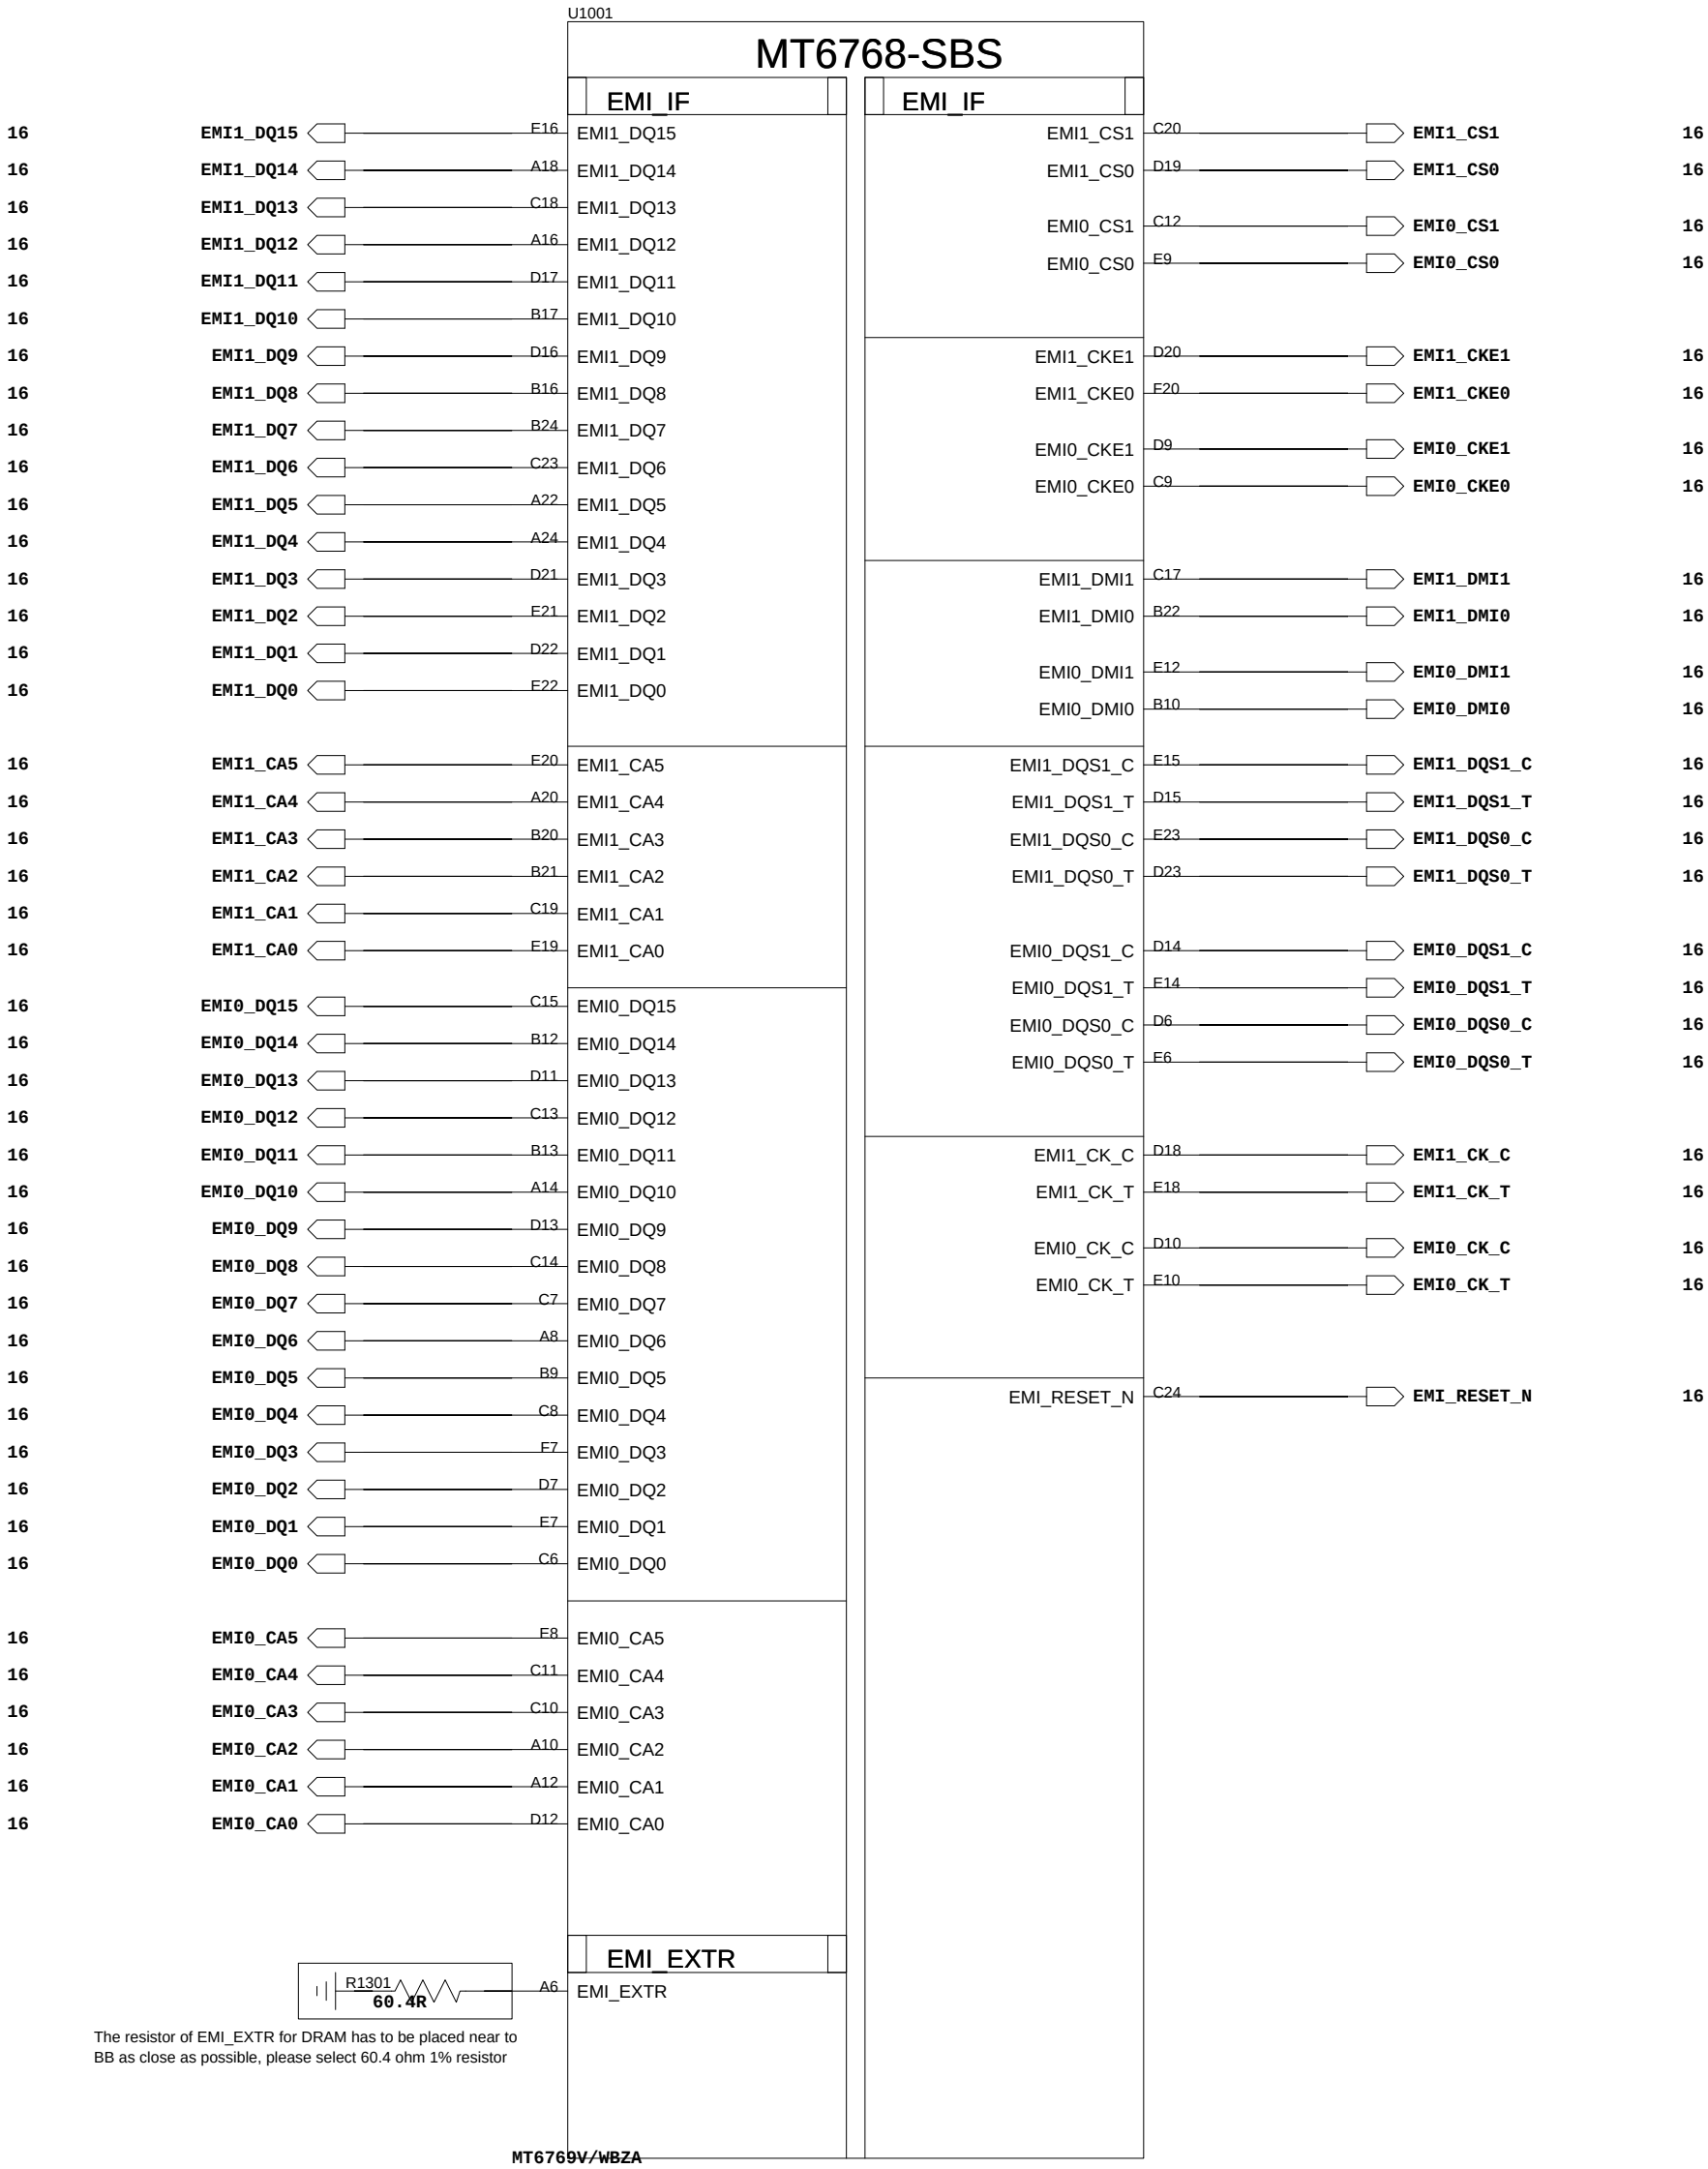


The resistor of EMI_EXTR for DRAM has to be placed near to BB as close as possible, please select 60.4 ohm 1% resistor


COMPANY: TRANSSION HOLDINGS				MODEL: H6929		Modified Date: 11/10/2022:21:24	
DRAWN		DATED		TITLE: 13_BB_III		VERSION:	SHEET: 5 OF 27
CHECKED		DATED	< >	Confidentiality	CONFIDENTIAL		

POWER_MT6358_I

PMU_BUCK

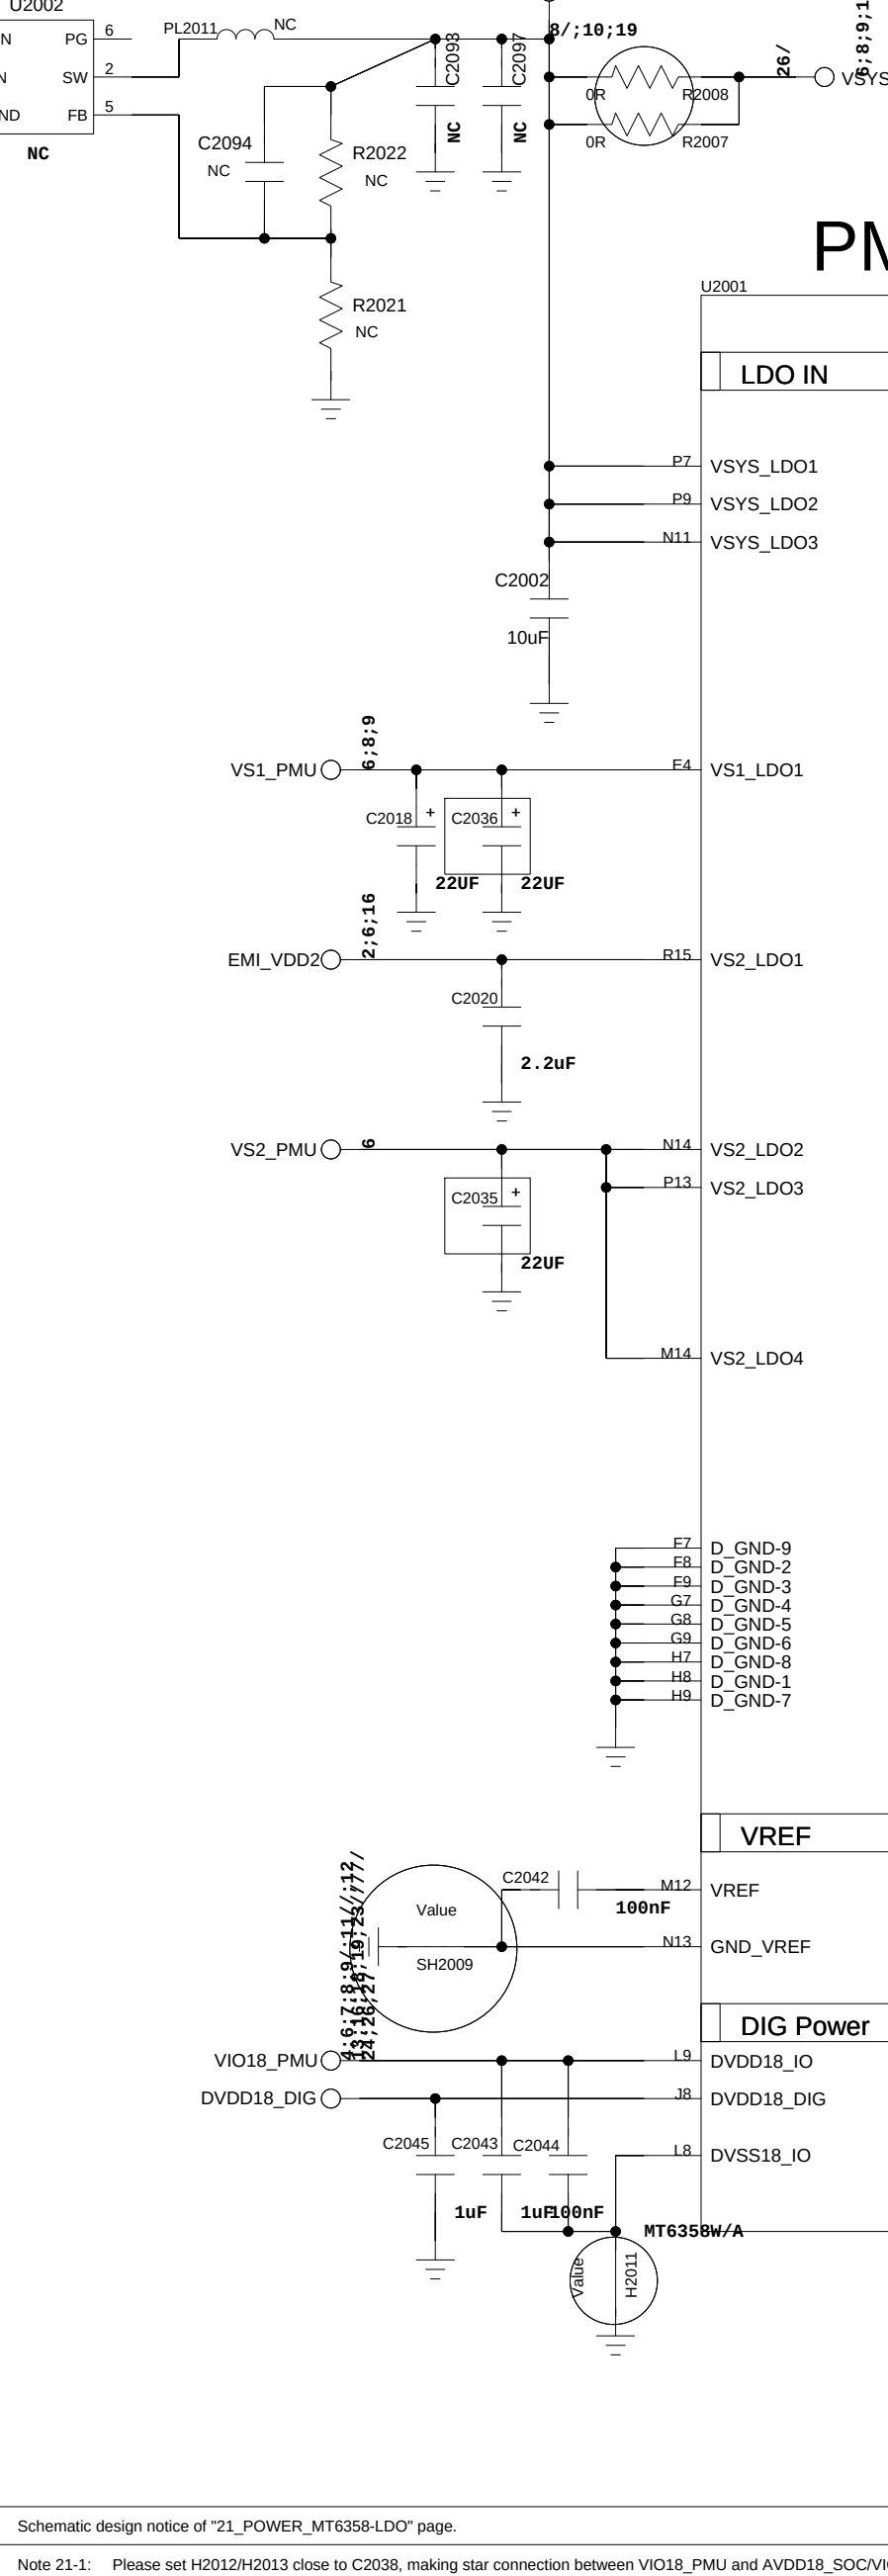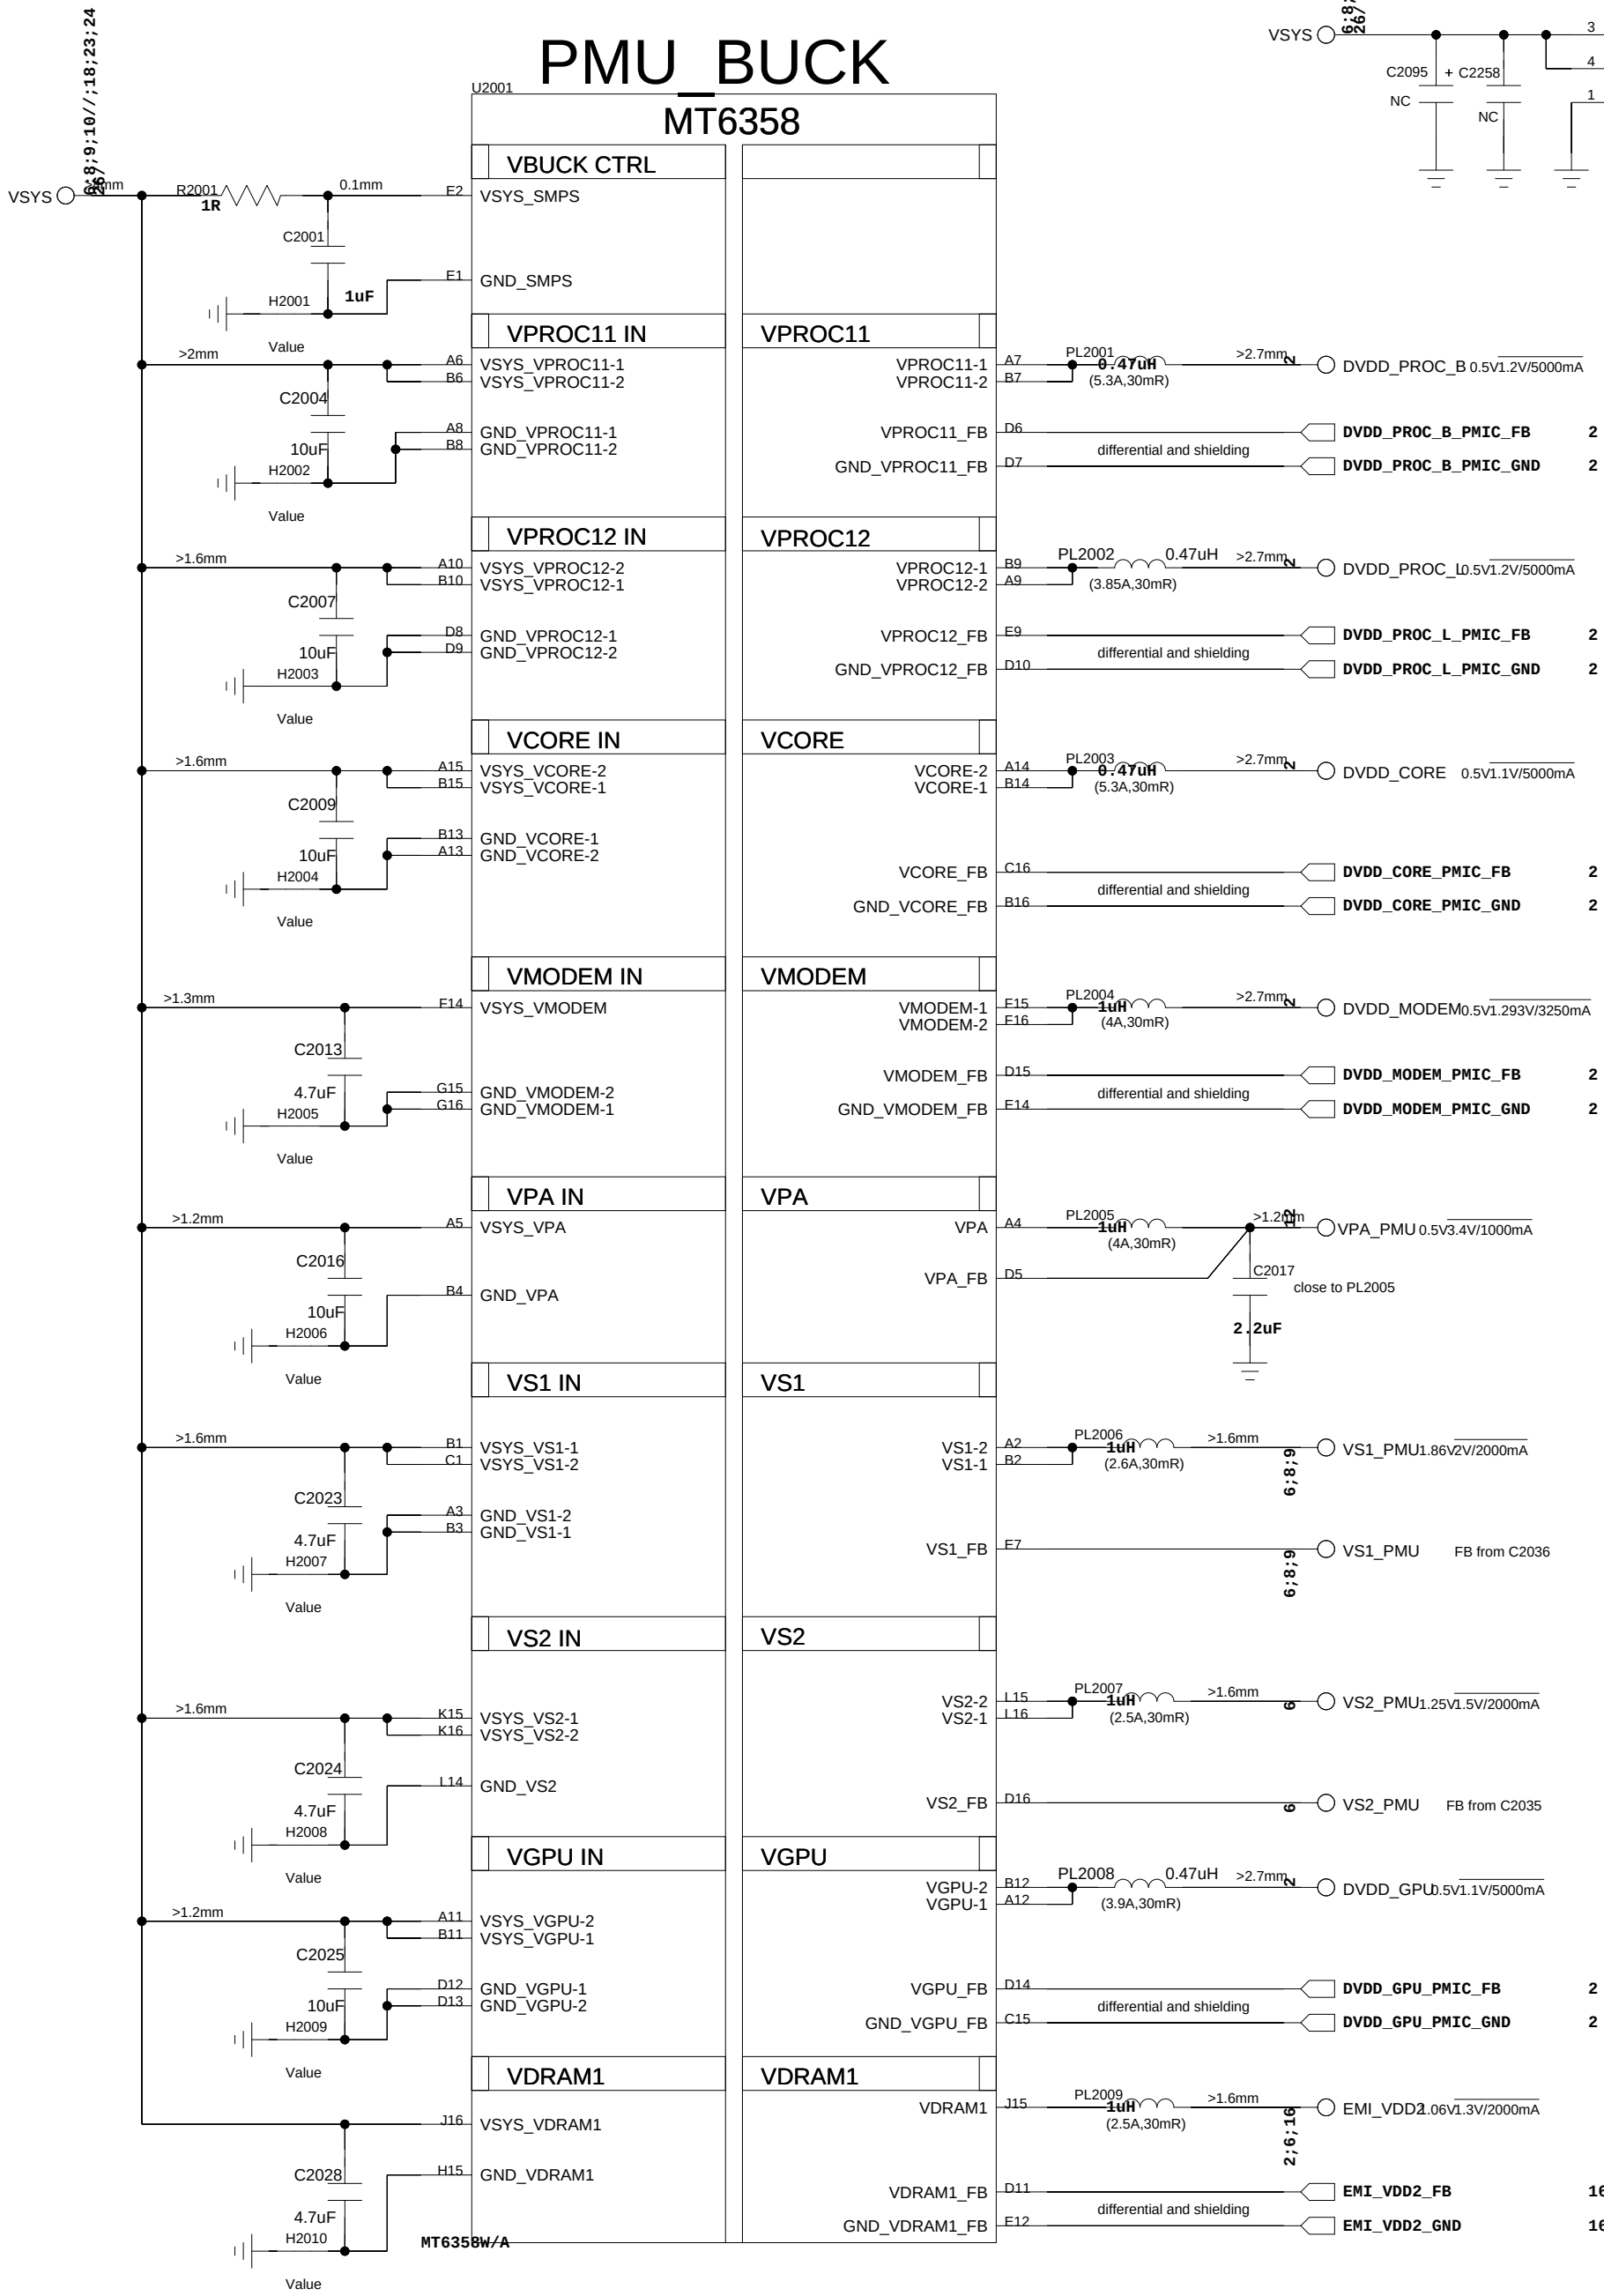

PMU_LDO

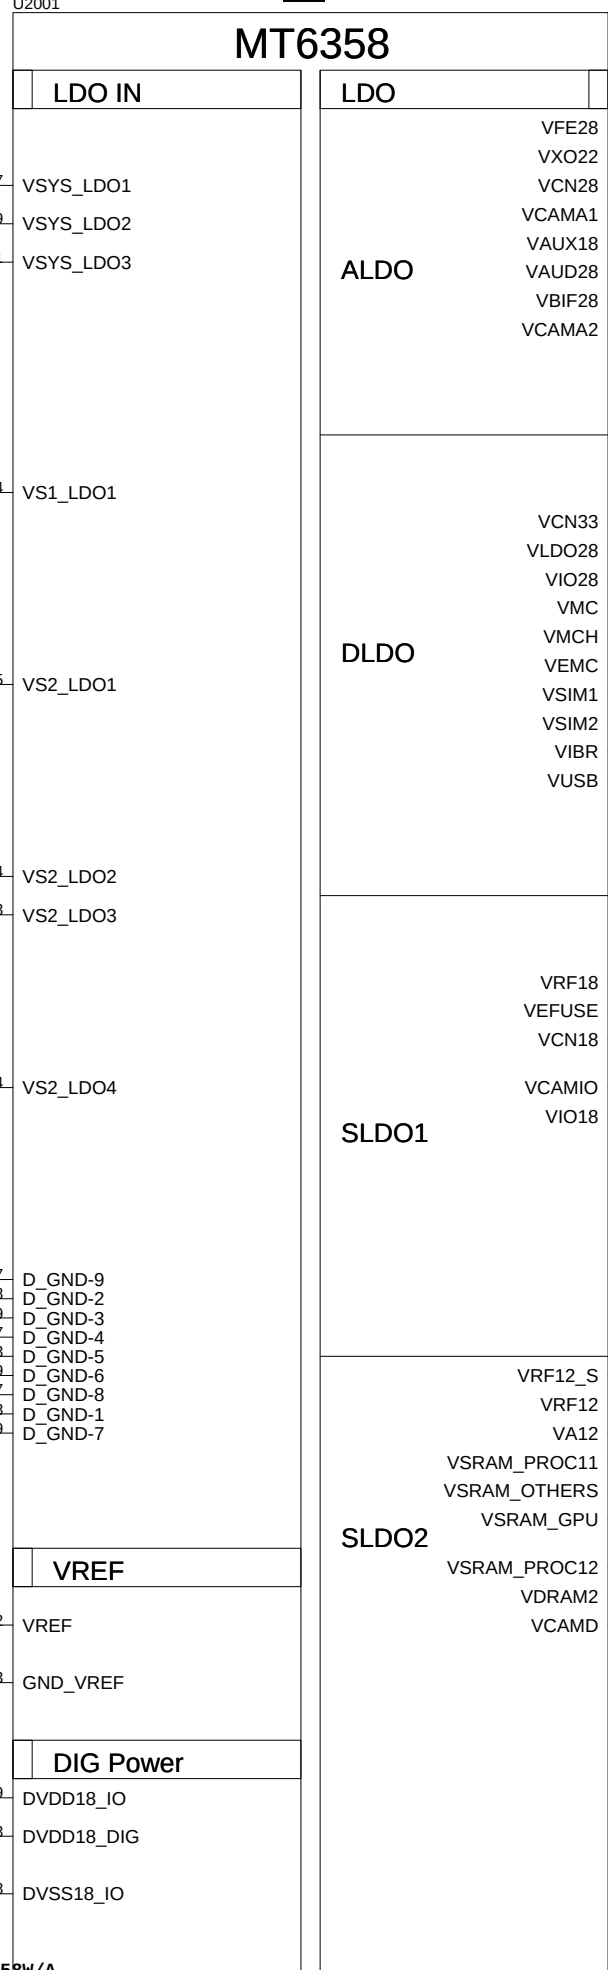

1. "Typical Cap" defined in design notice is the minimum cap. to LDO Cout.
2. NC cap can move to application, if (PCB L<20mm, PCB R<0.2 ohm)
=> value and placement of Cap, please refer design notice

REVISION RECORD			
LTR	ECO NO:	APPROVED:	DATE:


VFE28	R7	VFE28_PMU	2.8V/50mA	12;13;14;15;24
VXO22	P6	VXO22_PMU	2.24V/50mA	
VCN28	R6	VCN28_PMU	2.8V/40mA	17
VCAMA1	M10	VCAMA1_PMU	2.5V/2.8V/200mA	21/
VAUX18	M6	VAUX18_PMU	1.8V/50mA	7
VAUD28	R5	VAUD28_PMU	2.8V/50mA	7
VBIF28	M9	VBIF28_PMU	2.8V/50mA	7
VCAMA2	N10	VCL_3V	2.5V/2.8V/2.9V/3V 200mA	19
VCN33	N12	VCN33_PMU	3.3V/3.4V/3.5V/3.6V/800mA	
VLD028	P8	VCAMA4_PMU	2.8V/3.0V/400mA	21;22
VIO28	N9	VIO28_PMU	2.8V/200mA	
VMC	R9	VMC_PMU	1.86V/2.9V/3.0V/3.3V/200mA	
VMCH	R10	VMCH_PMU	2.9V/3.0V/3.3V/800mA	
VEMC	R11	VEMC_PMU	2.9V/3.0V/3.3V/800mA	
VSIM1	N7	VSIM1_PMU	1.7V/1.8V/1.86V/2.76V/3.0V/3.1V/200mA	
VSIM2	P10	VSIM2_PMU	1.7V/1.8V/1.86V/2.76V/3.0V/3.1V/200mA	
VIBR	P11	VIBR_PMU	1.2V/1.3V/1.5V/1.8V/2.0V/2.8V/3.0V/3.3V/200mA	
VUSB	N8	VUSB_PMU	3.0V/200mA	
VRF18	E5	VRF18_PMU	1.81V/450mA	11///
VEFUSE	E3	VEFUSE_PMU	1.71V/1.8V/1.84V/300mA	2
VCN18	E6	VCN18_PMU	1.8V/300mA	17
VCAMIO	E6	VCAMIO_PMU	1.8V/300mA	20;21;22
VIO18	E3	VIO18_PMU	1.8V/700mA	
		AVDD18_SOC		2;13;15;18;19;24;26;27
		VIO18_PMU_AP		2//
VRF12_S	P16	VRF12_S		11
VRF12	N15	VRF12_PMU	1.2V/800mA	
VA12	N16	VA12_PMU	1.2V/300mA	2//10;11
VSRAM_PROC11	P12	DVDD_SRAM_PROC_B	0.6V1.31V/600mA	2
VSRAM_OTHERS	P14	DVDD_SRAM_CORE	0.6V1.31V/600mA	2
VSRAM_GPU	R14	DVDD_VSRAM_GPU	0.6V1.31V/600mA	2
VSRAM_PROC12	R13	DVDD_SRAM_PROC_L	1.12V/1.24V/600mA	19
VDRAM2	P15	EMI_VDDQ	0.6V/1.2V/600mA	
VCAMD	M15	VLCM_1V35	0.9V/1.0V/1.05V/1.1V/1.2V/1.3V/1.5V/1.8V/600	

Schematic design notice of "21_POWER_MT6358-LDO" page.
Note 21-1: Please set H2012/H2013 close to C2038, making star connection between VIO18_PMU and AVDD18_SOC/VIO18_PMU_AP near to LDO cap. C2038
Please also refer to MT6358 design notice for further detail design information


COMPANY: TRANSSION HOLDINGS				MODEL:H6929		Modified Date: 11/10/2022:21:24	
DRAWN		DATED		TITLE: 20_POWER_MT6358_I		VERSION:	SHEET: 6 OF 27
CHECKED		DATED	< >	Confidentiality	CONFIDENTIAL		

POWER_MT6358_II

REVISION RECORD			
LTR	ECO NO:	APPROVED:	DATE:

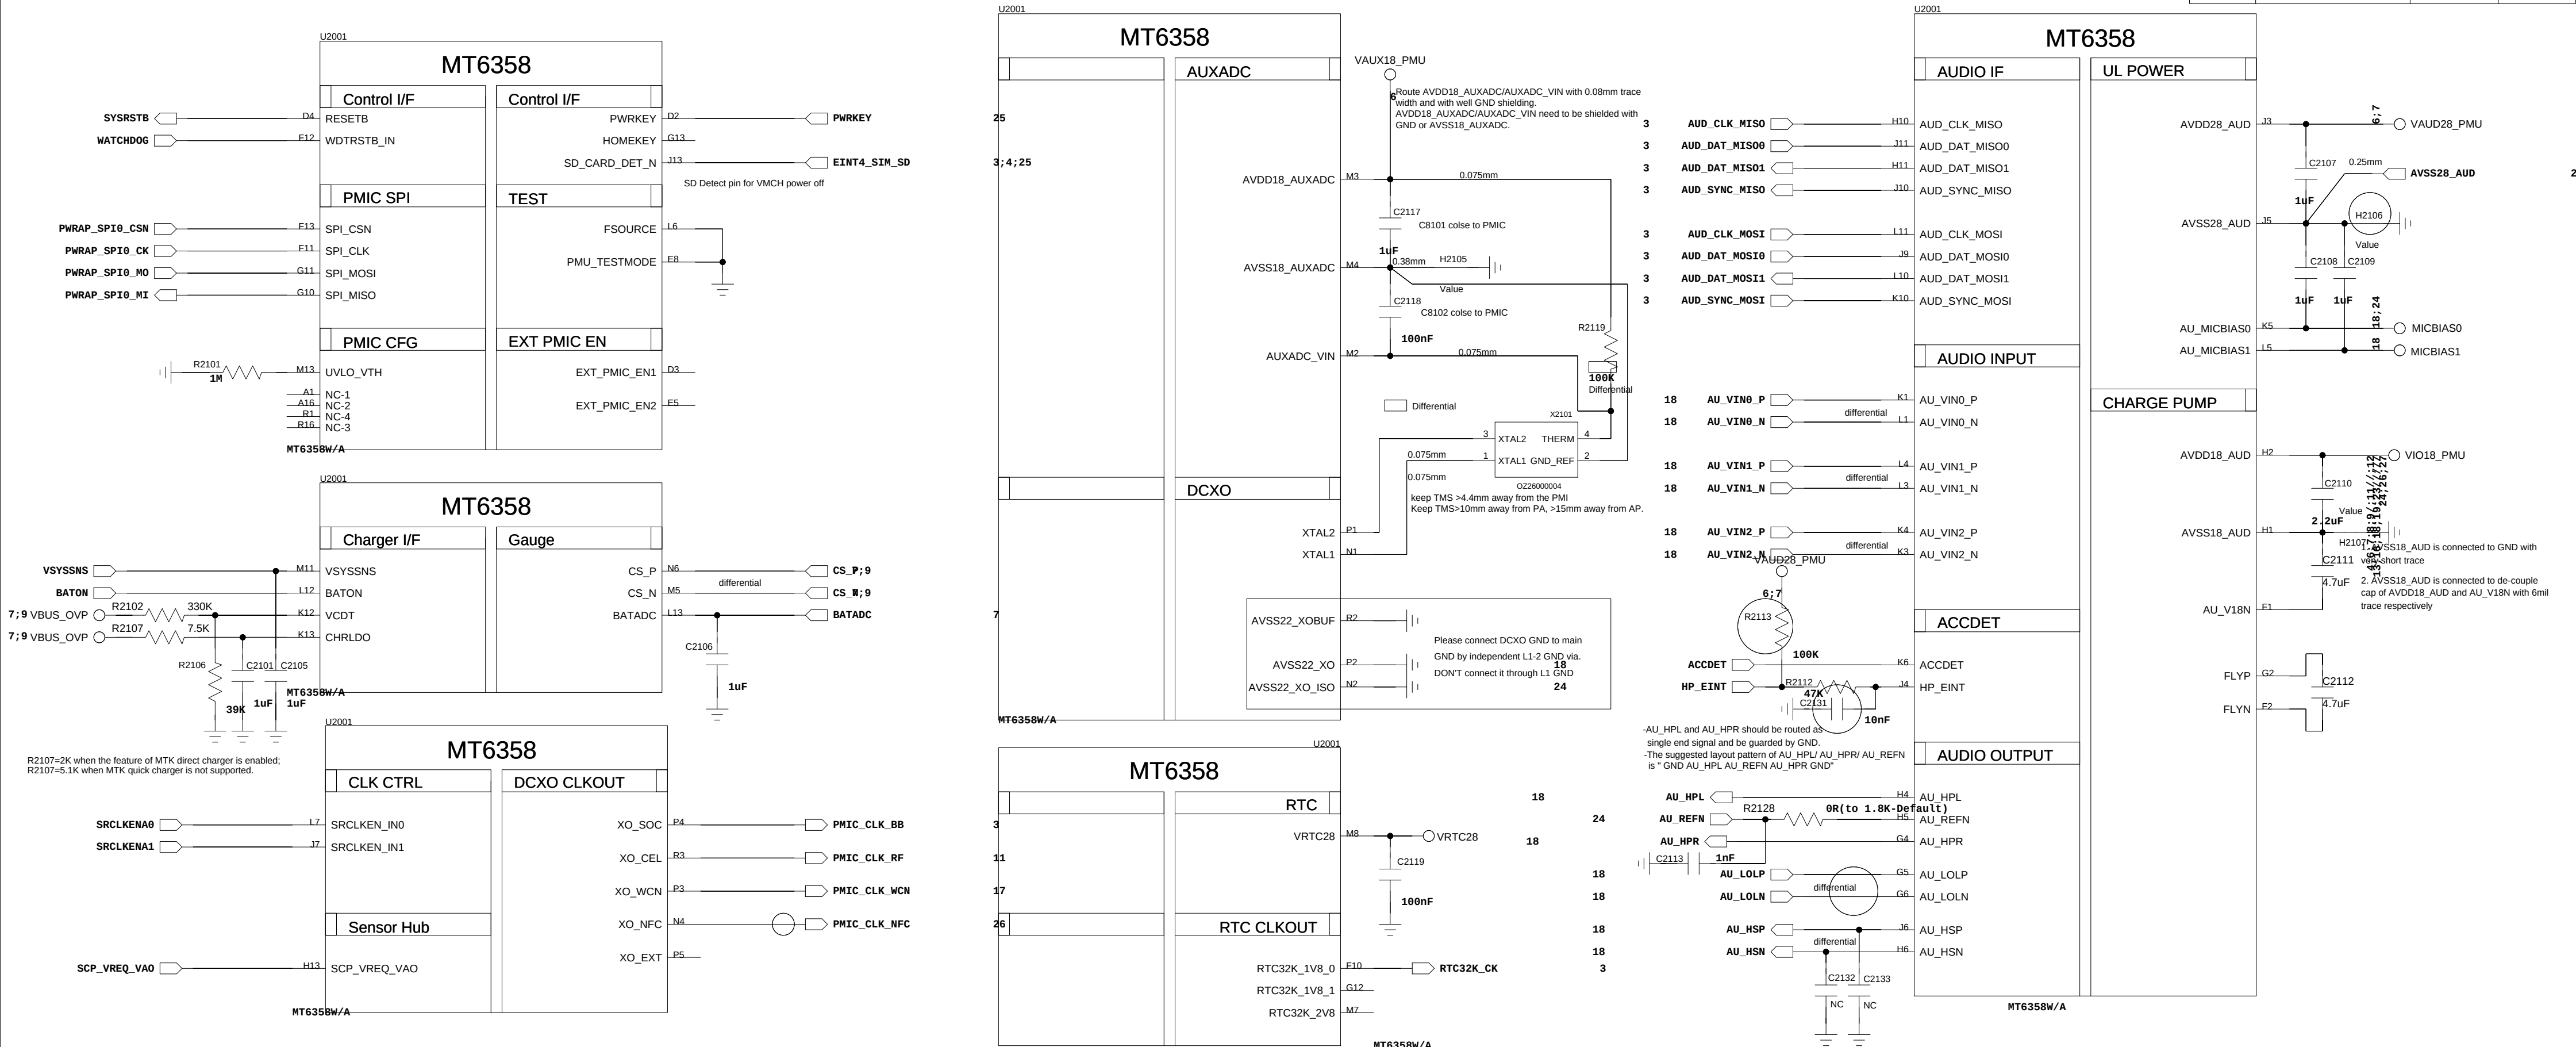




BATTERY CONNECTOR

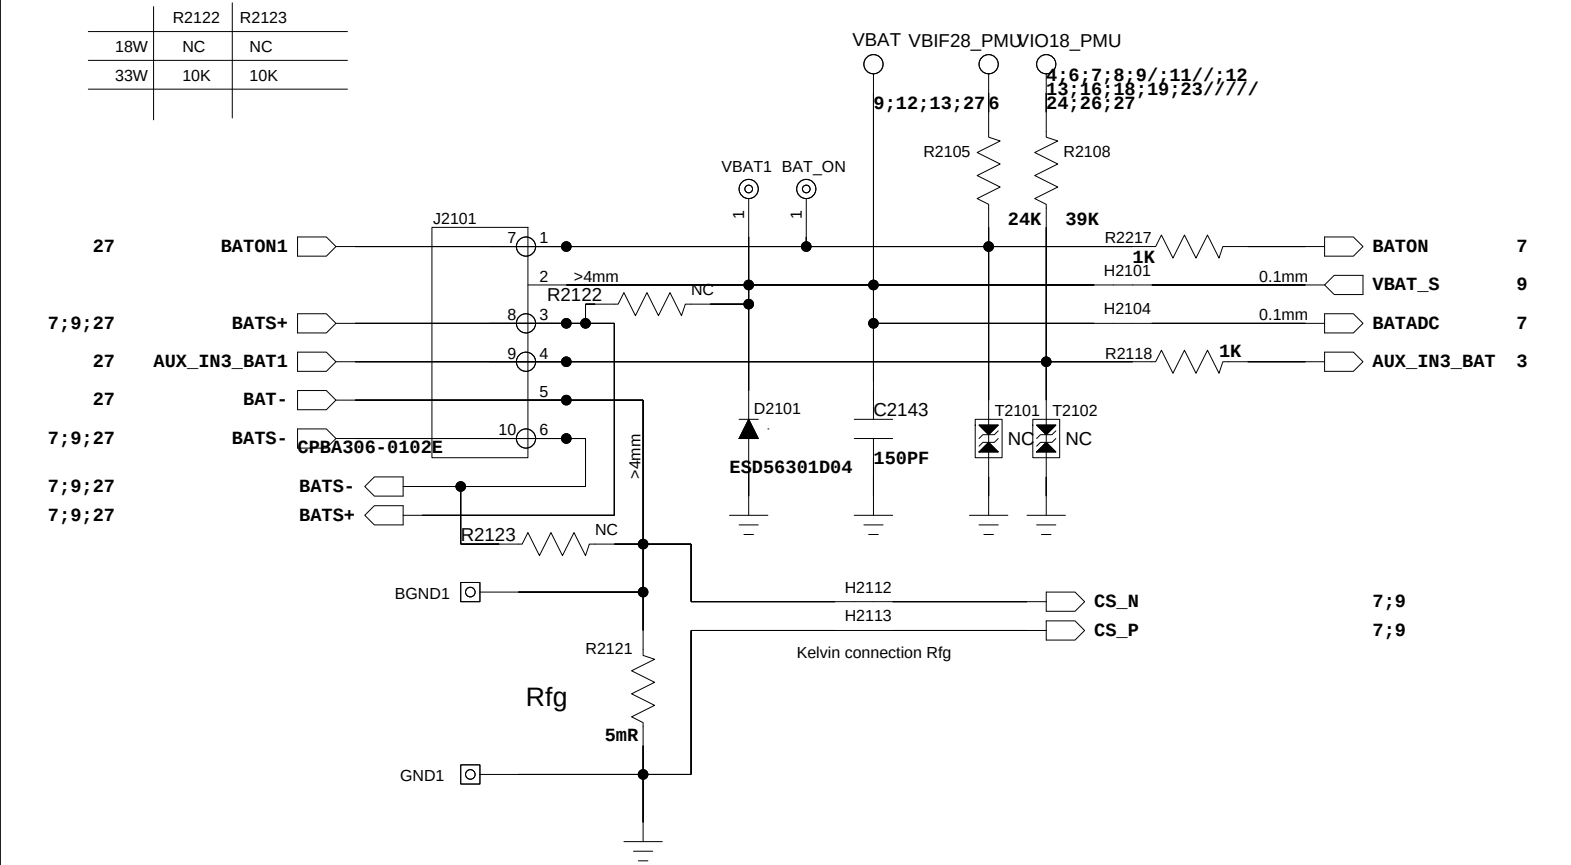

COMPANY: TRANSSION HOLDINGS				MODEL: H6929			Modified Date: 11/10/2022:21:24		
DRAWN		DATED		TITLE: 21_POWER_MT6358_II			VERSION:	SHEET: 7 OF 27	
CHECKED		DATED	< >	Confidentiality	CONFIDENTIAL				


POWER_THIRD-PARTY_I
FRONT CAMERA FLASH LED

AW36515:I2C ADDRESS:0xD6(Write)/0xD7(Read)
OCP81375:I2C ADDRESS:0xC6(Write)/0xC7(Read)

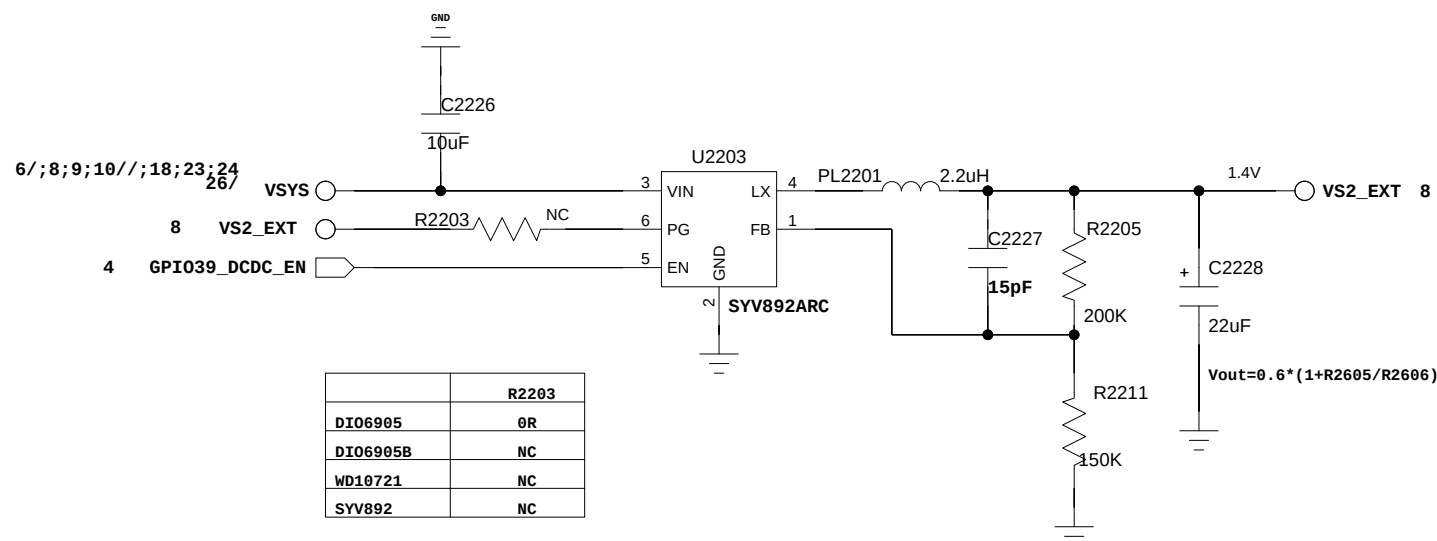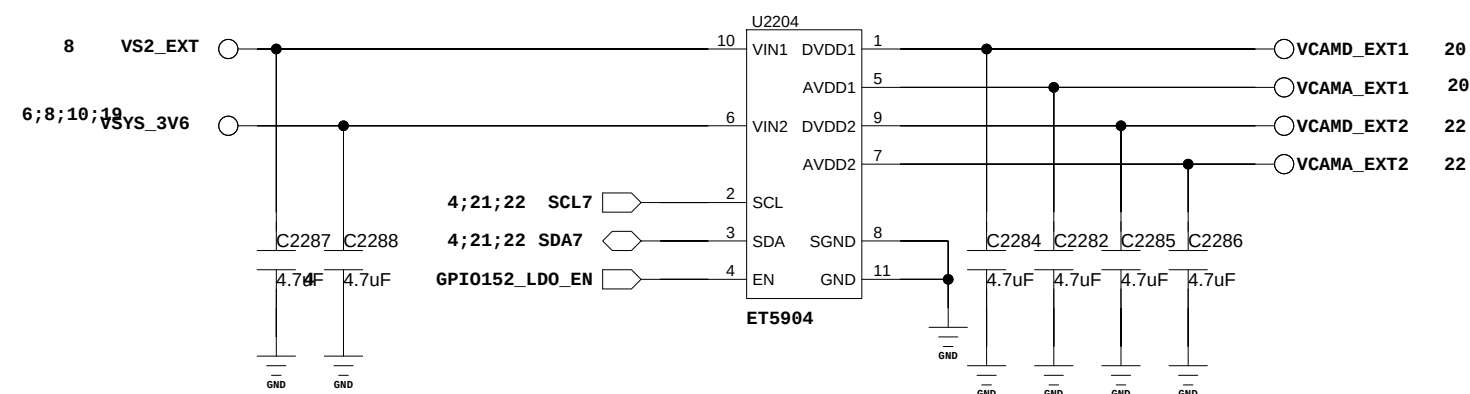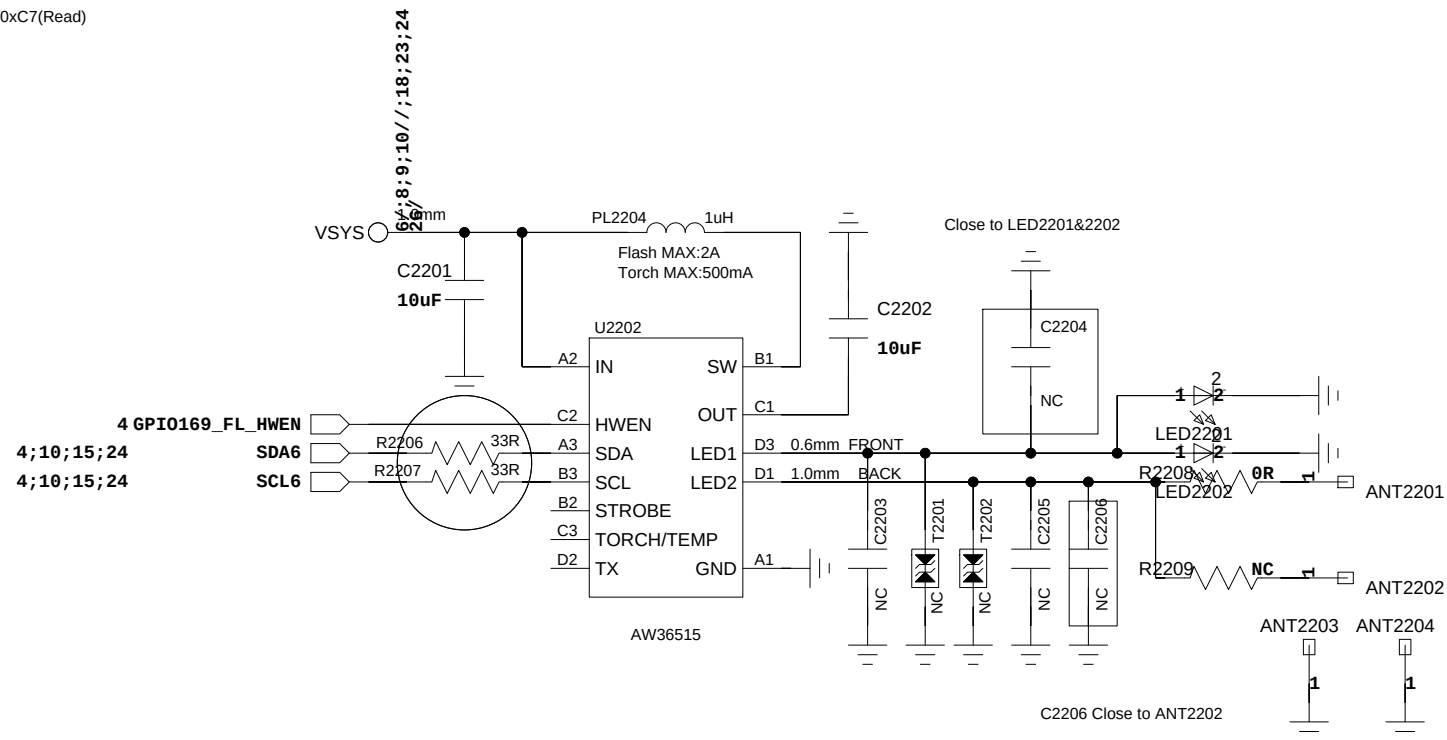


	R2203
DI06905	0R
DI06905B	NC
WD10721	NC
SYV892	NC


OIS_AVDD(3.3V)

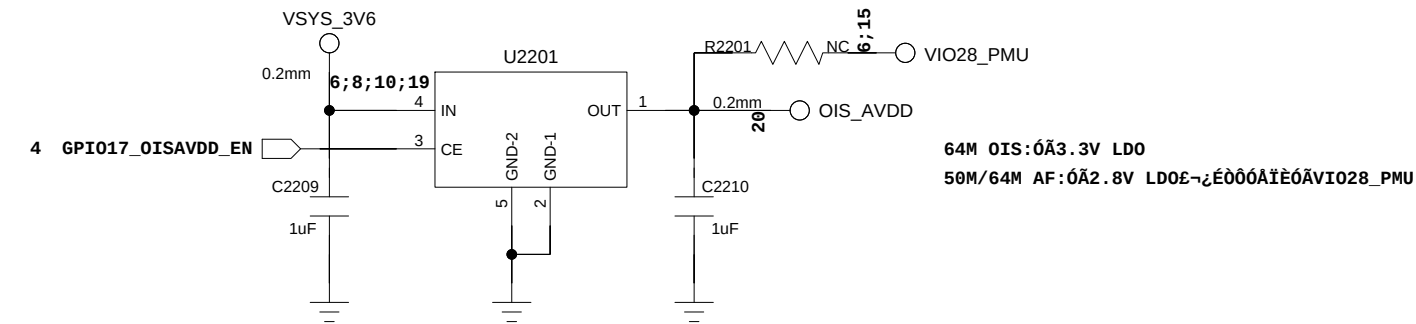


ACT_VDD(3.3V)

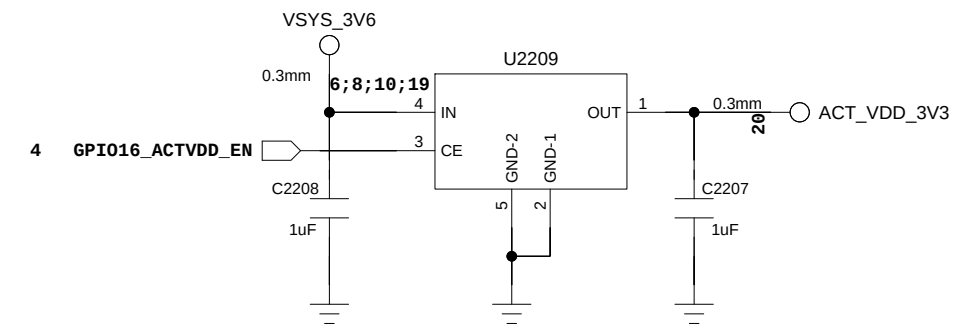

VOIS_1V8(1.8V)

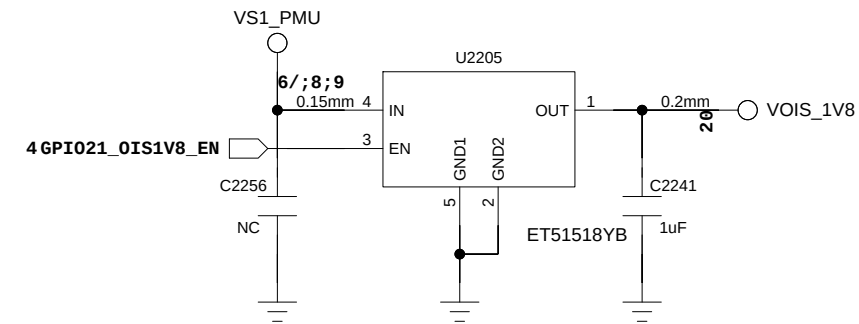

VIO18_EXT(1.8V)

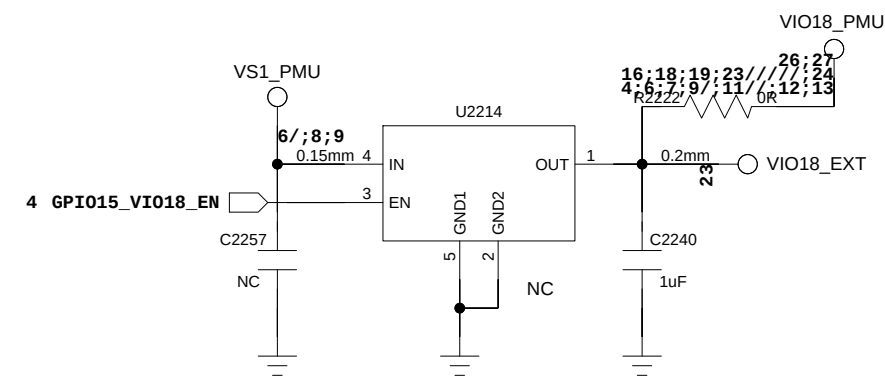


REVISION RECORD			
LTR	ECO NO:	APPROVED:	DATE:

COMPANY: TRANSSION HOLDINGS				MODEL: H6929		Modified Date: 17/10/2022:15:57	
DRAWN		DATED		TITLE: 22_POWER_THIRD-PARTY_I		VERSION:	SHEET: 8 OF 27
CHECKED		DATED	< >	Confidentiality	CONFIDENTIAL		


POWER_THIRD-PARTY_II

REVISION RECORD			
LTR	ECO NO:	APPROVED:	DATE:


LPDDR4X VDD1 1.8V LDO

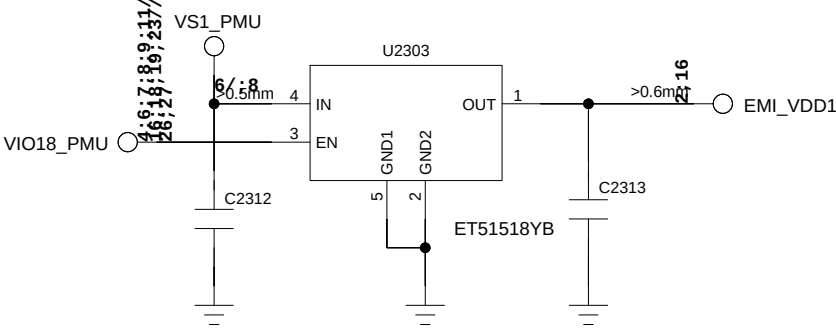


OVP

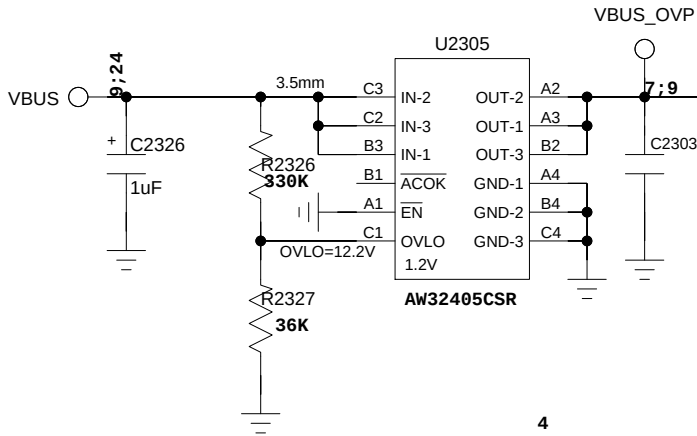

CHARGER_I

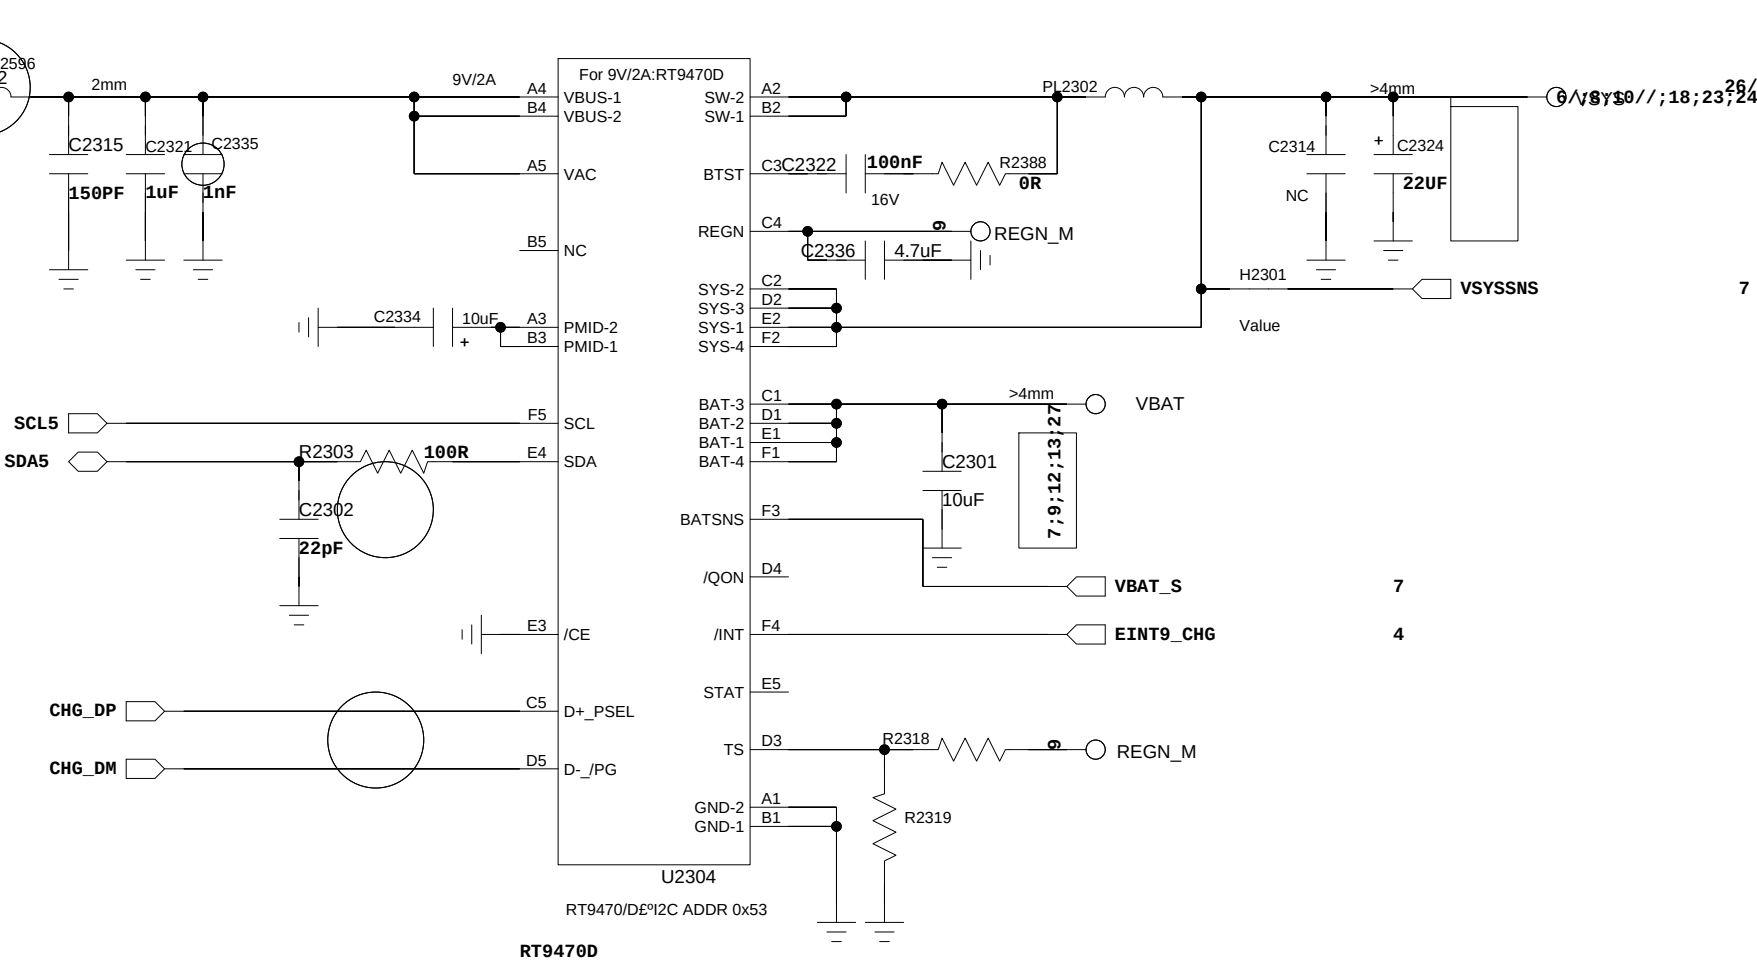


Thermistor to sense U2304 temperature

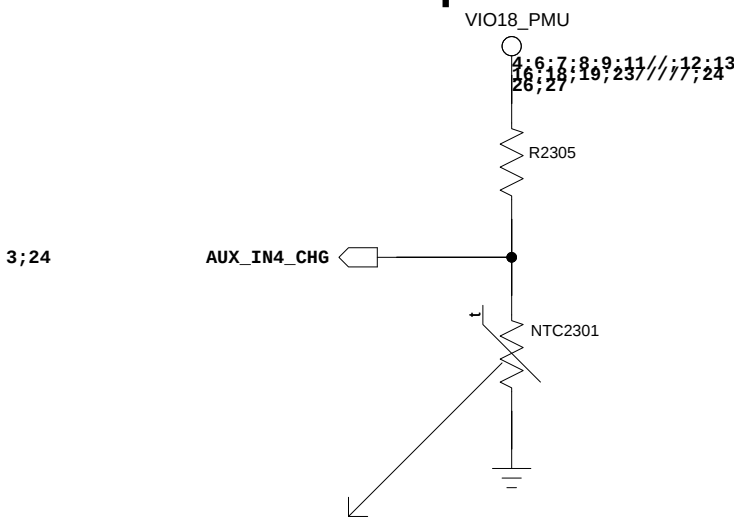

- 1. NTC2301 must keep a distance about 2 mm away from U2304 and far from other heat sources 10 mm at least.
- 2. The distance is the shortest distance from package edge to edge.

·İö³äµç

	R2307	C2310
HL7139	0R	NC
SC8548	NC	4.7uF


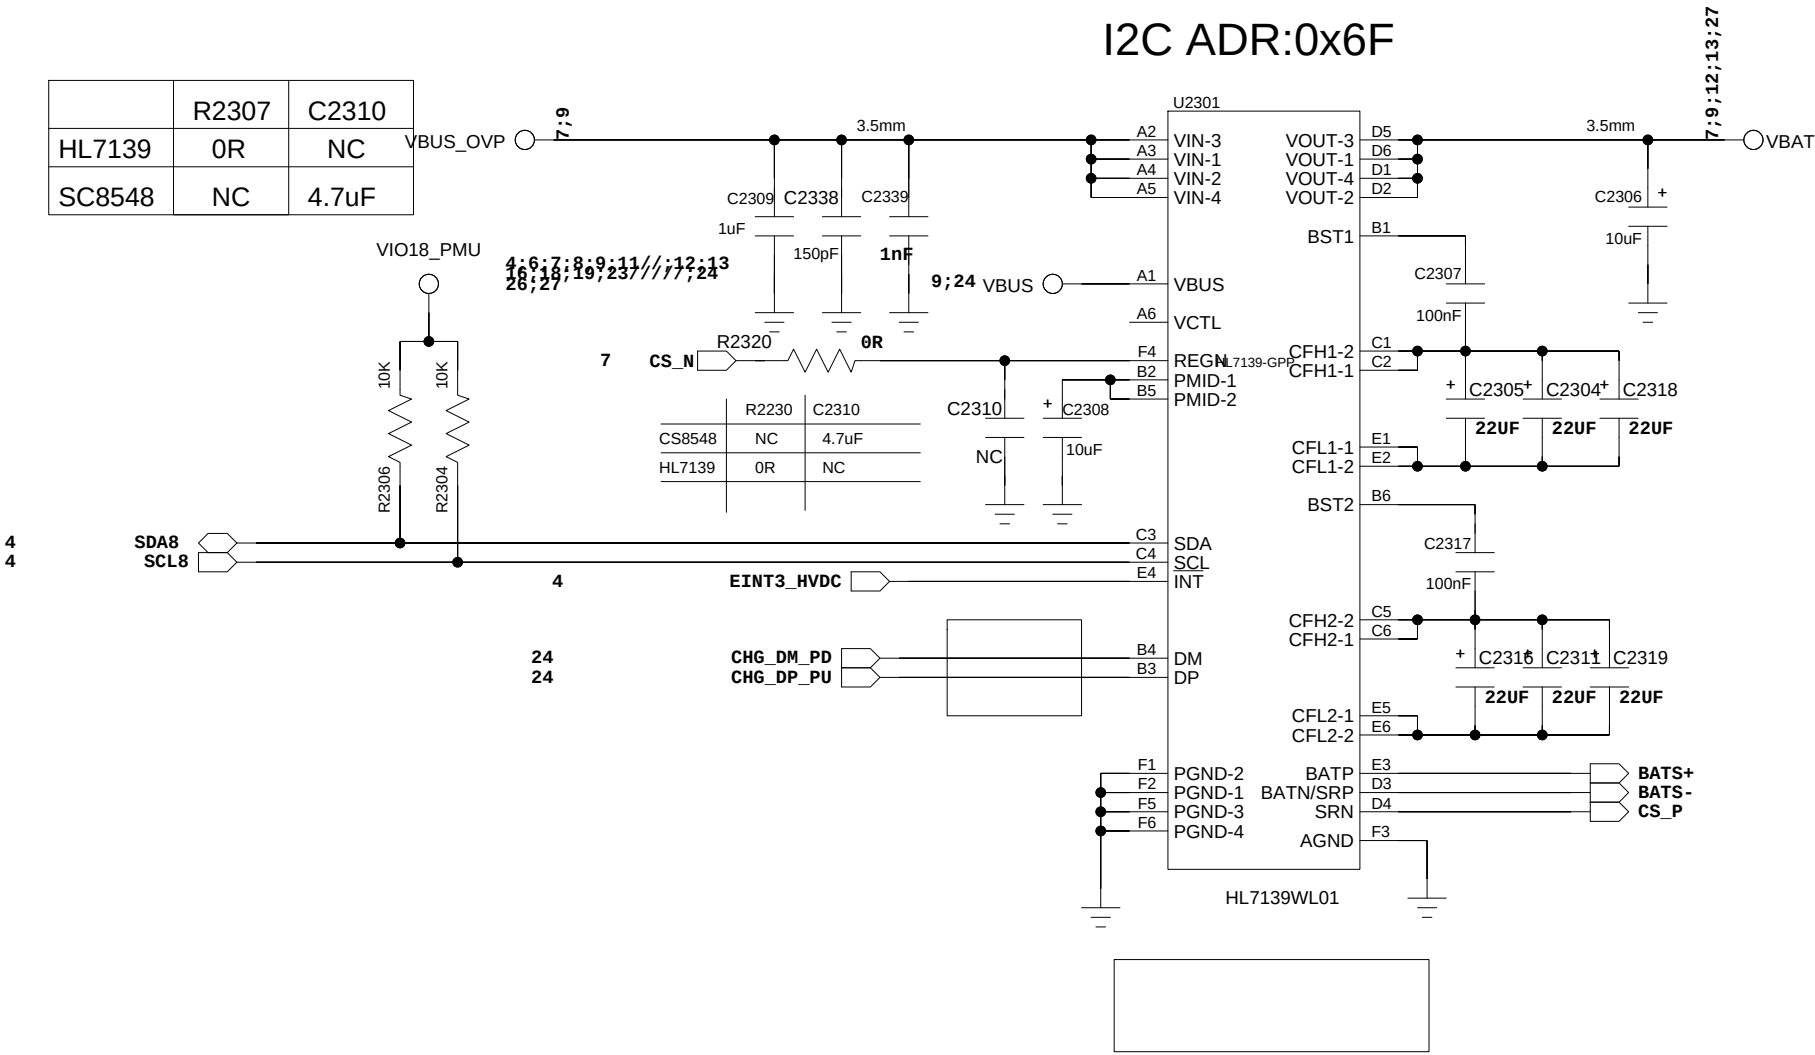


COMPANY: TRANSSION HOLDINGS				MODEL: H6929		Modified Date: 17/11/2022:10:35	
DRAWN		DATED		TITLE: 23_POWER_THIRD-PARTY_II		VERSION:	SHEET: 9 OF 27
CHECKED		DATED	< >	Confidentiality	CONFIDENTIAL		

REVISION RECORD			
LTR	ECO NO:	APPROVED:	DATE:


AMOLED POWER--DCDC

LCM_1V35

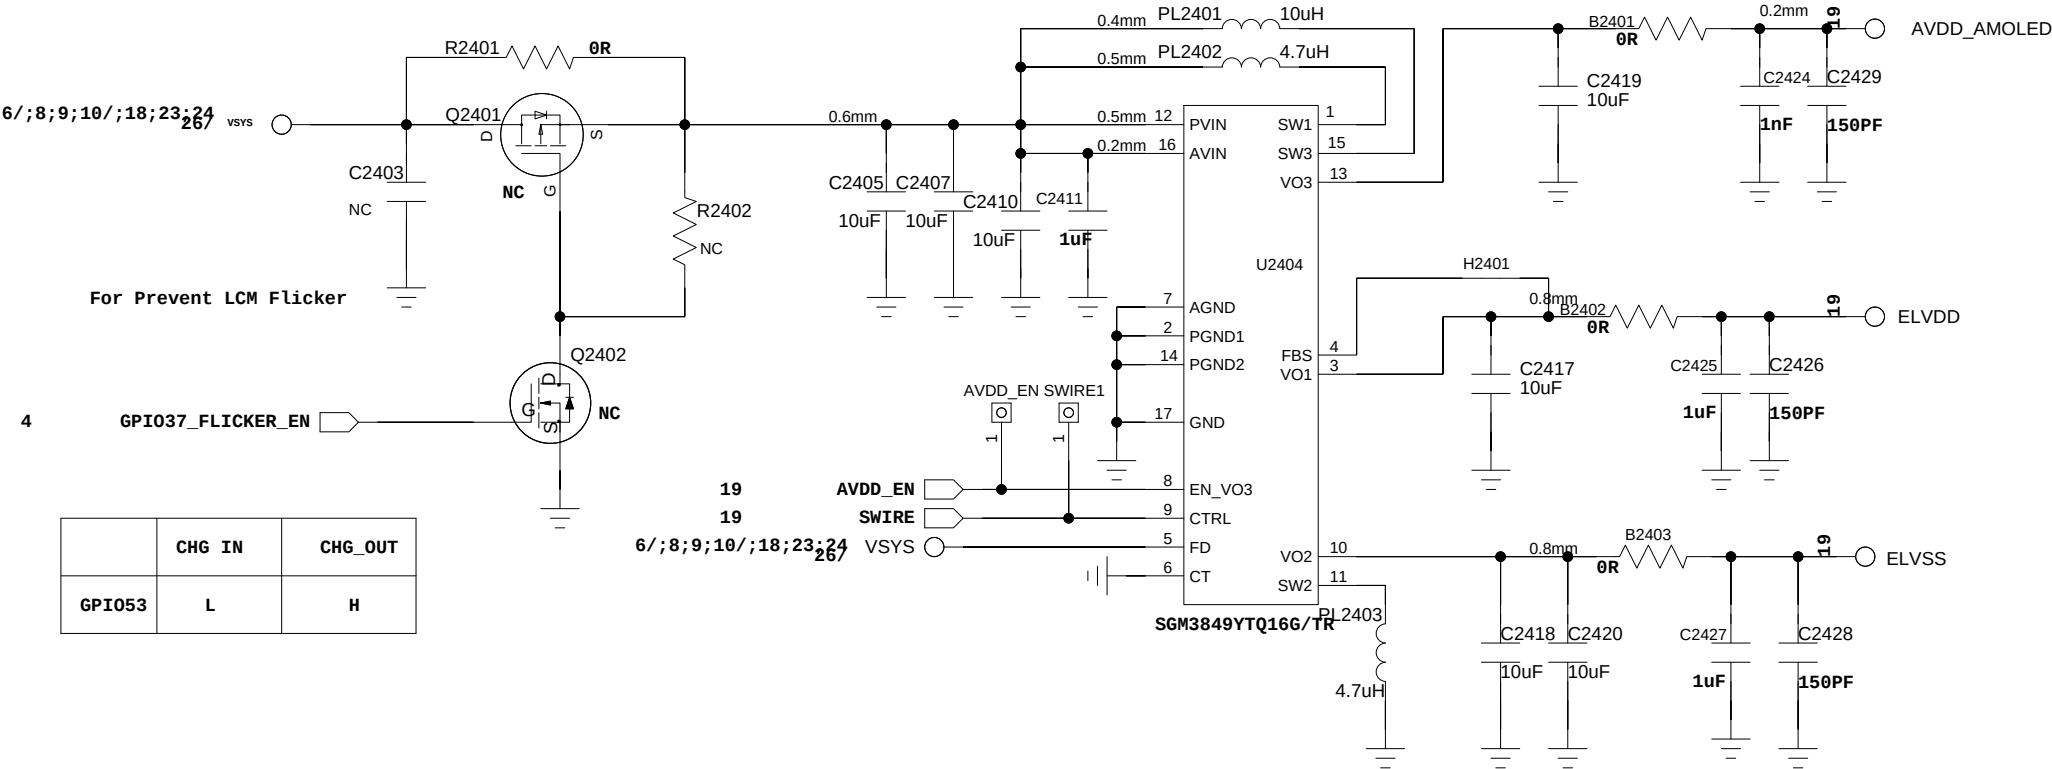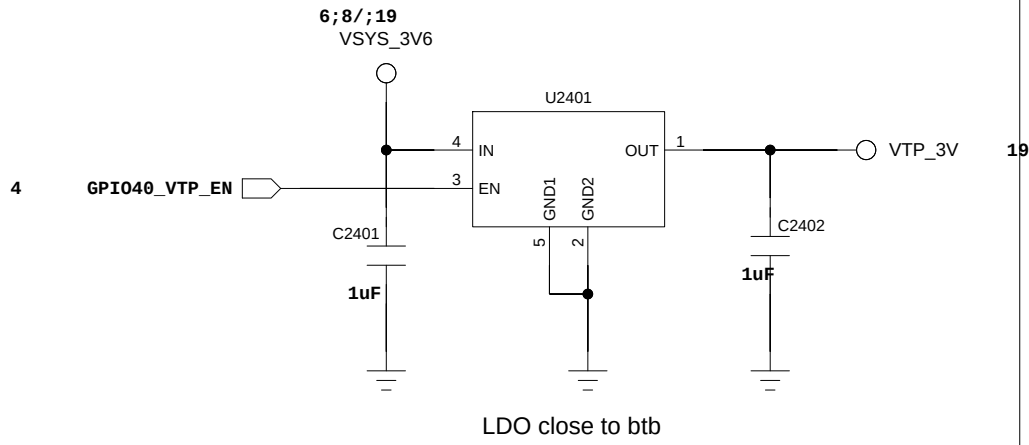


LCM BIAS

NT50358ACG/J12C ADDRESS:0x7C(Write)/0x7D(Read)

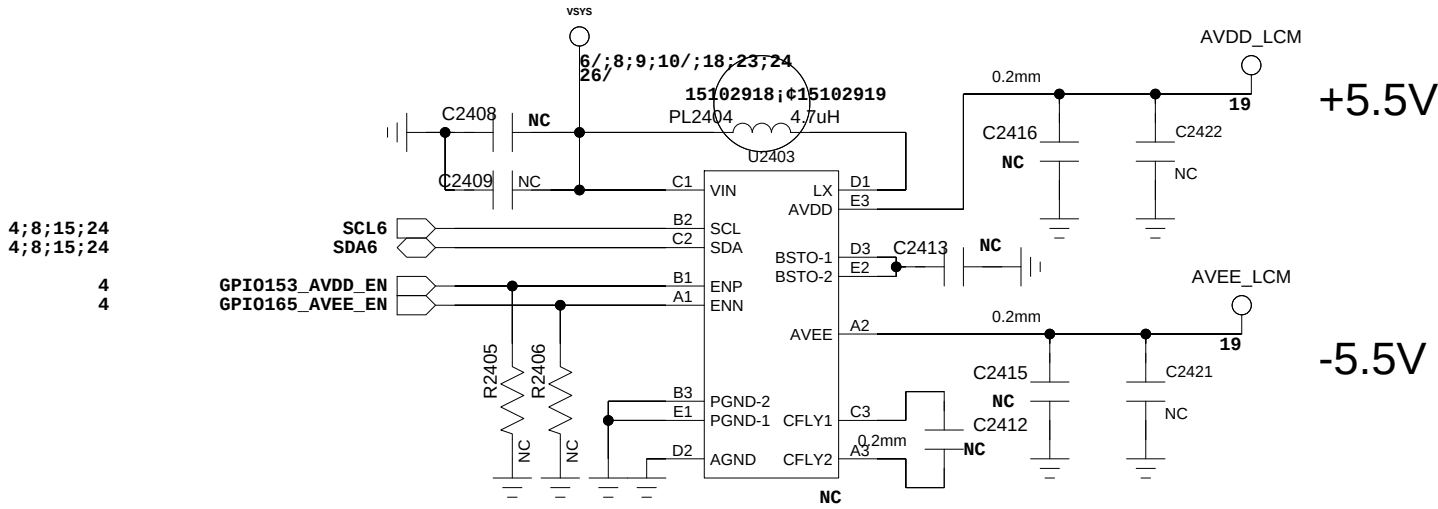

LCM LED

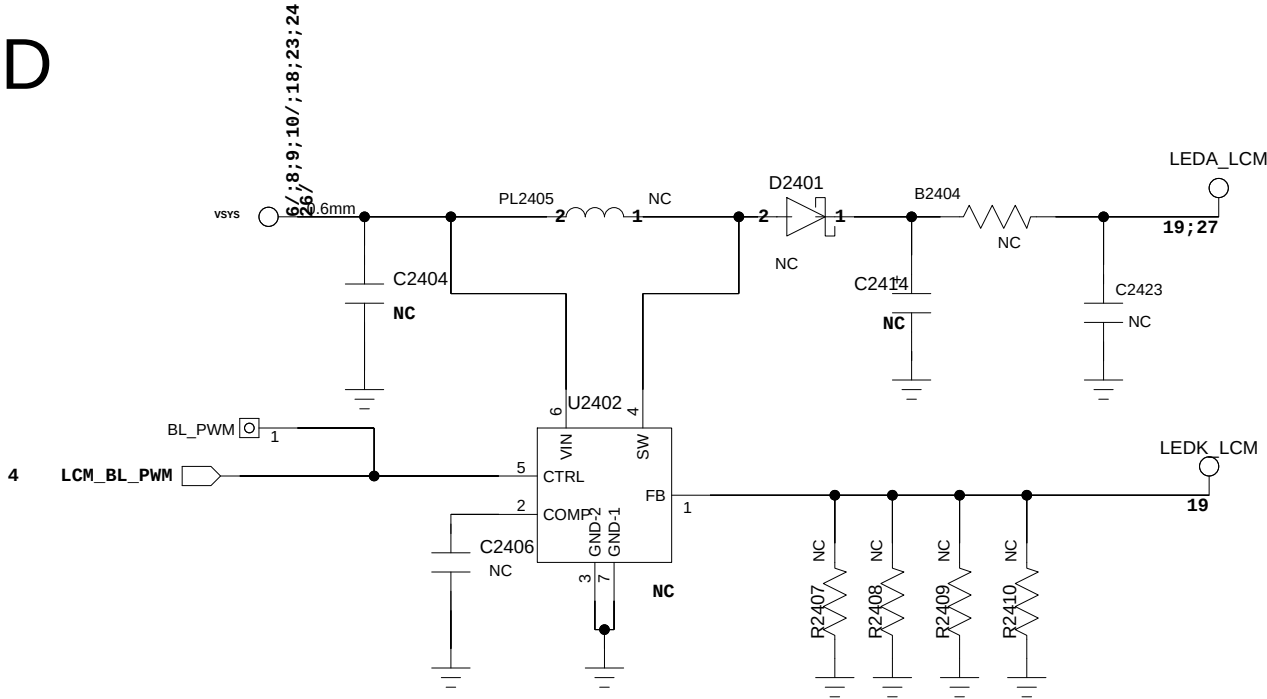

COMPANY: TRANSSION HOLDINGS

MODEL:H6929

Modified Date: 11/10/2022:21:24

DRAWN

DATED

TITLE: 24_POWER_THIRD-PARTY_III

CHECKED

DATED

< >

Confidentiality



CONFIDENTIAL

VERSION:


SHEET: 10 OF 27

RF_MT6177M_PIN_OUT

REVISION RECORD			
LTR	ECO NO:	APPROVED:	DATE:

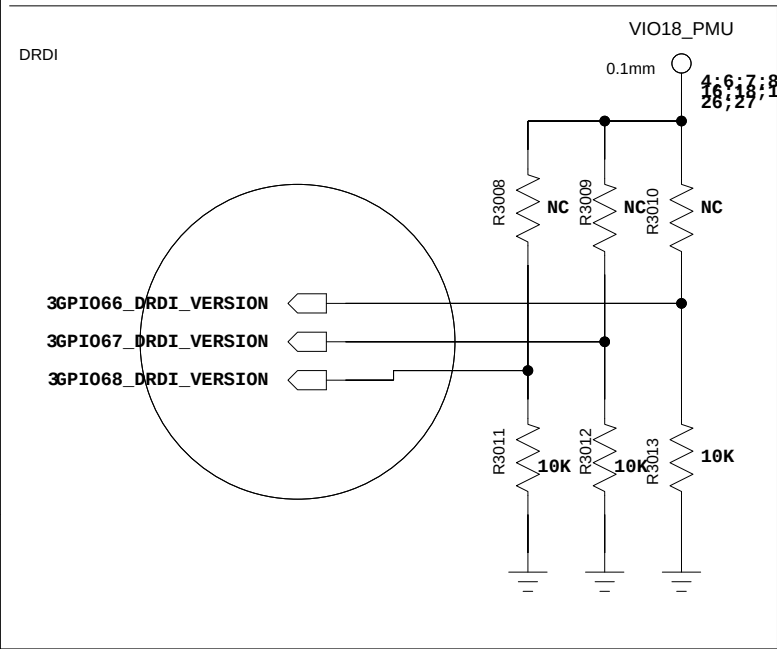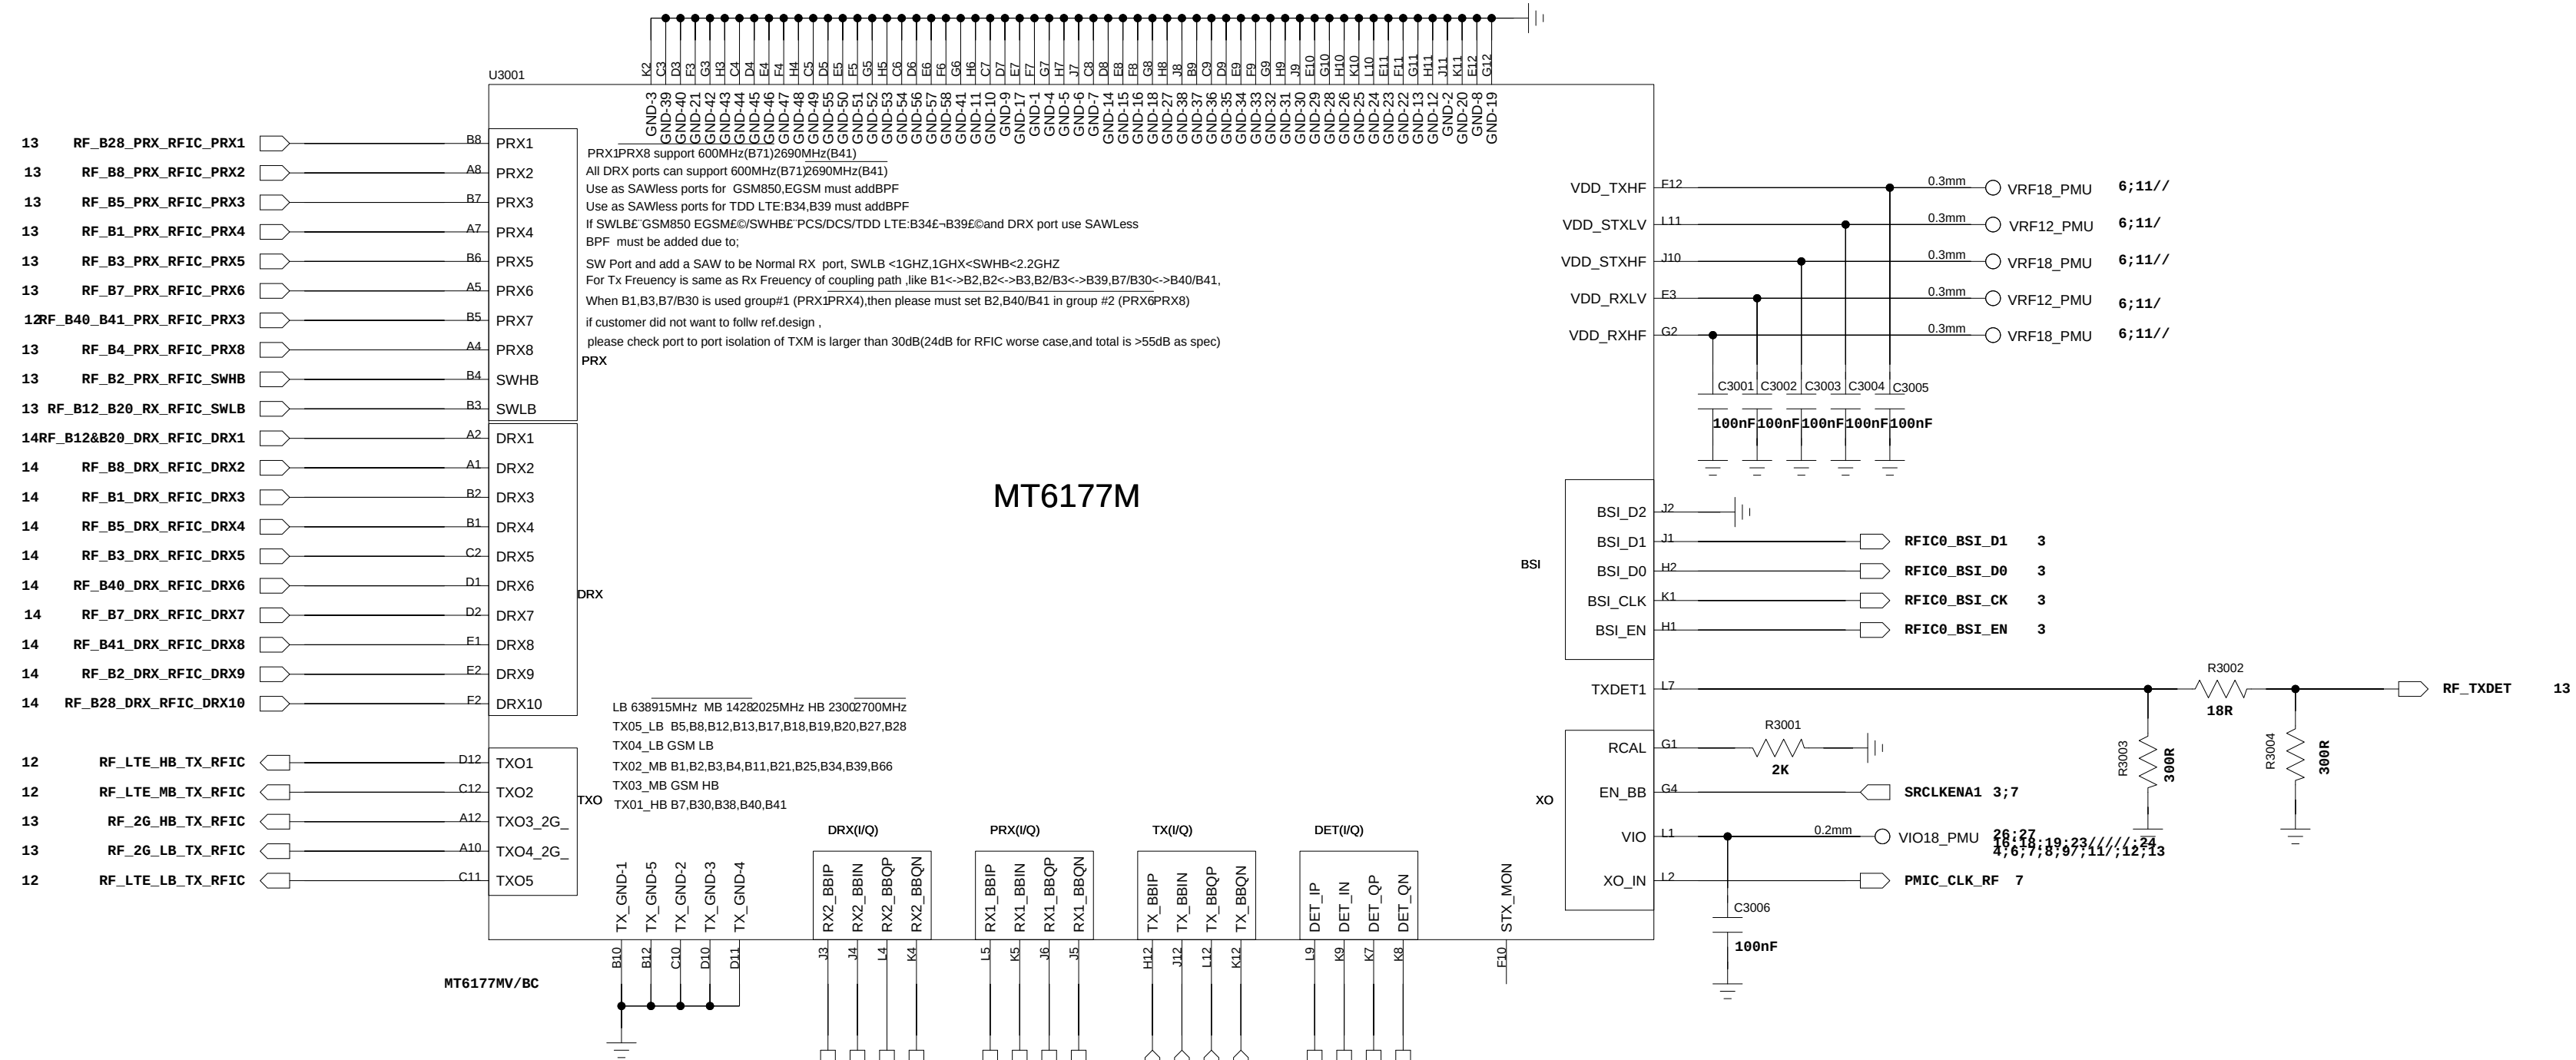

Power domain of MT6177M

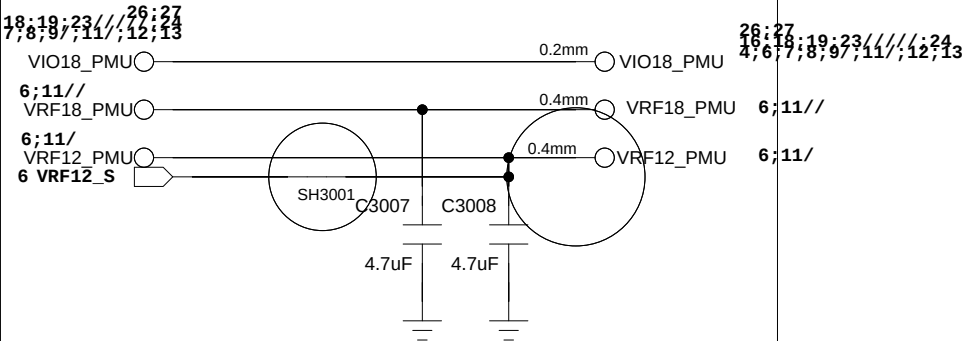


Star Power

COMPANY: TRANSSION HOLDINGS				MODEL: H6929		Modified Date: 11/10/2022:21:24	
DRAWN		DATED		TITLE: 30_RF_MT6177M_PIN_OUT		VERSION:	SHEET: 11 OF 27
CHECKED		DATED	< >	Confidentiality	CONFIDENTIAL		

RF_MT6177M_RF_TX


REVISION RECORD			
LTR	ECO NO:	APPROVED:	DATE:

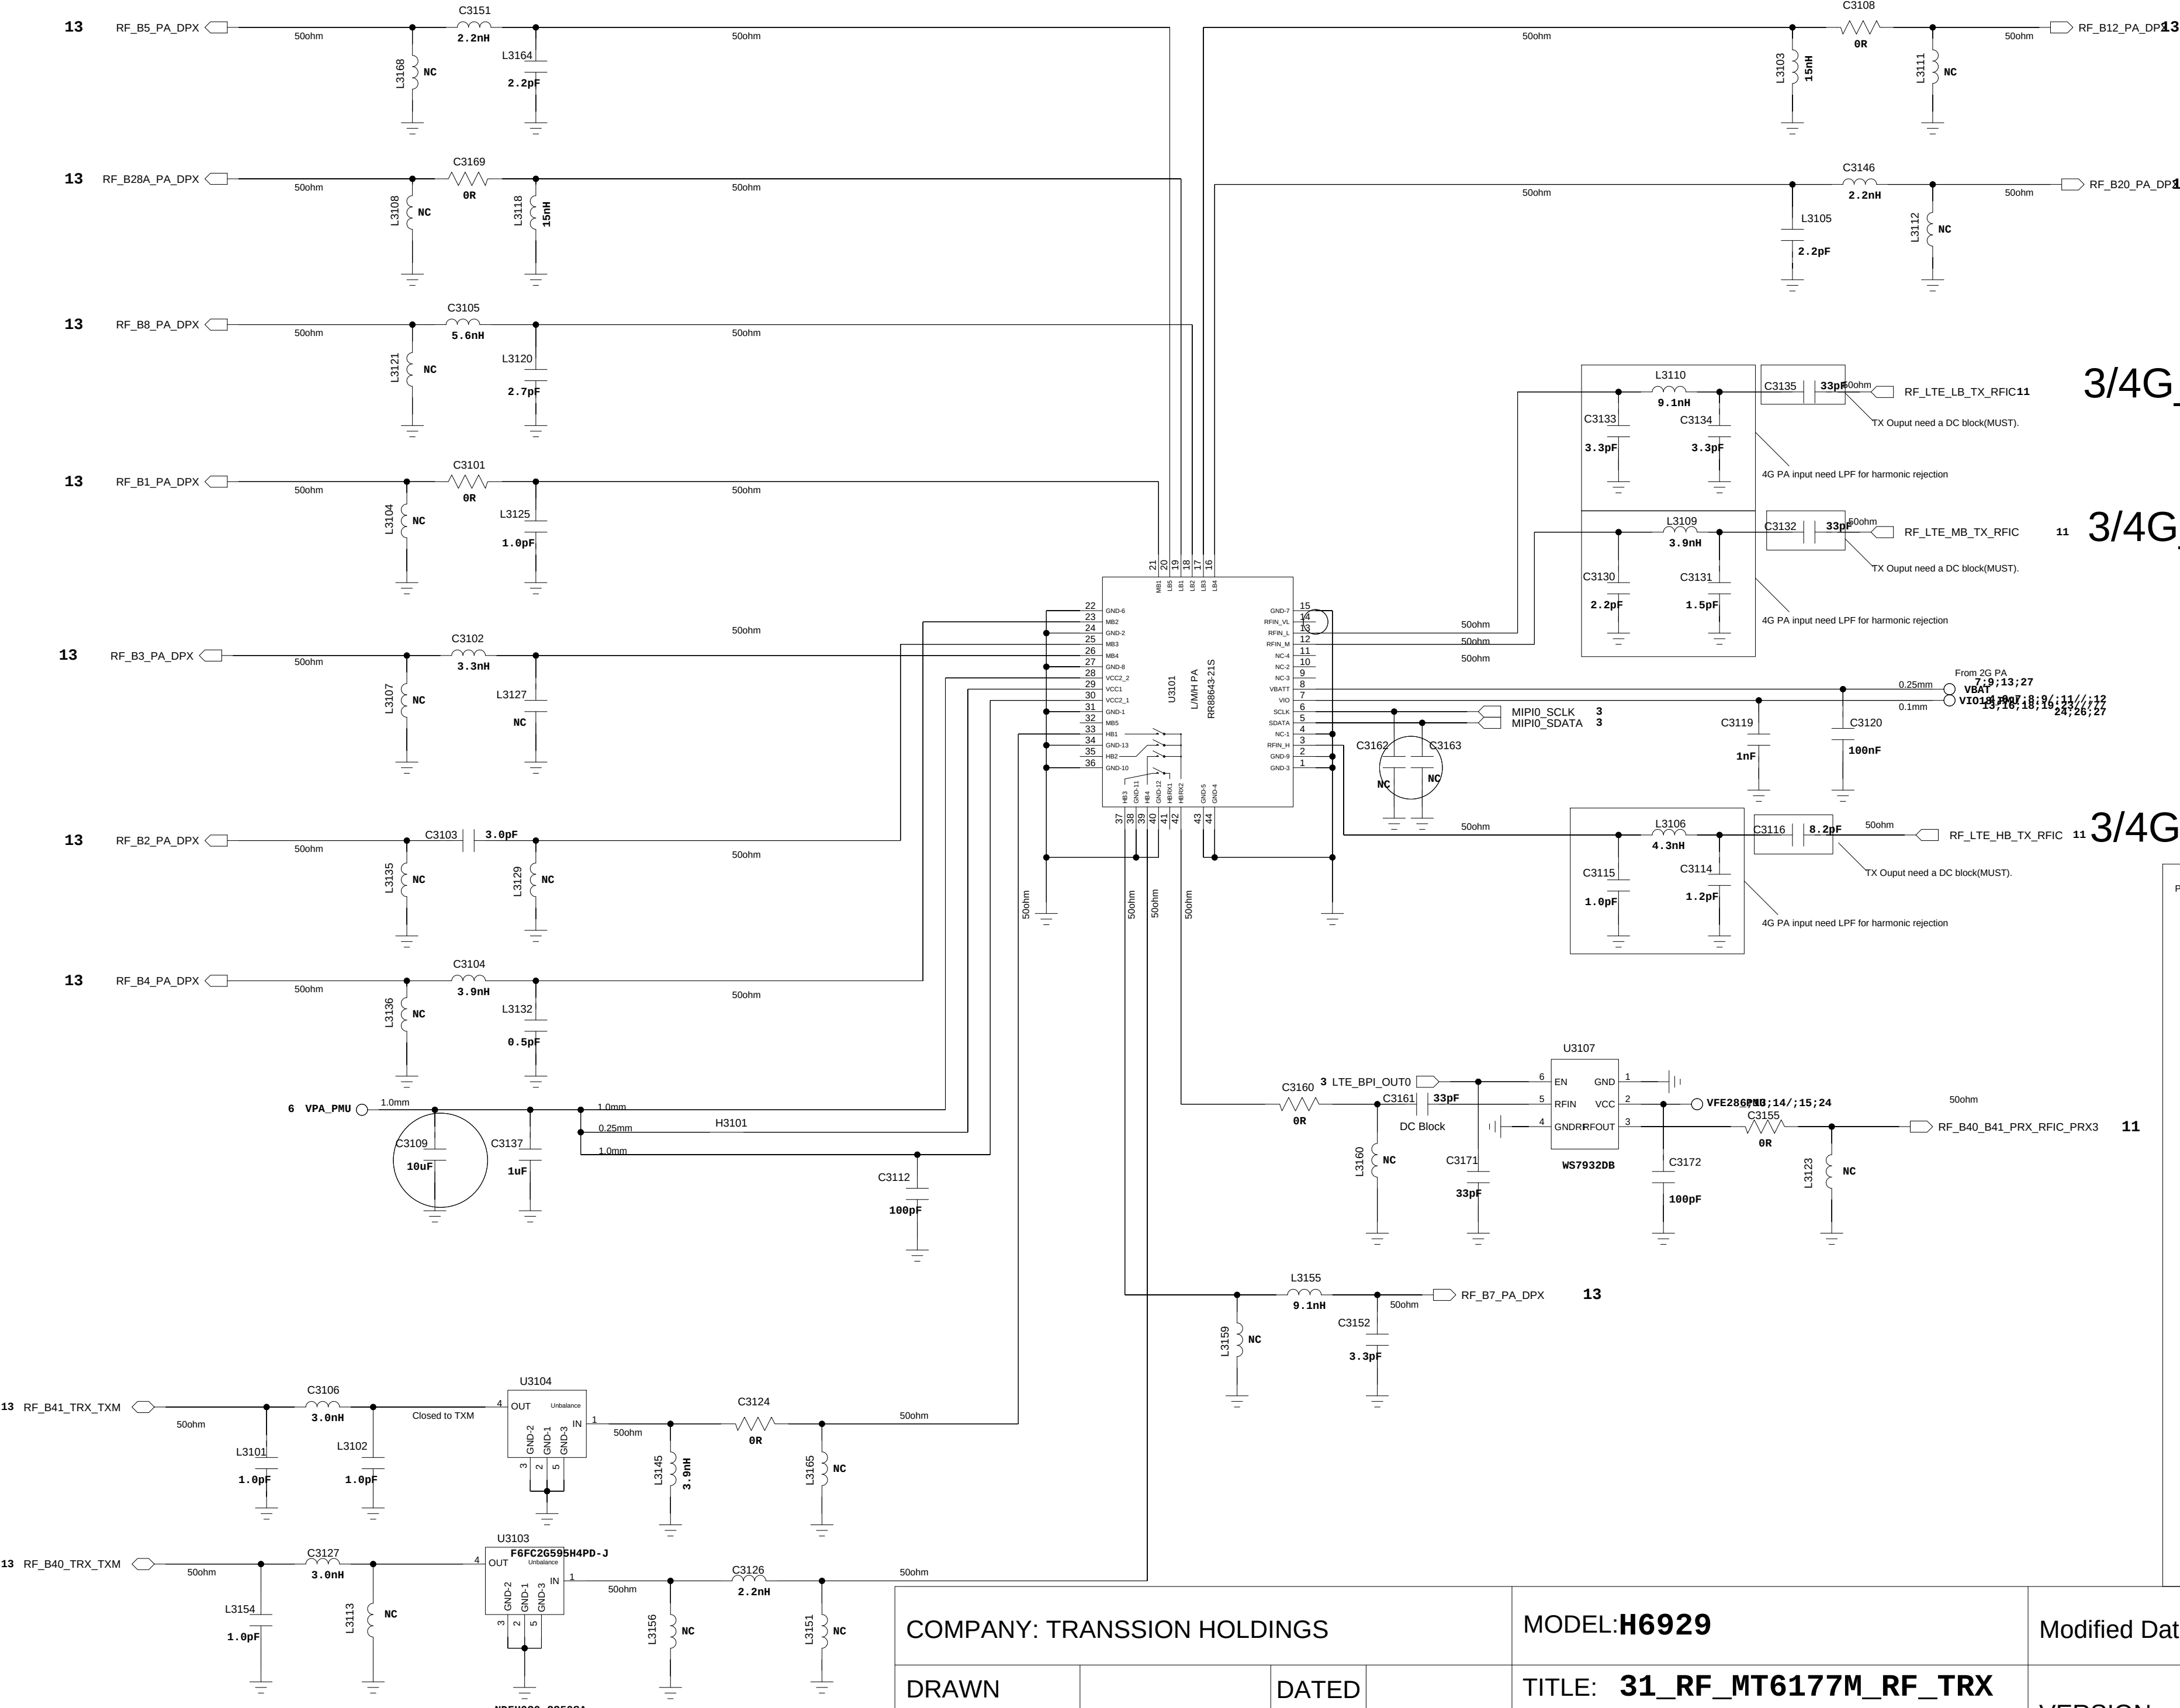

3/4G_PAIN_LB

3/4G_PAIN_MB





3/4G_PAIN_HB

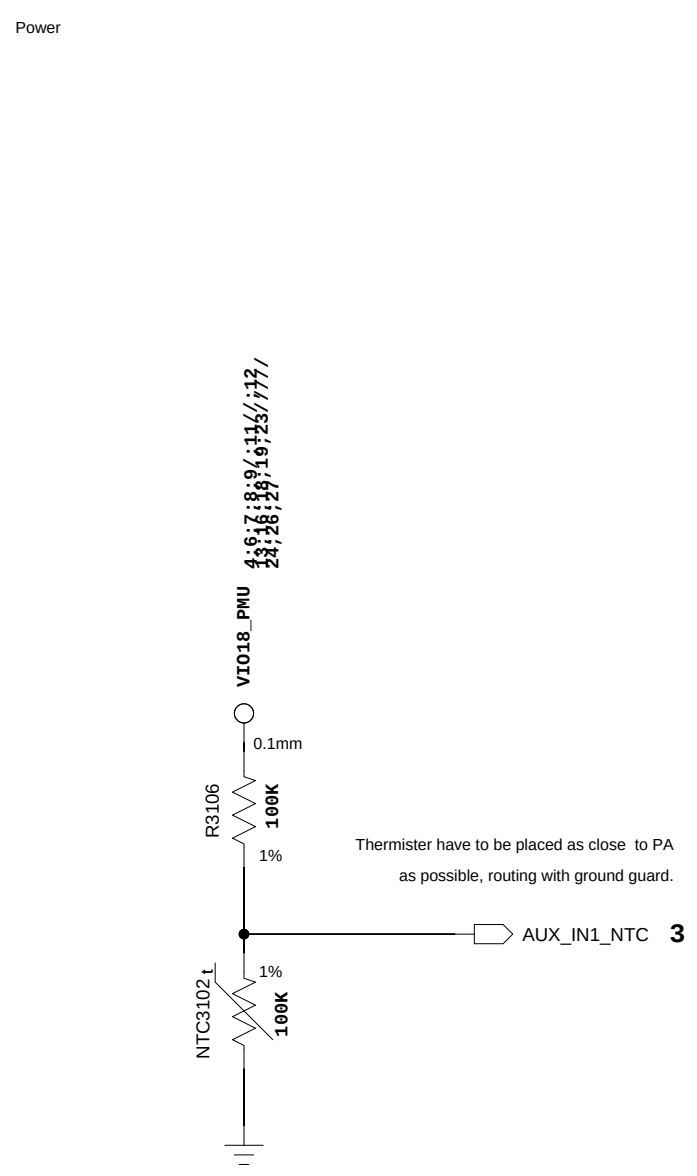

COMPANY: TRANSSION HOLDINGS				MODEL:H6929		Modified Date: 11/10/2022:21:24	
DRAWN		DATED		TITLE: 31_RF_MT6177M_RF_TRX		VERSION:	SHEET: 12 OF 27
CHECKED		DATED	< >	Confidentiality	CONFIDENTIAL		





swap B5&8 @MMMB PA 20220119

REVISION RECORD			
LTR	ECO NO:	APPROVED:	DATE:

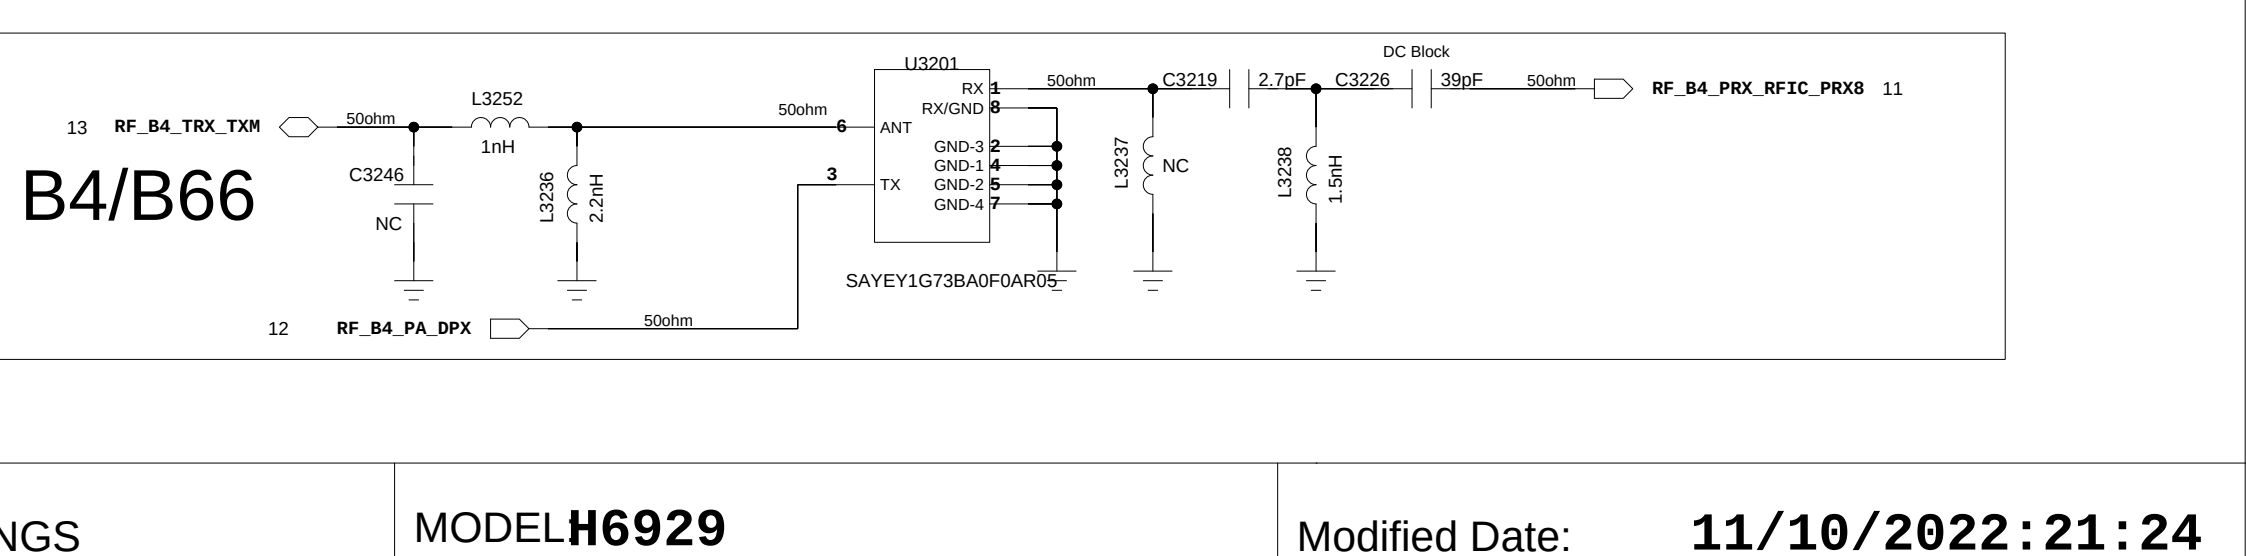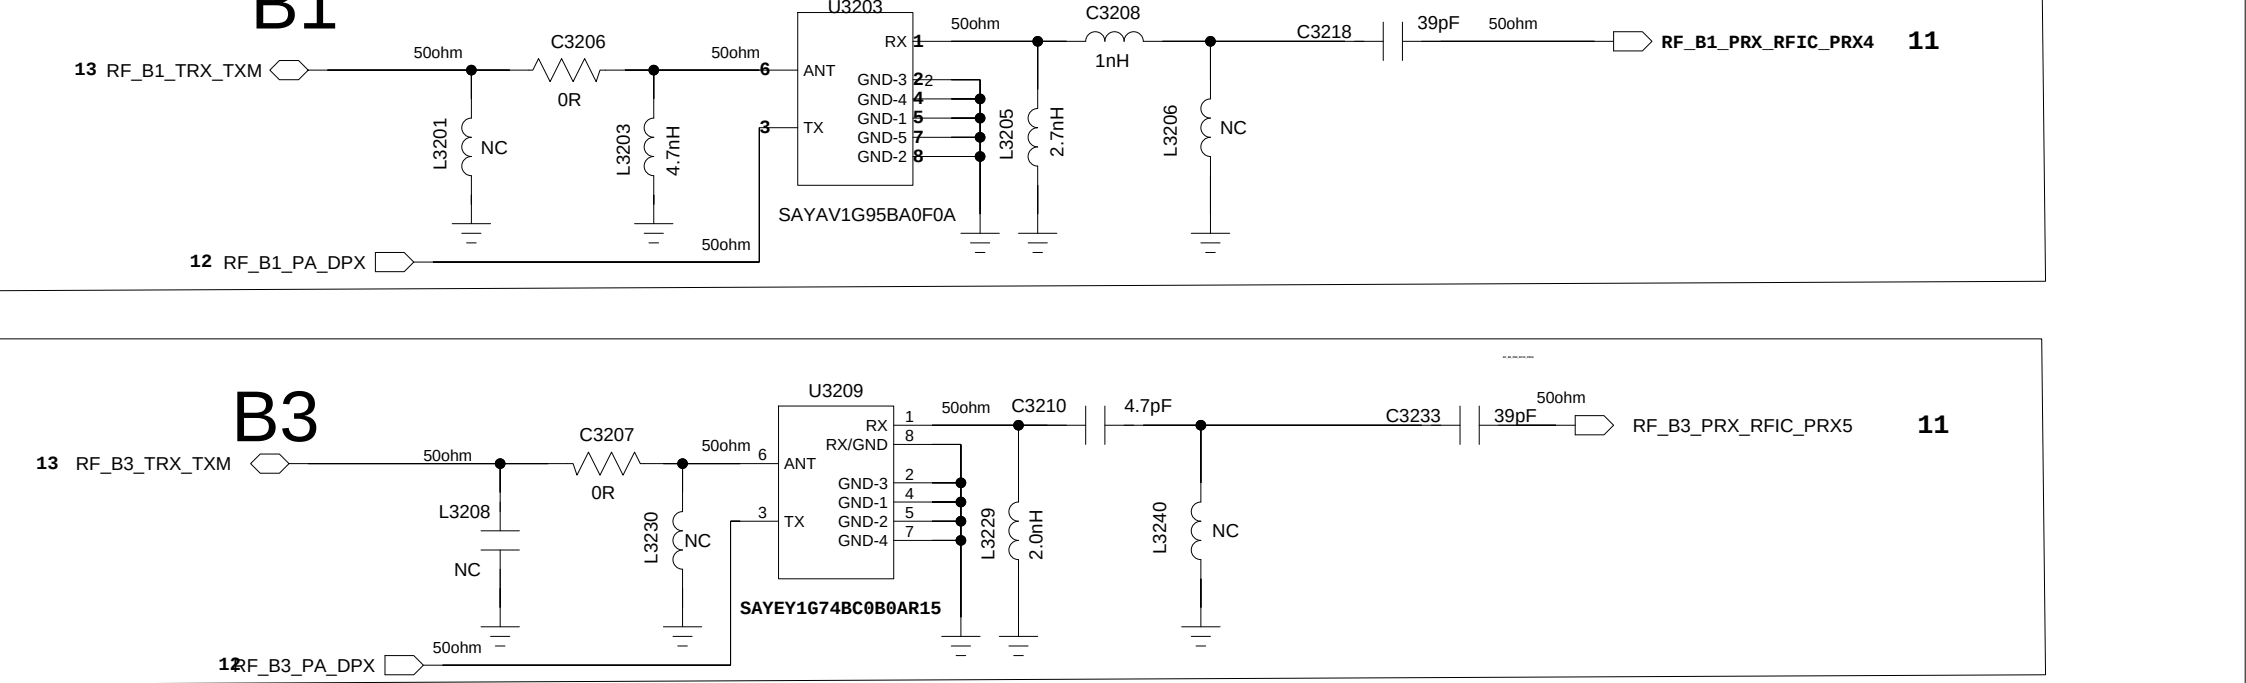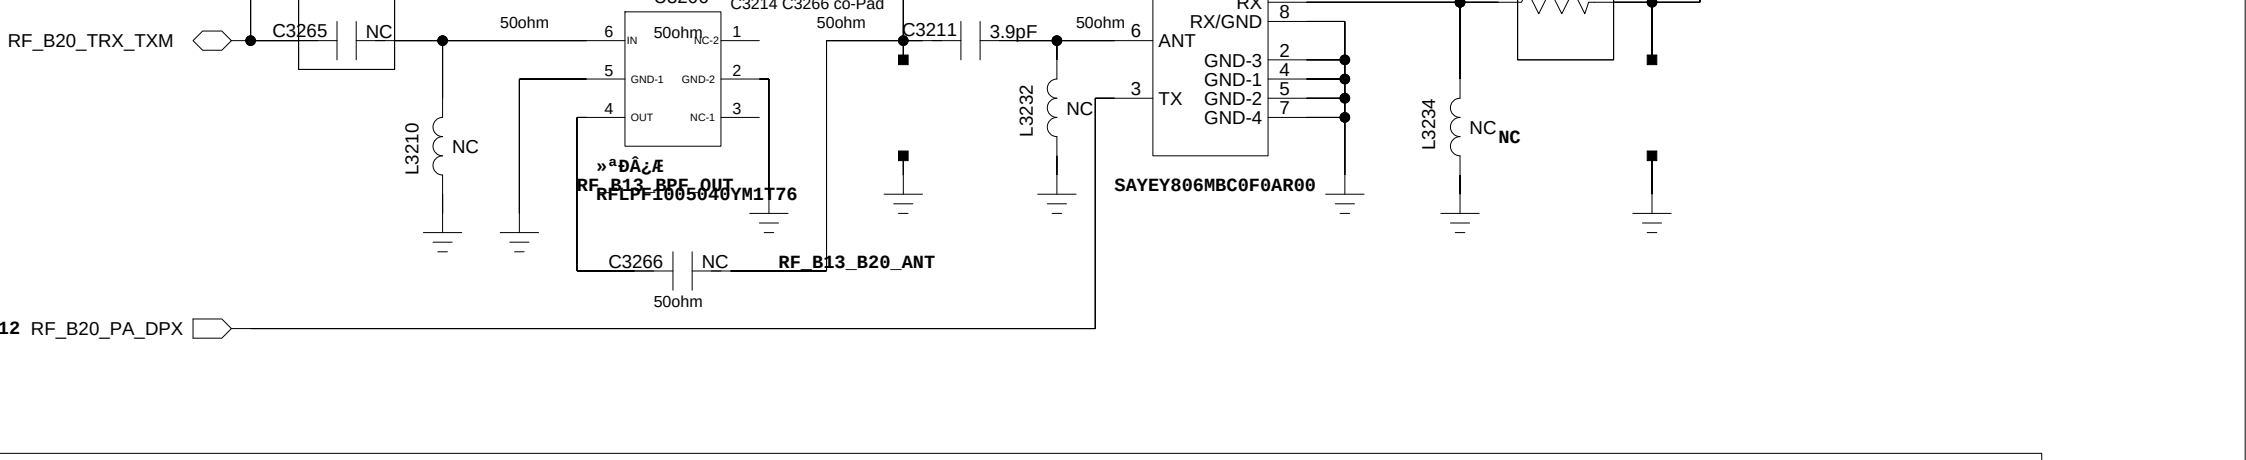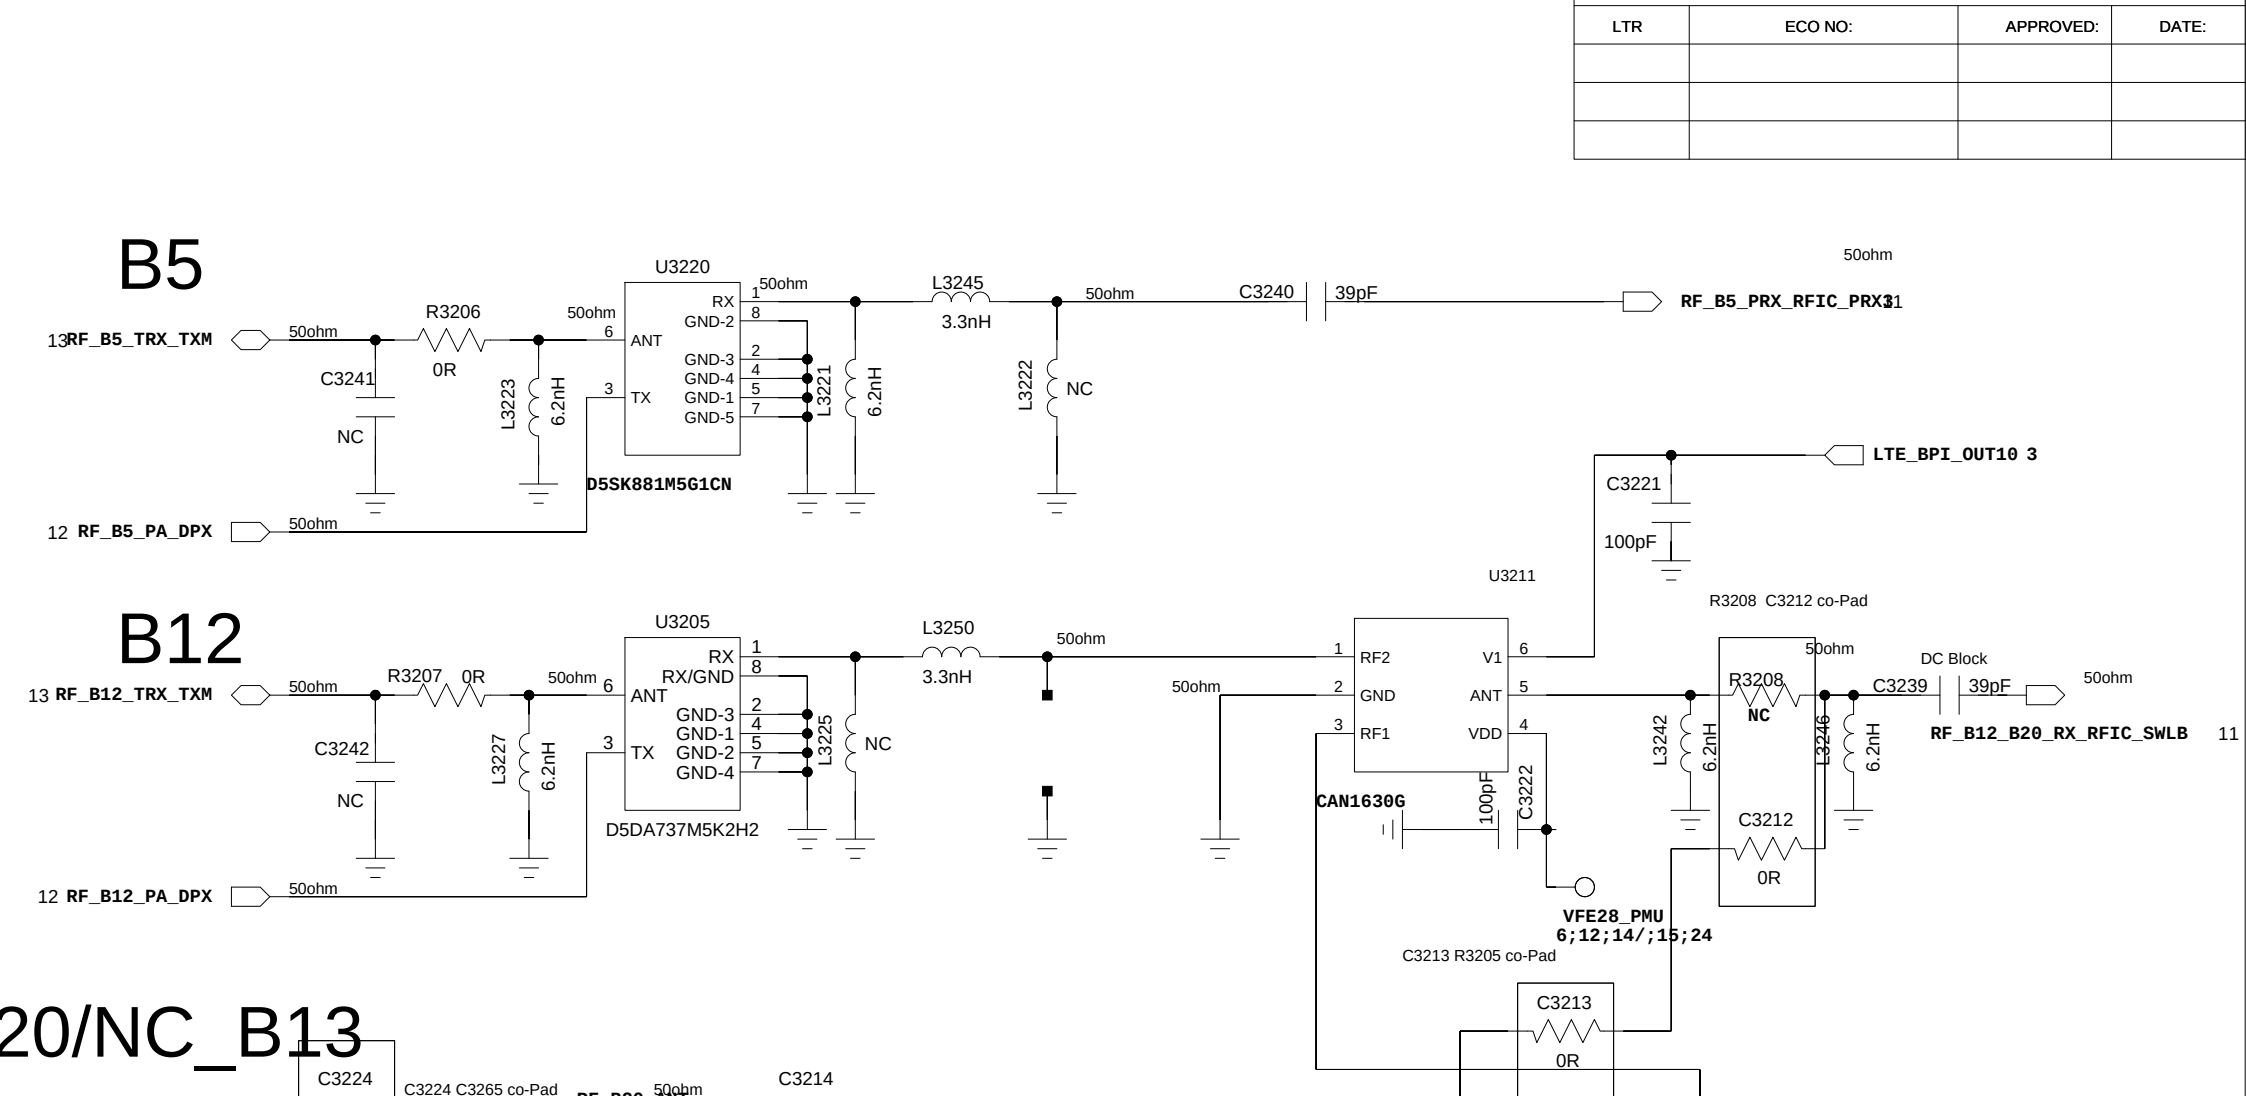

COMPANY: TRANSSION HOLDINGS				MODEL H6929		Modified Date: 11/10/2022:21:24	
DRAWN		DATED		TITLE: 32_RF_MT6177M_RF_PRX		VERSION:	SHEET: 13 O 27
CHECKED		DATED	< >	Confidentiality	CONFIDENTIAL		

RF_MT6177M_RF_DRX

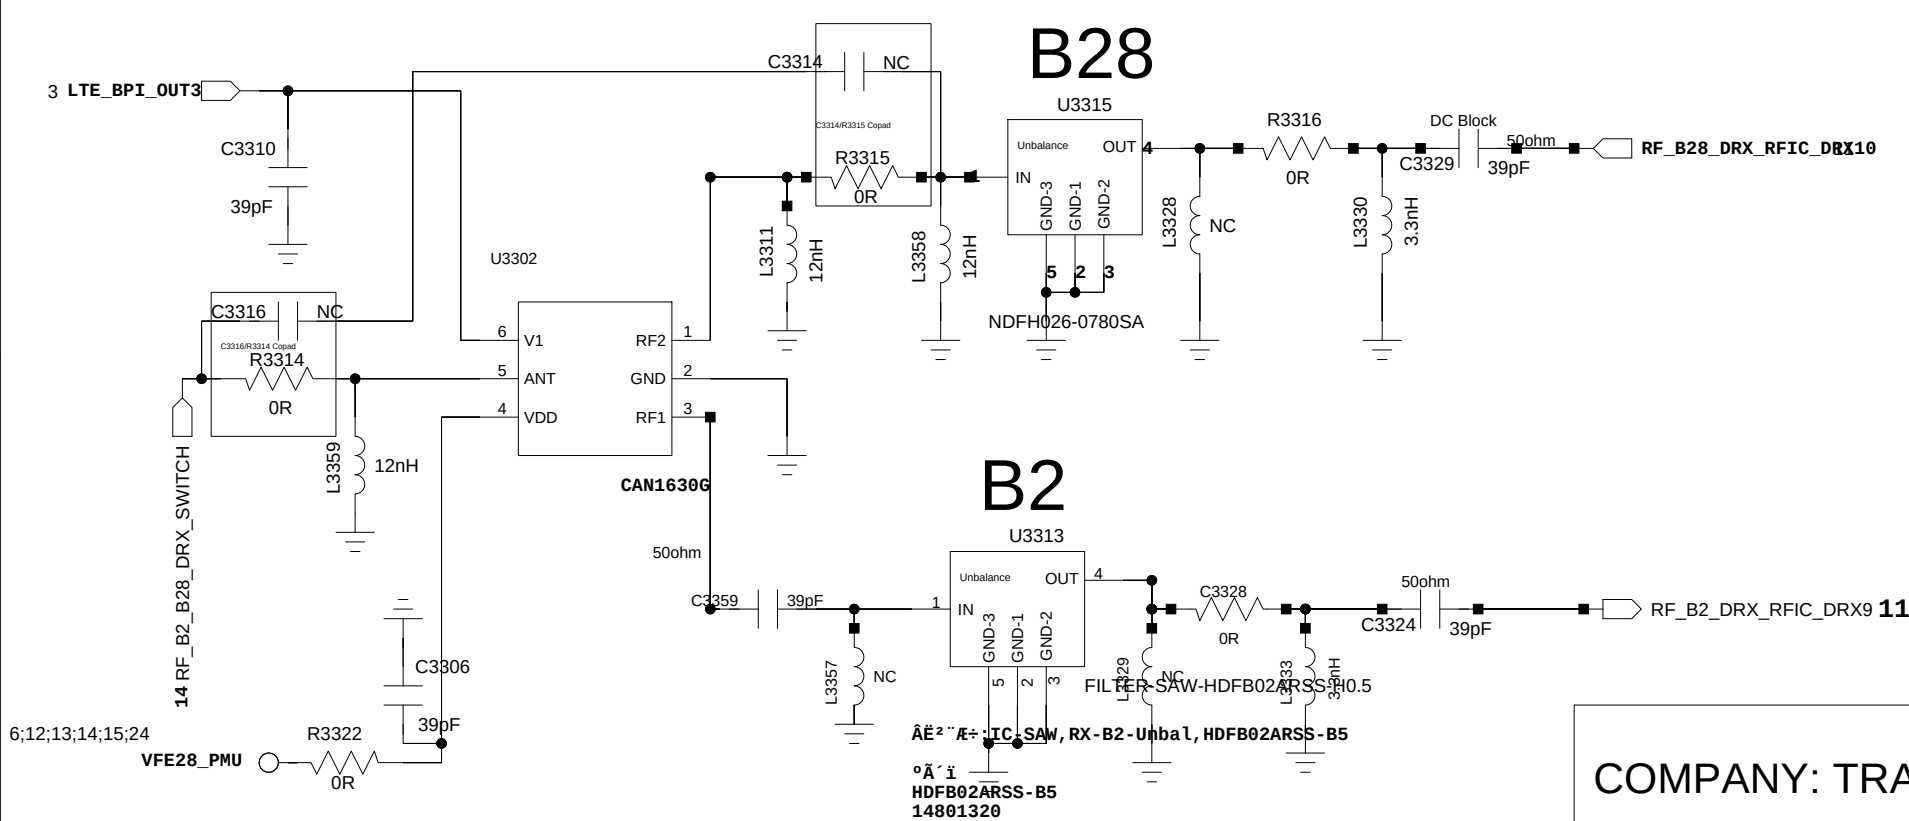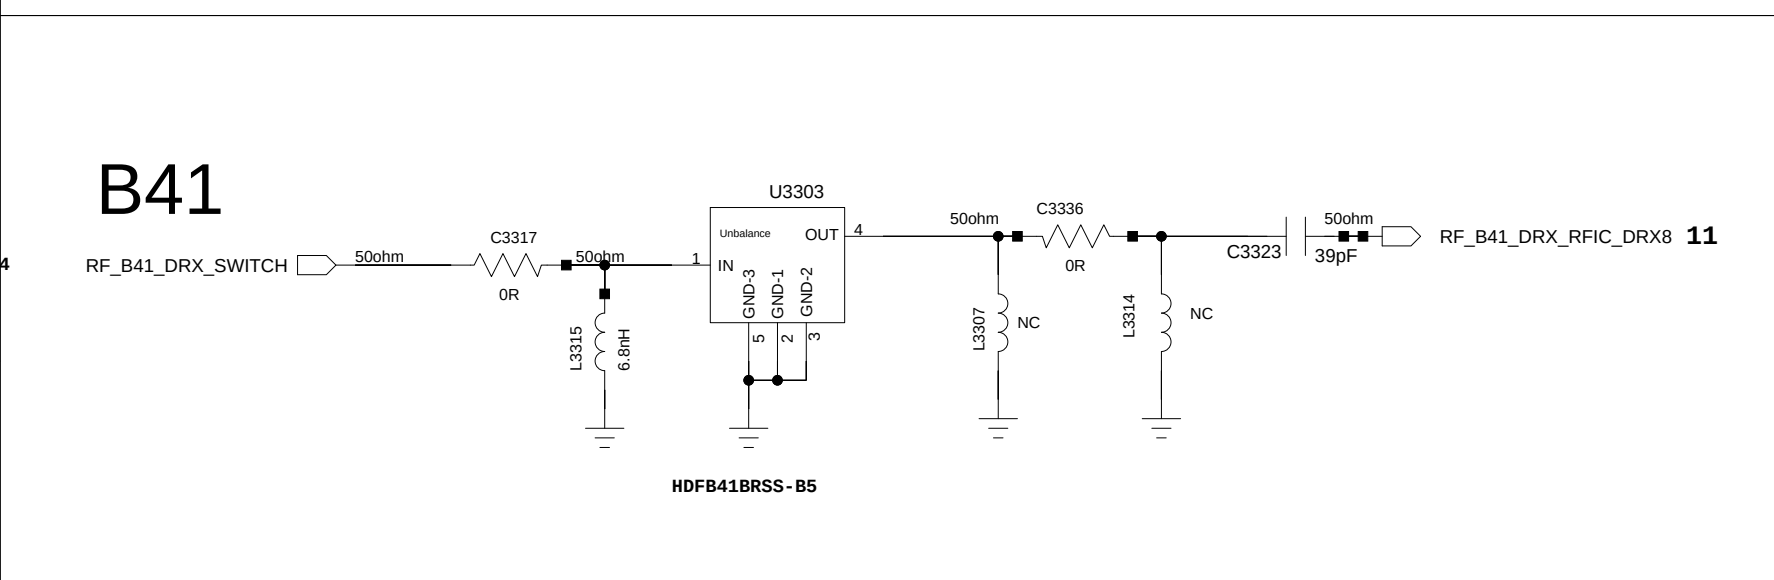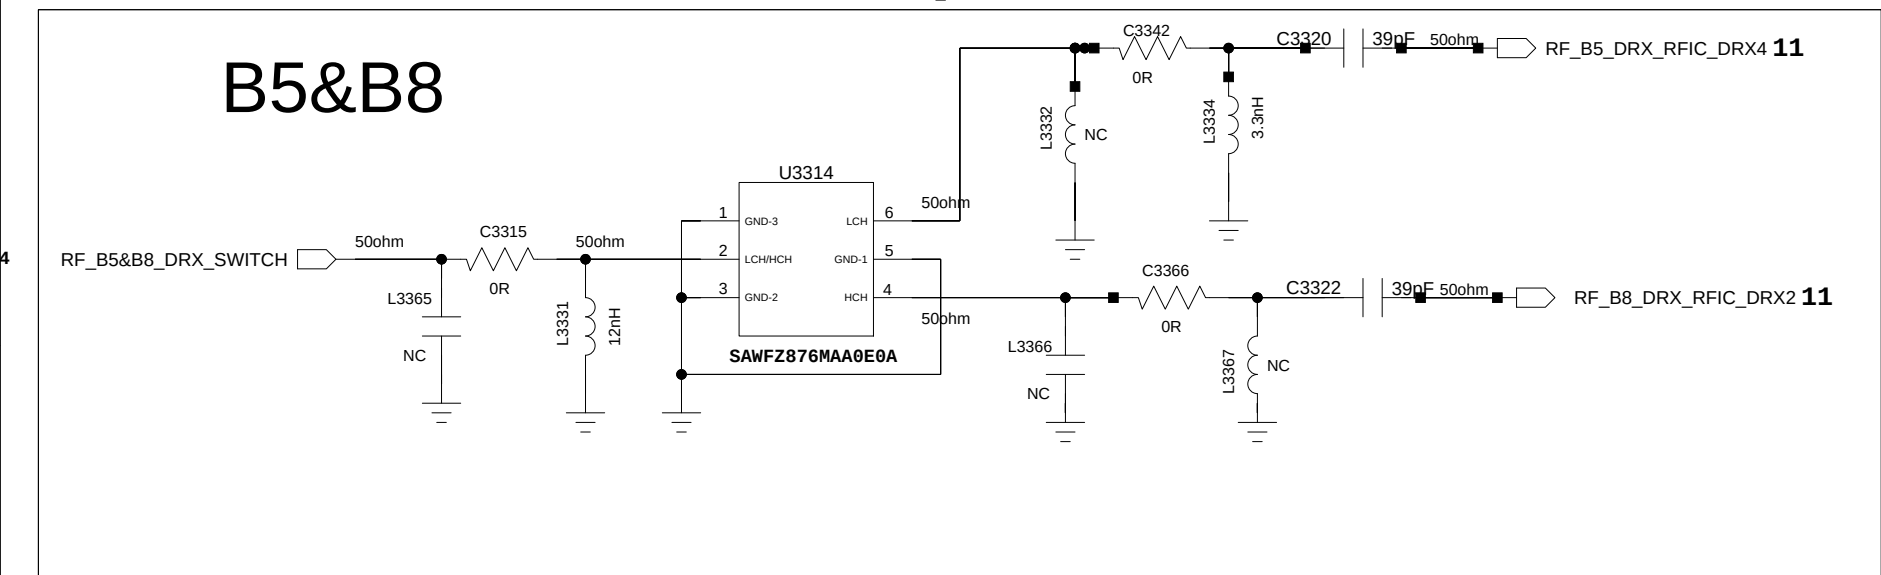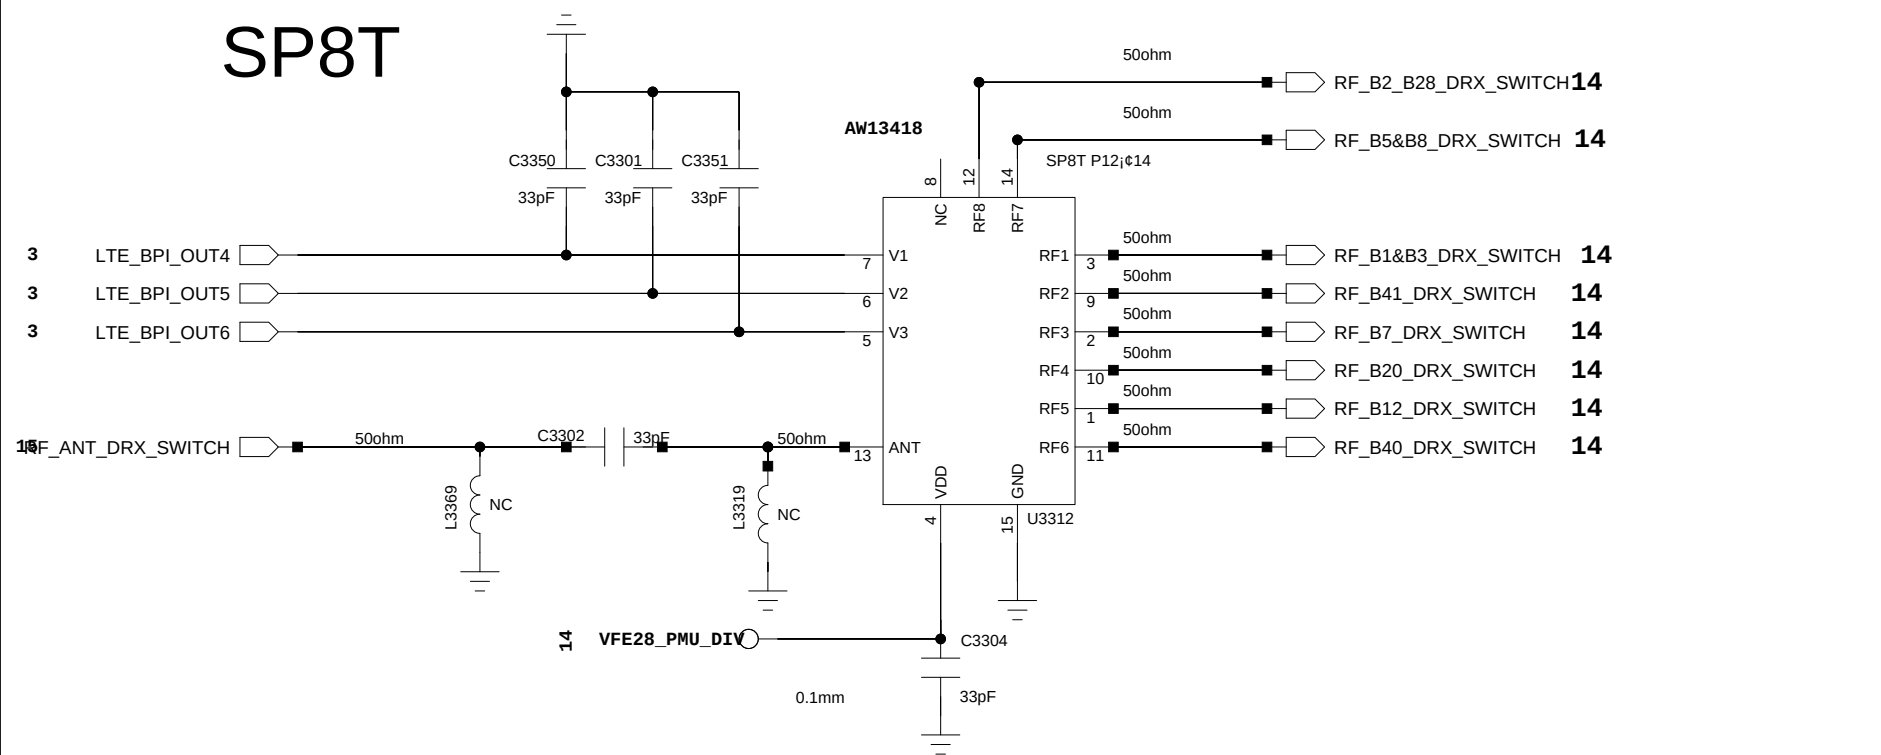

VC1613 control logic					SP8T control logic										
VC1	VC2	RF1	RF2	RF3	SP6T control logic										
H	L	Y	N	N	V1	V2	V3	RF1	RF2	RF3	RF4	RF5	RF6	RF7	RF8
H	H	N	Y	N	L	L	L	Y	N	N	N	N	N	N	N
N	H	N	N	Y	L	L	H	N	Y	N	N	N	N	N	N
					L	H	L	N	N	Y	N	N	N	N	N
					L	H	H	N	N	N	Y	N	N	N	N
					H	L	L	N	N	N	N	Y	N	N	N
					H	L	H	N	N	N	N	N	Y	N	N
					H	H	L	N	N	N	N	N	N	Y	N
					H	H	H	N	N	N	N	N	N	N	Y

REVISION RECORD			
LTR	ECO NO:	APPROVED:	DATE:

VFE28_PMU_DIV

1uF

C3303

Power





R3350

0R

0.2mm

VFE28_PMU





6; 12; 13; 14; 15; 24

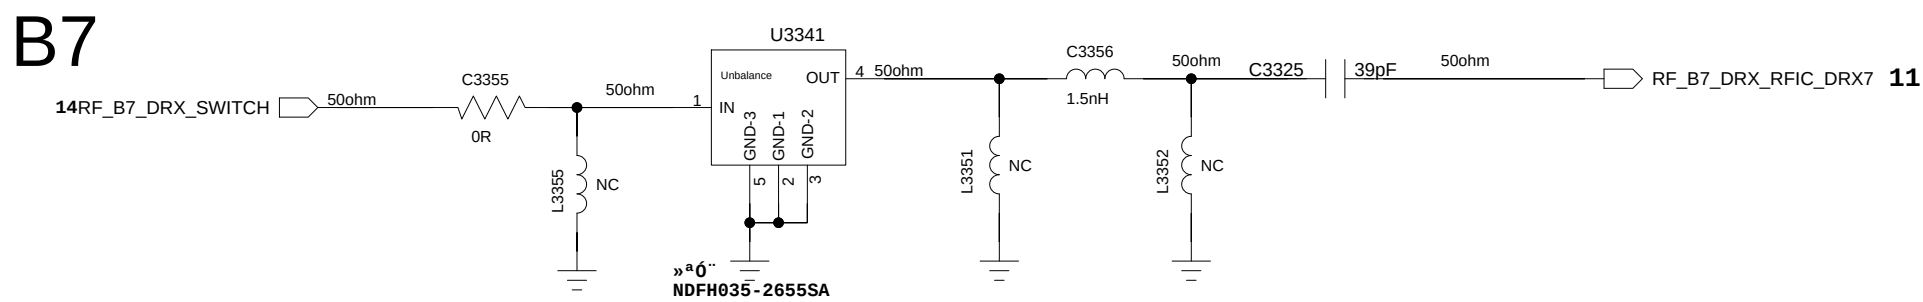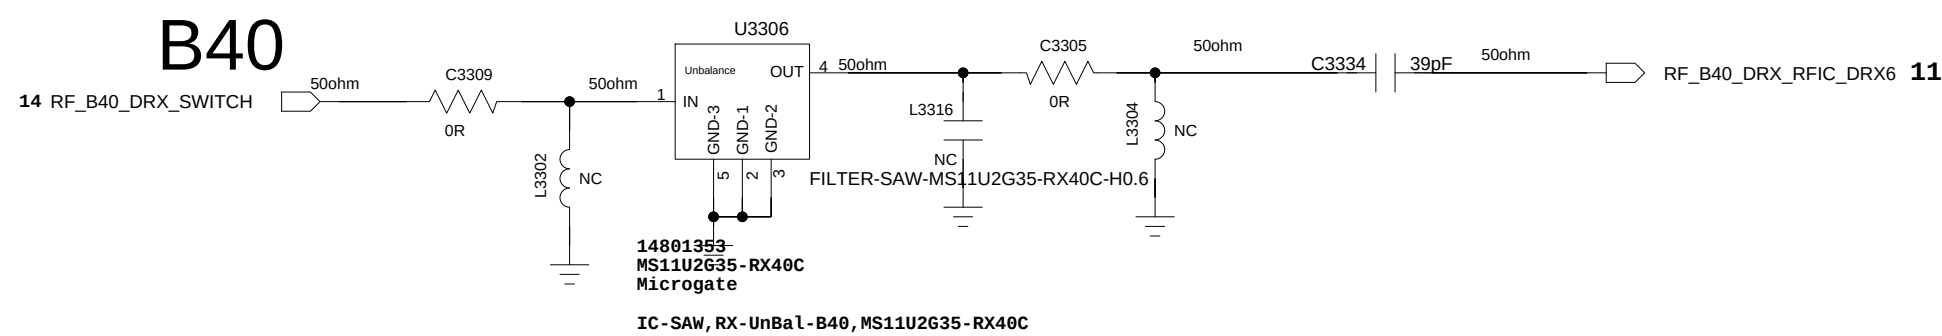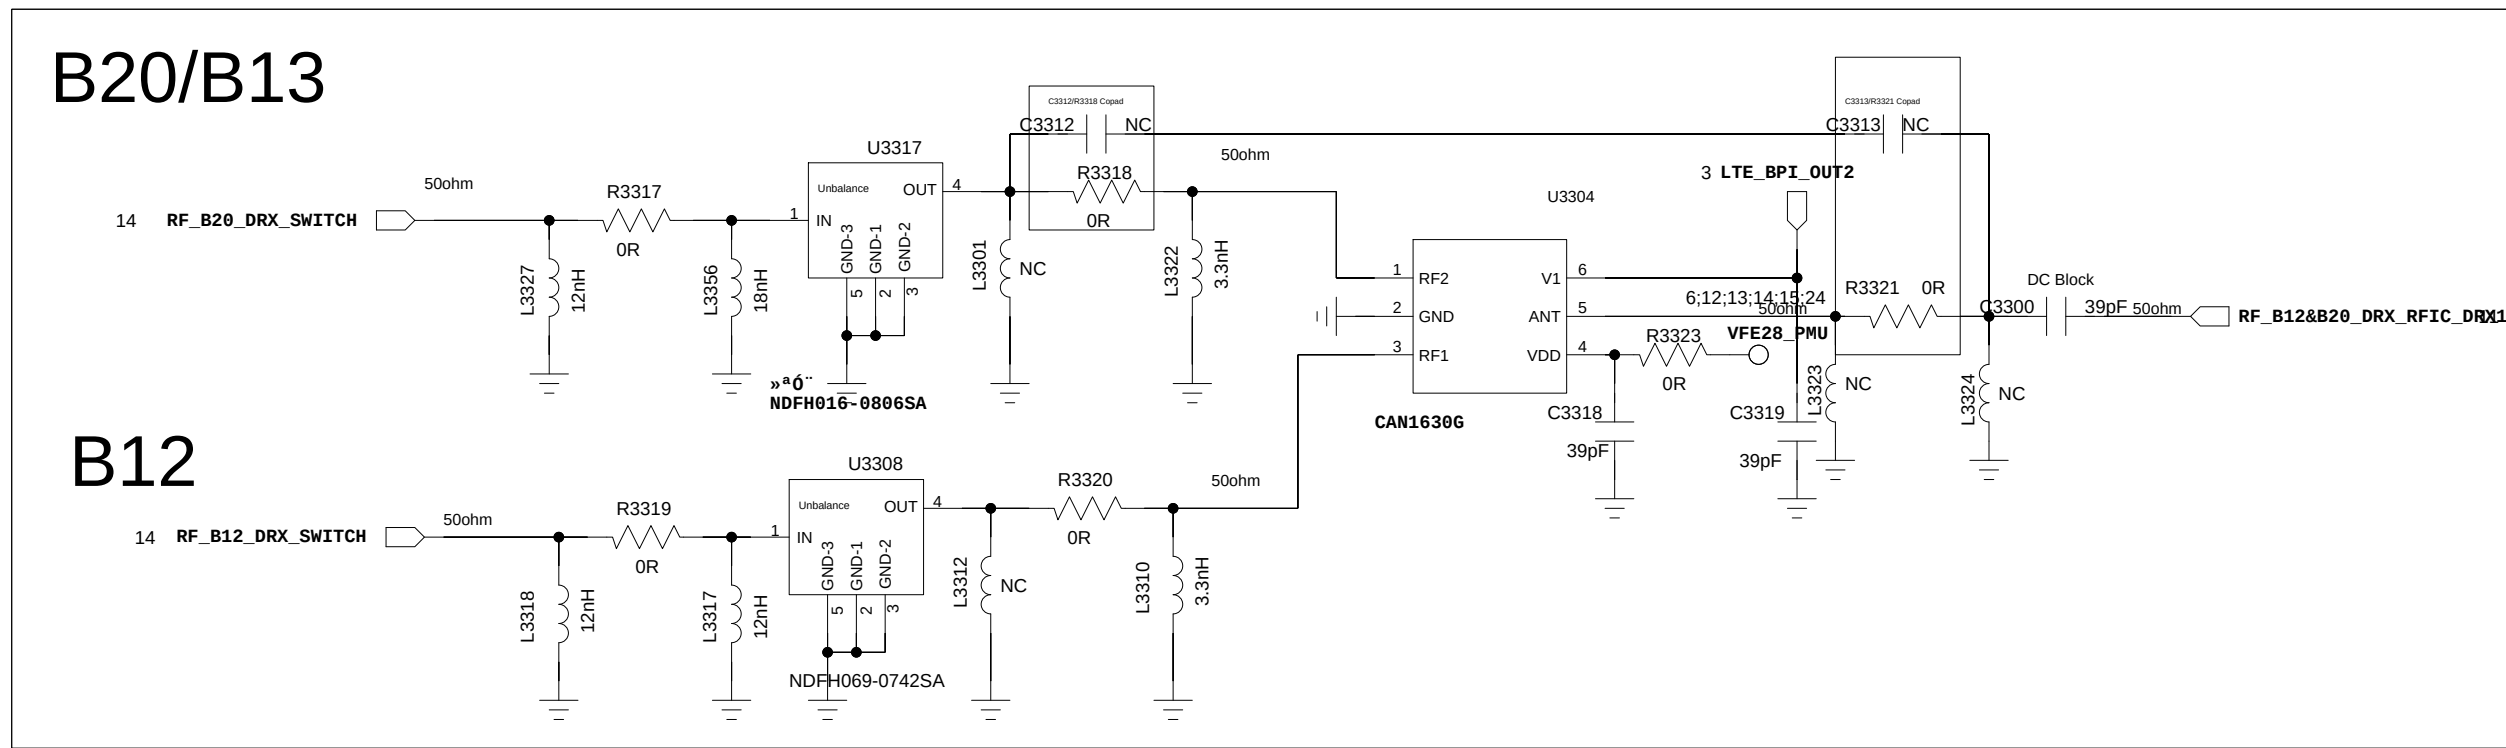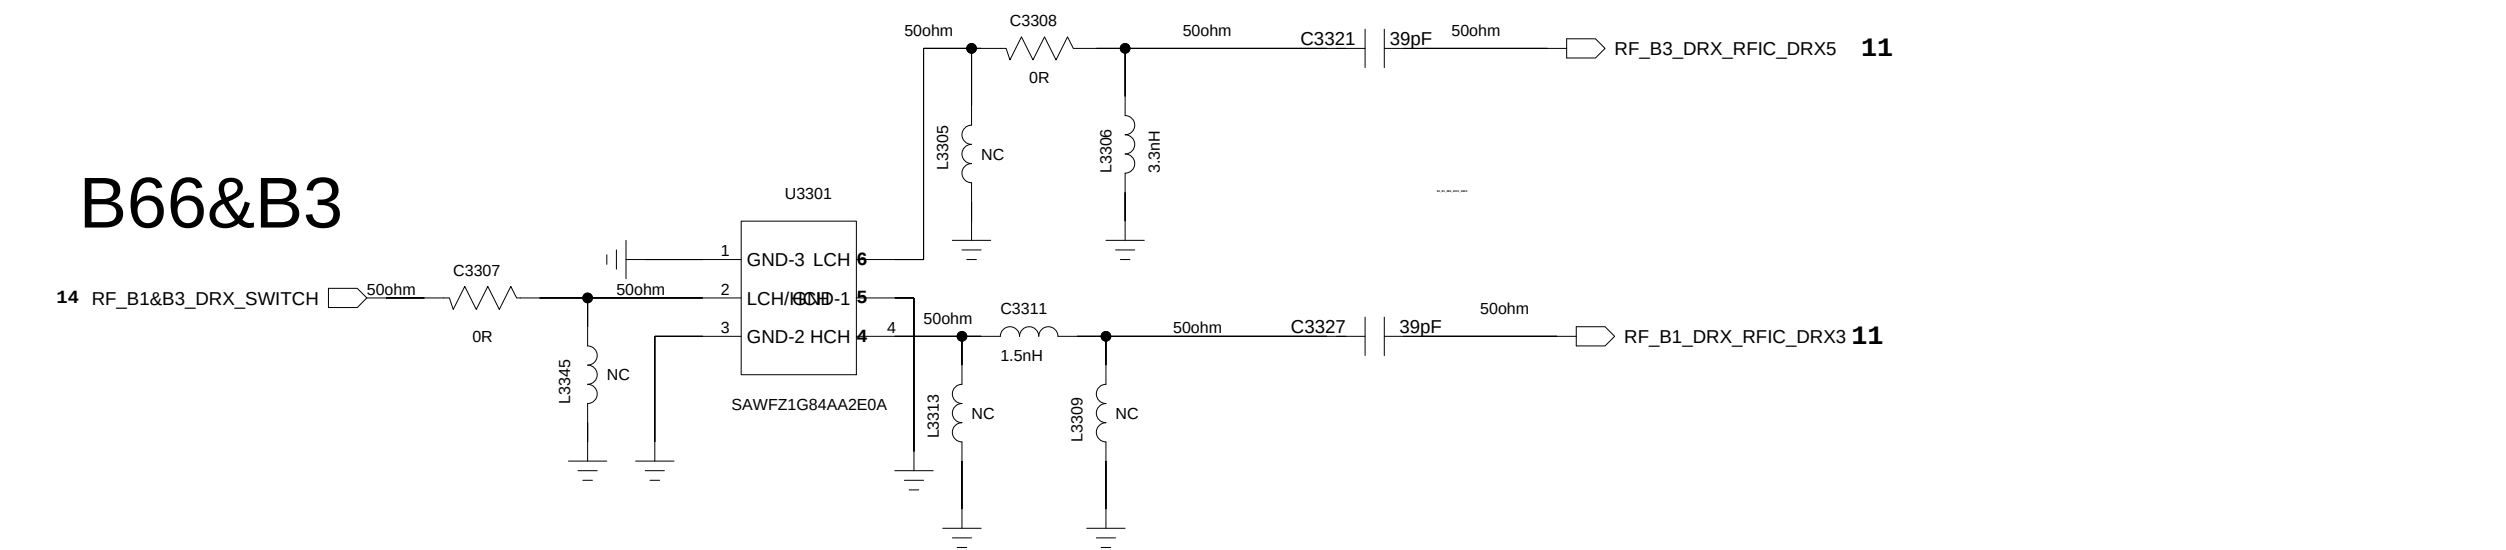

COMPANY: TRANSSION HOLDINGS				MODEL: H6929		Modified Date: 01/12/2022:11:16	
DRAWN		DATED		TITLE: 33_RF_MT6177M_RF_DRX		VERSION:	SHEET: 14 OF 27
CHECKED		DATED	< >	Confidentiality	CONFIDENTIAL		

RF_MT6177M_RF_ANT


REVISION RECORD			
LTR	ECO NO:	APPROVED:	DATE:

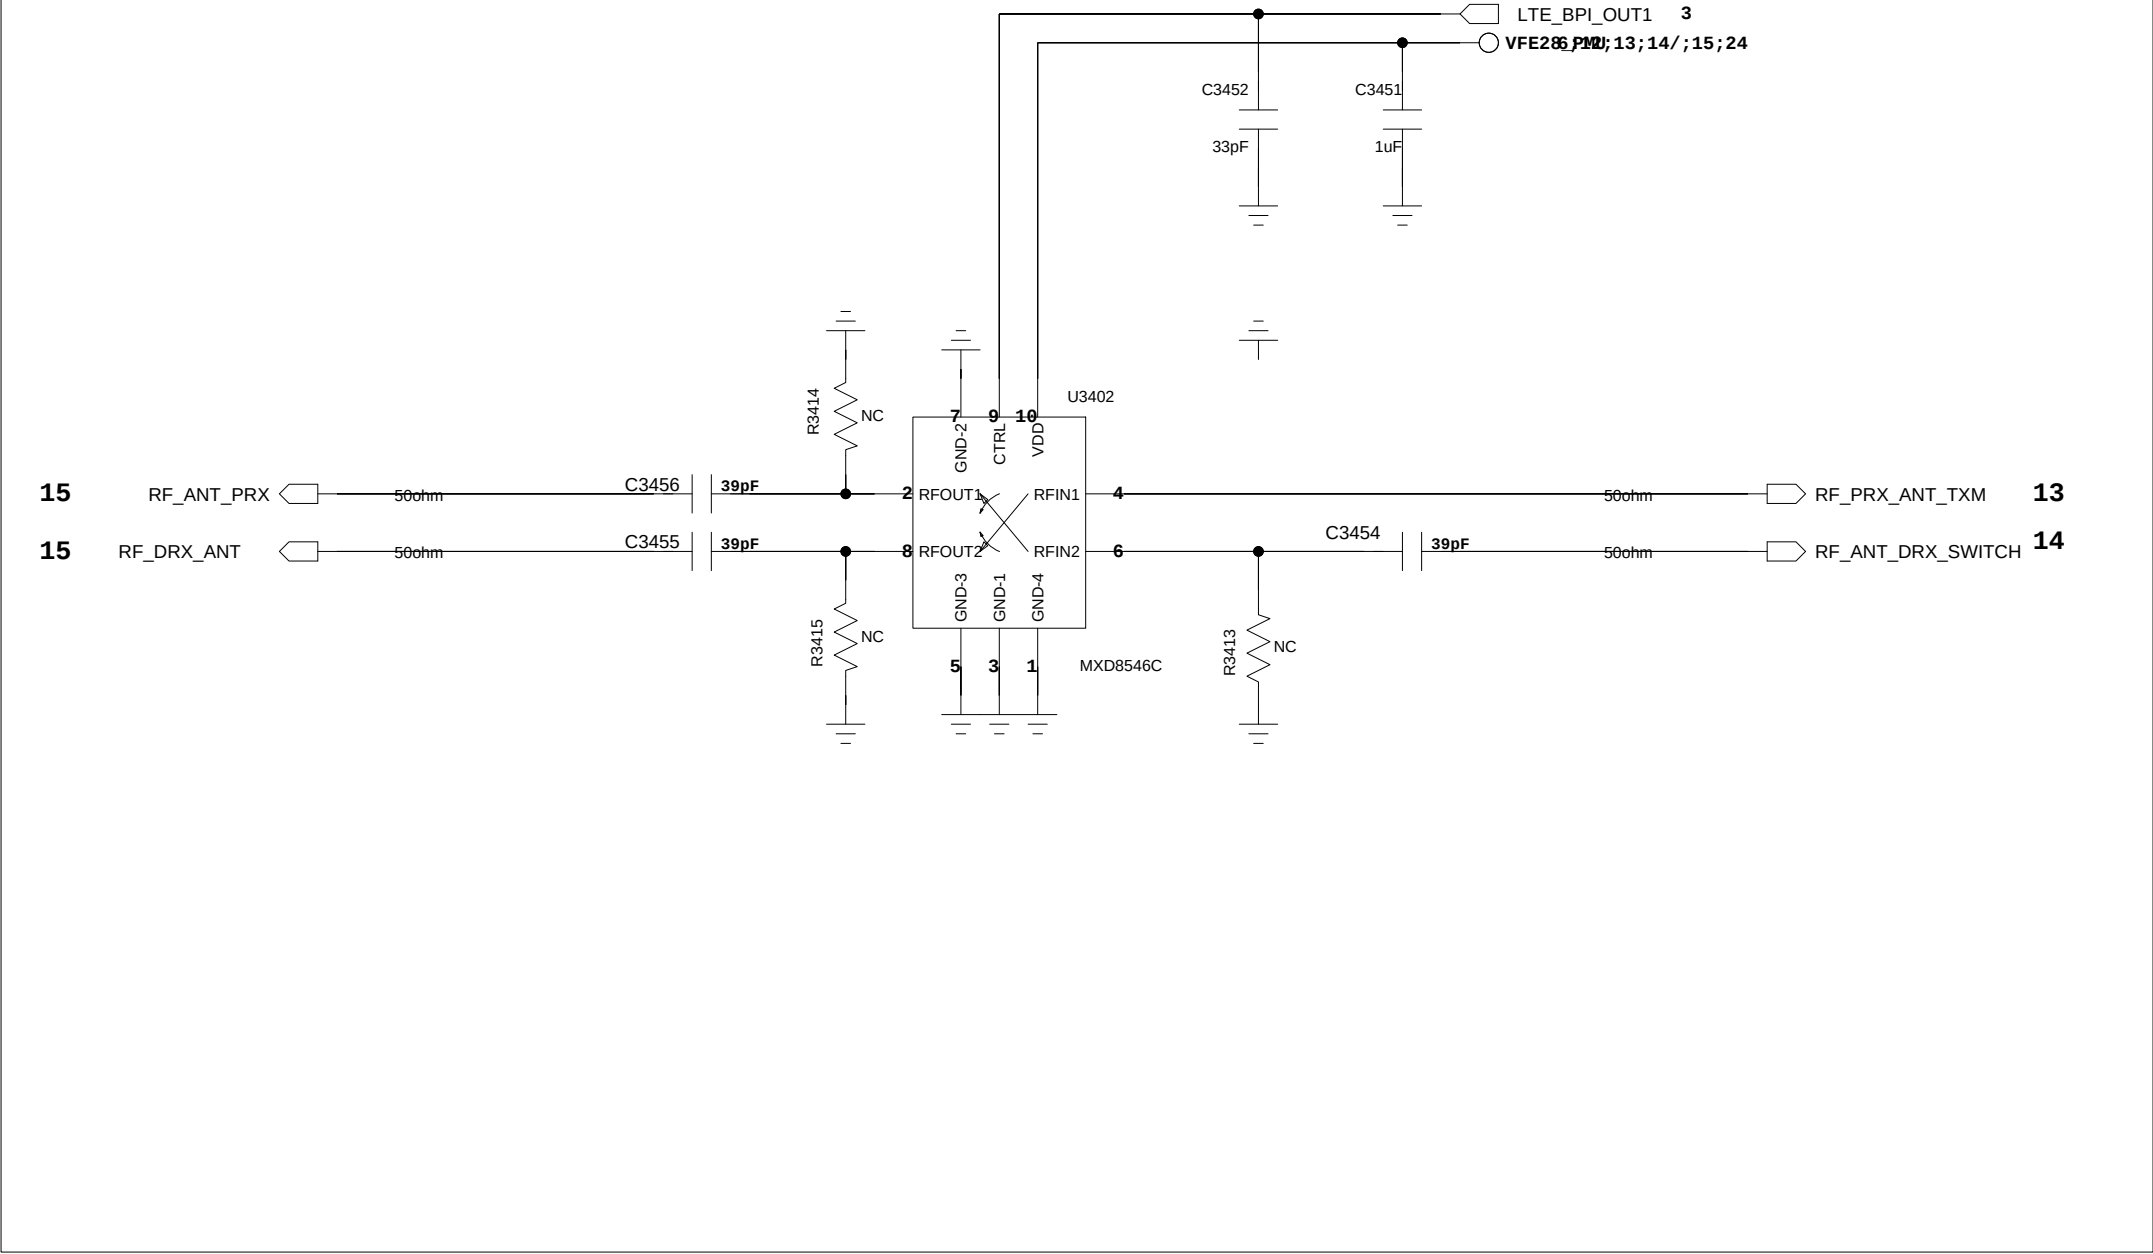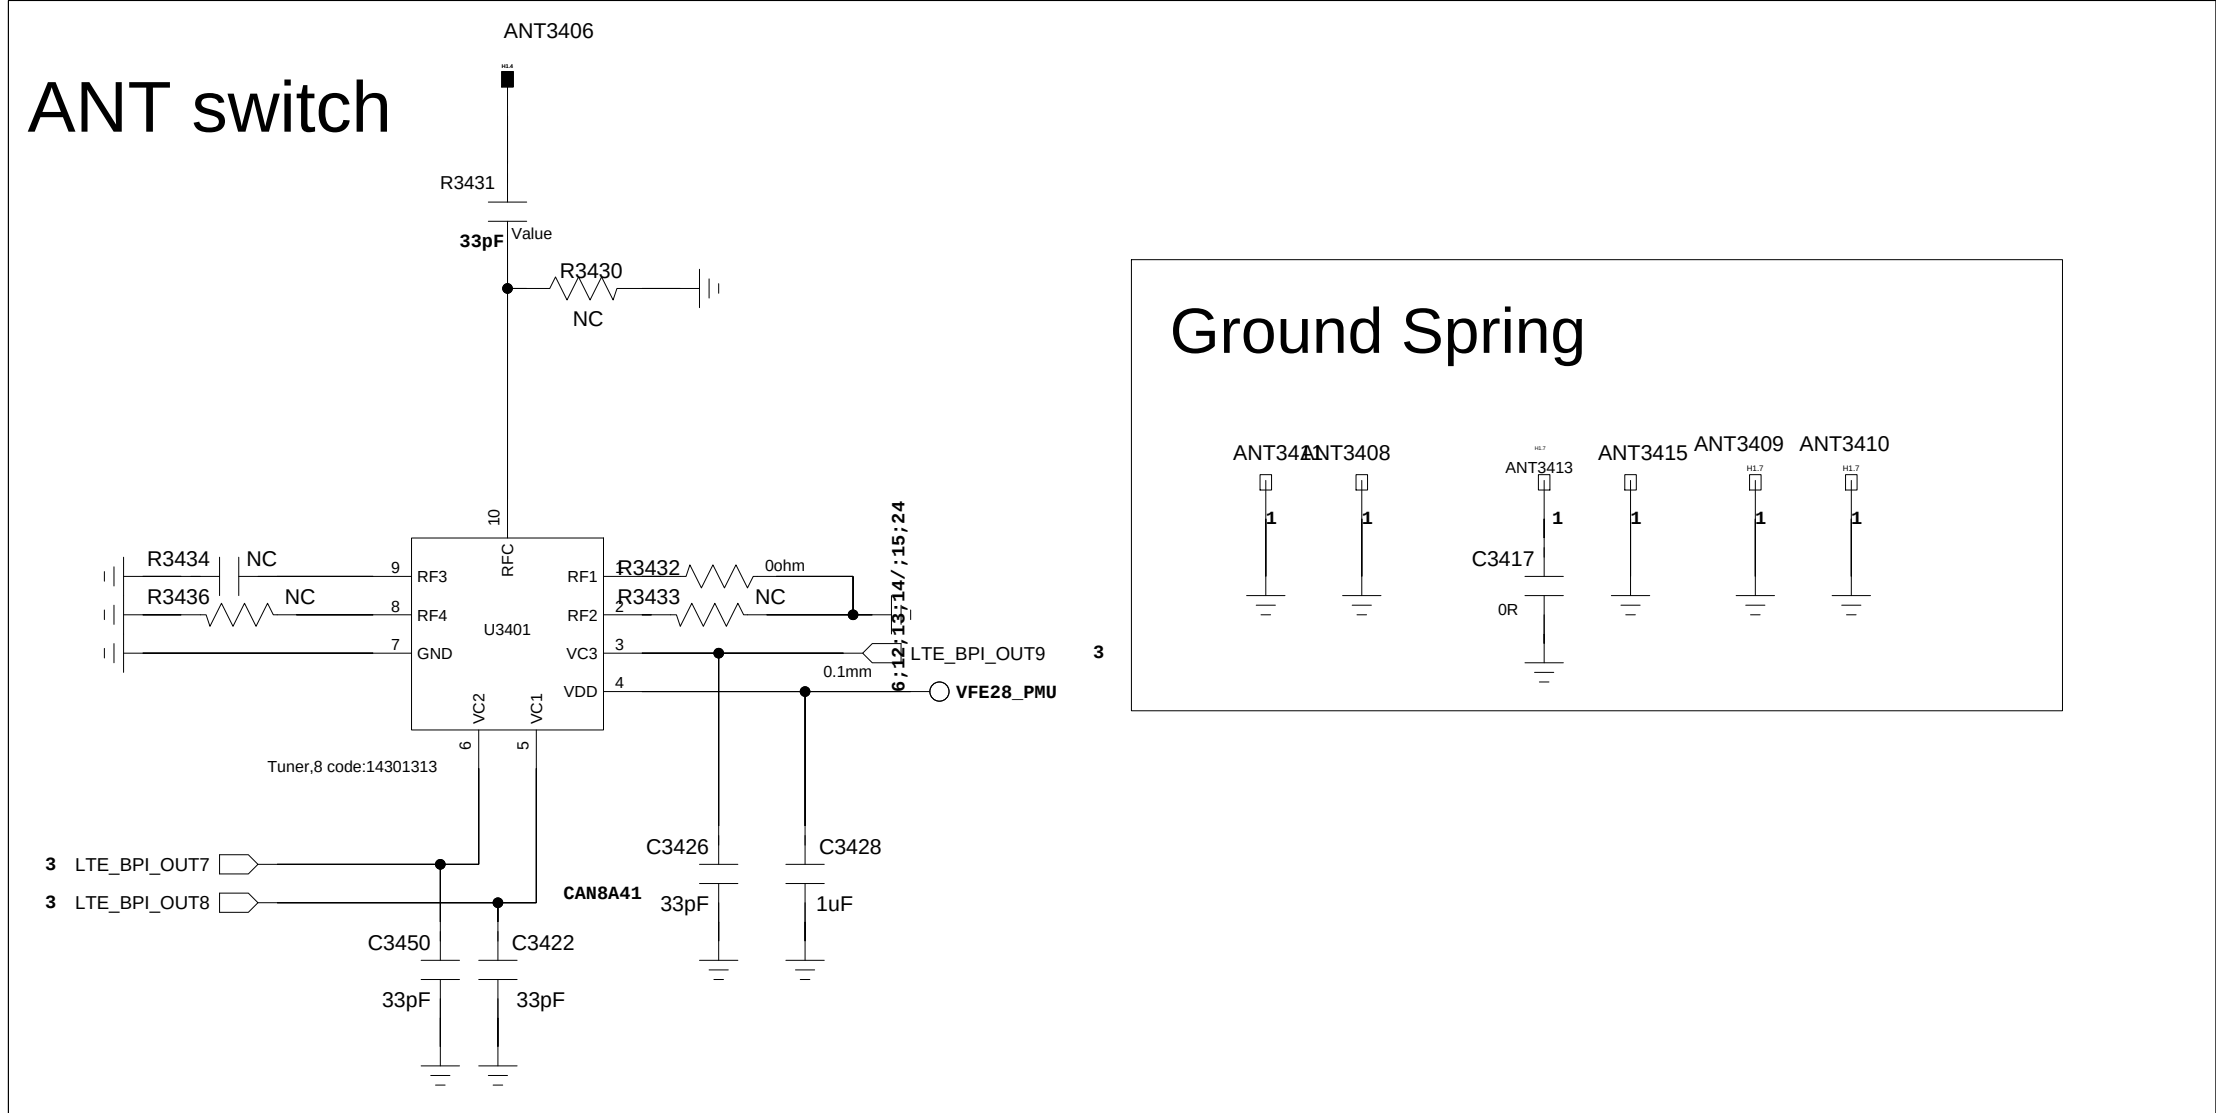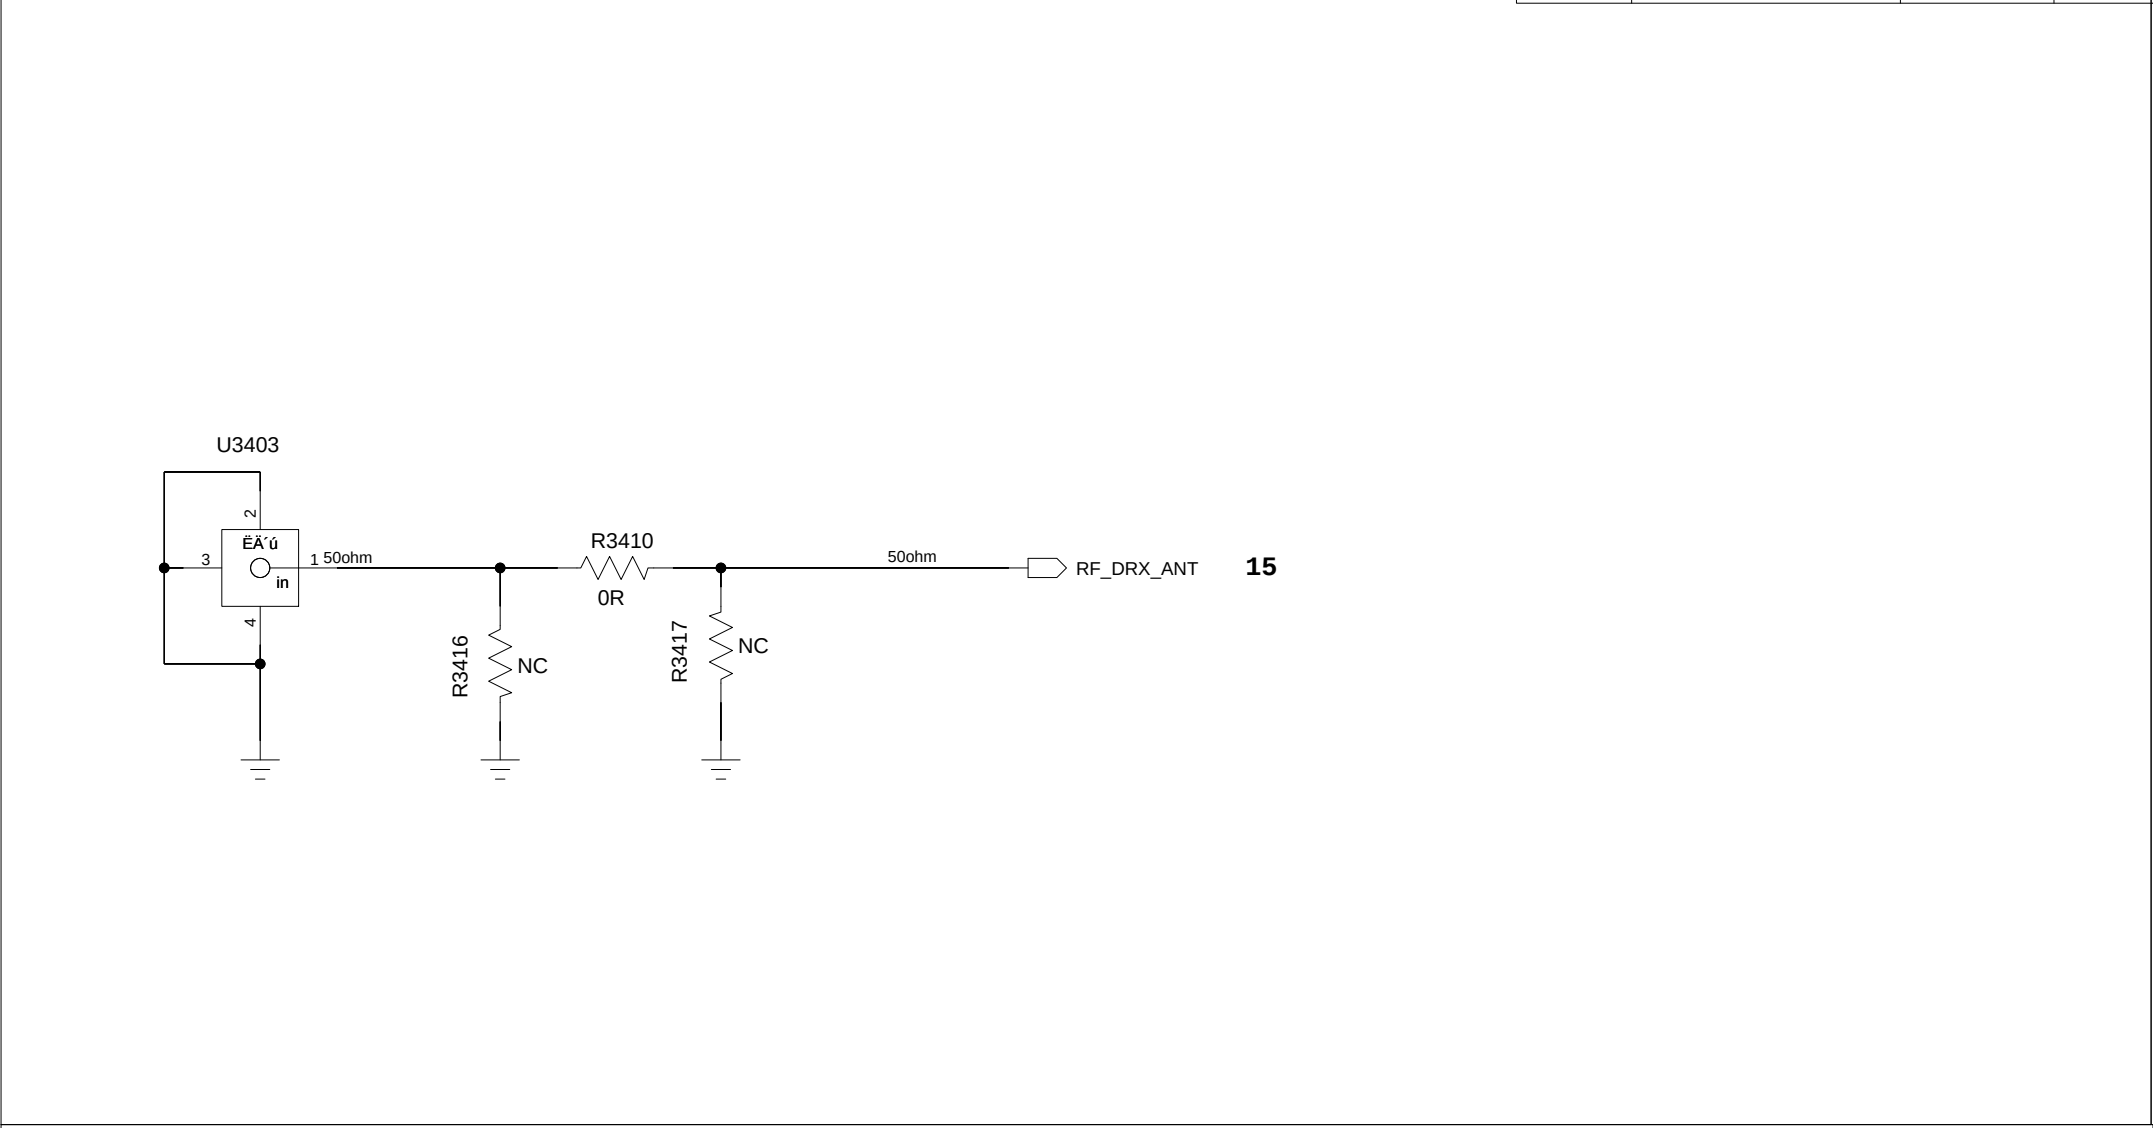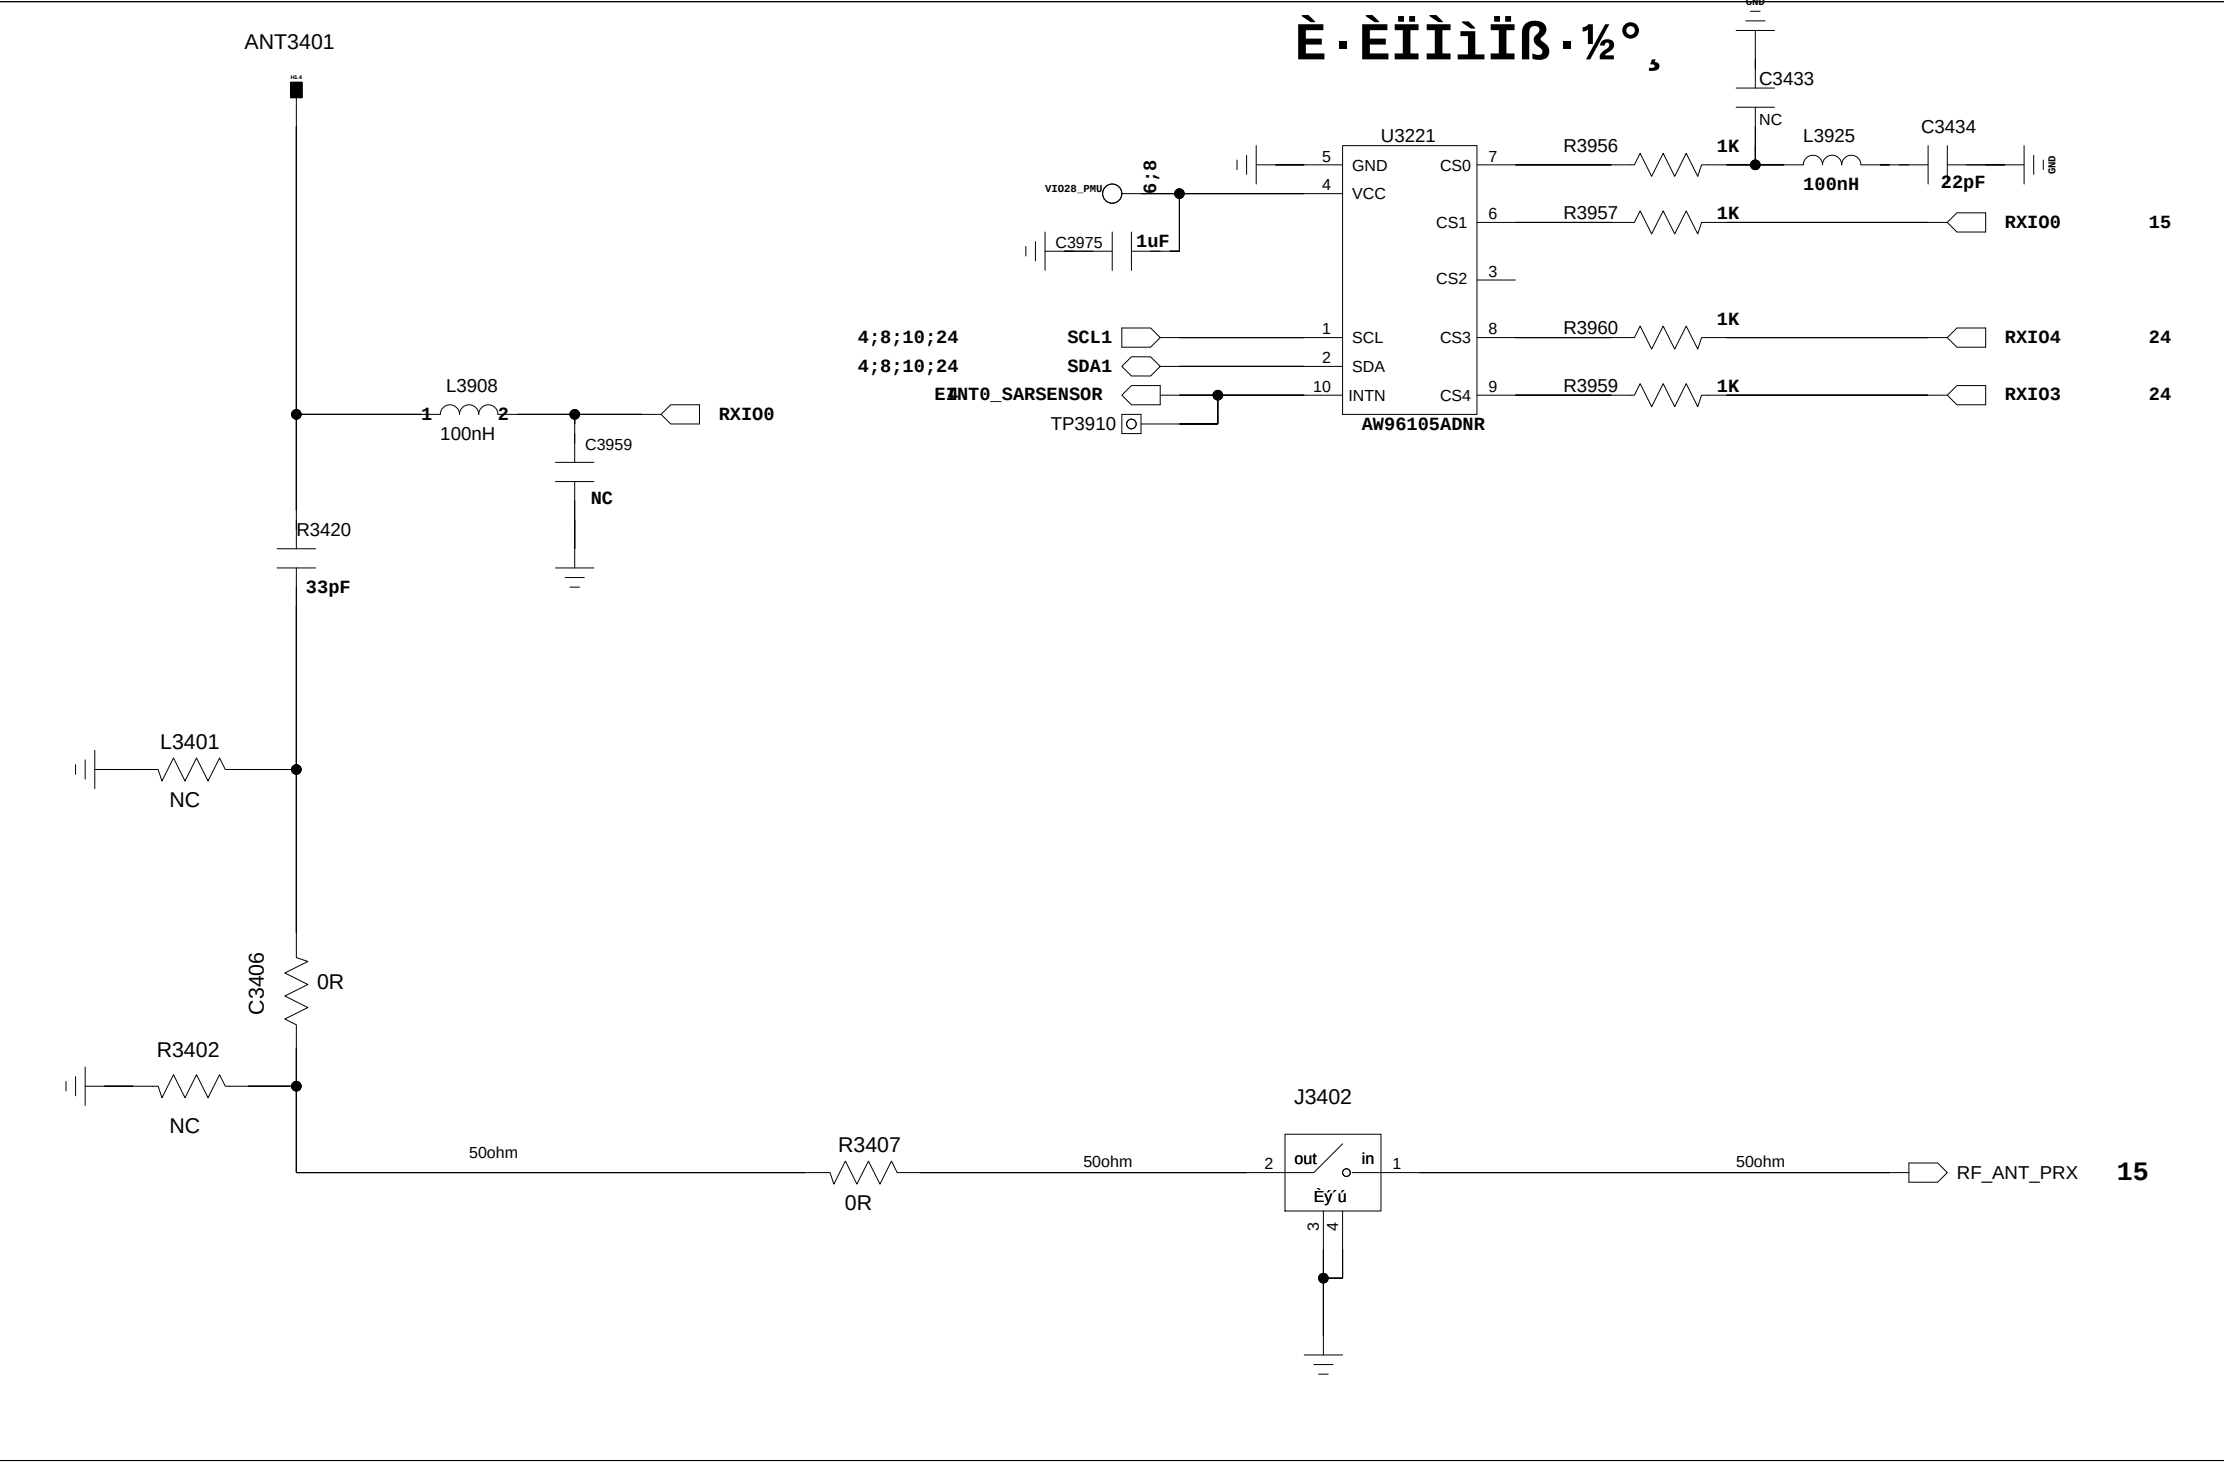

COMPANY: TRANSSION HOLDINGS				MODEL: H6929		Modified Date: 21/10/2022:10:43	
DRAWN		DATED		TITLE: 34_RF_ANT_CONTROLLER		VERSION:	SHEET: 15 OF 27
CHECKED		DATED	< >	Confidentiality	CONFIDENTIAL		


MEMORY_eMCP_LPDDR4X

REVISION RECORD			
LTR	ECO NO:	APPROVED:	DATE:

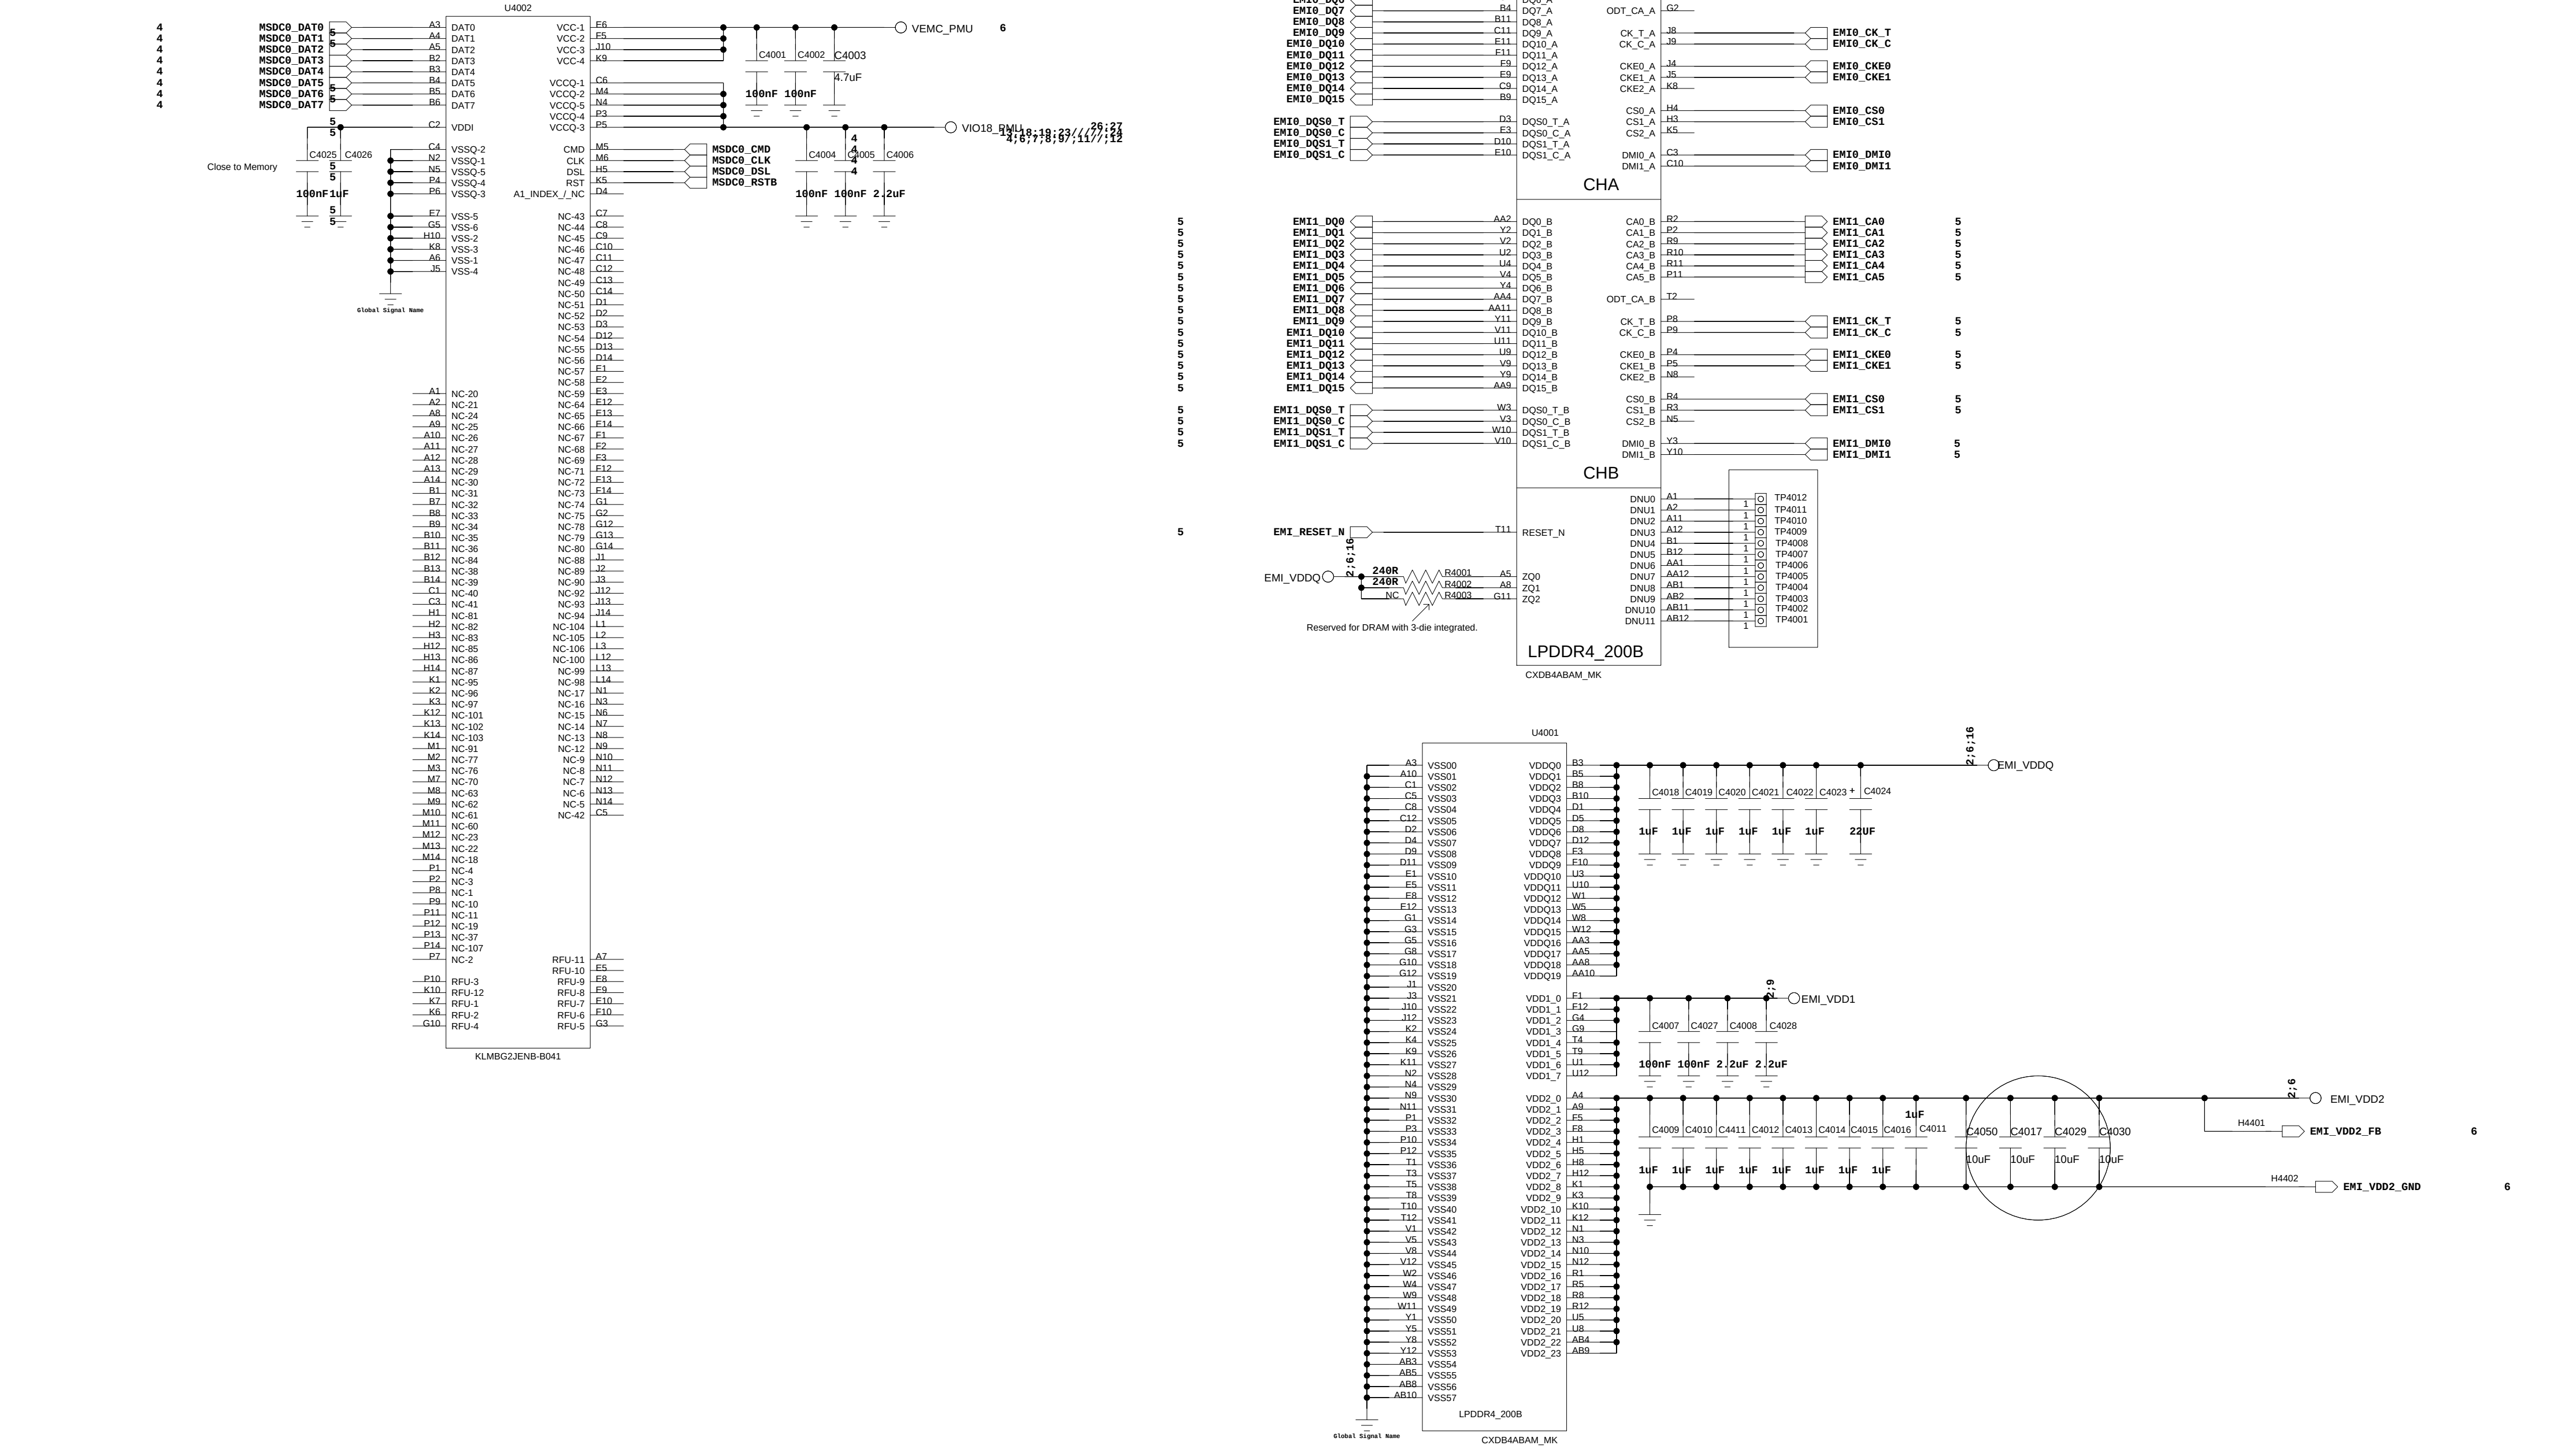


COMPANY: TRANSSION HOLDINGS				MODEL: H6929		Modified Date: 11/10/2022:21:24	
DRAWN		DATED		TITLE: 40_MEMORY_EMCP_LPDDR4X		VERSION:	SHEET: 16 OF 27
CHECKED		DATED	< >	Confidentiality	CONFIDENTIAL		

REVISION RECORD			
LTR	ECO NO:	APPROVED:	DATE:

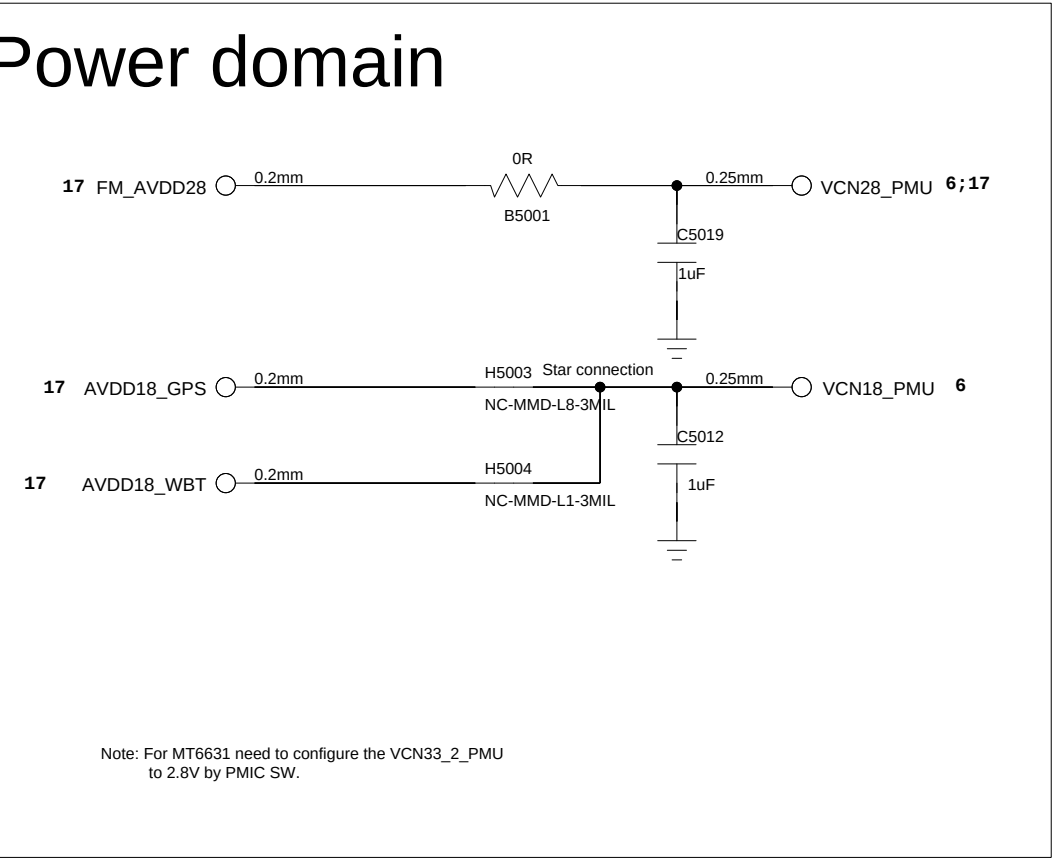


COMPANY: TRANSSION HOLDINGS				MODEL H6929		Modified Date: 21/10/2022:10:55	
DRAWN		DATED		TITLE: 50_CONNECTIVITY_MT6631		VERSION:	SHEET: 17 O27
CHECKED		DATED	< >	Confidentiality	CONFIDENTIAL		

Audio PA
UP SPK


$$^{1/4}\text{æ}\text{È}\acute{\text{Y}}\text{Æ}^{1/2}\grave{\text{I}}\text{''}\hat{\text{E}}\acute{\text{y}}\times\ddot{\text{O}}\text{MIC}$$
[illegible]

Audio PA
DOWN SPK



7

[illegible]

7



COMPANY: TRANSSION HOLDINGS

MODEL:**H6929**

Modified Date: **11/10/2022:21:24**

DRAWN

DATED

CHECKED

DATED

 $\angle$

TITLE: **60_PERI_AUDIO**

Confidentiality

CONFIDENTIAL

VERSION:


SHEET: **18** OF **27**

PERI_LCM_CTP_FP



REVISION RECORD			
LTR	ECO NO:	APPROVED:	DATE:

LCD_CTP_INTERFACE


CTP (NT36525) I2C address: 0X01 (Write:0x02, Read:0x03)

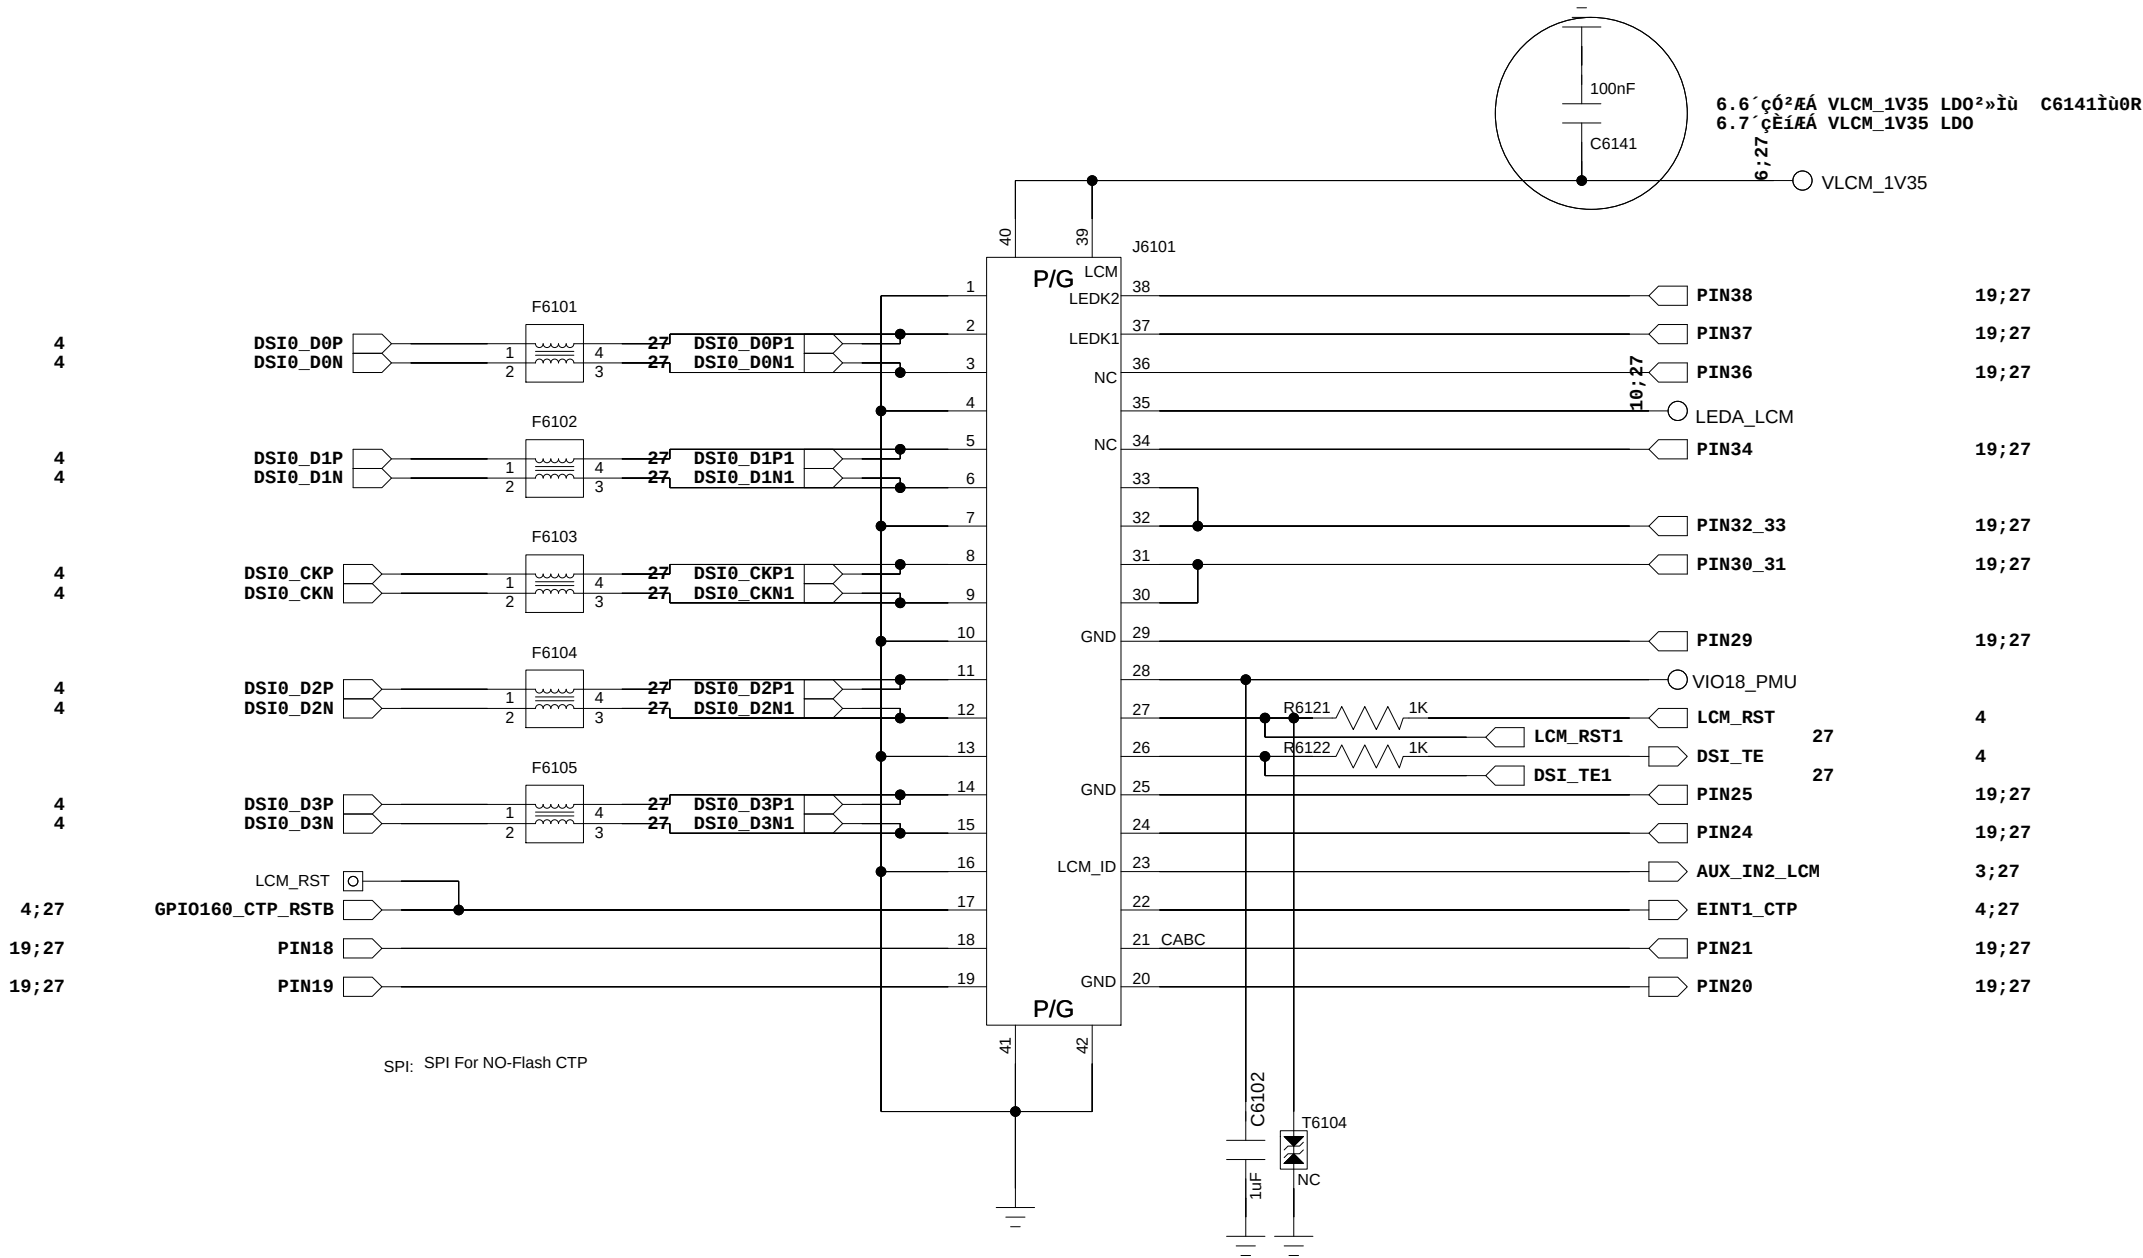

FINGER PRINT

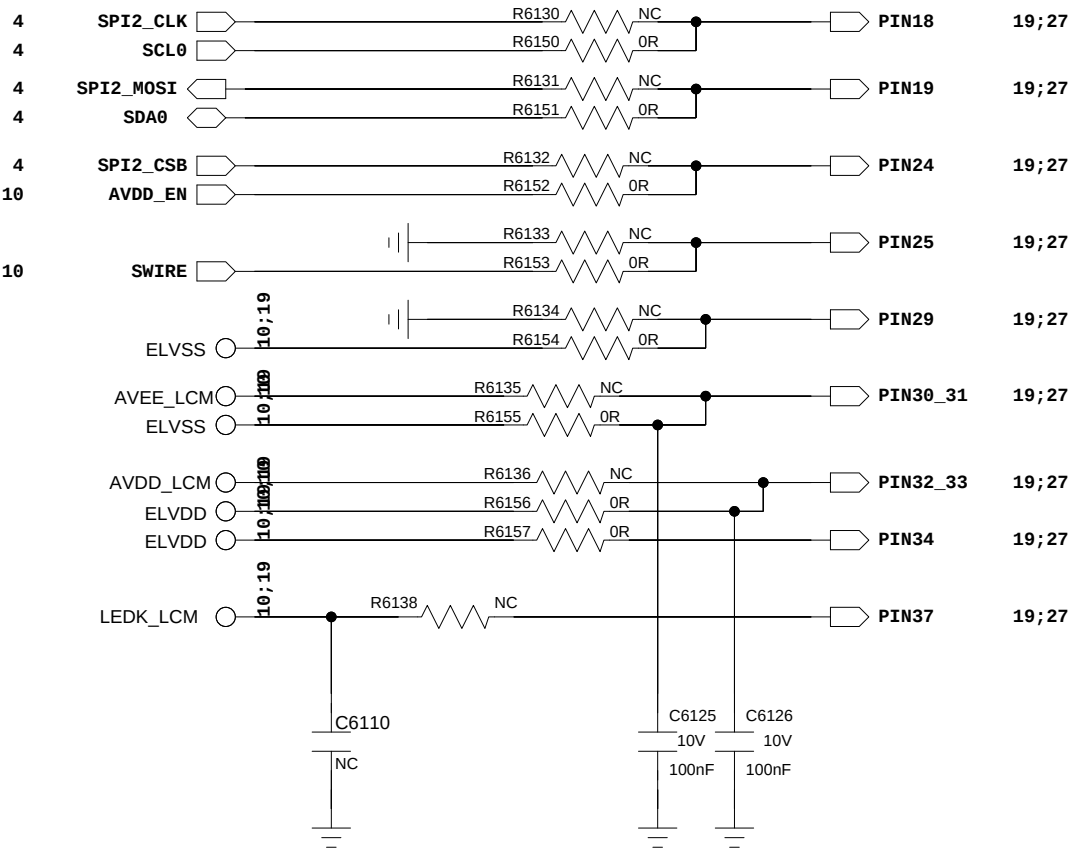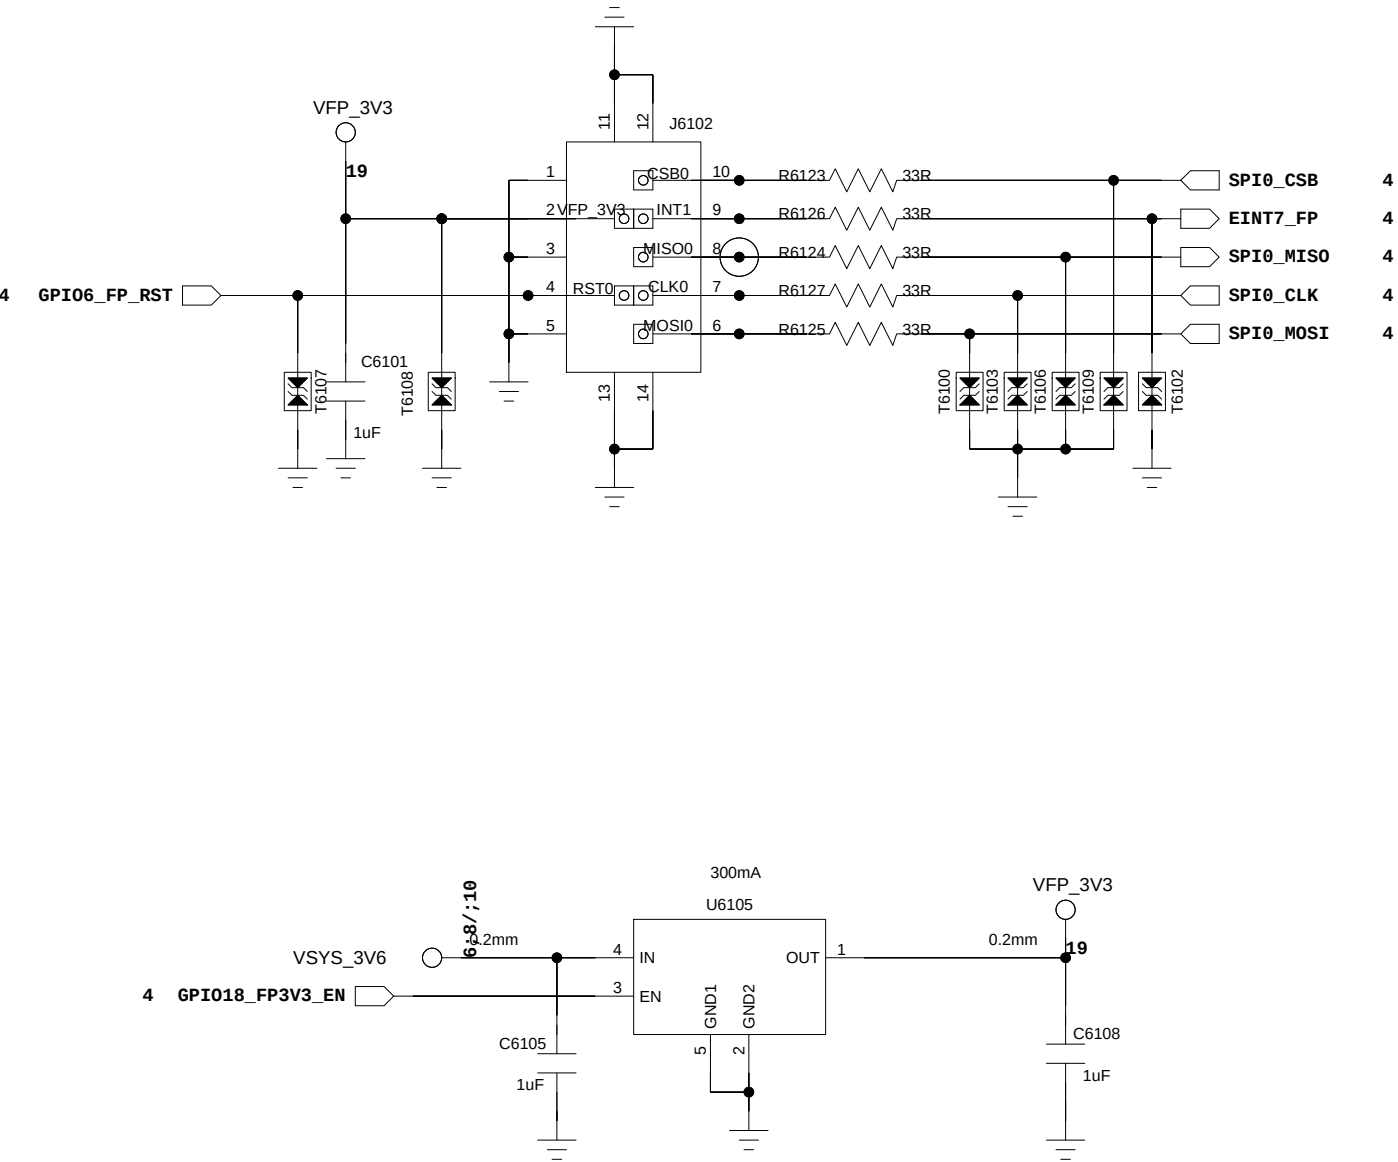

6.66 OLED SMT	6.95 TFT SMT
R6150	R6130
R6151	R6131
R6152	R6132
R6153	R6133
R6154	R6134
R6155	R6135
R6156	R6136
R6157	R6137
R6158	R6138
R6159	R6139
R6160	R6140
R6161	R6141

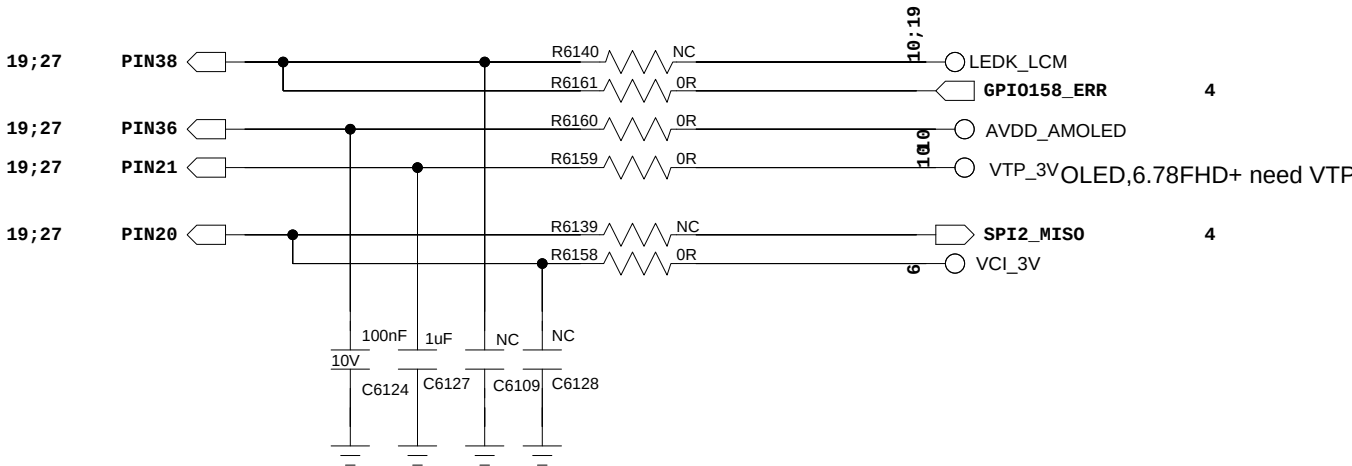

COMPANY: TRANSSION HOLDINGS

MODEL:H6929

Modified Date: 11/10/2022:21:24

DRAWN

DATED

TITLE: 61_PERI_LCM_CTP_FP

VERSION:

SHEET: 19 OF 27

CHECKED

DATED


< >

Confidentiality


CONFIDENTIAL

PERI_CAMERA_I


CAM I 16M/50M)

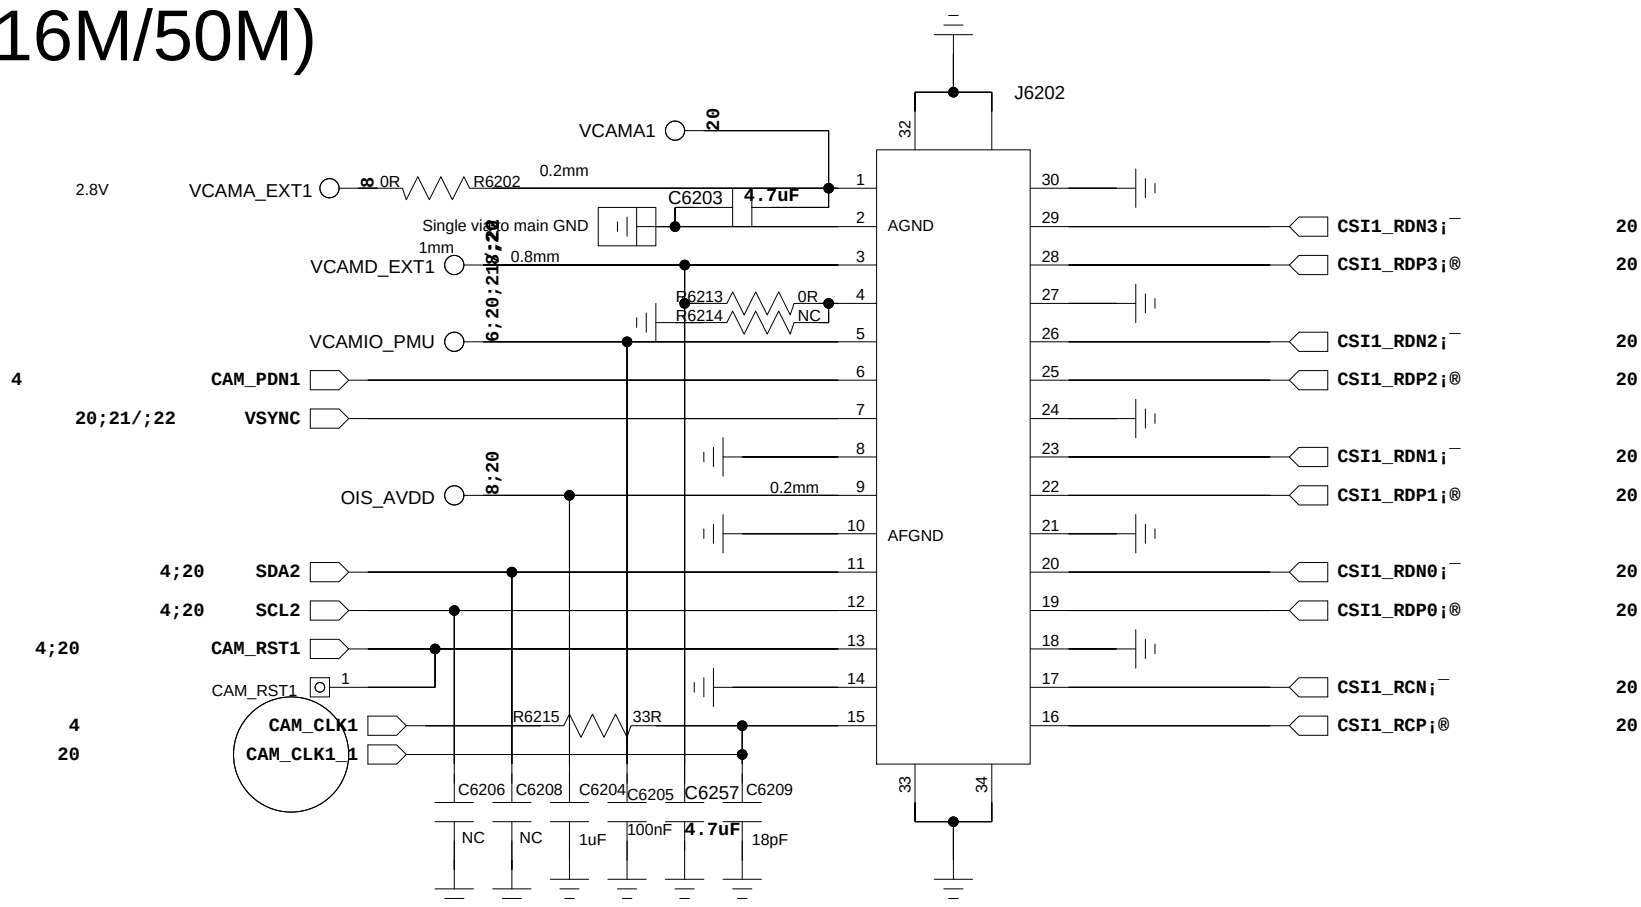

	AVDD	DVDD	IOVDD	AFVDD	4Pin	I2C addr
16M AF-17201673 16M AF-17201693 OV16B10-GASA	2.8V 52mA	1.05V 200mA	1.8V 5mA	2.8V 100mA	GND	Sensor:0x20(W)/0x21(R) VCM:0x18(W)/0x19(R) EEPROM:0xA0(W)/0xA1(R)
50M AF-17201711 50M AF-17201715 SSKJNLSQ03-FGX9	2.8V 67.7mA	1.05V 260.7mA	1.8V 4mA	2.8V 100mA	DVDD	Sensor:0x20(W)/0x21(R) VCM:0x18(W)/0x19(R) EEPROM:0xA0(W)/0xA1(R)
50M AF-17201826 HI-5021Q	2.8V 78mA	1.1V 598mA	1.8V 31mA	2.8V 103mA	DVDD	Sensor:0x40(W)/0x41(R) VCM:0x18(W)/0x19(R) EEPROM:0xA0(W)/0xA1(R)

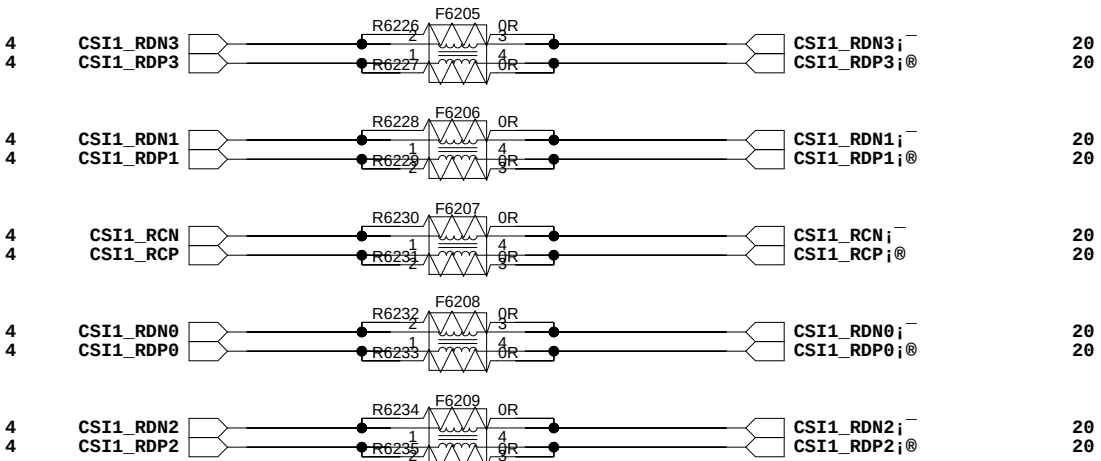

(CAM II 64M)

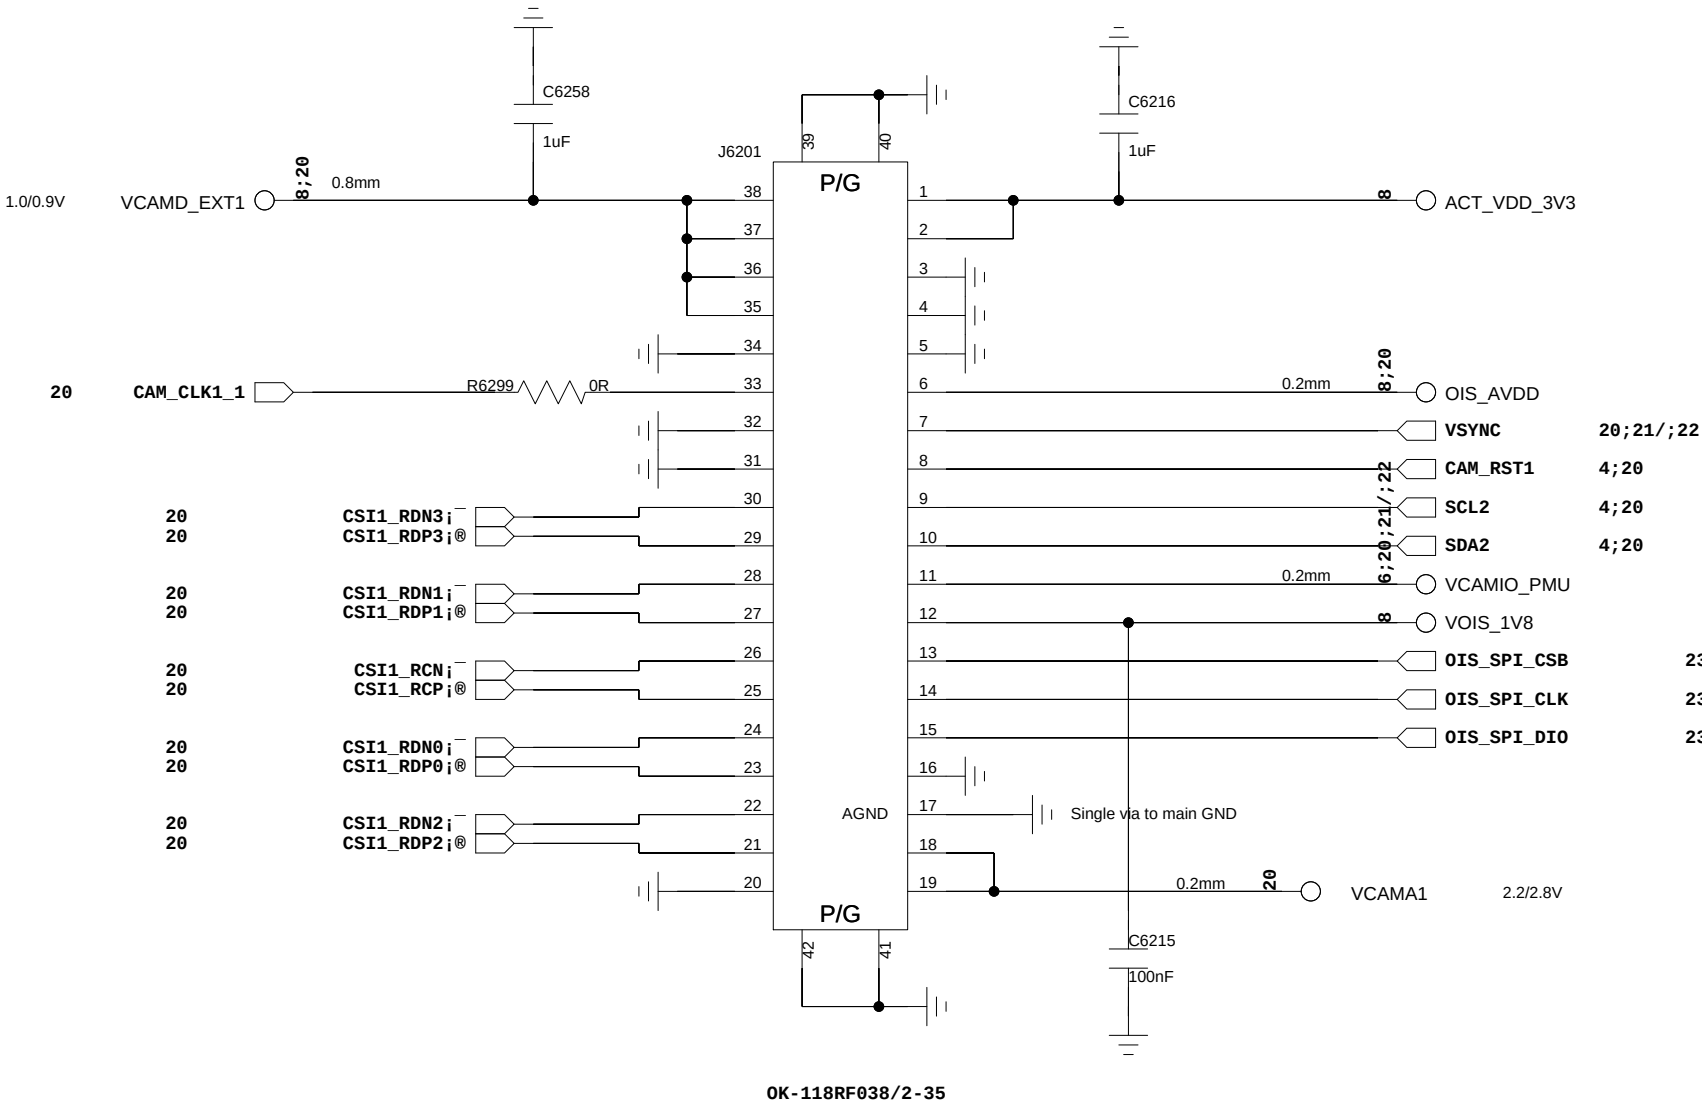

	AVDD	DVDD	IOVDD	AFVDD	ACT-VDD	I2C addr
64M 17201734 SSKGWBSW03-FGX9	2.8V 163.8mA	0.9V 750mA	1.8V 18.55mA	2.8V 105mA		Sensor:0x20(W)/0x21(R) VCM:0x18(W)/0x19(R) EEPROM:0xA0(W)/0xA1(R)
64M OIS SSKGWBSW03-FGX9	2.8V 164mA	0.9V 750mA	1.8V 17.6mA	3.3V 30mA	3.3V 300mA	Sensor:0x20(W)/0x21(R) VCM:0xE4(W)/0xE5(R) EEPROM:0xA0(W)/0xA1(R)

COMPANY: TRANSSION HOLDINGS

MODEL:H6929

Modified Date: 13/10/2022:20:32

DRAWN

DATED

TITLE: 62_PERI_CAMERA_I

VERSION:

SHEET: 20 OF 27

CHECKED


DATED

< >


Confidentiality

CONFIDENTIAL

CAM III (2M)

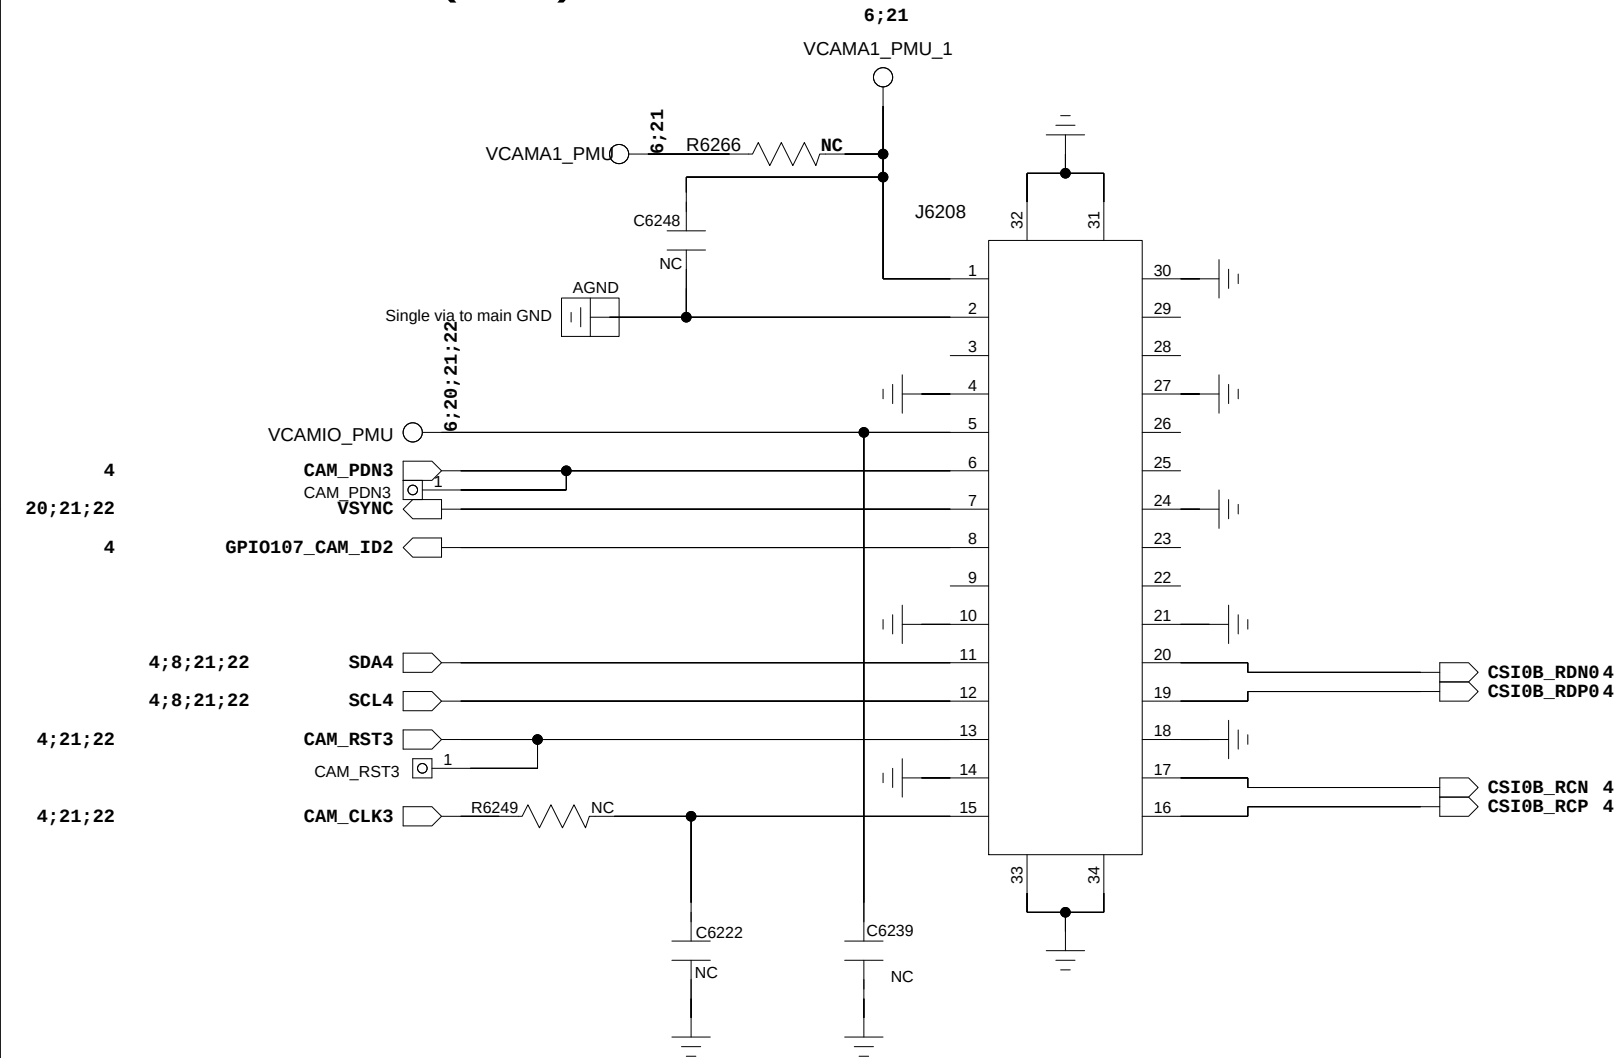

CAM IV (2M)

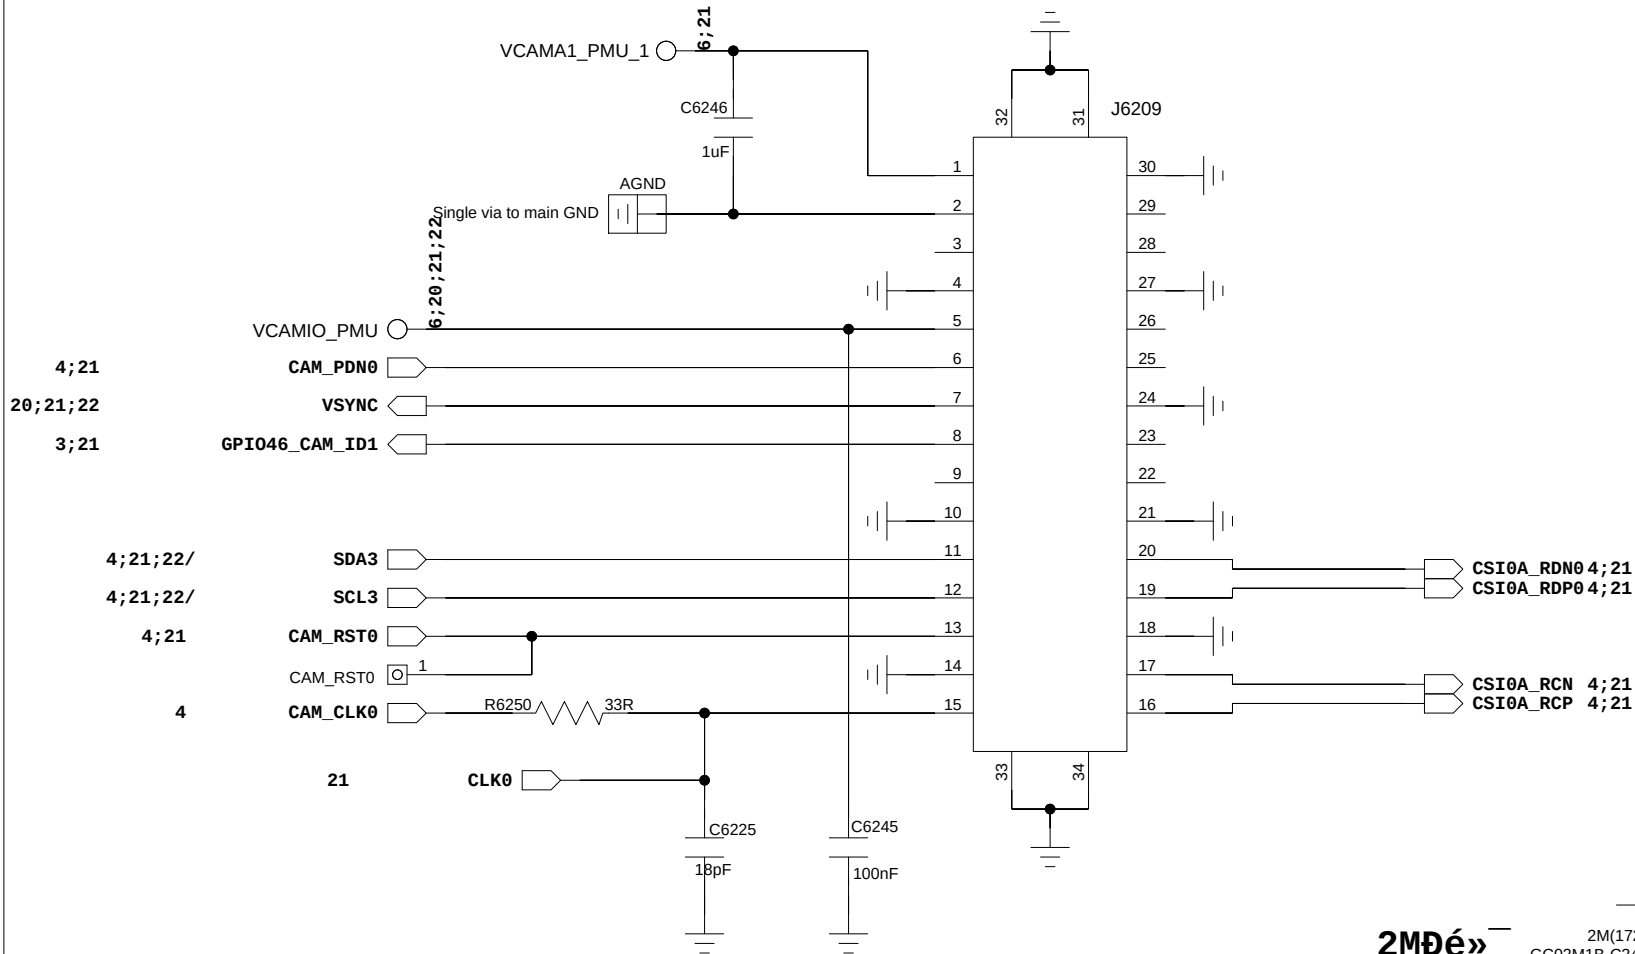


REVISION RECORD				
LTR	ECO NO:	APPROVED:	DATE:	

	AVDD	DVDD	IOVDD	I2C addr
2M(17201755) GC02M1B-C24Y0 (CSP)	2.8V,40mA	/	1.8V,70mA	sensor:0x20(W)/0x21(R)
2M(17201677) GC02M1B-C24Y0 (CSP)	2.8V,40mA	/	1.8V,70mA	sensor:0x20(W)/0x21(R)
2M(17201678) OV02B10	2.8V,33mA	/	1.8V,34mA	sensor:0x78(W)/0x79(R)

CAM VI (QVGA)


QVGA

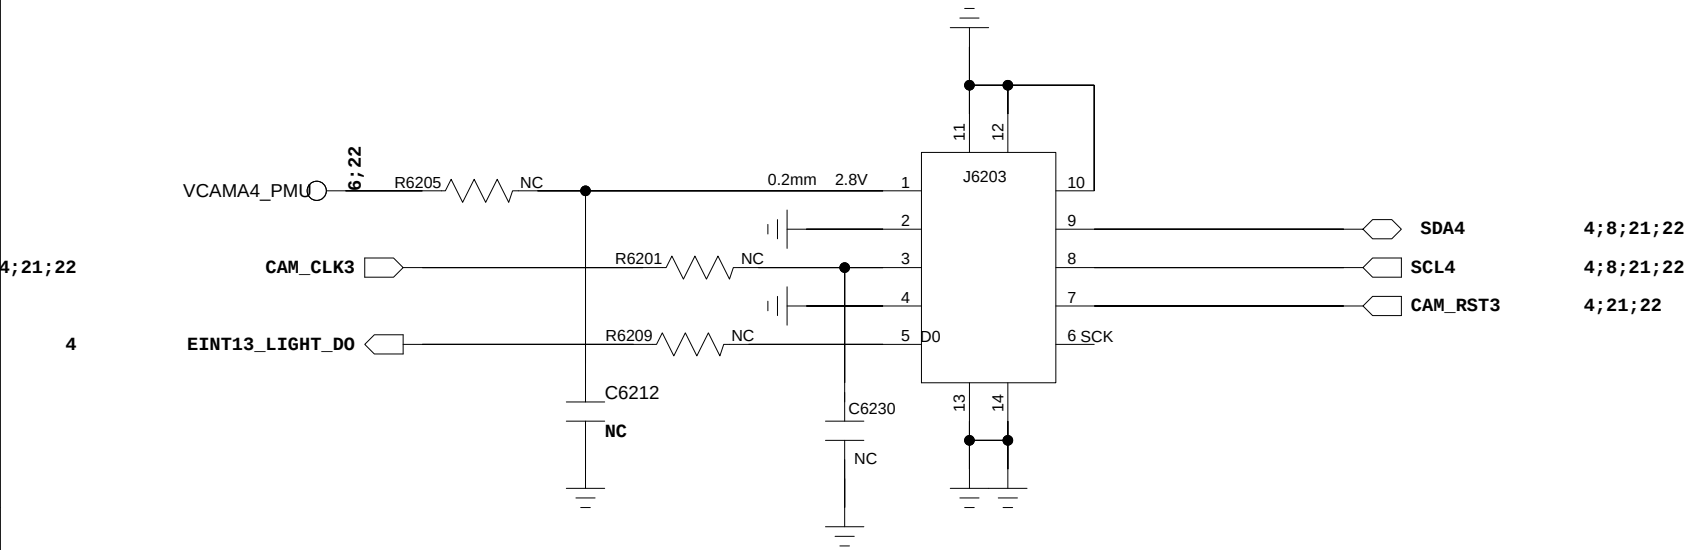

QVGA

17201729	1aA0		
17201740	GC6133(CSP)	sensor:0x80(W)/0x81(R)	2.8V,30mA
17201741	GC6133(CSP)	sensor:0x80(W)/0x81(R)	2.8V,30mA
17201742	GC6133(CSP)	sensor:0x80(W)/0x81(R)	2.8V,30mA
17201743	1aA0		

CAM V (2M)

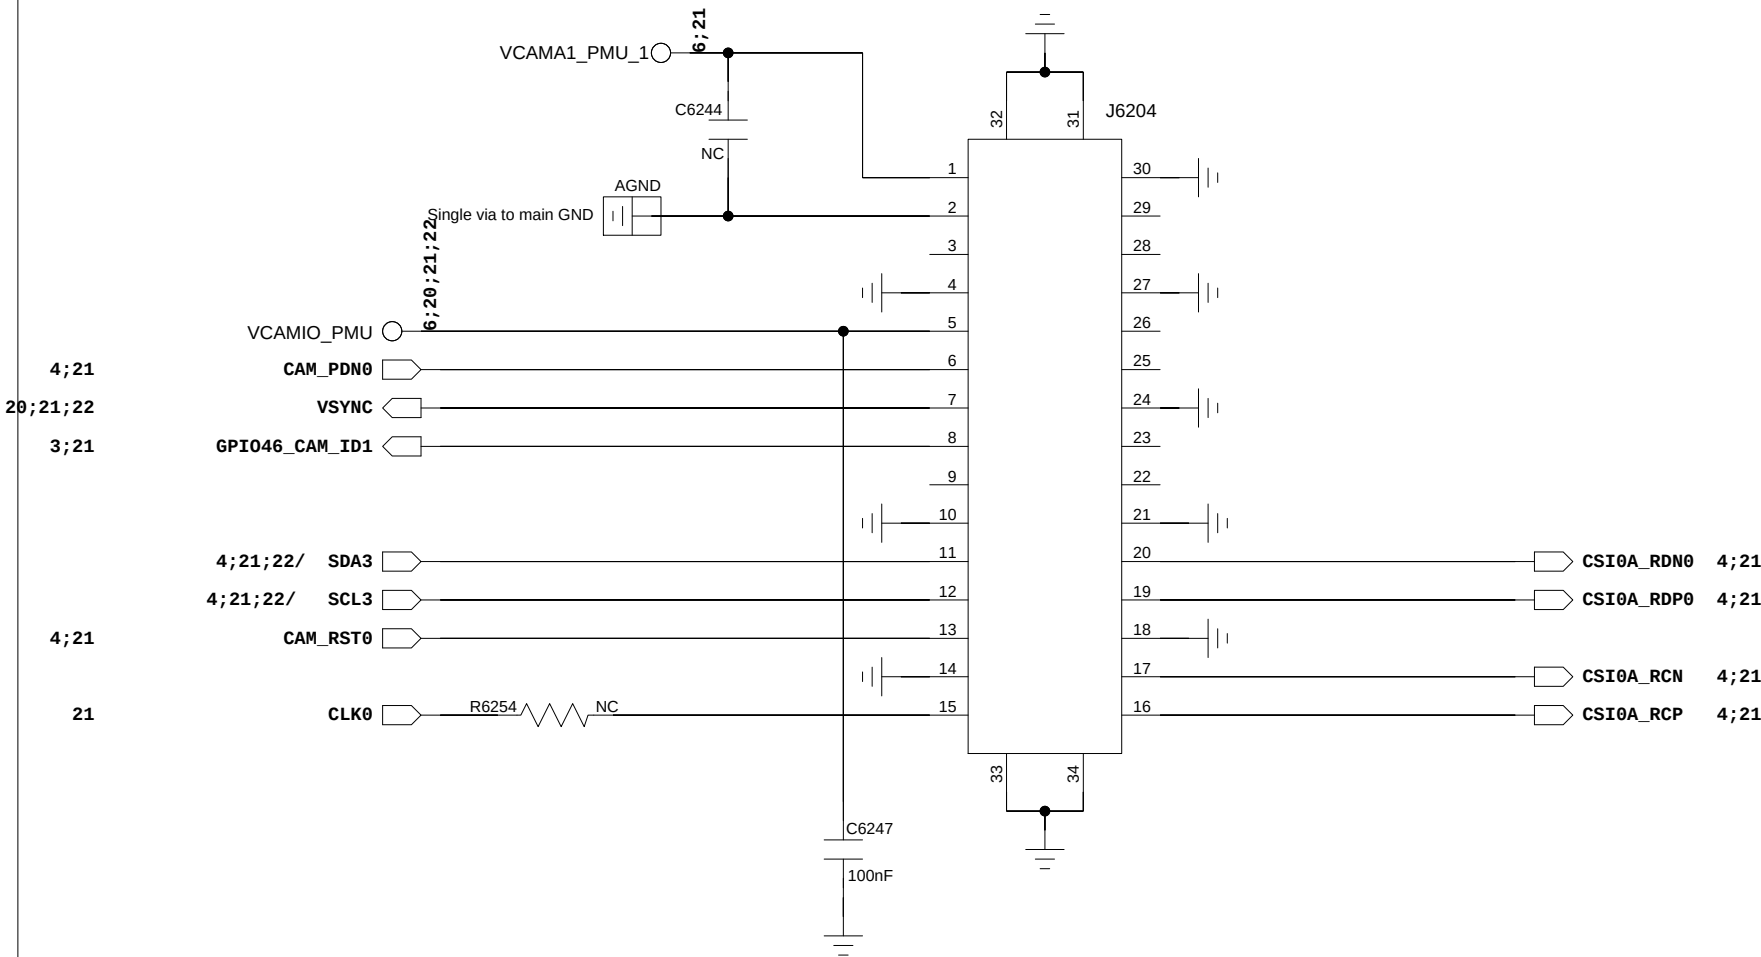


COMPANY: TRANSSION HOLDINGS				MODEL: H6929		Modified Date: 25/10/2022:19:42	
DRAWN		DATED		TITLE: 62_PERI_CAMERA_II		VERSION:	SHEET: 21 OF 27
CHECKED		DATED	< >	Confidentiality	CONFIDENTIAL		

PERI_CAMERA_III


FRONT MAIN CAMERA (8M/16M/32M)

REVISION RECORD			
LTR	ECO NO:	APPROVED:	DATE:

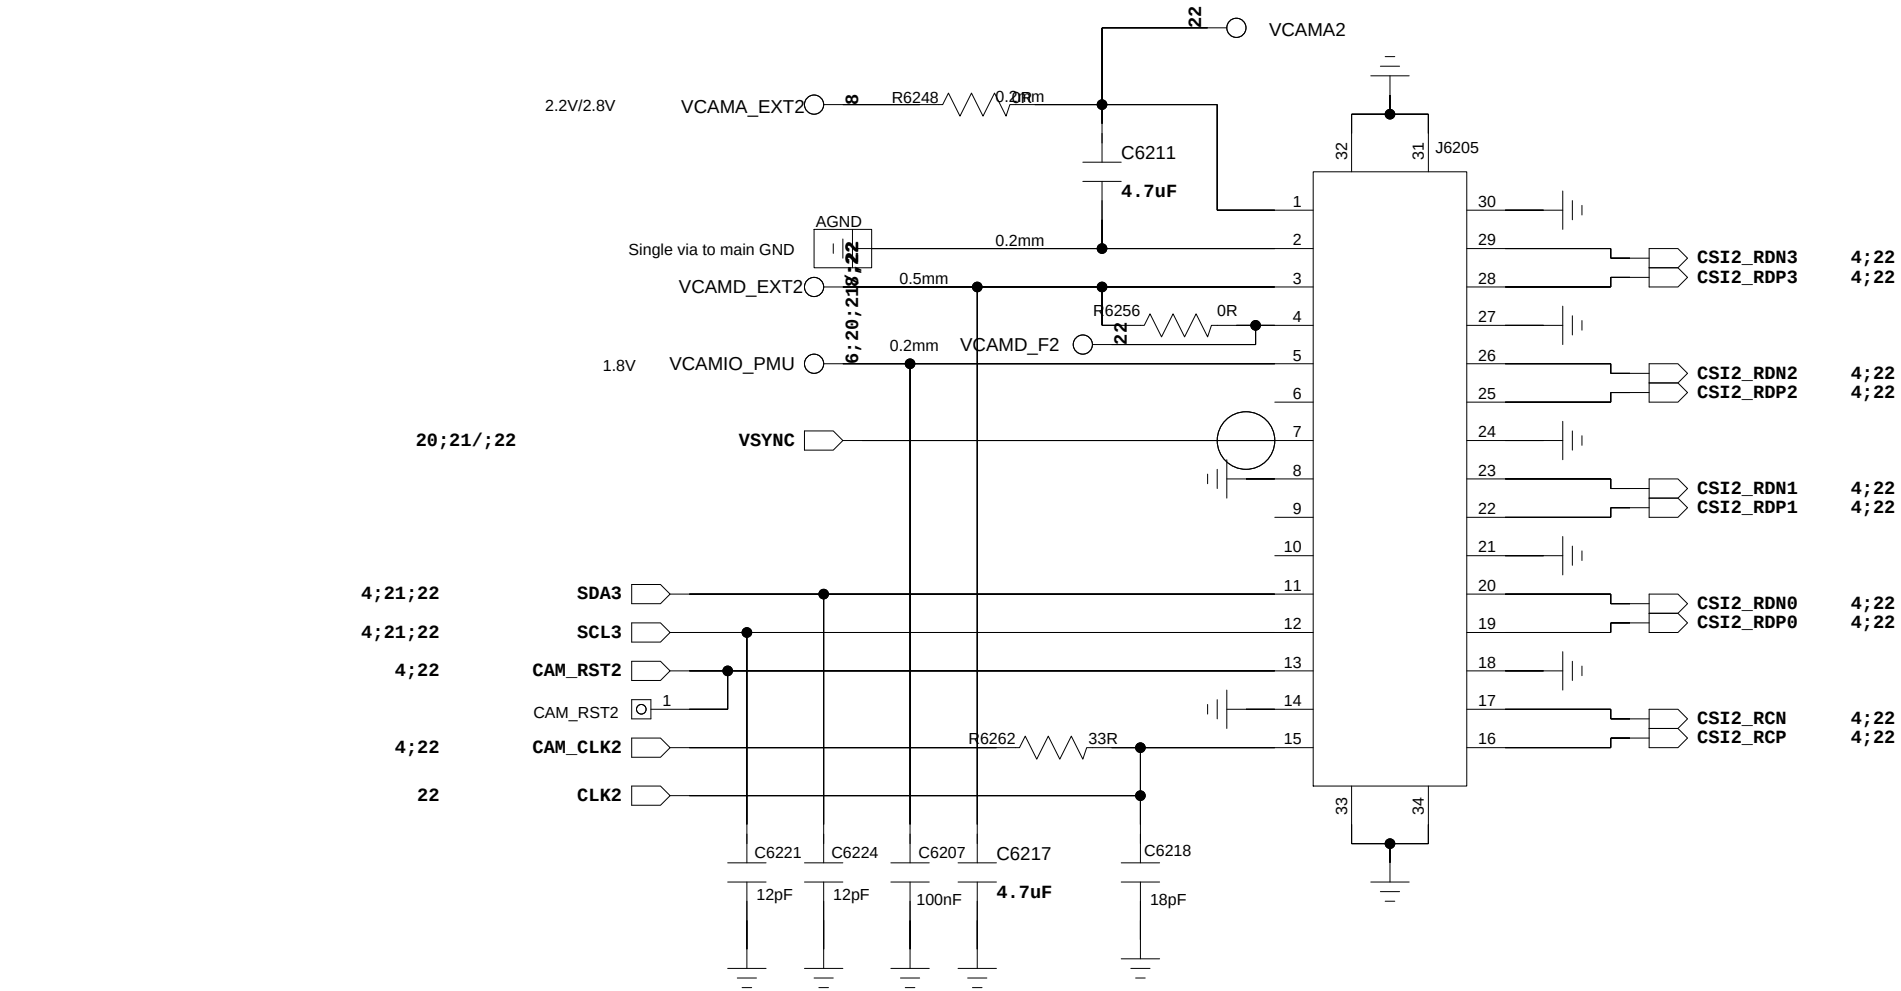


		AVDD		DVDD		IOVDD		4Pin	I2C addr
8M	17201672 OV08856-GA4A-2A	2.8V	28mA	1.2V	95mA	1.8V	2.7mA	GND	Sensor:0x6C(W)/0x6D(R)
8M	17201716 GC08A3-WA1XA	2.8V	50mA	1.2V	120mA	1.8V	10mA	GND	Sensor:0x24(W)/0x25(R)
8M	17201745 SSK4H7YX03-FGX9	2.8V	30mA	1.2V	96.5mA	1.8V	43uA	GND	Sensor:0x5A(W)/0x5B(R)
16M	17201821 HI-1634Q	2.8V	49mA	1.2V	115mA	1.8V	3mA	GND	Sensor:0x40(W)/0x41(R) EEPROM:0xA2(W)/0xA3(R)
16M	17201705 OV16B10	2.8V	52mA	1.05V	200mA	1.8V	5mA	DVDD	Sensor:0x6C(W)/0x6D(R) EEPROM:0xA2(W)/0xA3(R)
16M	17201701 HI-1631Q	2.8V	52mA	1.1V	125mA	1.8V	4mA	GND	Sensor:0x40(W)/0x41(R) EEPROM:0xA2(W)/0xA3(R)
32M	17201766 SSKGD2SP03-FGX9	2.8V	55.2mA	1.0V	468mA	1.8V	4mA	DVDD	Sensor:0x5A(W)/0x5B(R) EEPROM:0xA2(W)/0xA3(R)

CAM VII (QVGA)

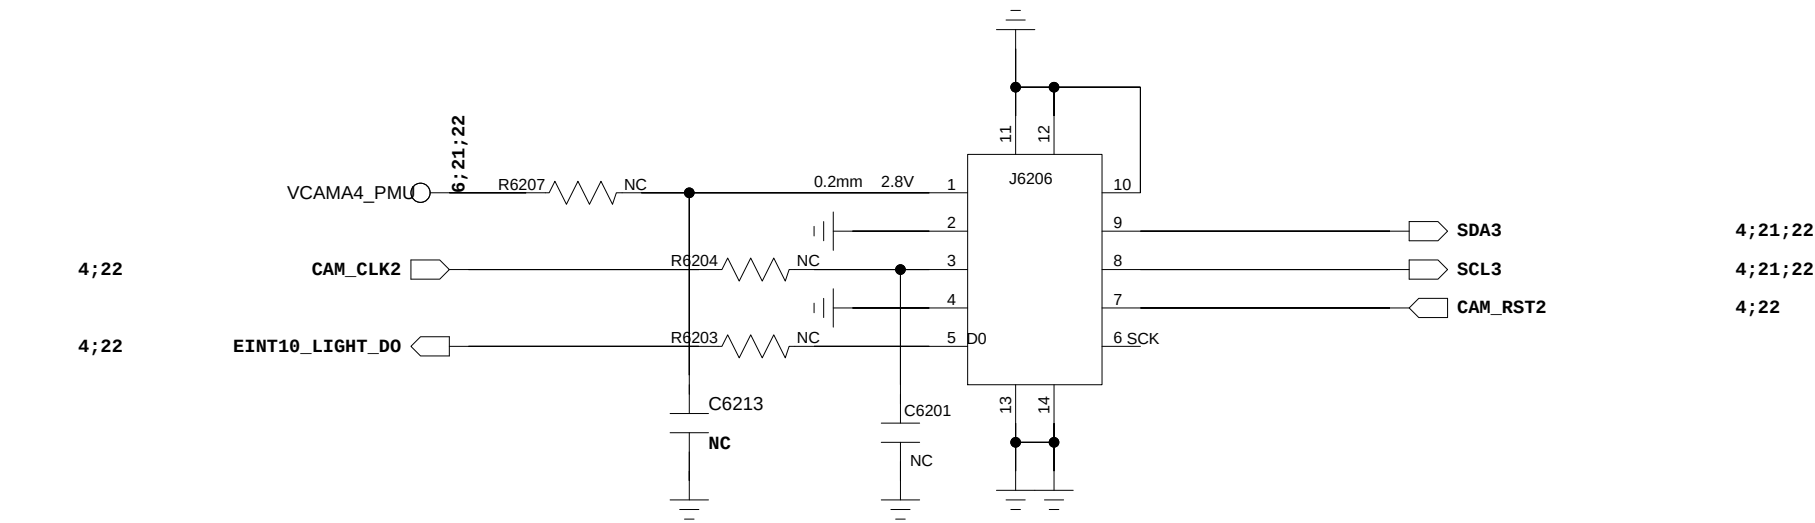


CAM VIII (QVGA)

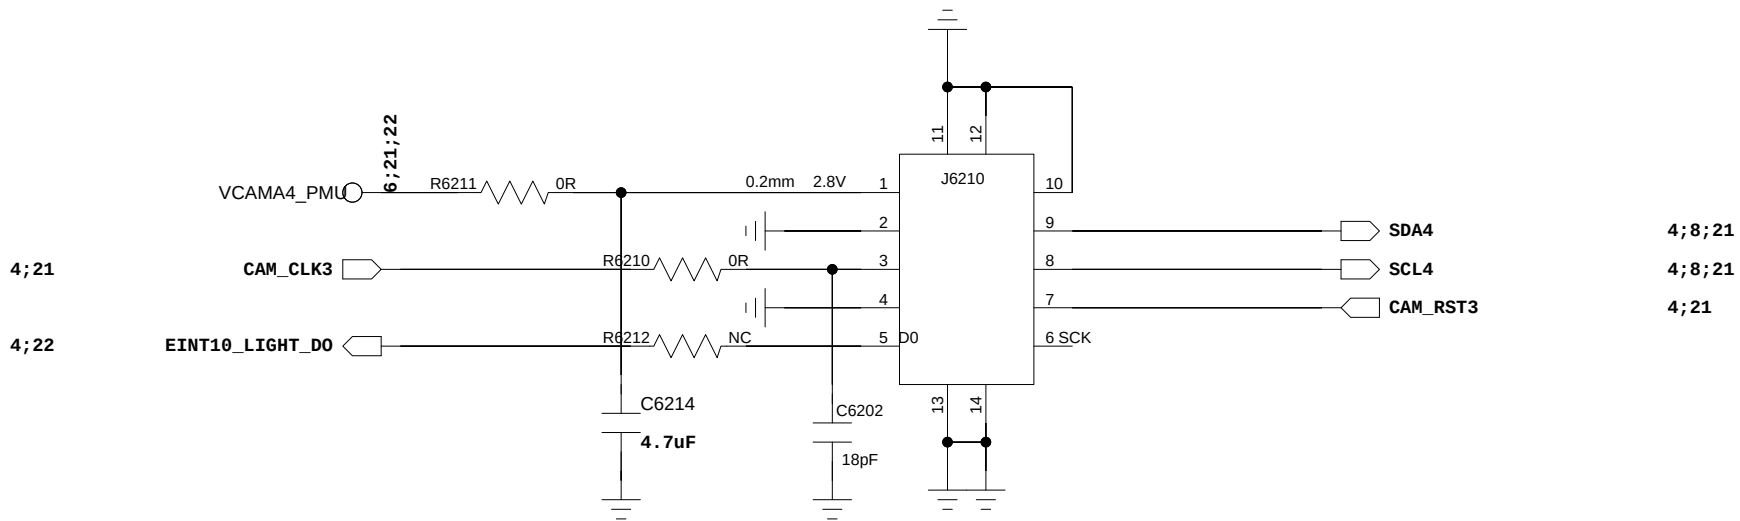


COMPANY: TRANSSION HOLDINGS				MODEL: H6929		Modified Date: 11/10/2022:21:24	
DRAWN		DATED		TITLE: 62_PERI_CAMERA_III		VERSION:	SHEET: 22 OF 27
CHECKED		DATED	< >	Confidentiality	CONFIDENTIAL		

REVISION RECORD			
LTR	ECO NO:	APPROVED:	DATE:

STK33562:I2C address: Write:0x8C, Read:0x8D

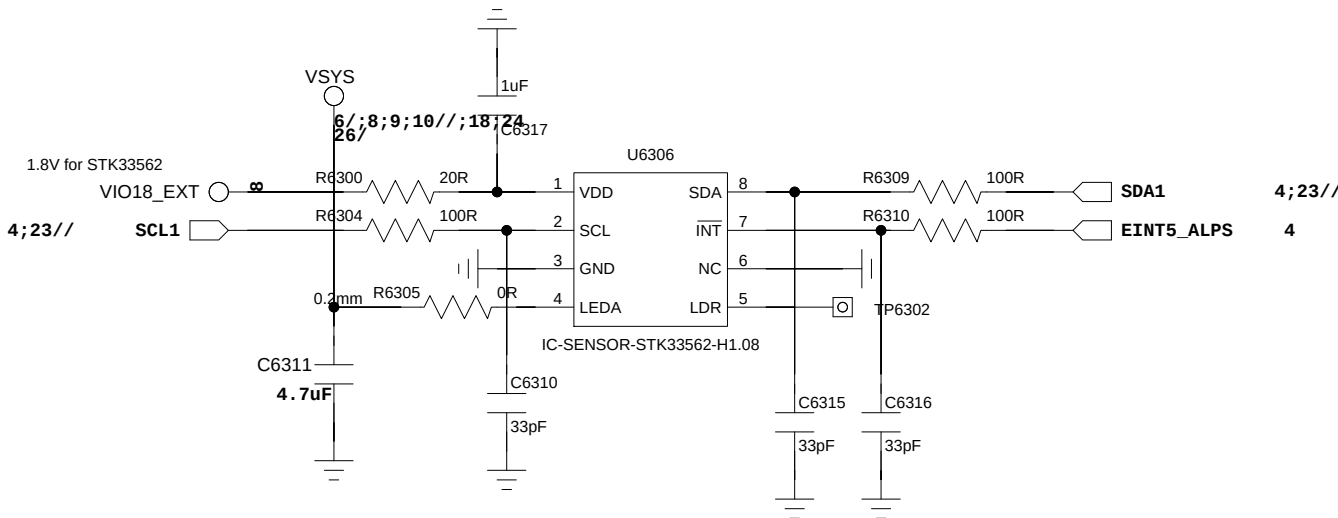

LSM6DS3TR-C:I2C address: Write:0xD4, Read:0xD5

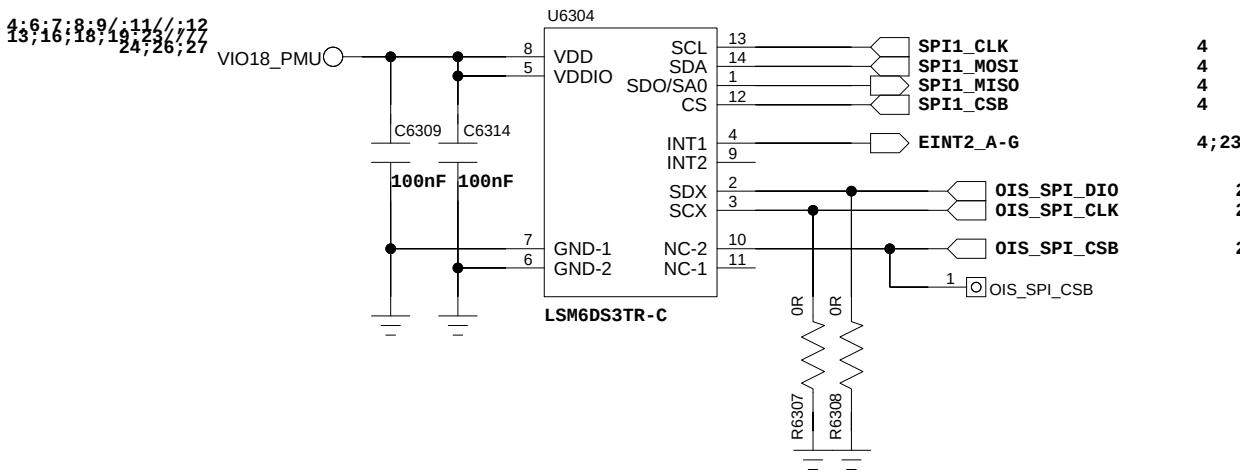

VIO18_PMU

4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 31, 32

R6306

390K

AUX_IN0_NTC



NTC6301

100K

3


1. NTC6301 must keep a distance about 68 mm away from BB and far from other heat sources 10 mm at least.
2. The distance is the shortest distance from package edge to edge.

```
MXC6655XA:ADDRESS:0x2A(Write)/0x2B(Read)
SC7A20:ADDRESS:0x30(Write)/0x31(Read)
MXC4005XC:ADDRESS:0x2A(Write)/0x2B(Read)
```

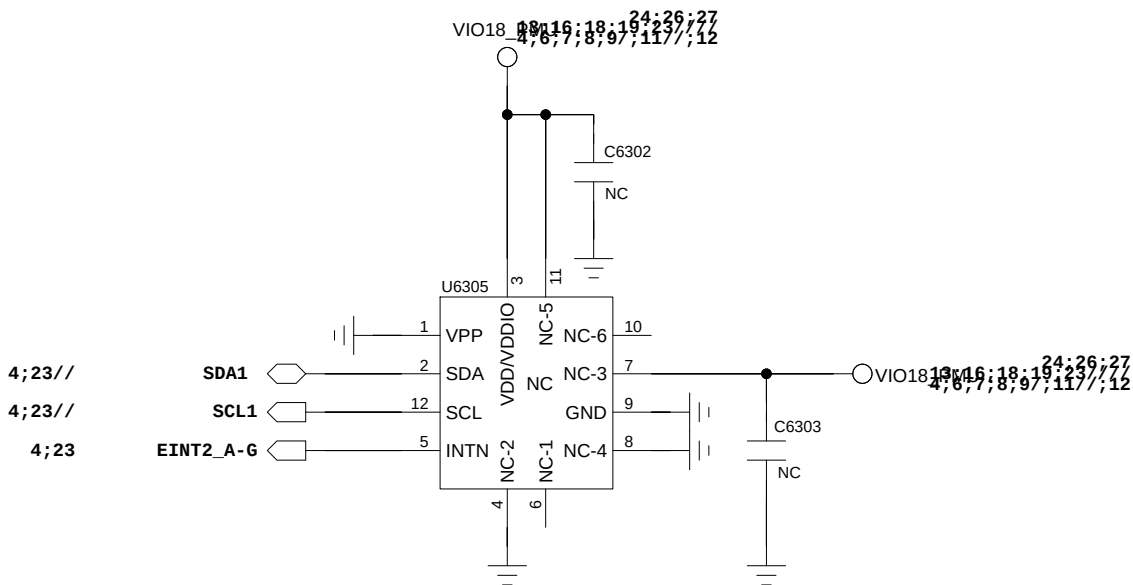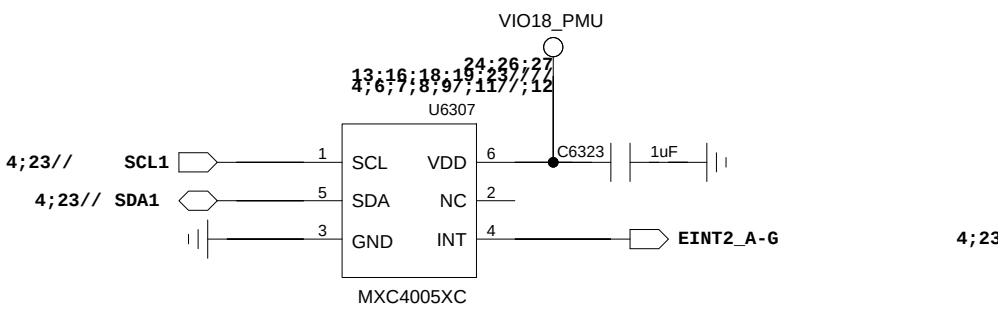

component	MXC6655XA	SC7A20	STK8BA50-S
C6302	NC	100nF	1uF
C6303	1uF	100nF	1uF


QMC6308:I2C ADDRESS:0x58(Write)/0x59(Read)

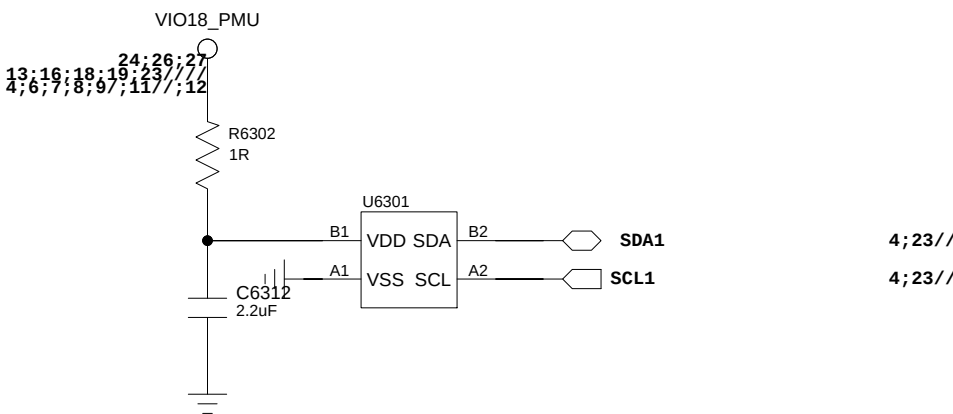


VL53L3:I2C address: Write:0x52, Read:0x53

COMPANY: TRANSSION HOLDINGS				MODEL: H6929		Modified Date: 25/10/2022:10:18	
DRAWN		DATED		TITLE: 63_PERI_SENSORS		VERSION:	SHEET: 23 OF 27
CHECKED		DATED	< >	Confidentiality	CONFIDENTIAL		


PERI_EXCH_IO

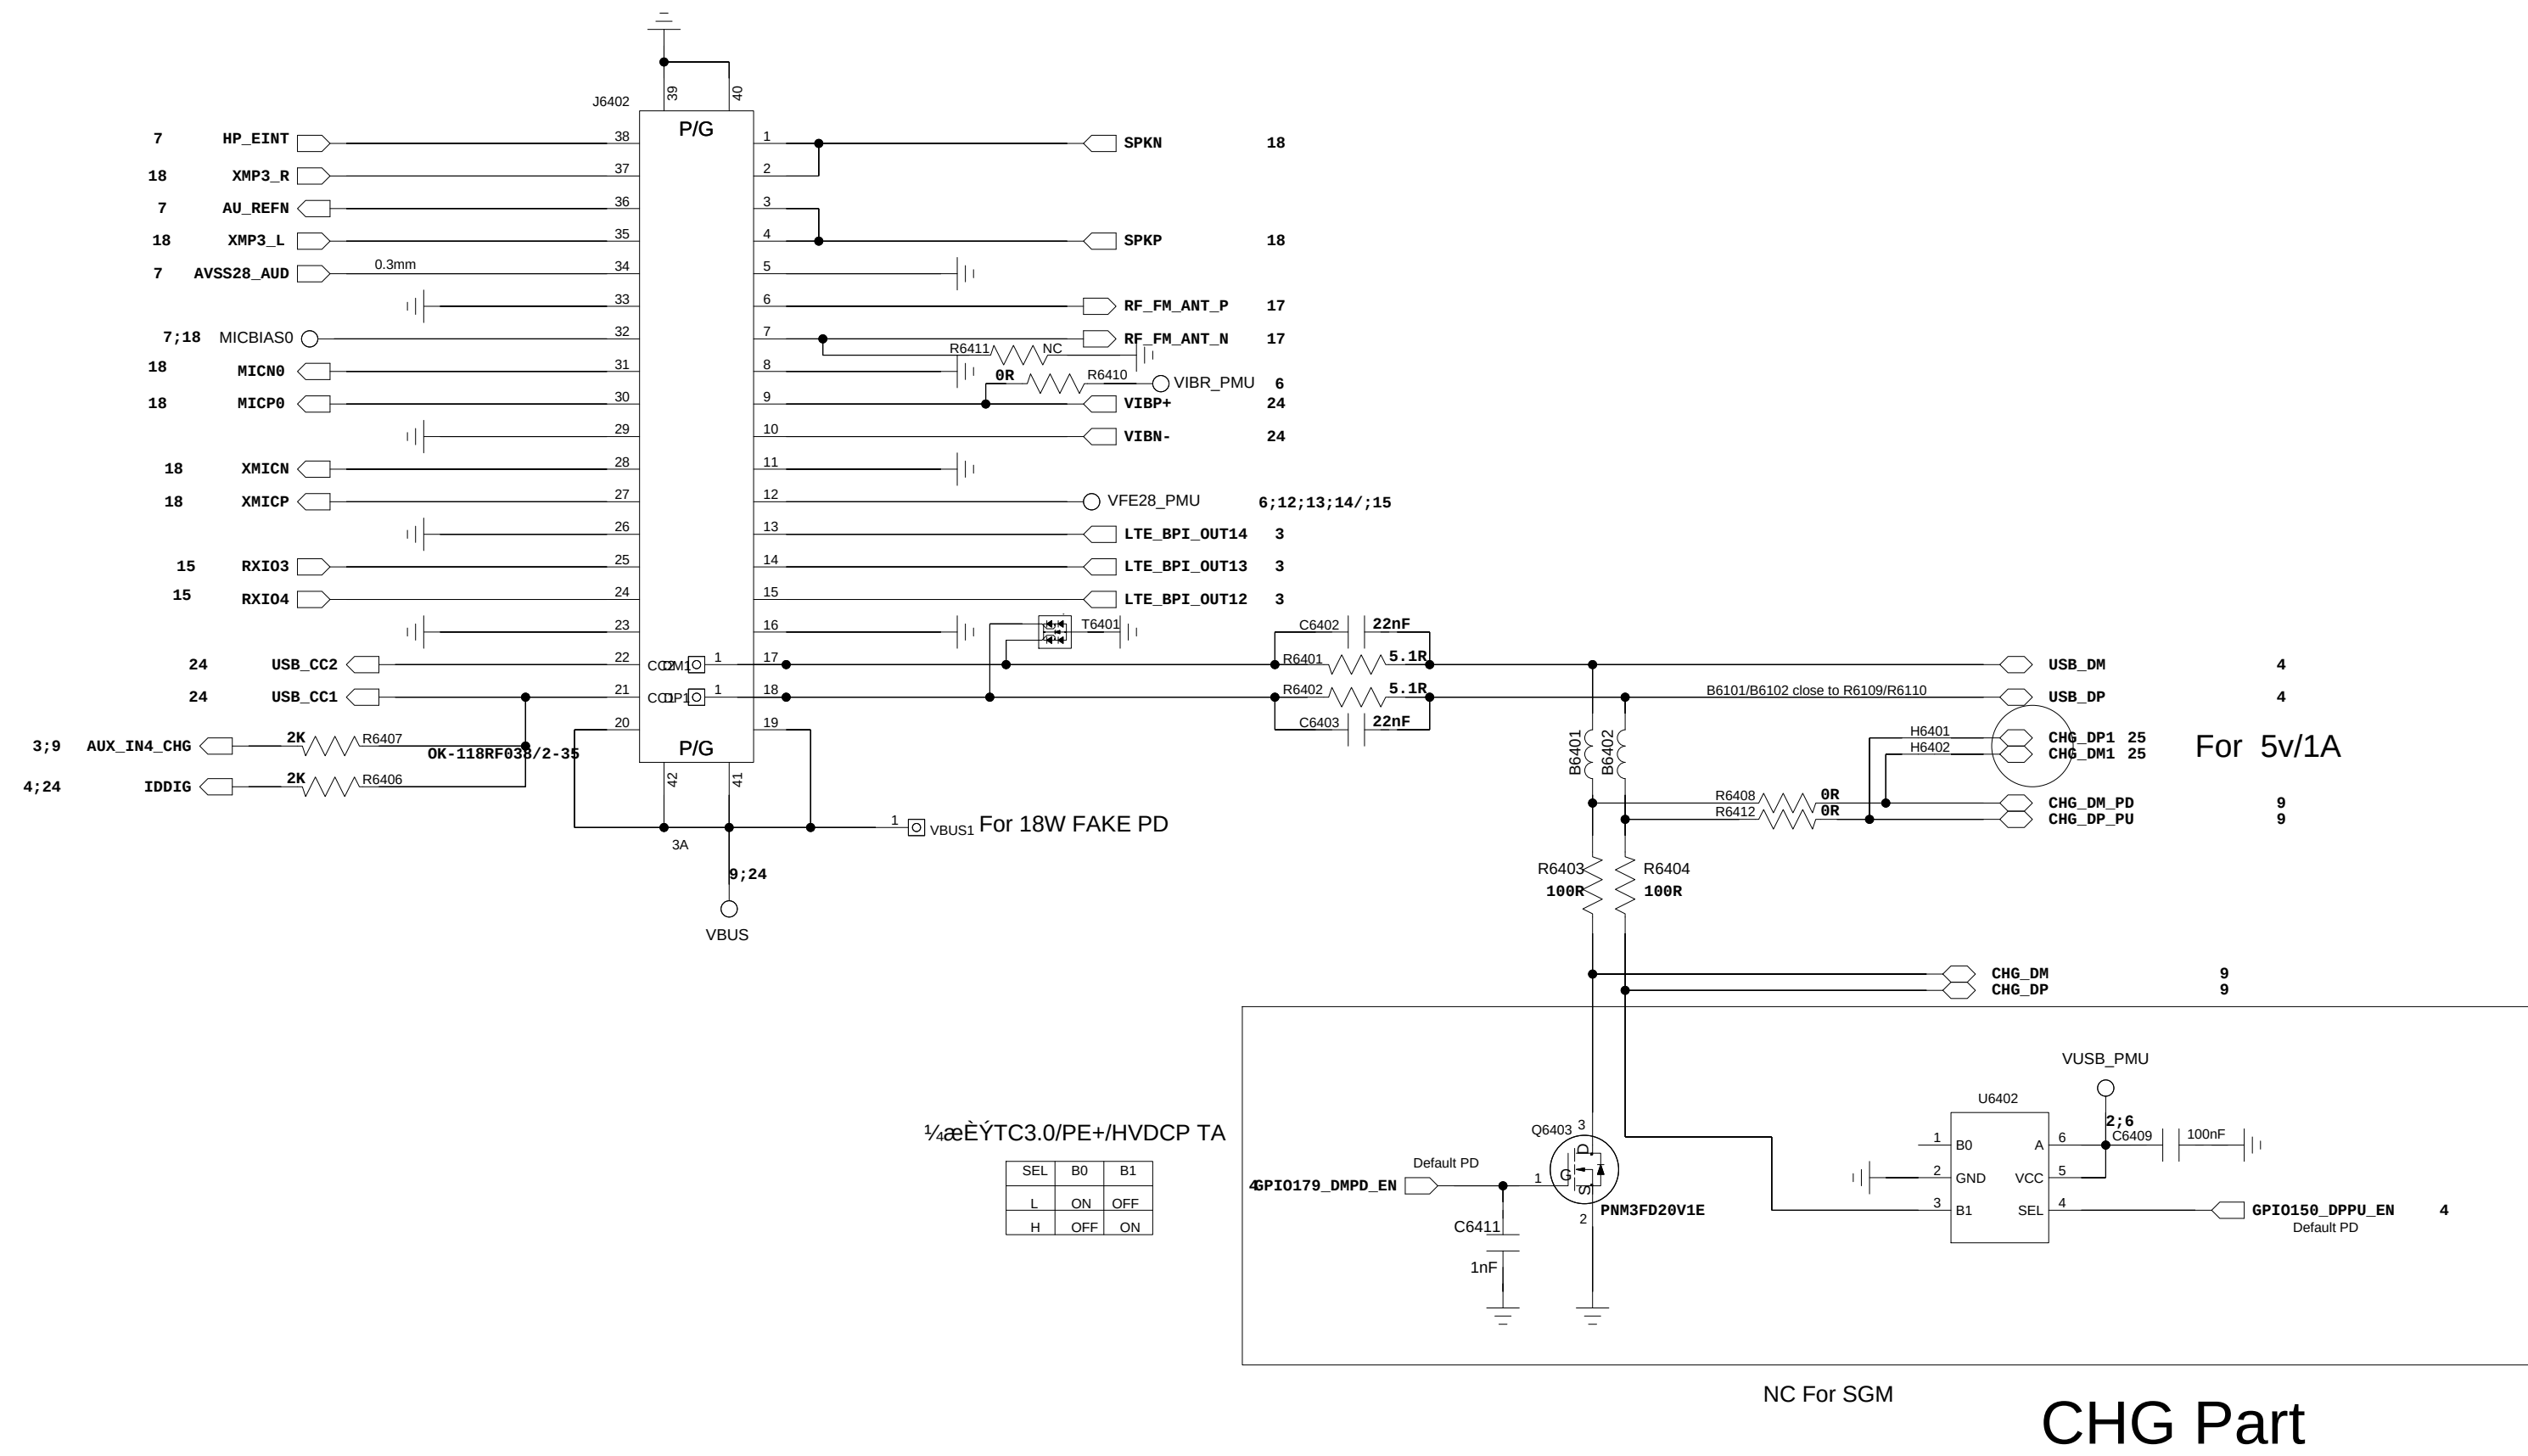

CC Logic

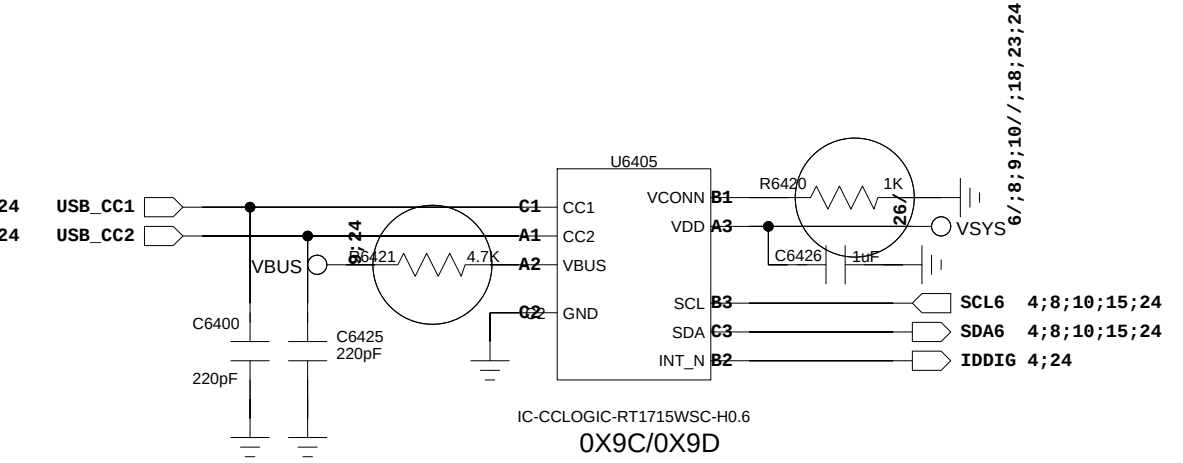


5v/1A

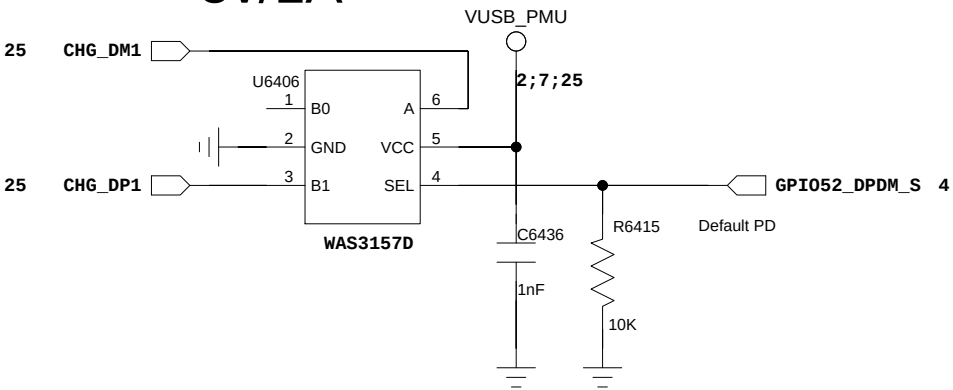

CHG Part

Z Linear Motor Driver

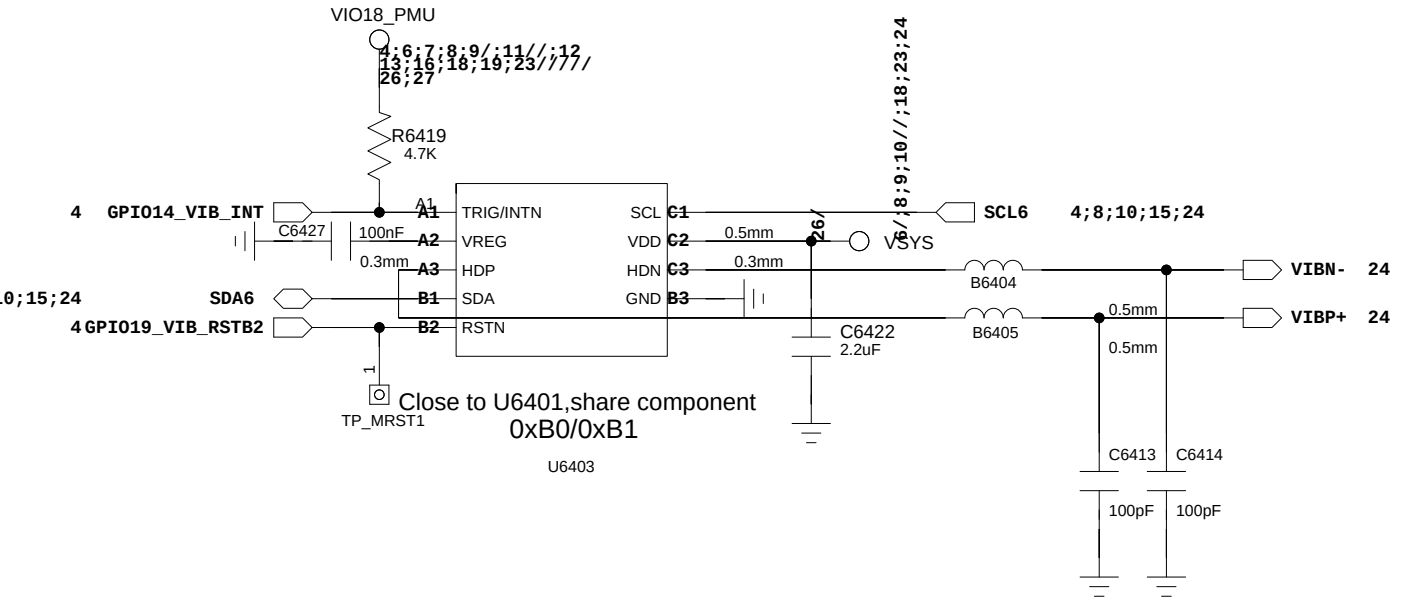


COMPANY: TRANSSION HOLDINGS				MODEL: H6929		Modified Date: 18/11/2022:11:34	
DRAWN		DATED		TITLE: 64_PERI_EXCH_IO		VERSION:	SHEET: 24 OF 27
CHECKED		DATED	< >	Confidentiality	CONFIDENTIAL		

PERI_SIM_SD_KEYPAD


REVISION RECORD			
LTR	ECO NO:	APPROVED:	DATE:

SIM1/2-SD-CARD

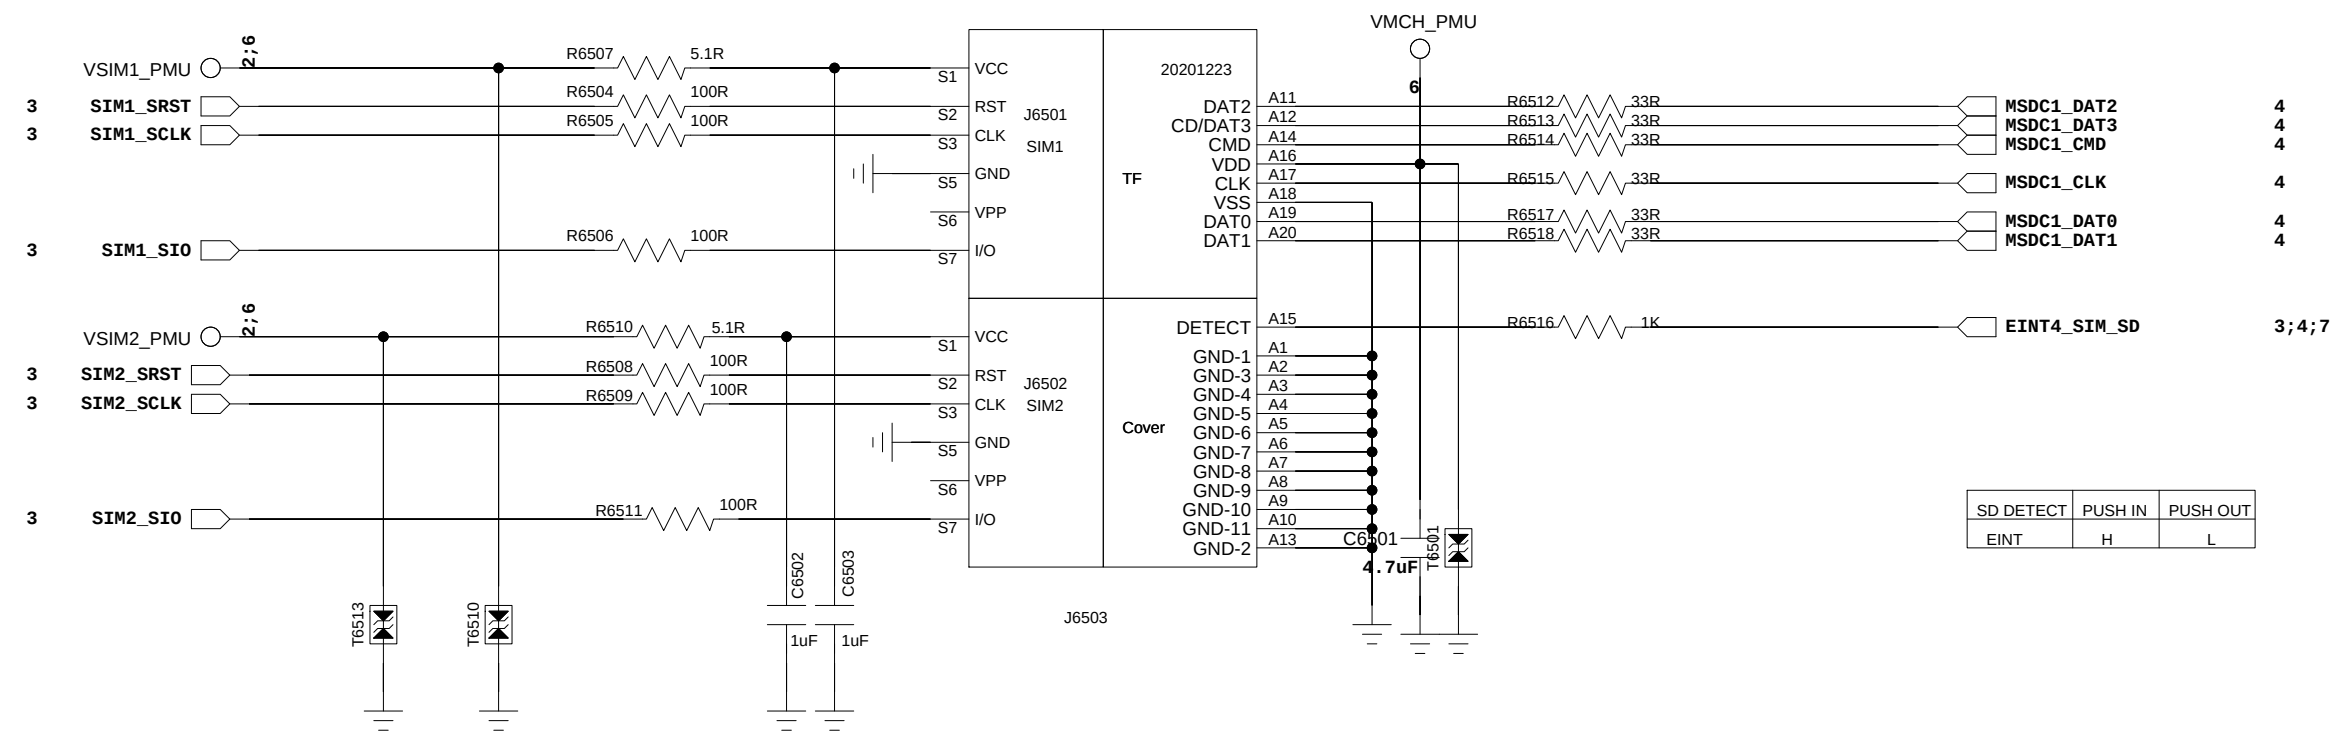

SD POWER CONTROL


SIDEKEY

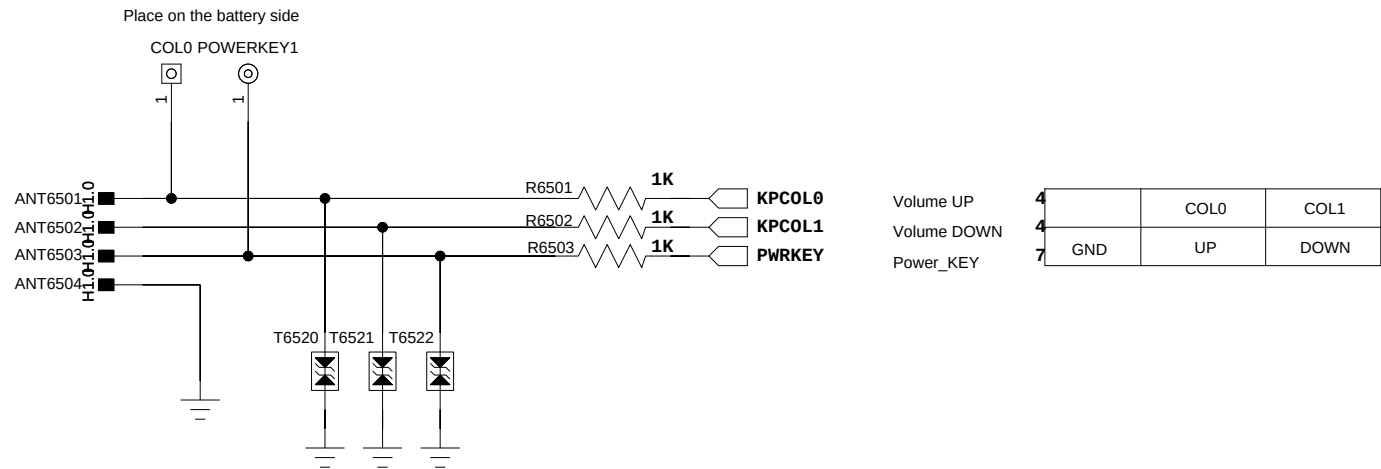

COMPANY: TRANSSION HOLDINGS				MODEL: H6929		Modified Date: 11/10/2022:21:24	
DRAWN		DATED		TITLE: 65_PERI_SIM_SD_KEYPAD		VERSION:	SHEET: 25 OF 27
CHECKED		DATED	< >	Confidentiality	CONFIDENTIAL		



PERI_NFC

REVISION RECORD			
LTR	ECO NO:	APPROVED:	DATE:

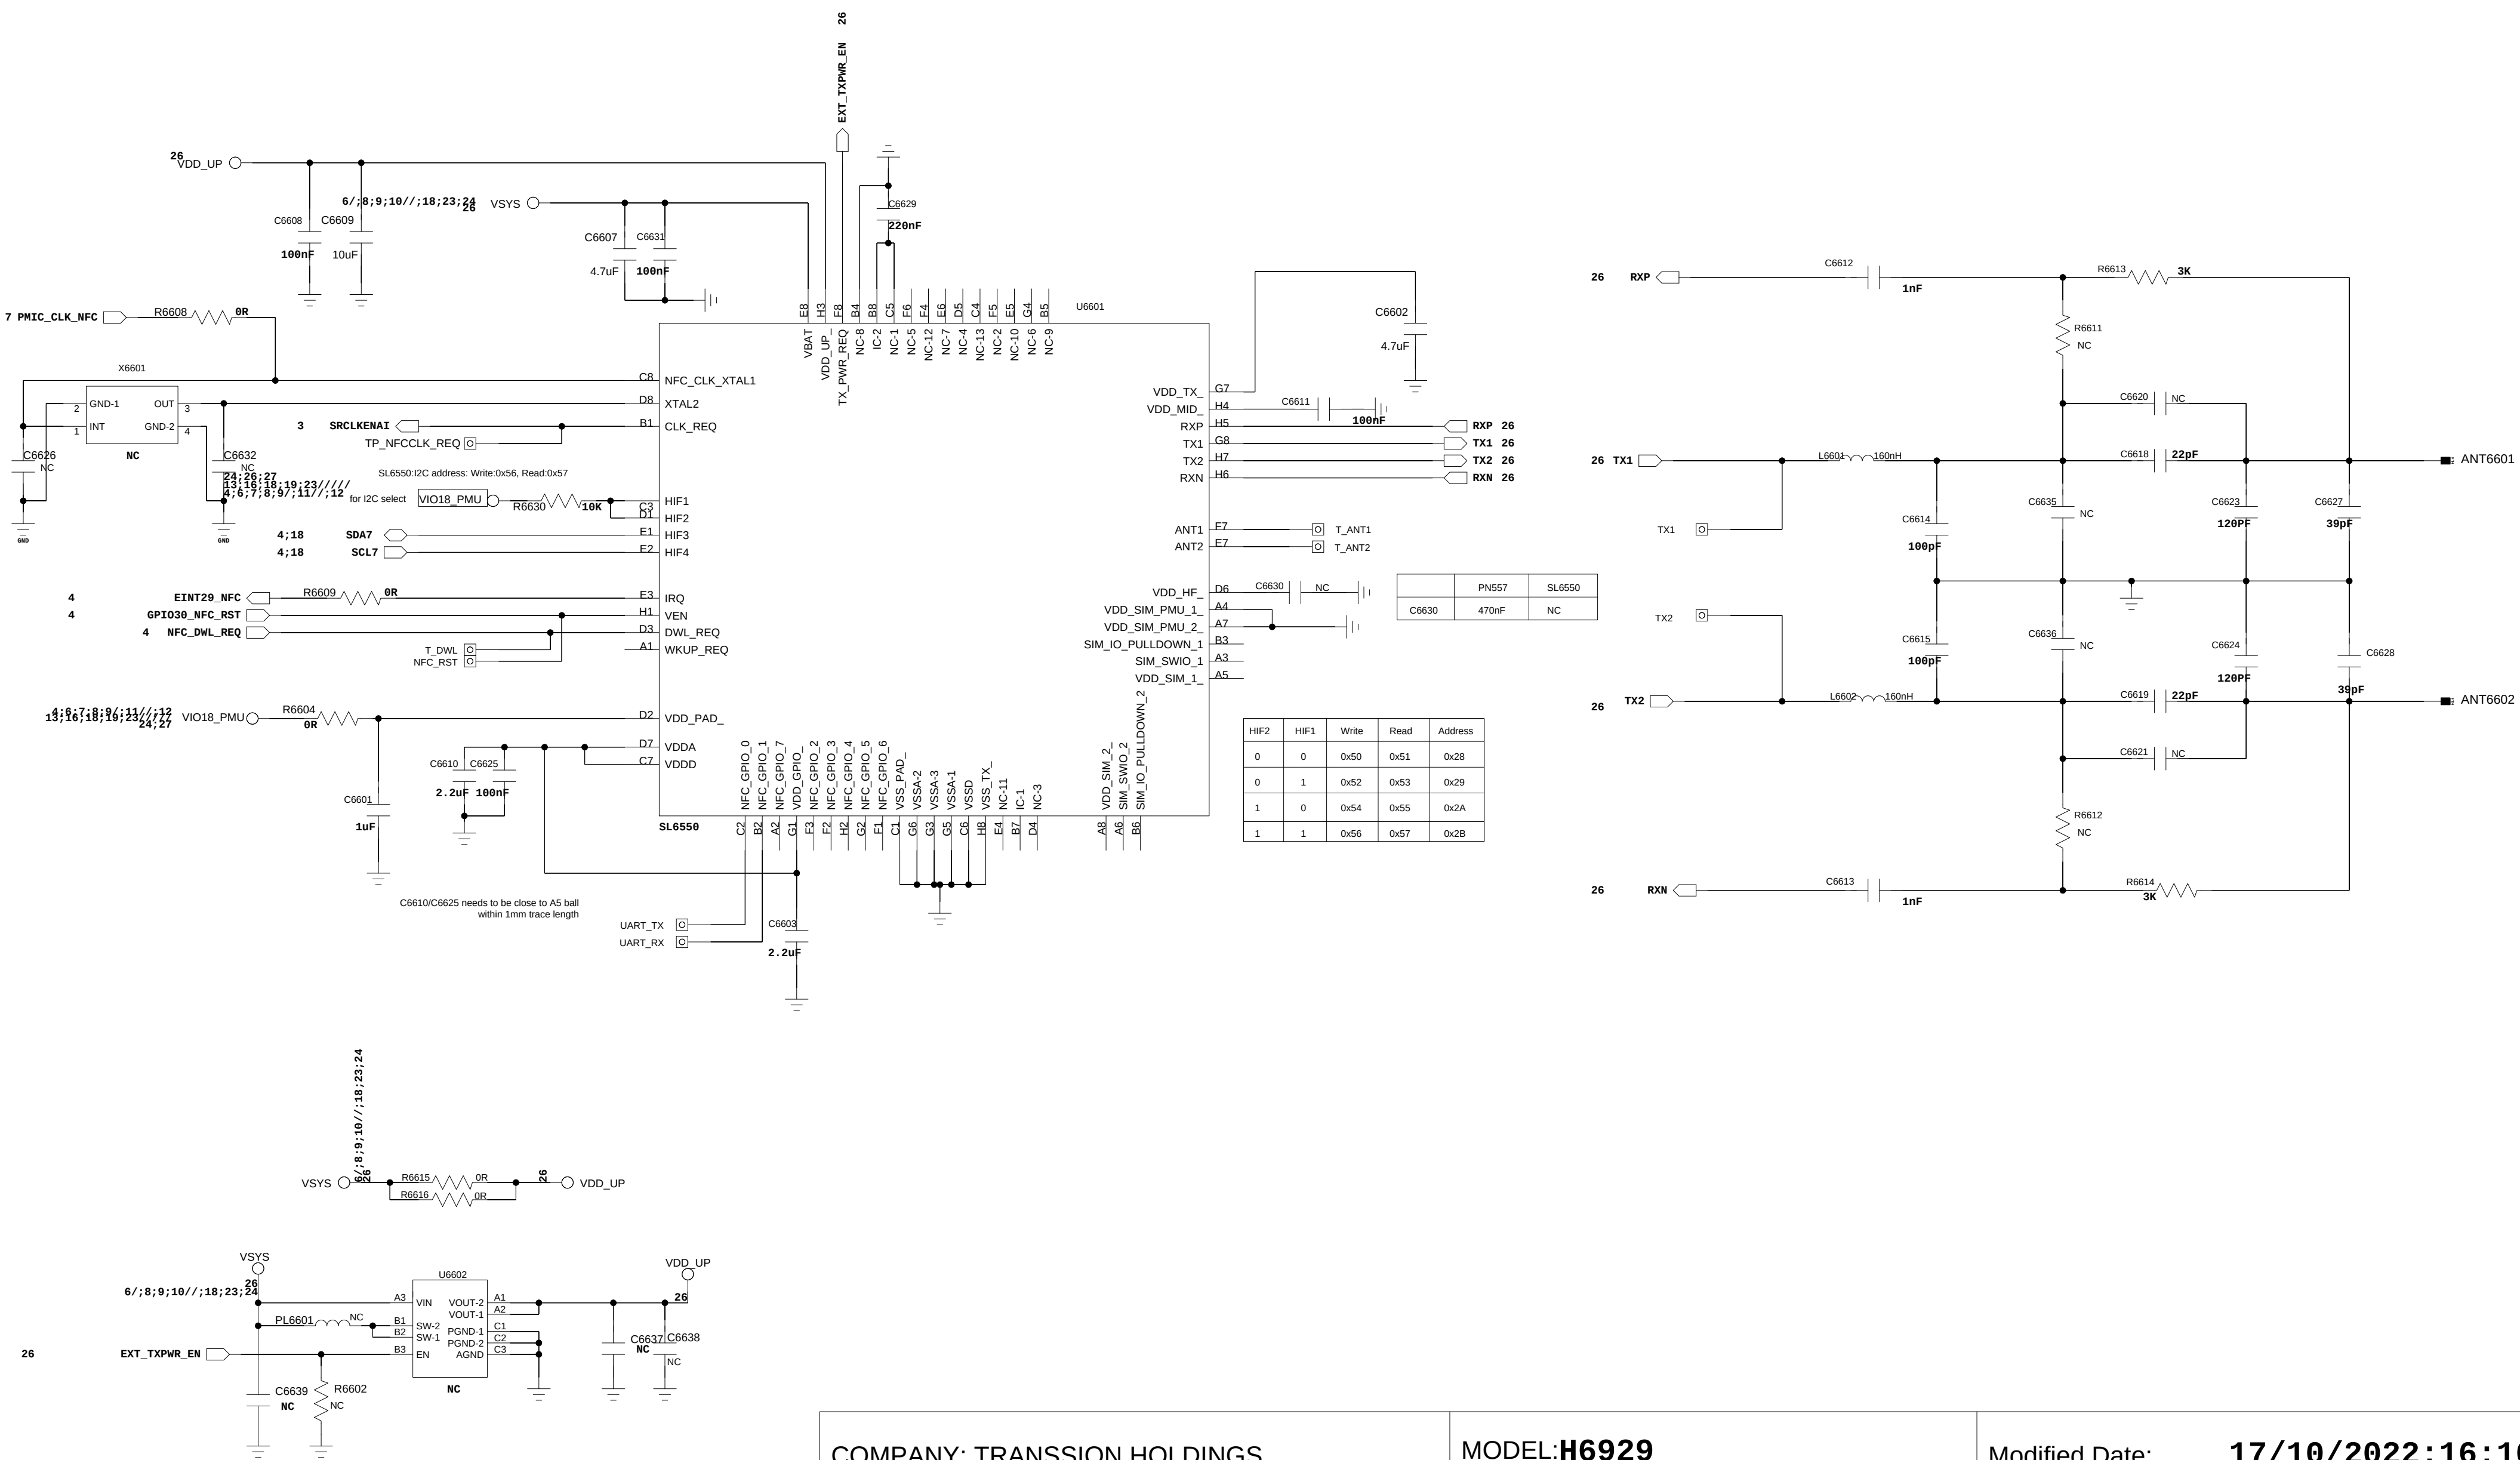

COMPANY: TRANSSION HOLDINGS				MODEL: H6929		Modified Date: 17/10/2022:16:10	
DRAWN		DATED		TITLE: 66_PERI_NFC		VERSION:	SHEET: 26 OF 27
CHECKED		DATED	< >	Confidentiality	CONFIDENTIAL		

REVISION RECORD			
LTR	ECO NO:	APPROVED:	DATE:

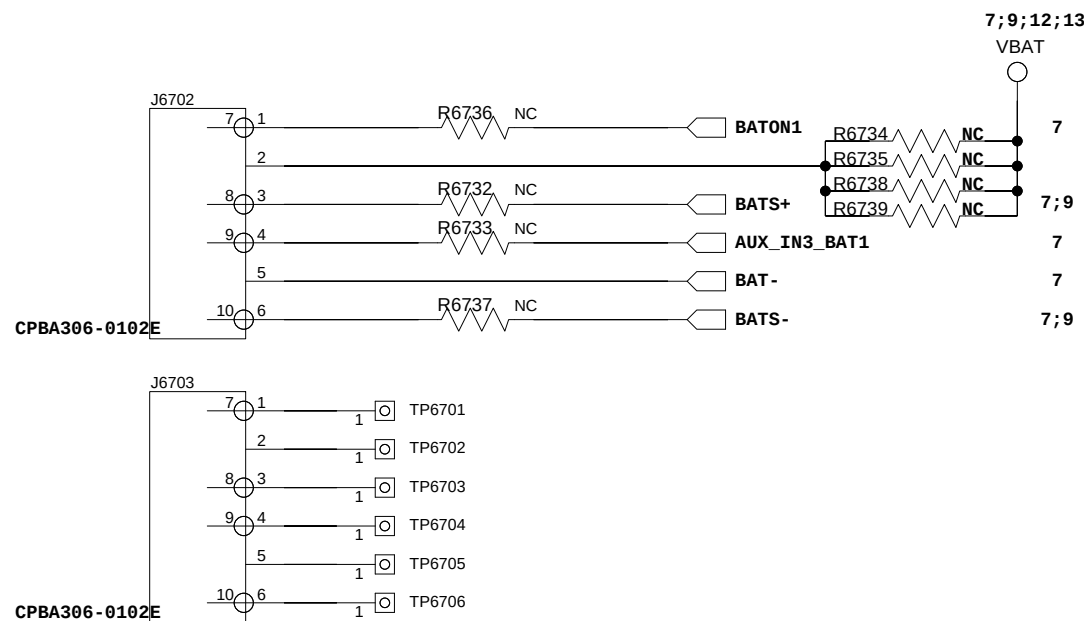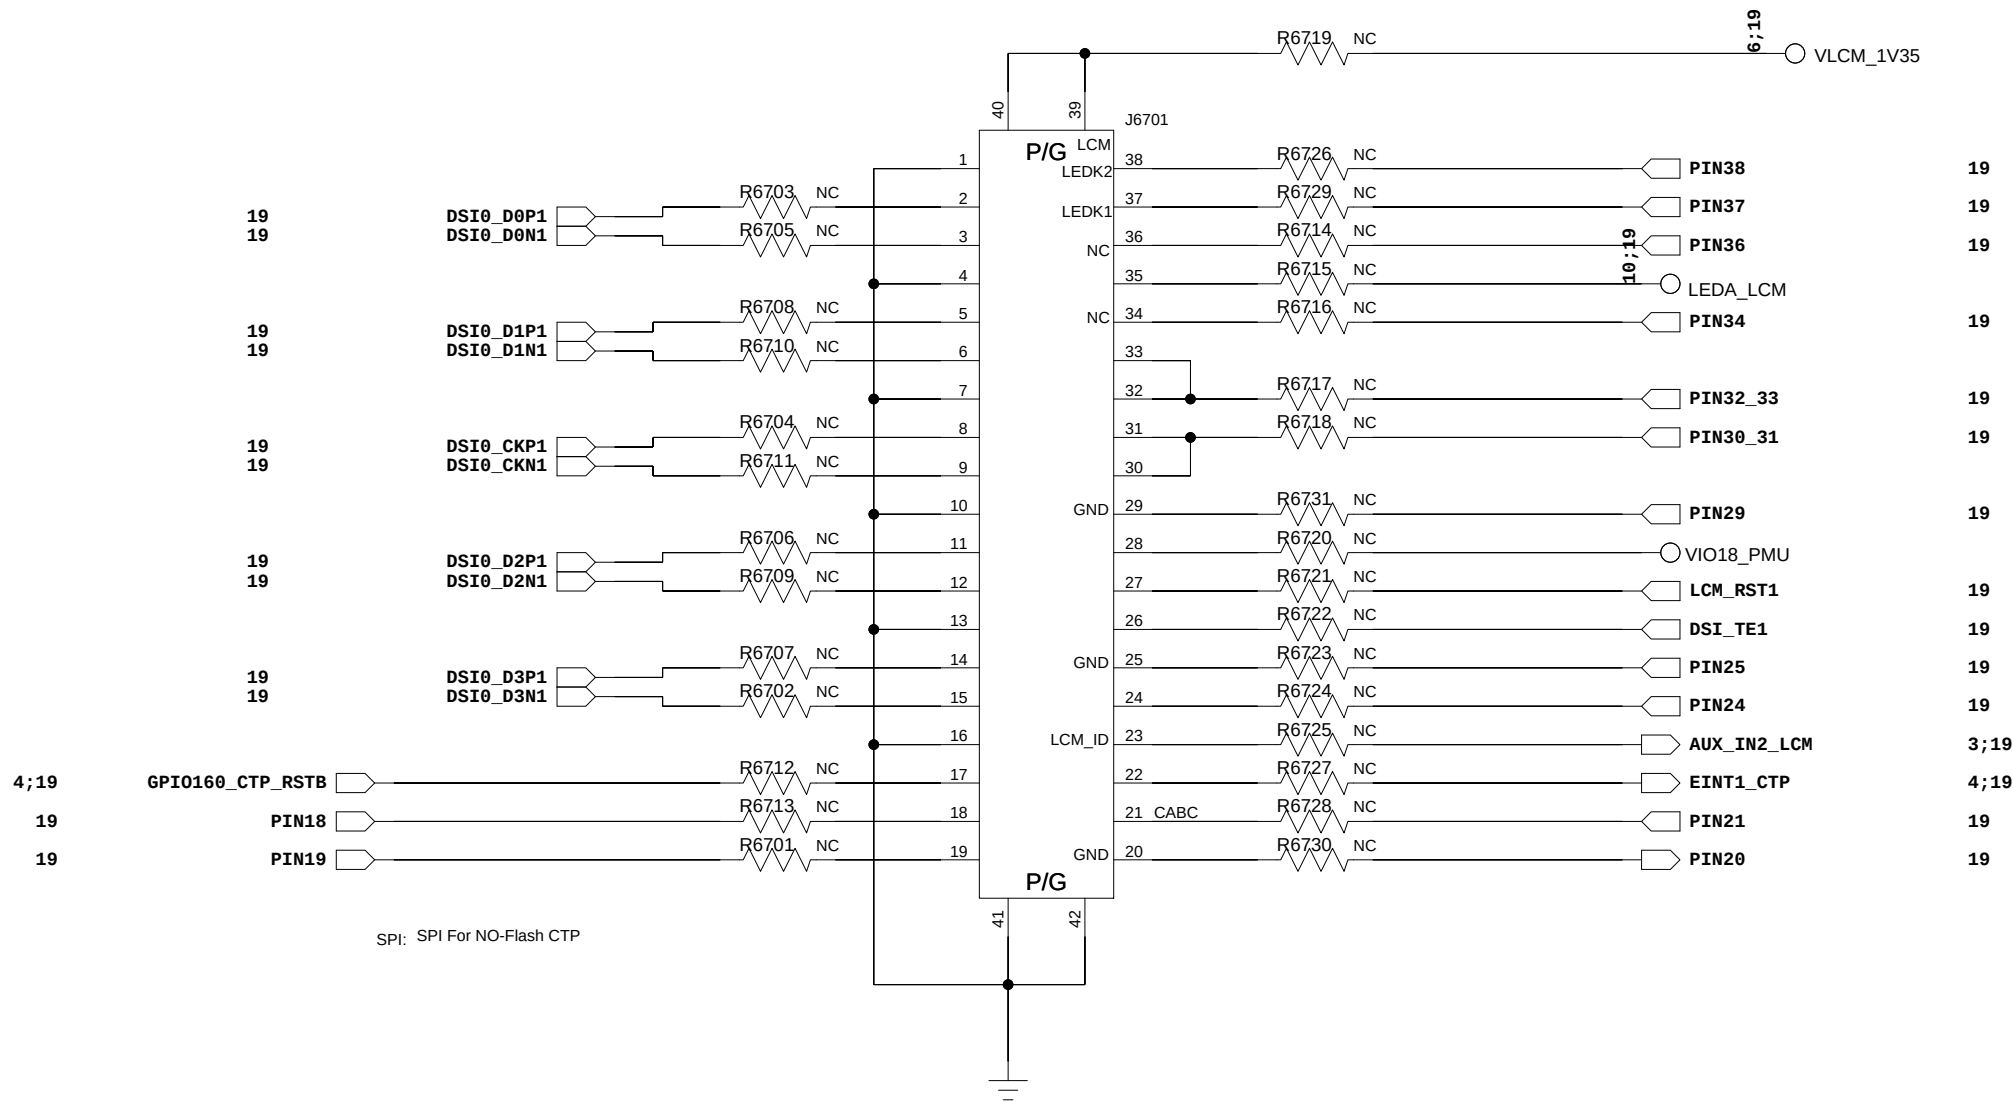

COMPANY: TRANSSION HOLDINGS				MODEL: H6929		Modified Date: 26/10/2022:14:34	
DRAWN		DATED		TITLE: 67_extend		VERSION:	SHEET: 27 OF 27
CHECKED		DATED	< >	Confidentiality	CONFIDENTIAL		