

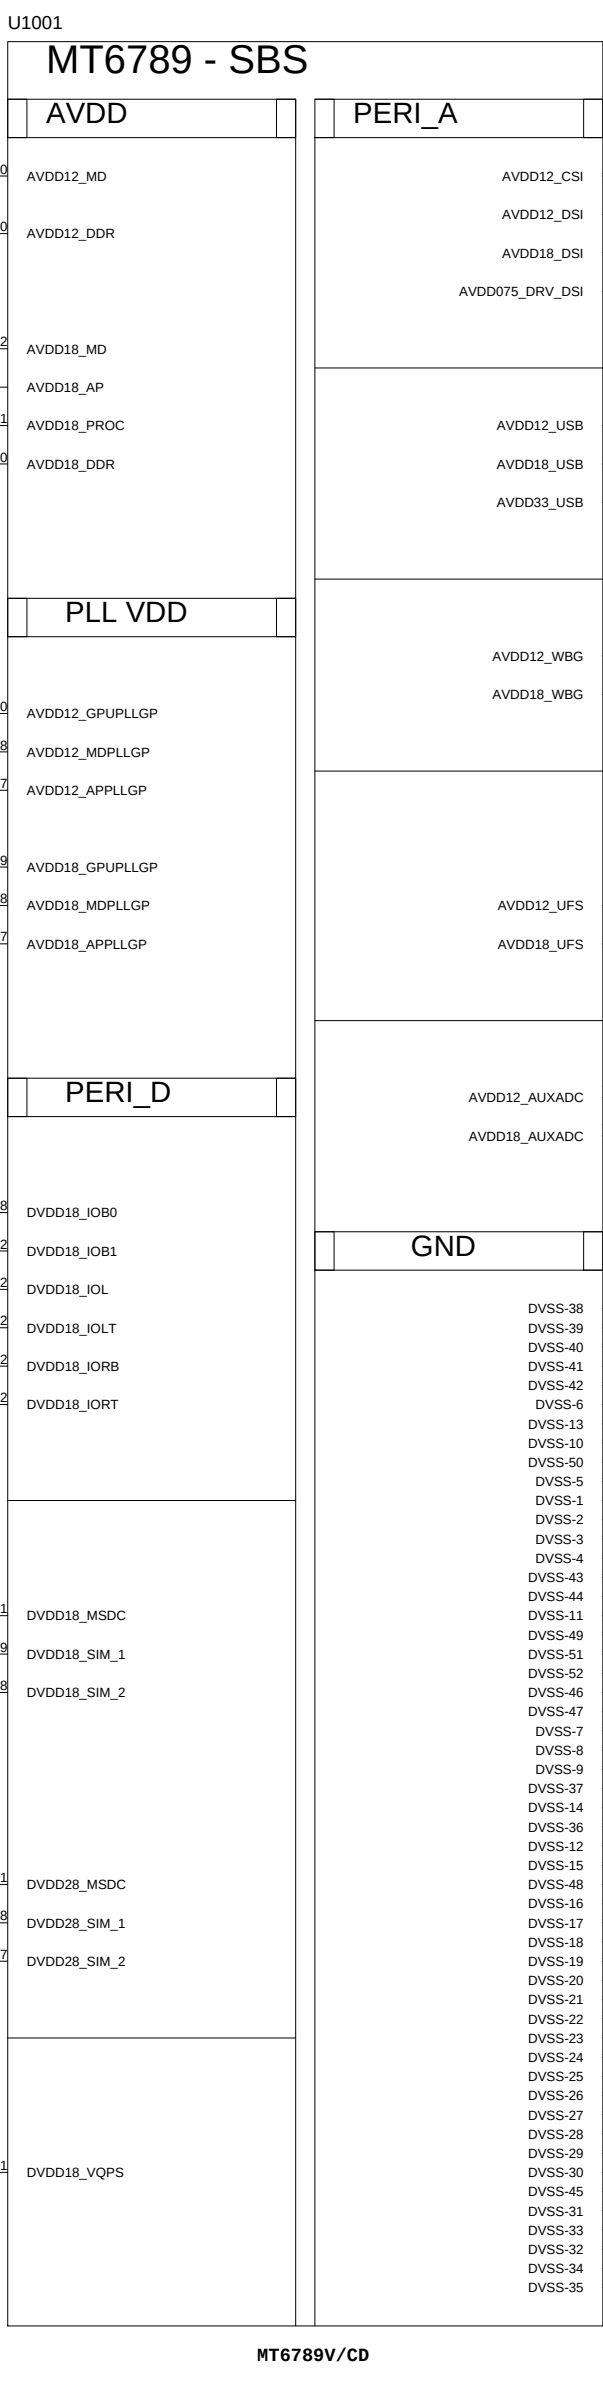
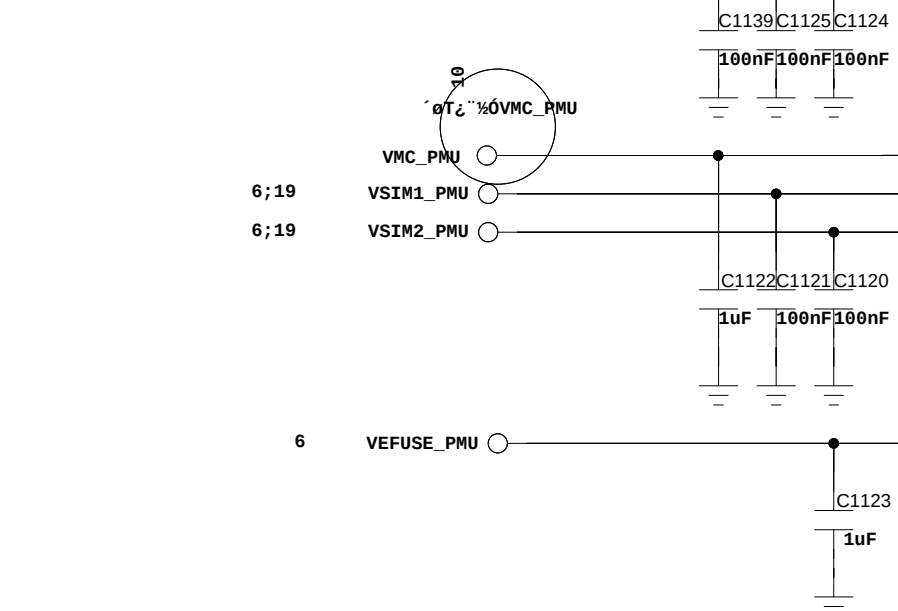
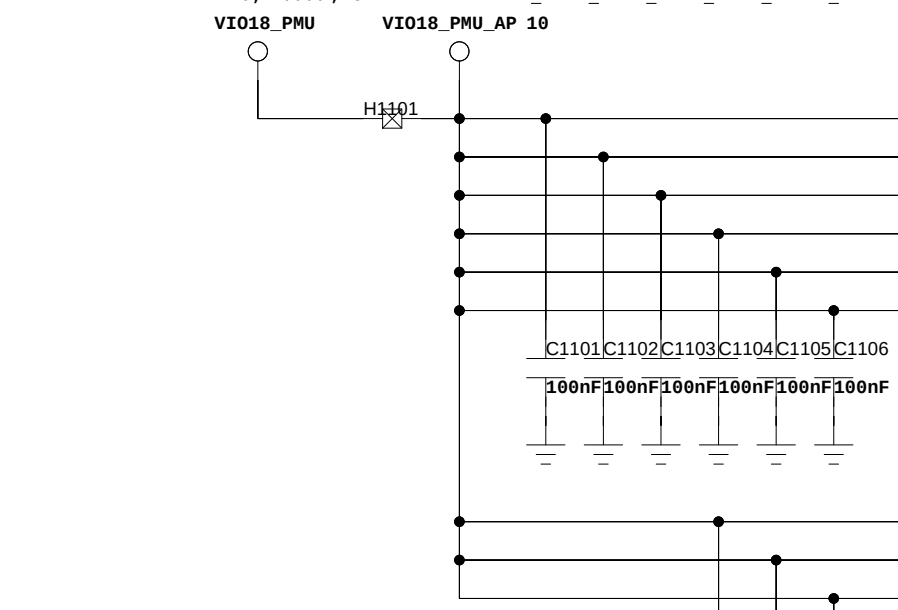
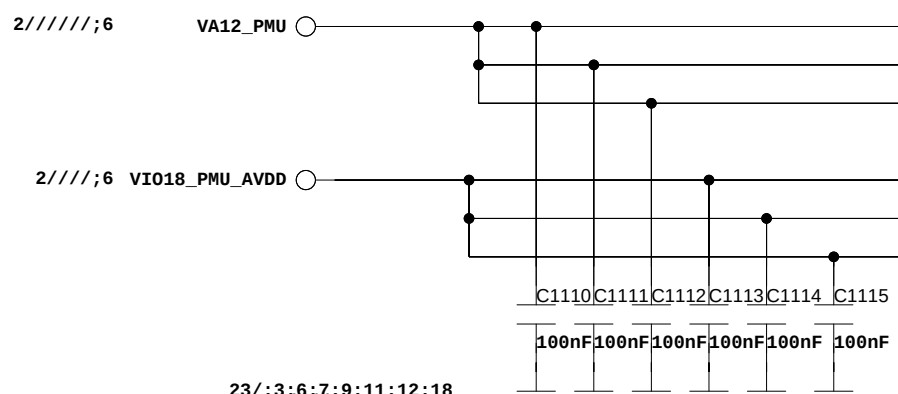
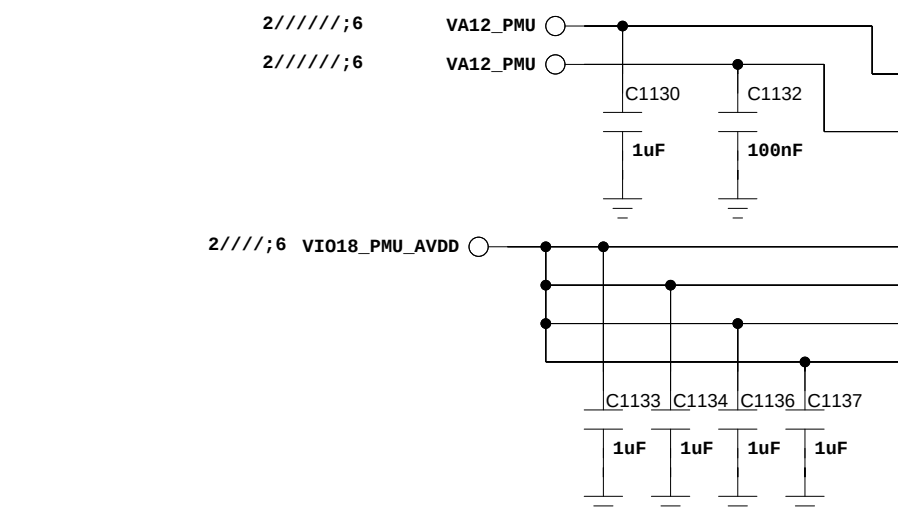
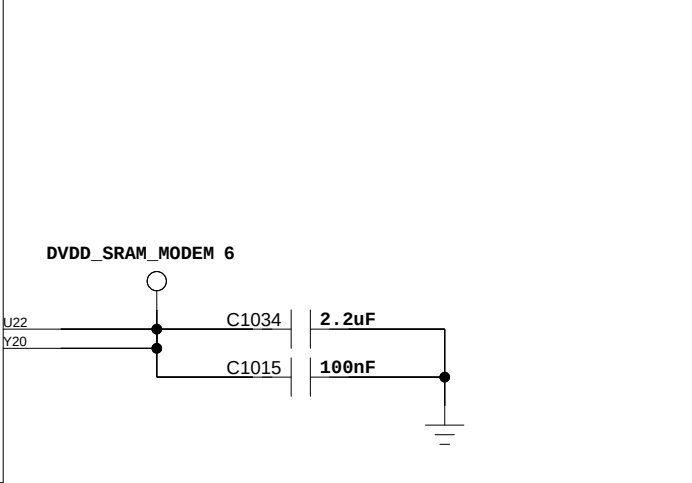
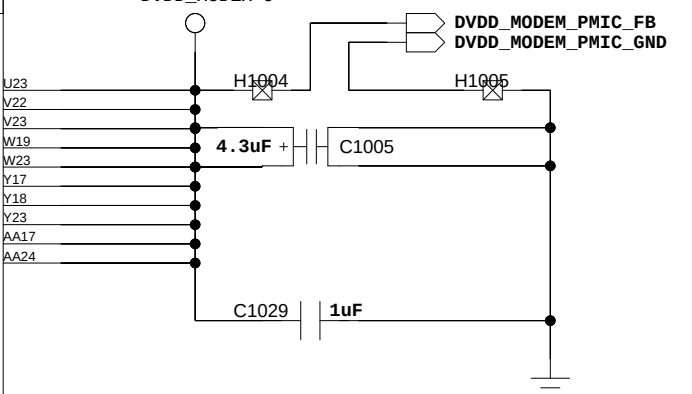
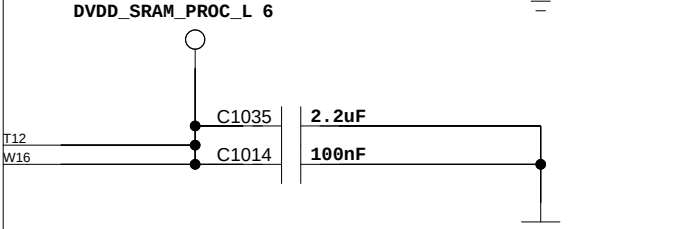
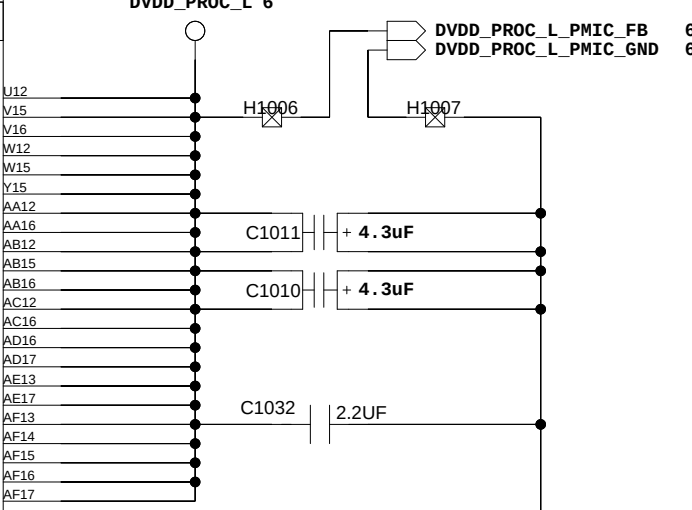
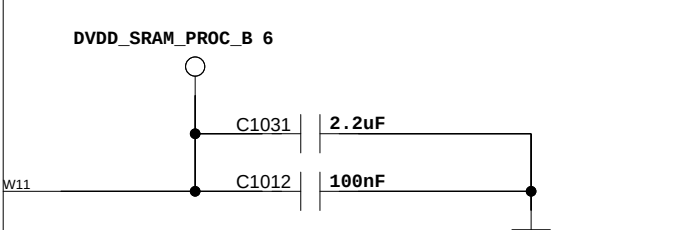
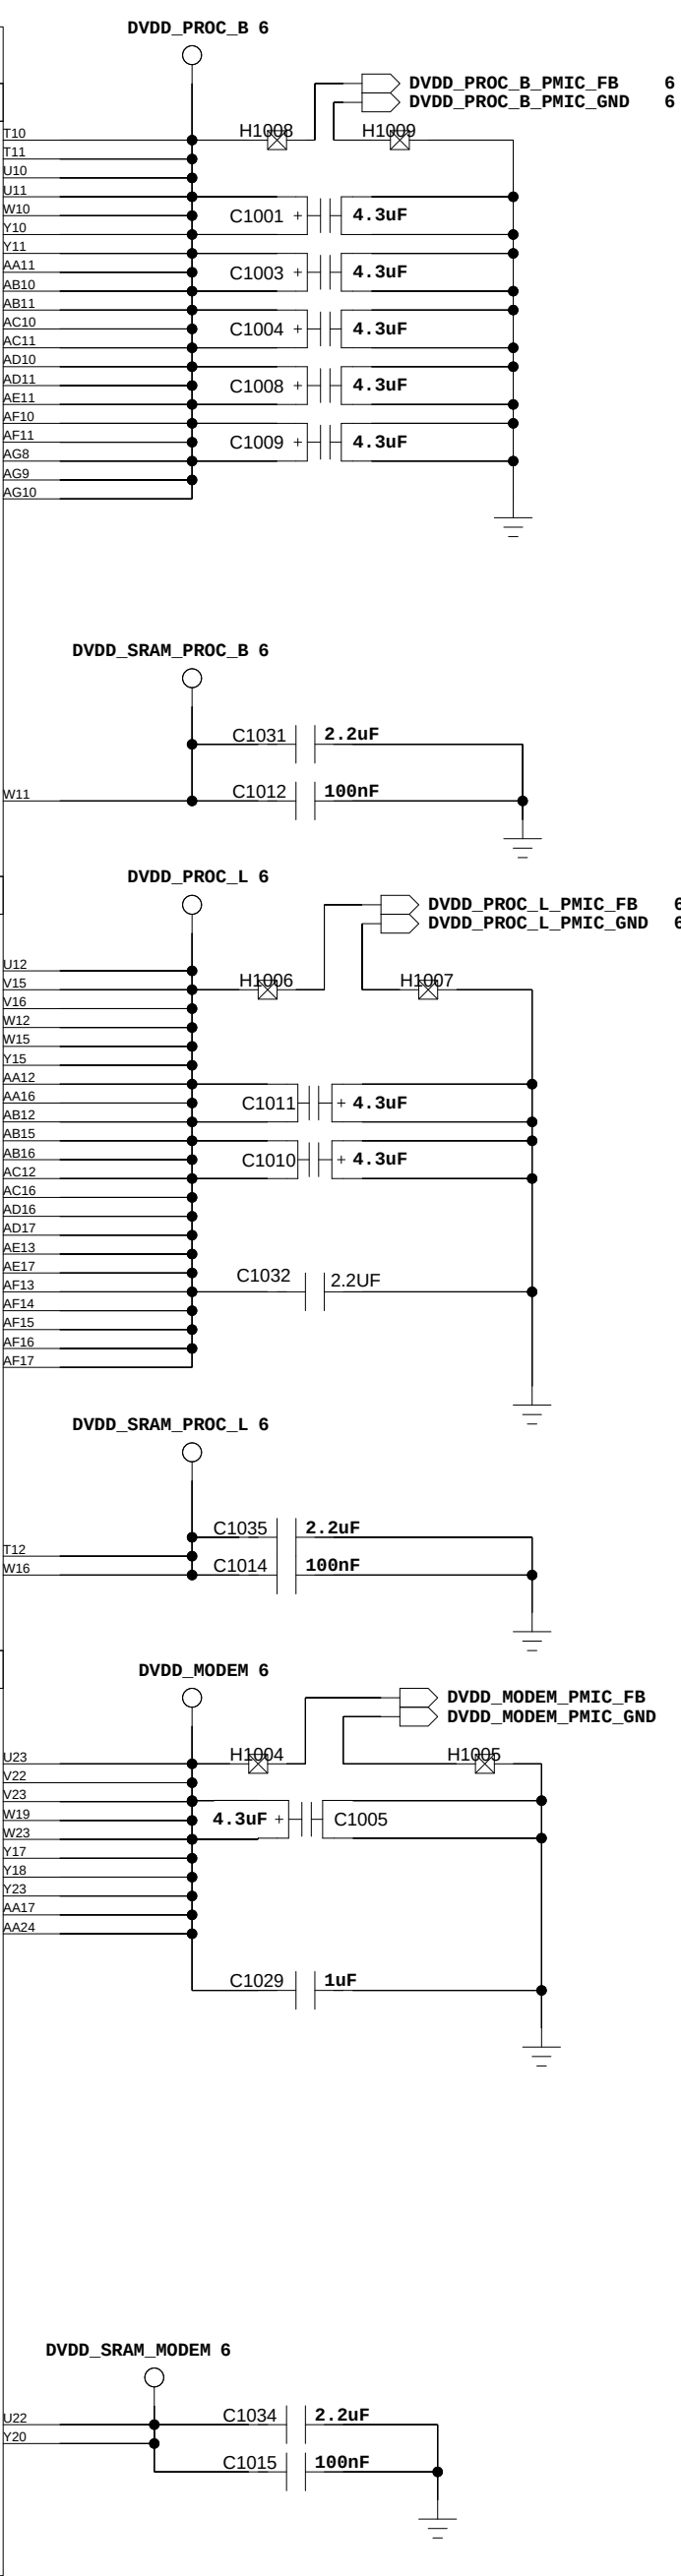
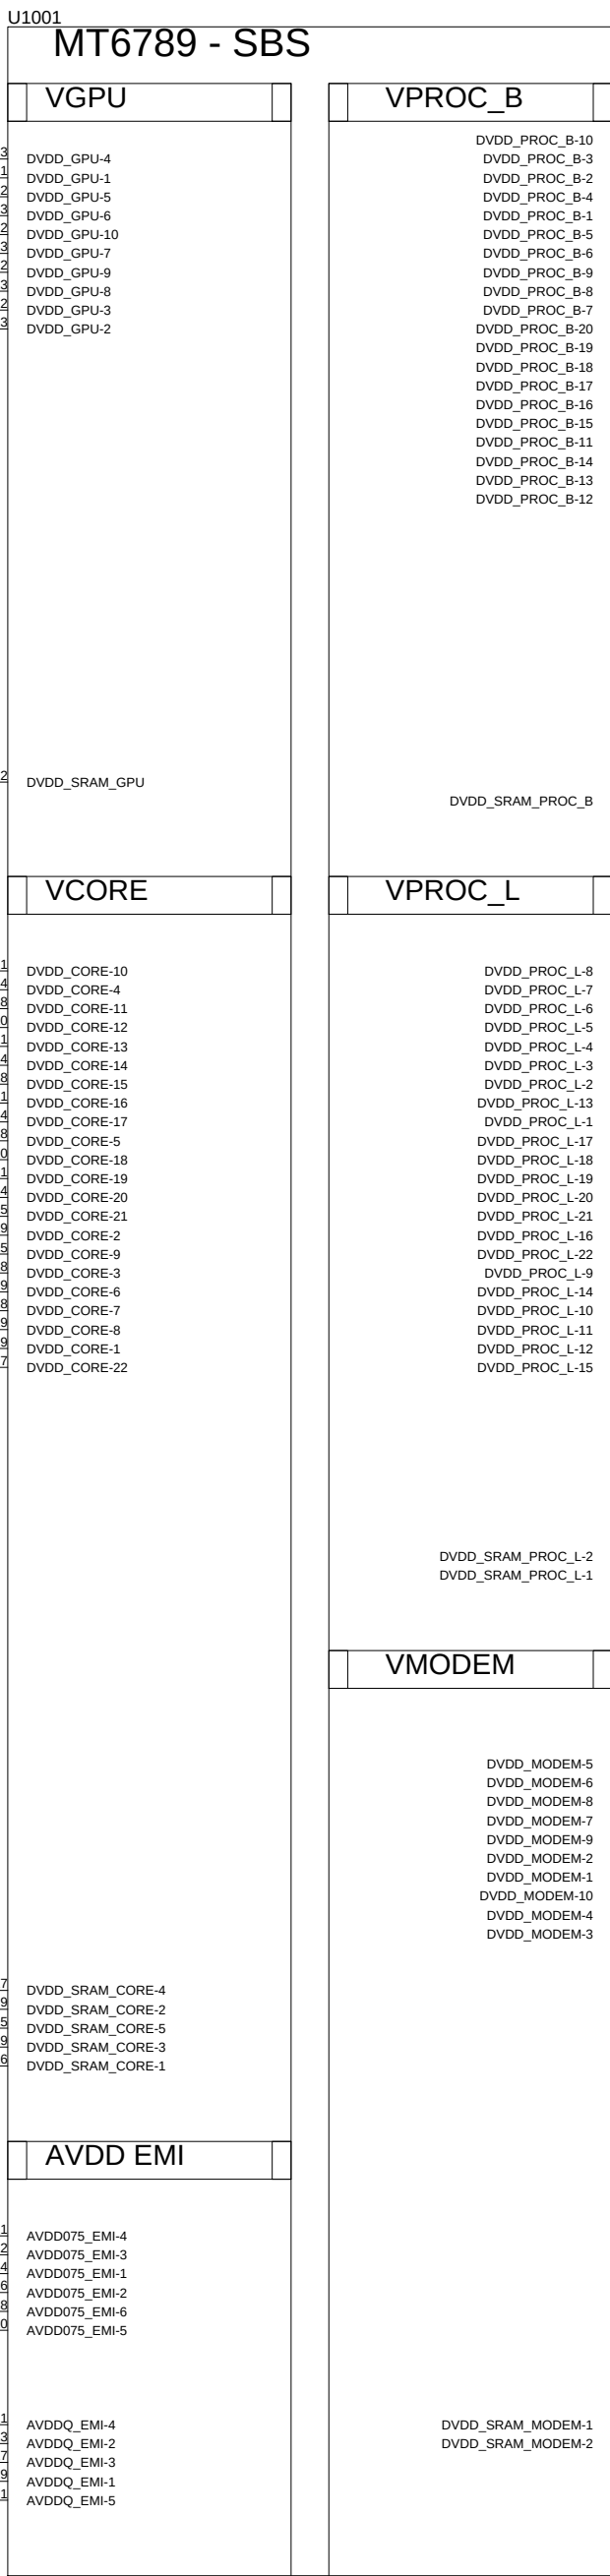
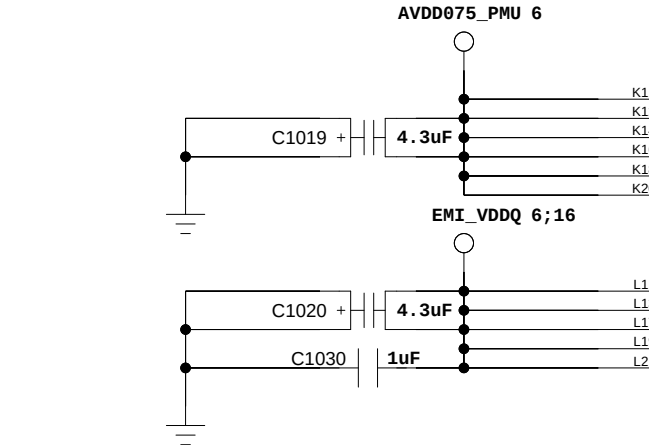
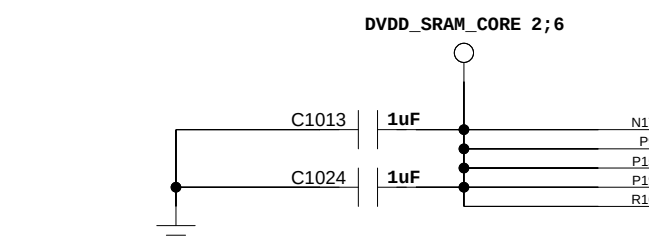
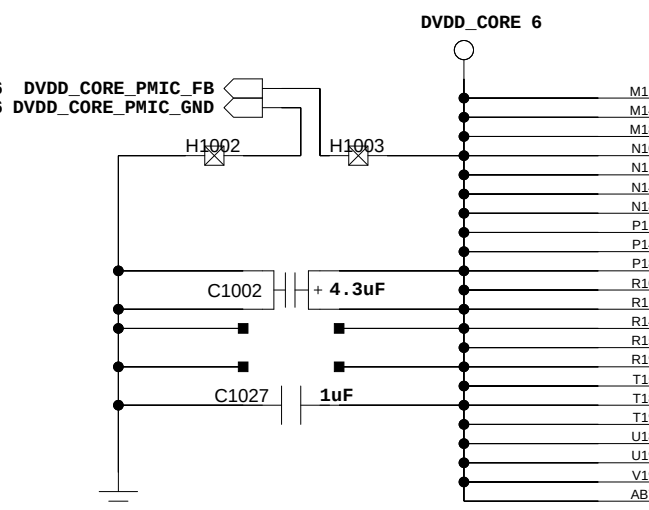
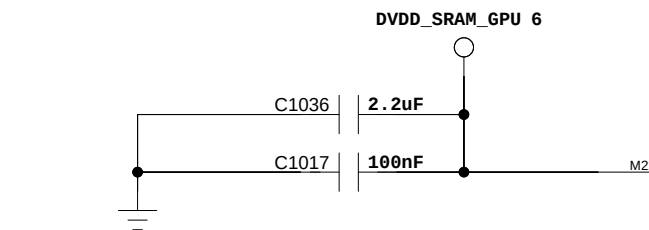


BB_POWER

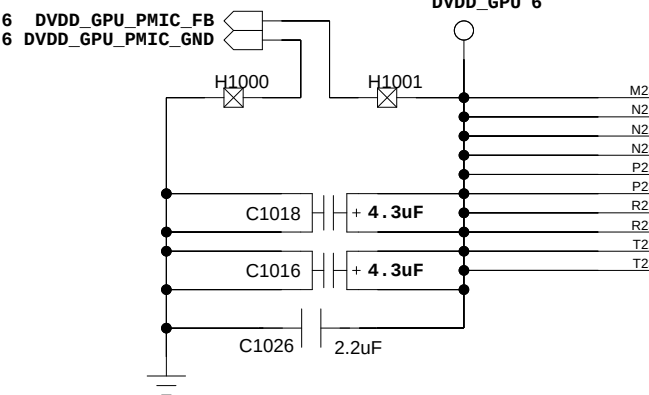


REVISION RECORD			
LTR	ECO NO:	APPROVED:	DATE:

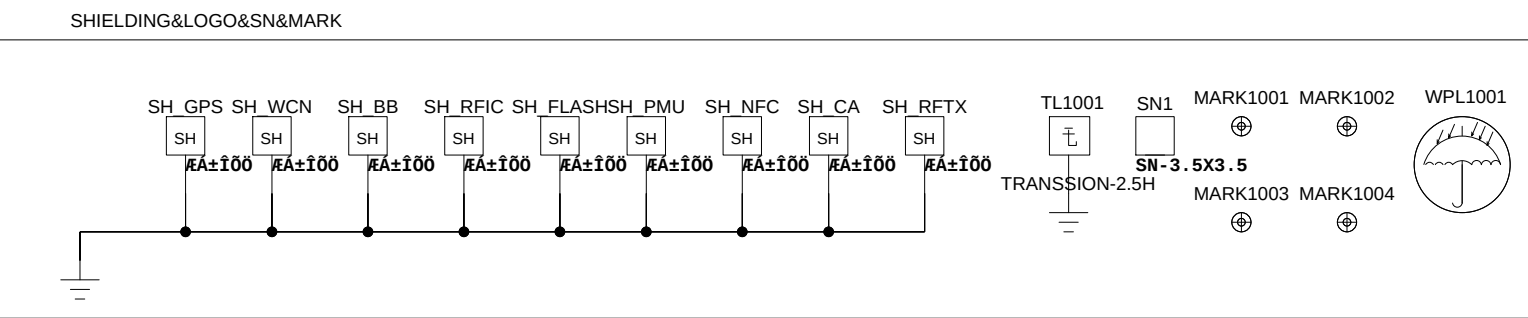

COMPANY: TRANSSION HOLDINGS				MODEL:G100		Modified Date: 02/08/2024:10:34	
DRAWN		DATED		TITLE: 10_BB_POWER_PDN		VERSION:	
CHECKED		DATED		Confidentiality		SHEET: 2 OF 25	
		< >		CONFIDENTIAL			

REVISION RECORD			
LTR	ECO NO:	APPROVED:	DATE:

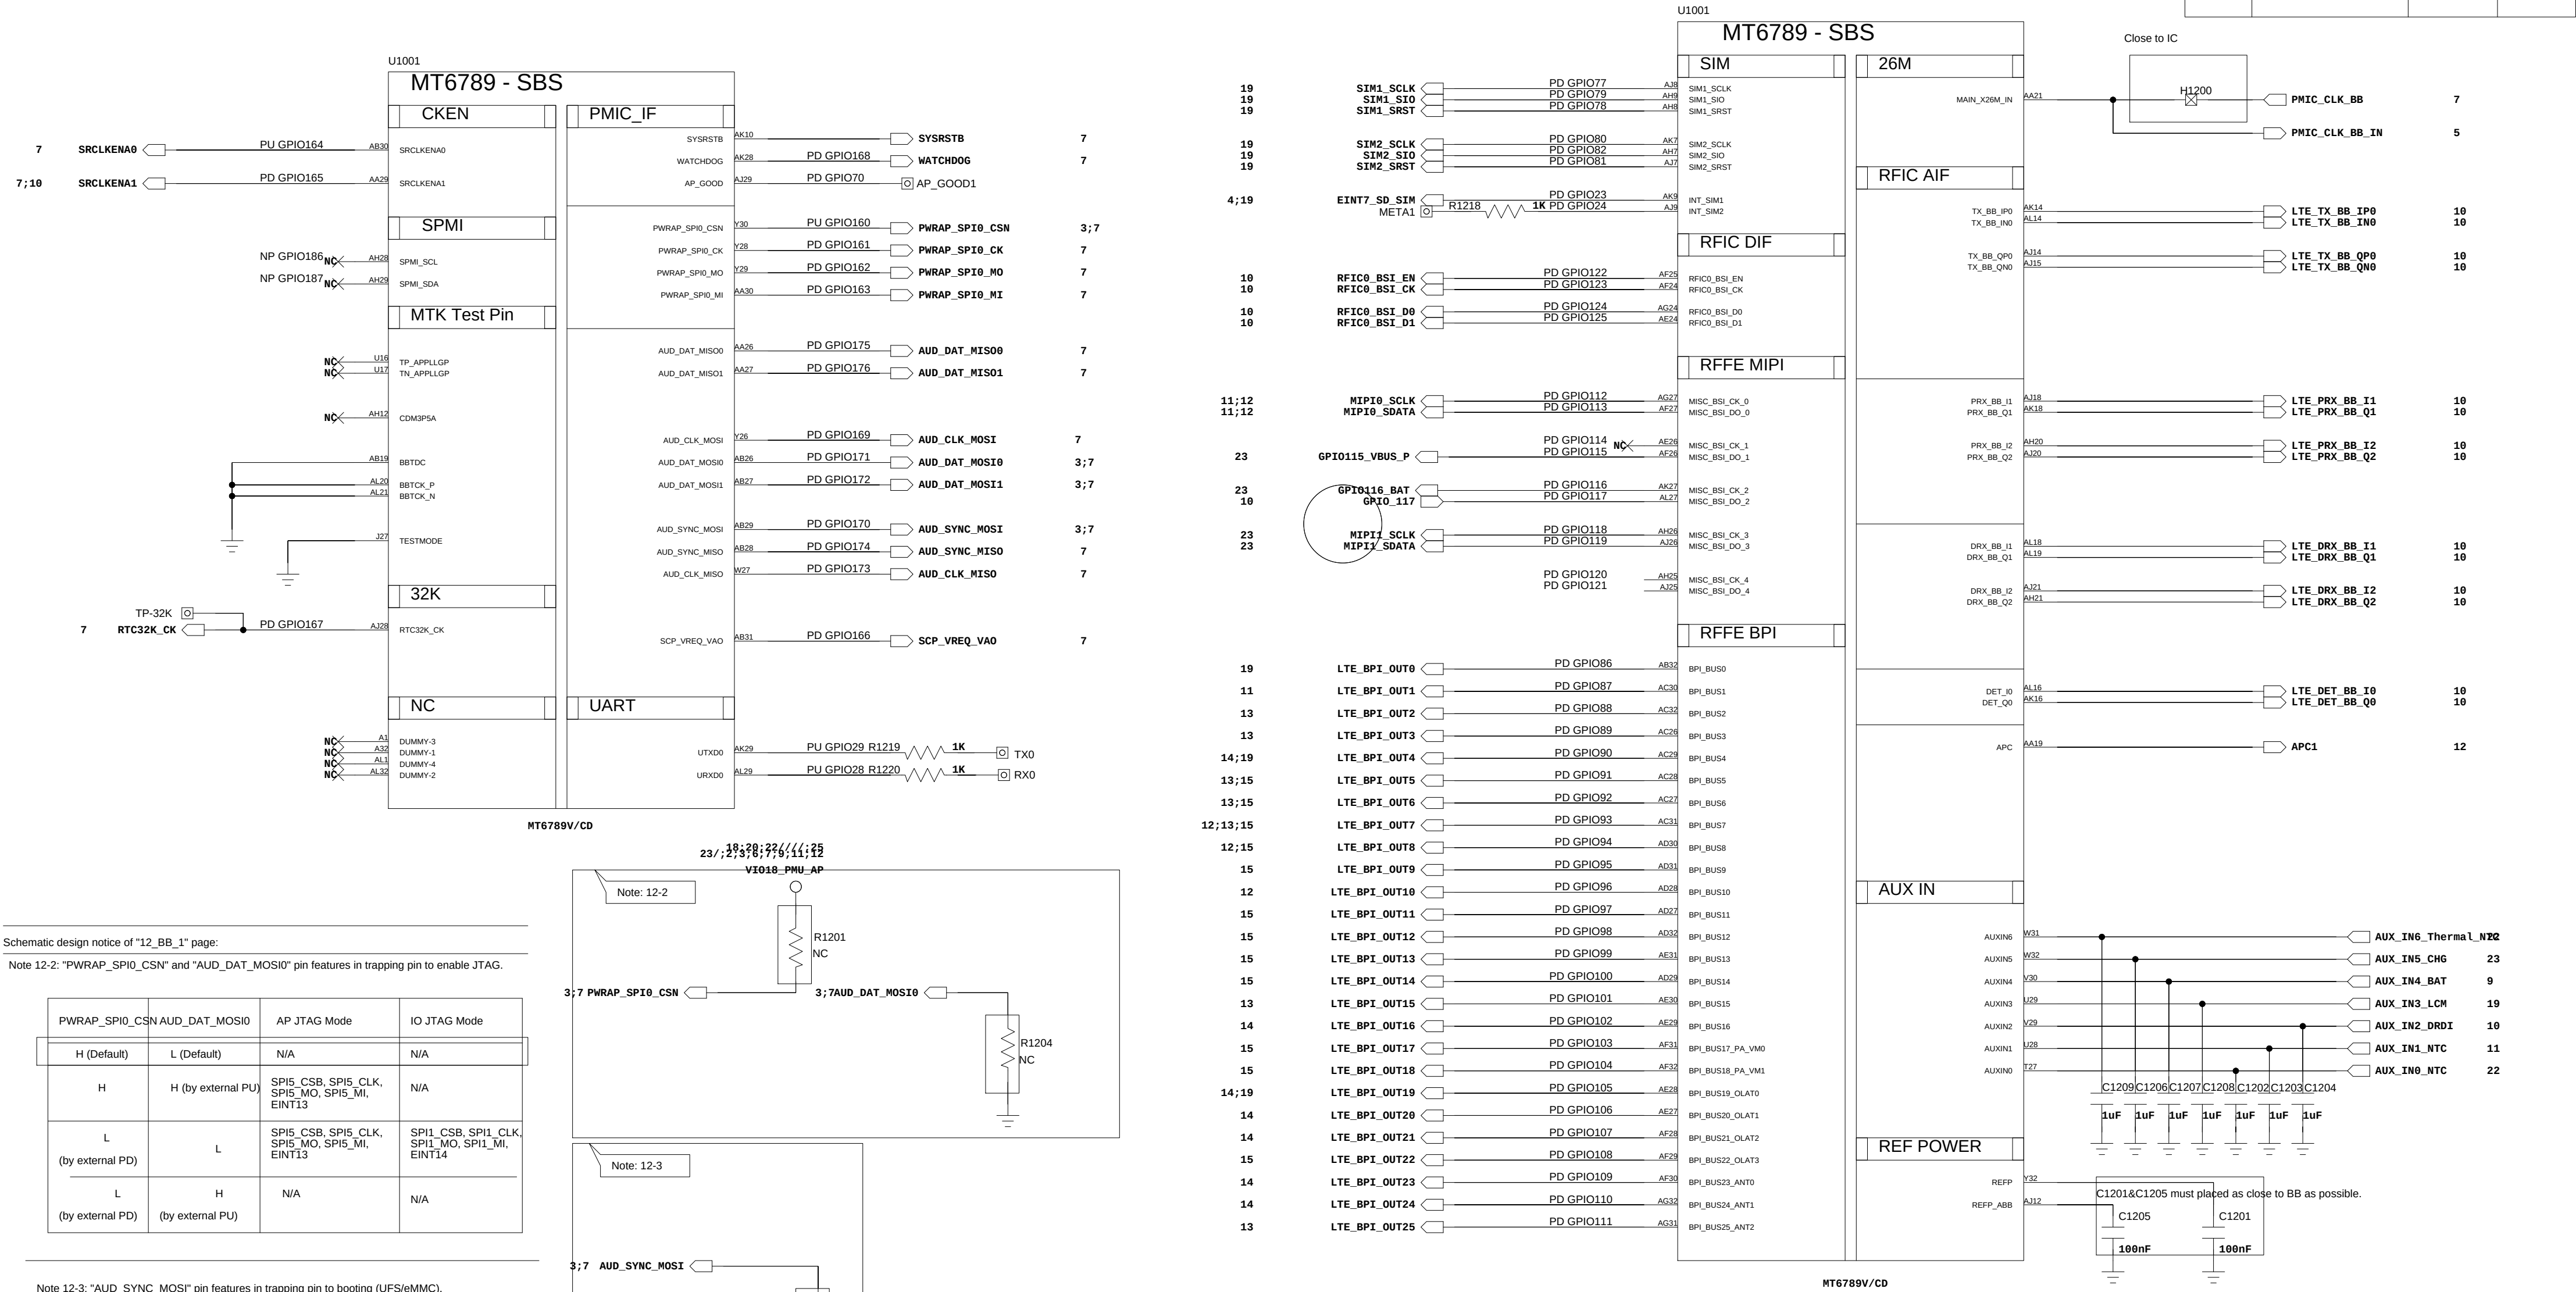

Schematic design notice of "12_BB_1" page:

Note 12-2: "PWRAP_SPI0_CSN" and "AUD_DAT_MOSI0" pin features in trapping pin to enable JTAG.

PWRAP_SPI0_CSN	AUD_DAT_MOSI0	AP JTAG Mode	IO JTAG Mode
H (Default)	L (Default)	N/A	N/A
H	H (by external PU)	SPI5_CSB, SPI5_CLK, SPI5_MO, SPI5_MI, EINT13	N/A
L (by external PD)	L	SPI5_CSB, SPI5_CLK, SPI5_MO, SPI5_MI, EINT13	SPI1_CSB, SPI1_CLK, SPI1_MO, SPI1_MI, EINT14
L (by external PD)	H (by external PU)	N/A	N/A



Note 12-3: "AUD_SYNC_MOSI" pin features in trapping pin to booting (UFS/eMMC).

AUD_SYNC_MOSI	Storage Booting Mode
L (Default)	Only UFS boot
H (by external PU)	Only eMMC boot

Note 12-4 "AUD_DAT_MOSI1" pin features in trapping pin for SW co-load.



AUD_DAT_MOSI1	Mode
L (Default)	LP4x-MCP
H (by external PU)	LP4x-Discrete

REVISION RECORD			
LTR	ECO NO:	APPROVED:	DATE:

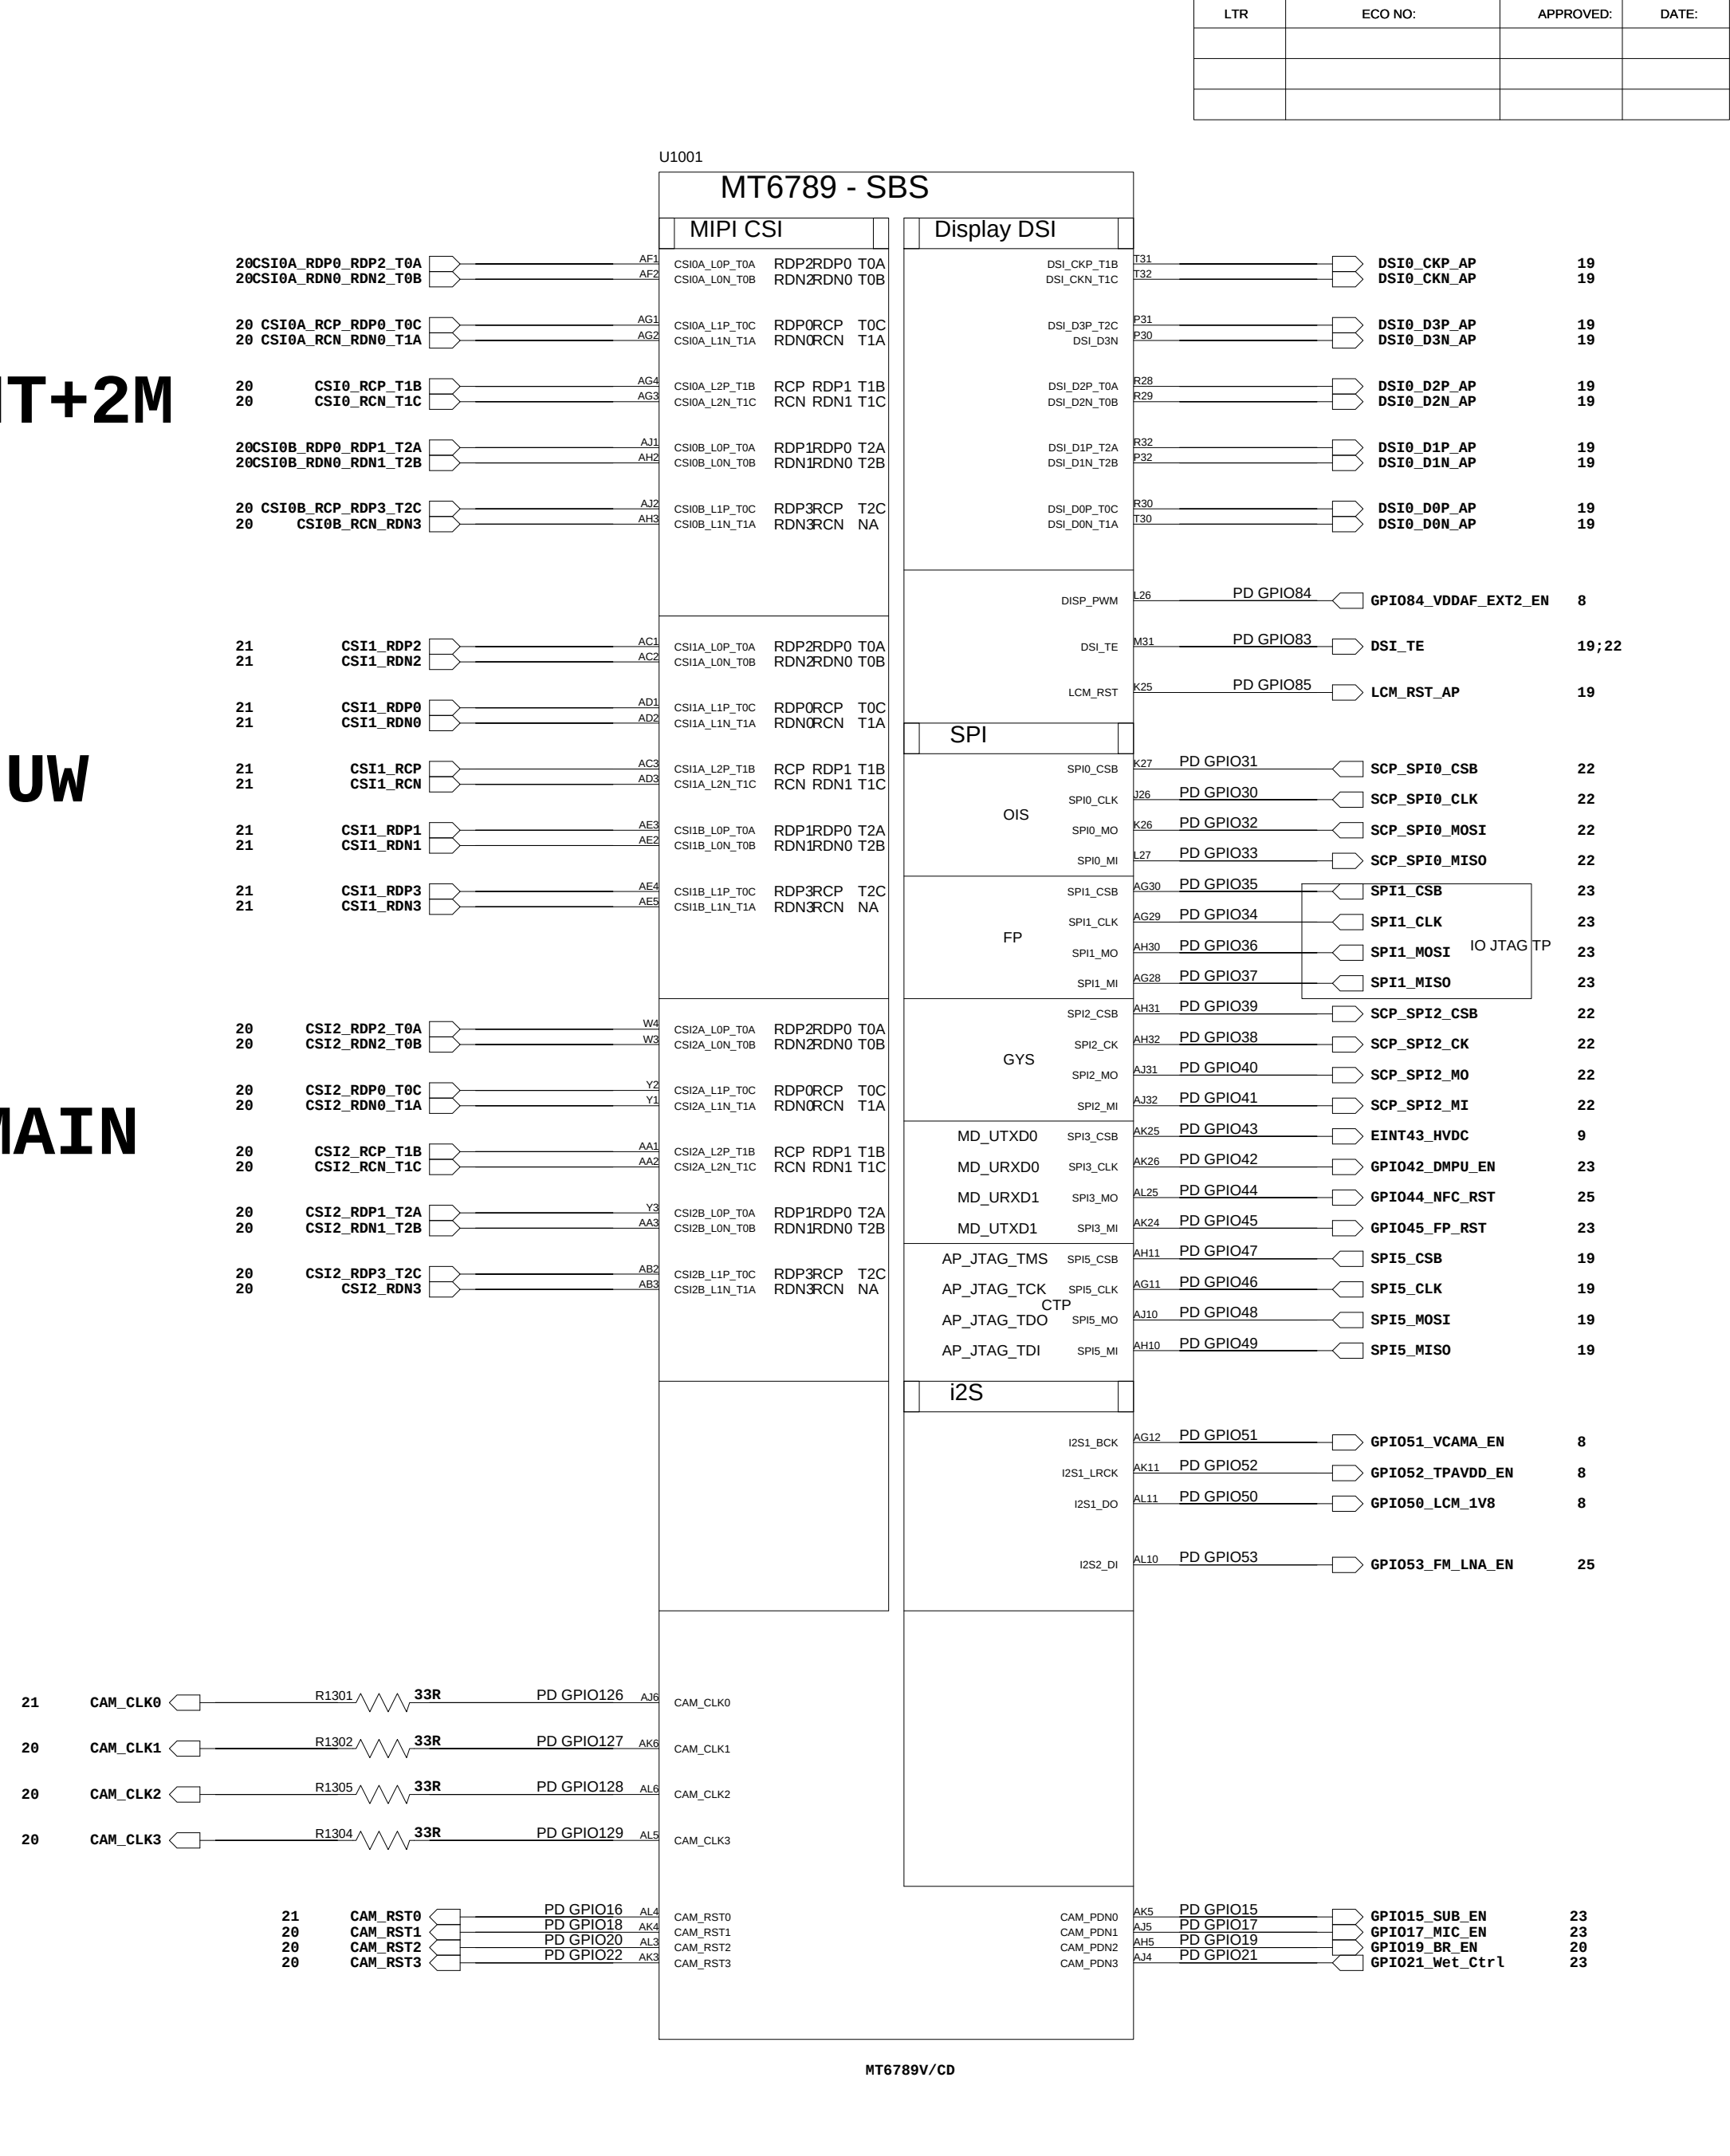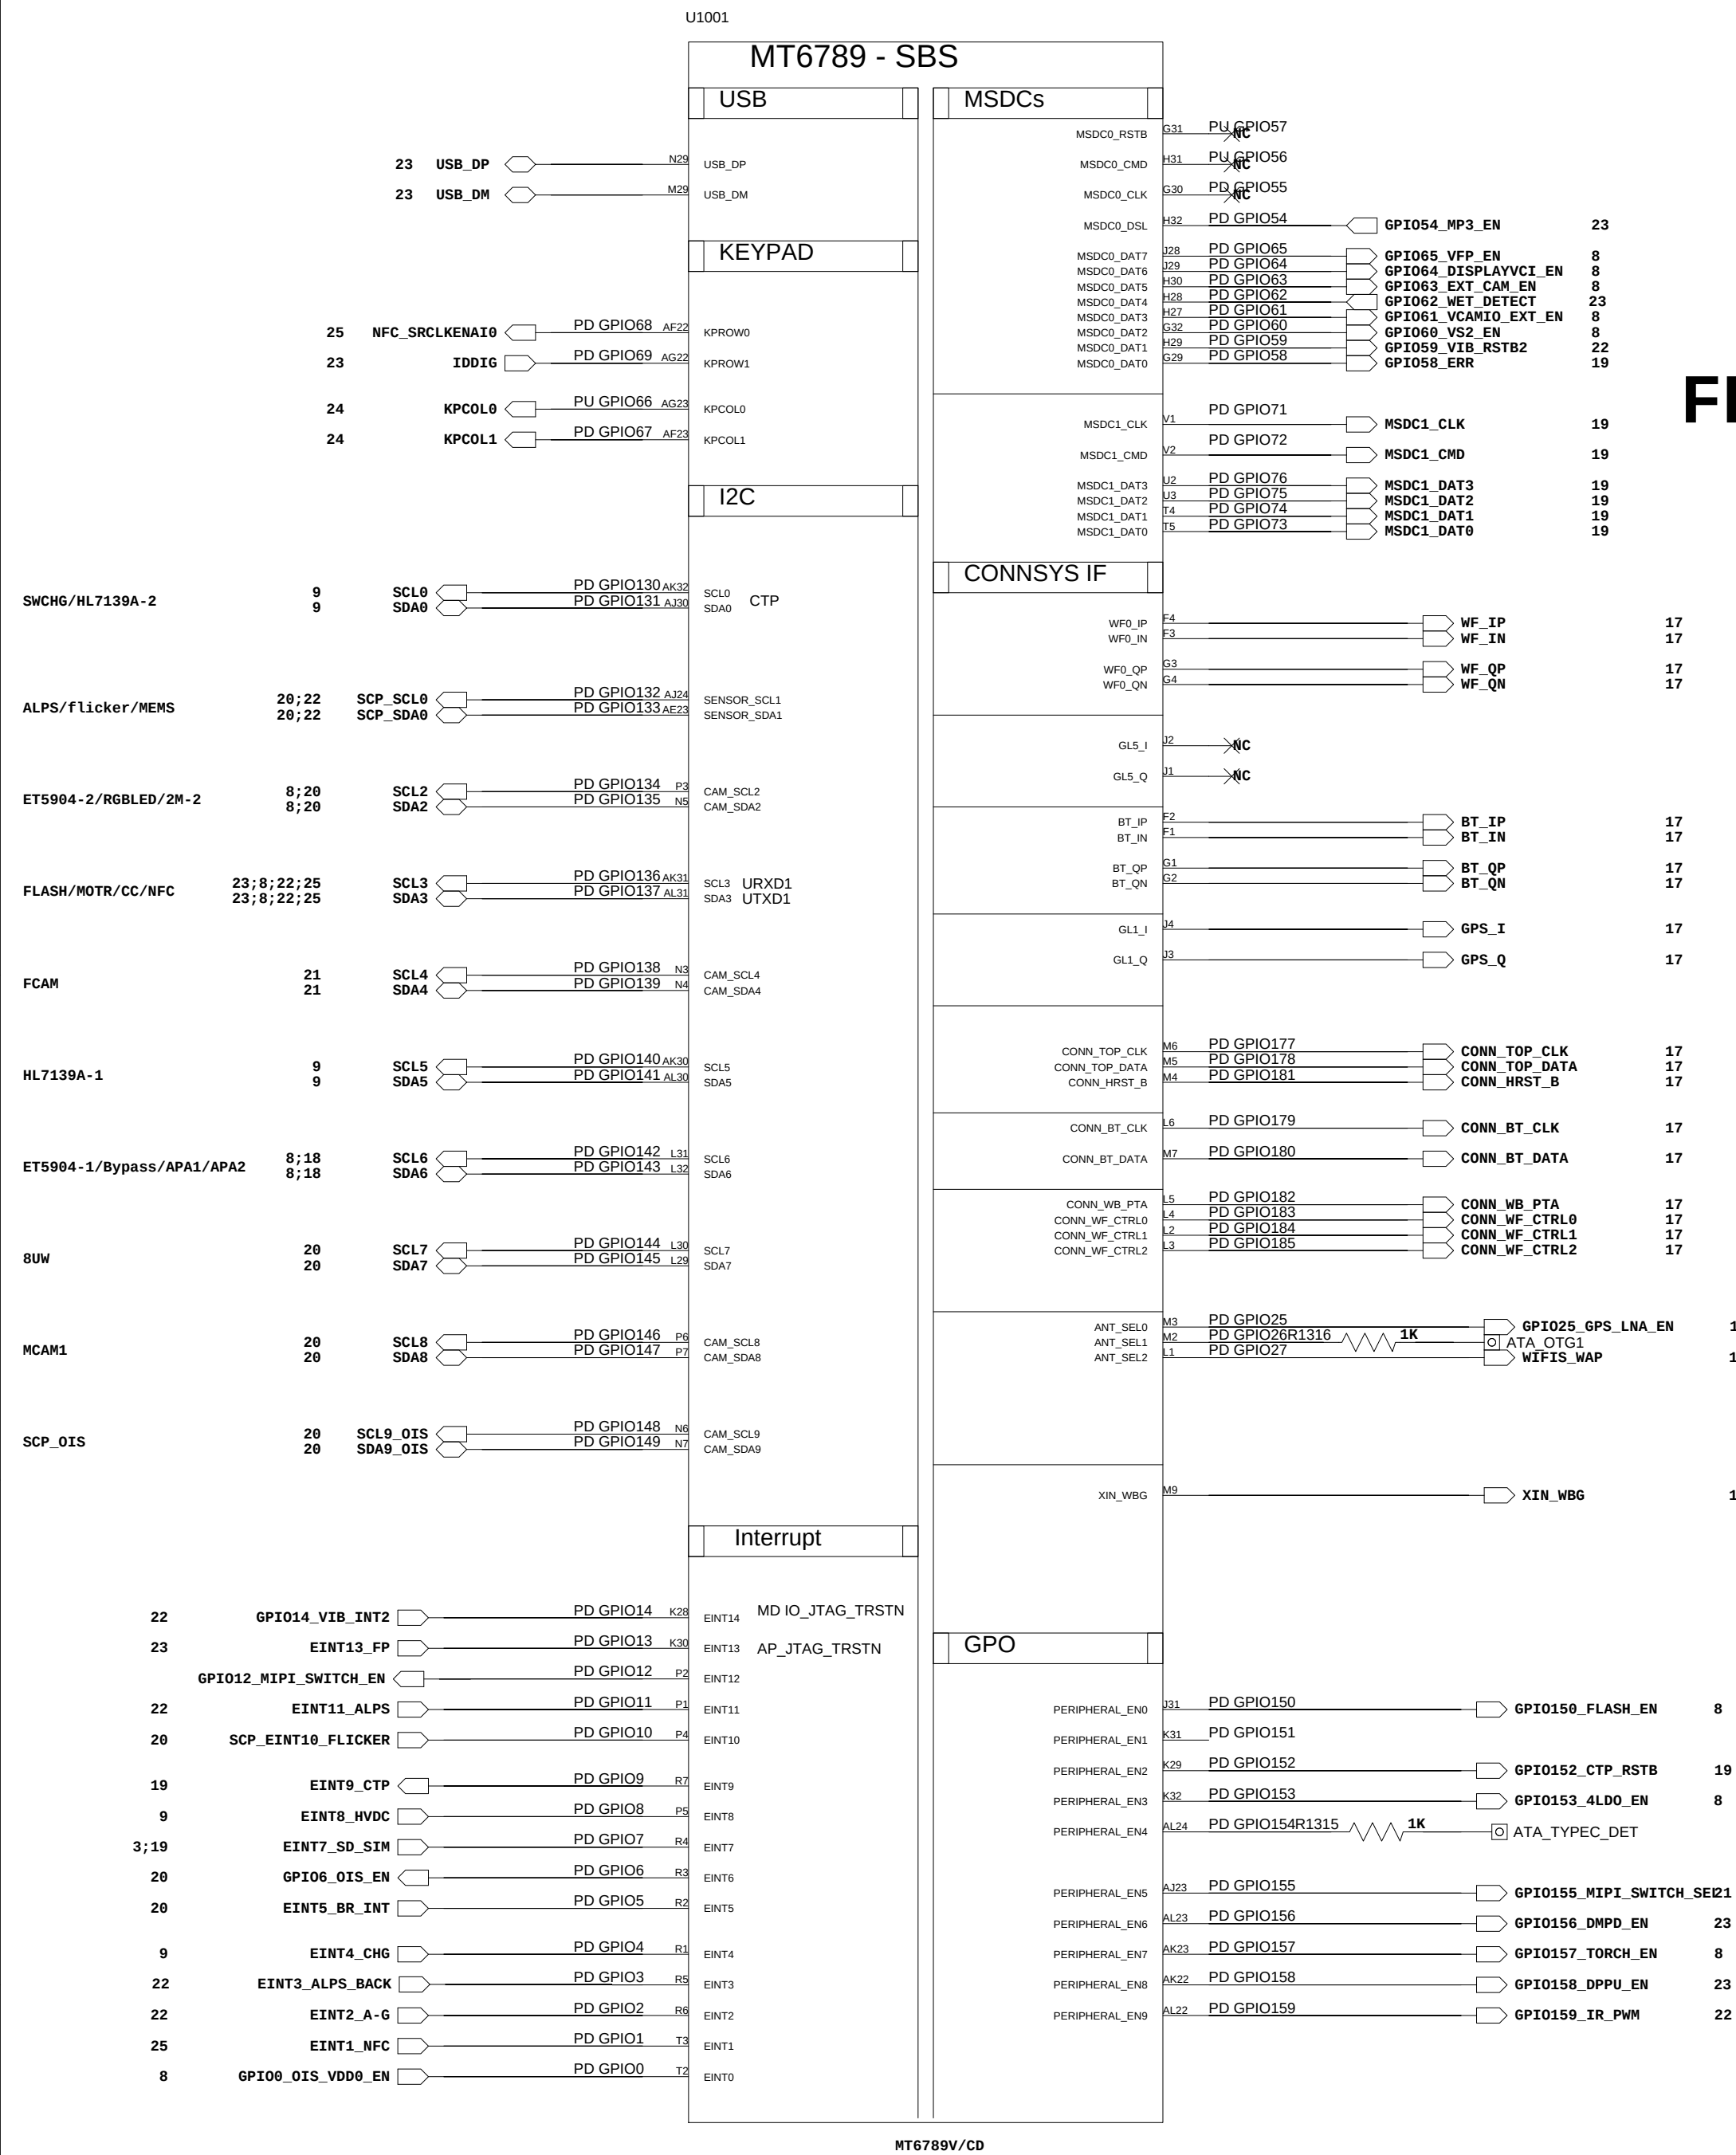

COMPANY: TRANSSION HOLDINGS				MODEL:G100		Modified Date: 25/07/2024:16:12	
DRAWN		DATED		TITLE: 13_BB_II_CONN_RF		VERSION:	SHEET: 4 OF 25
CHECKED		DATED	< >	Confidentiality	CONFIDENTIAL		

REVISION RECORD			
LTR	ECO NO:	APPROVED:	DATE:

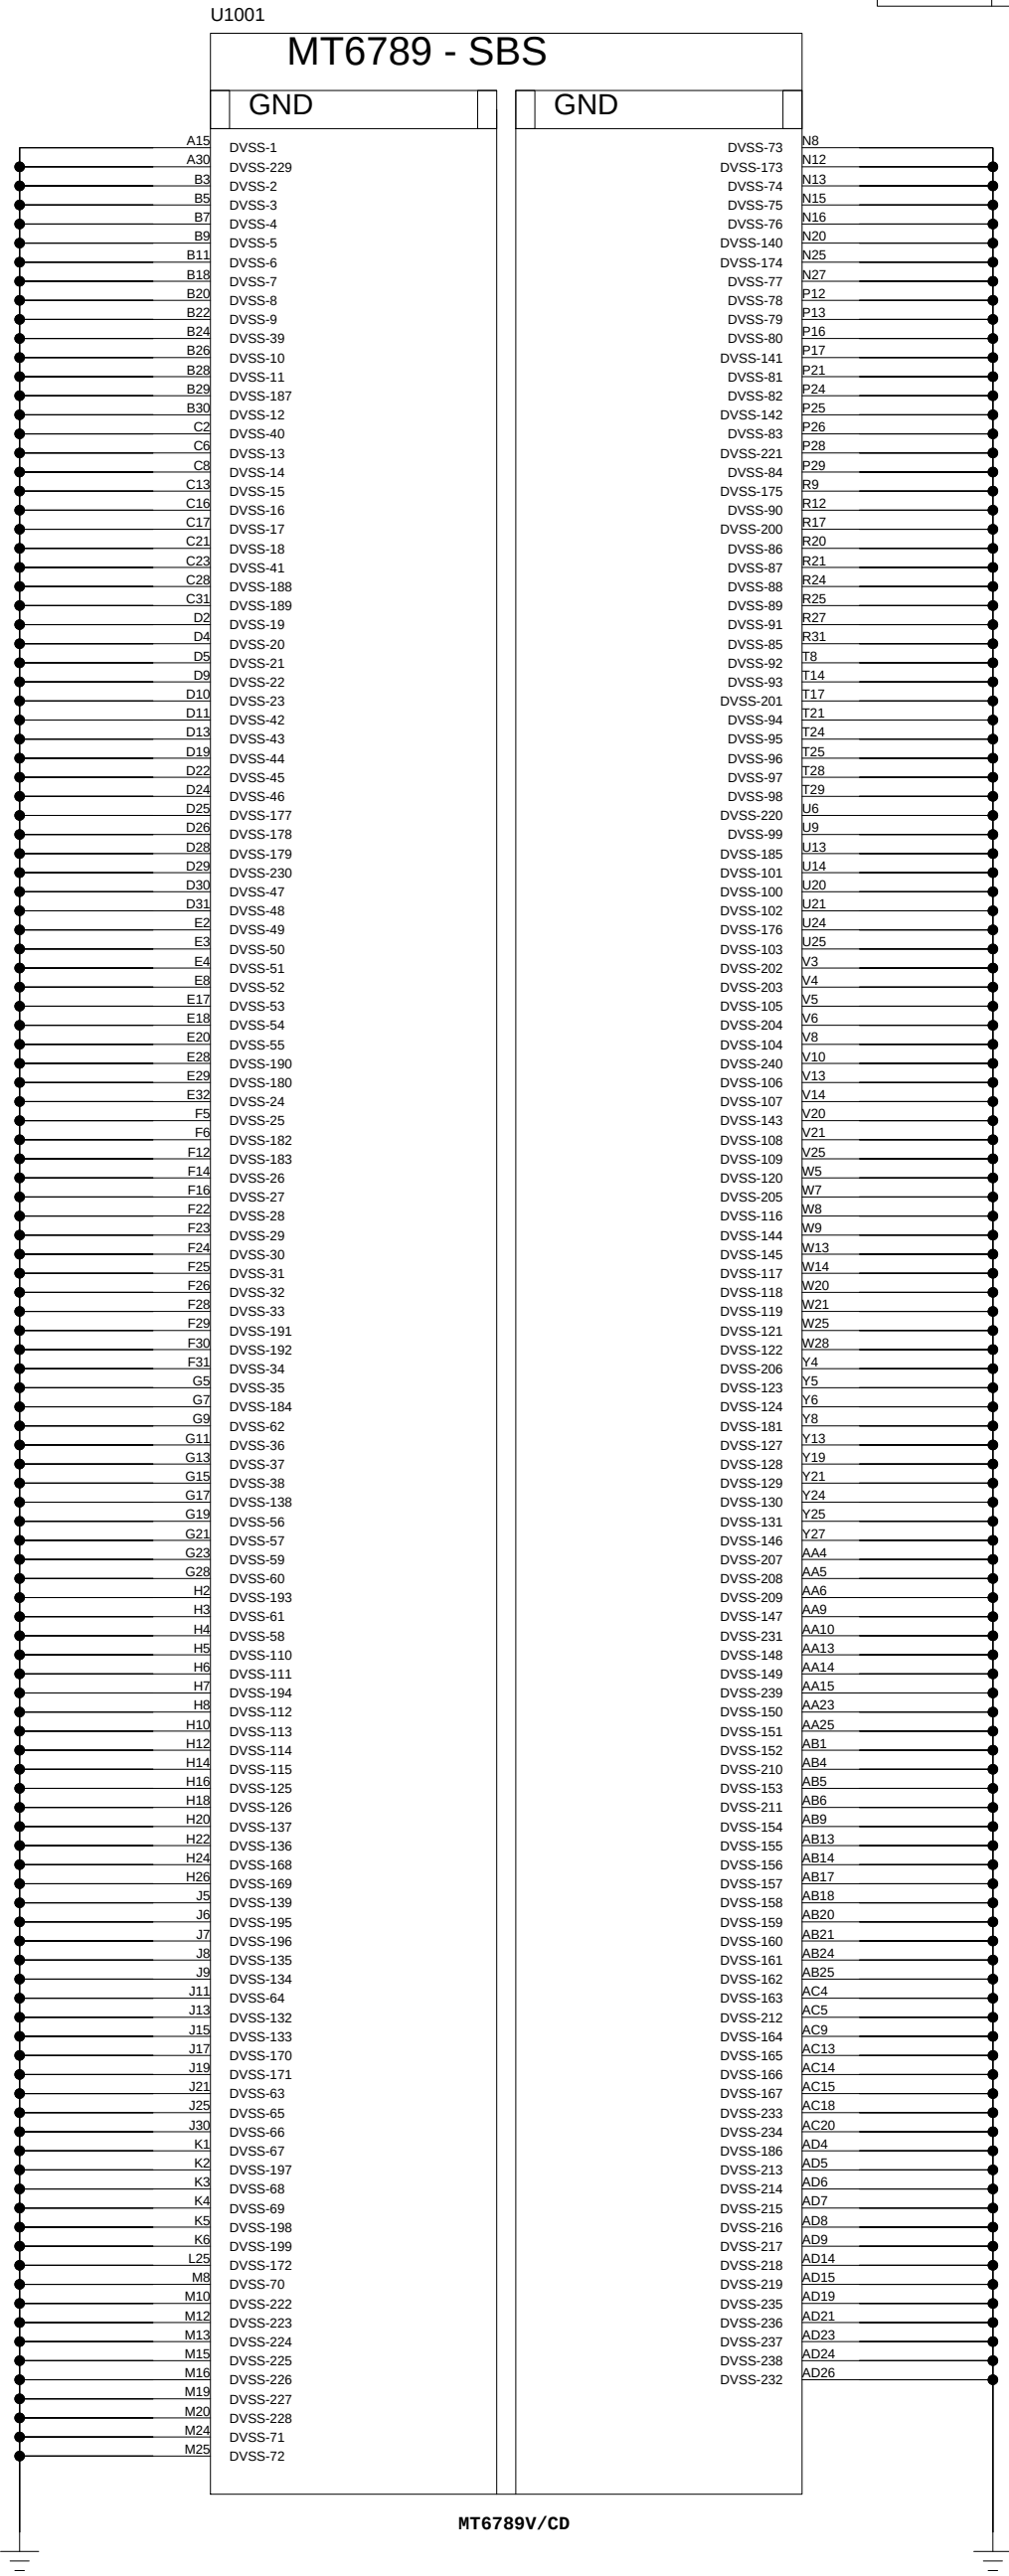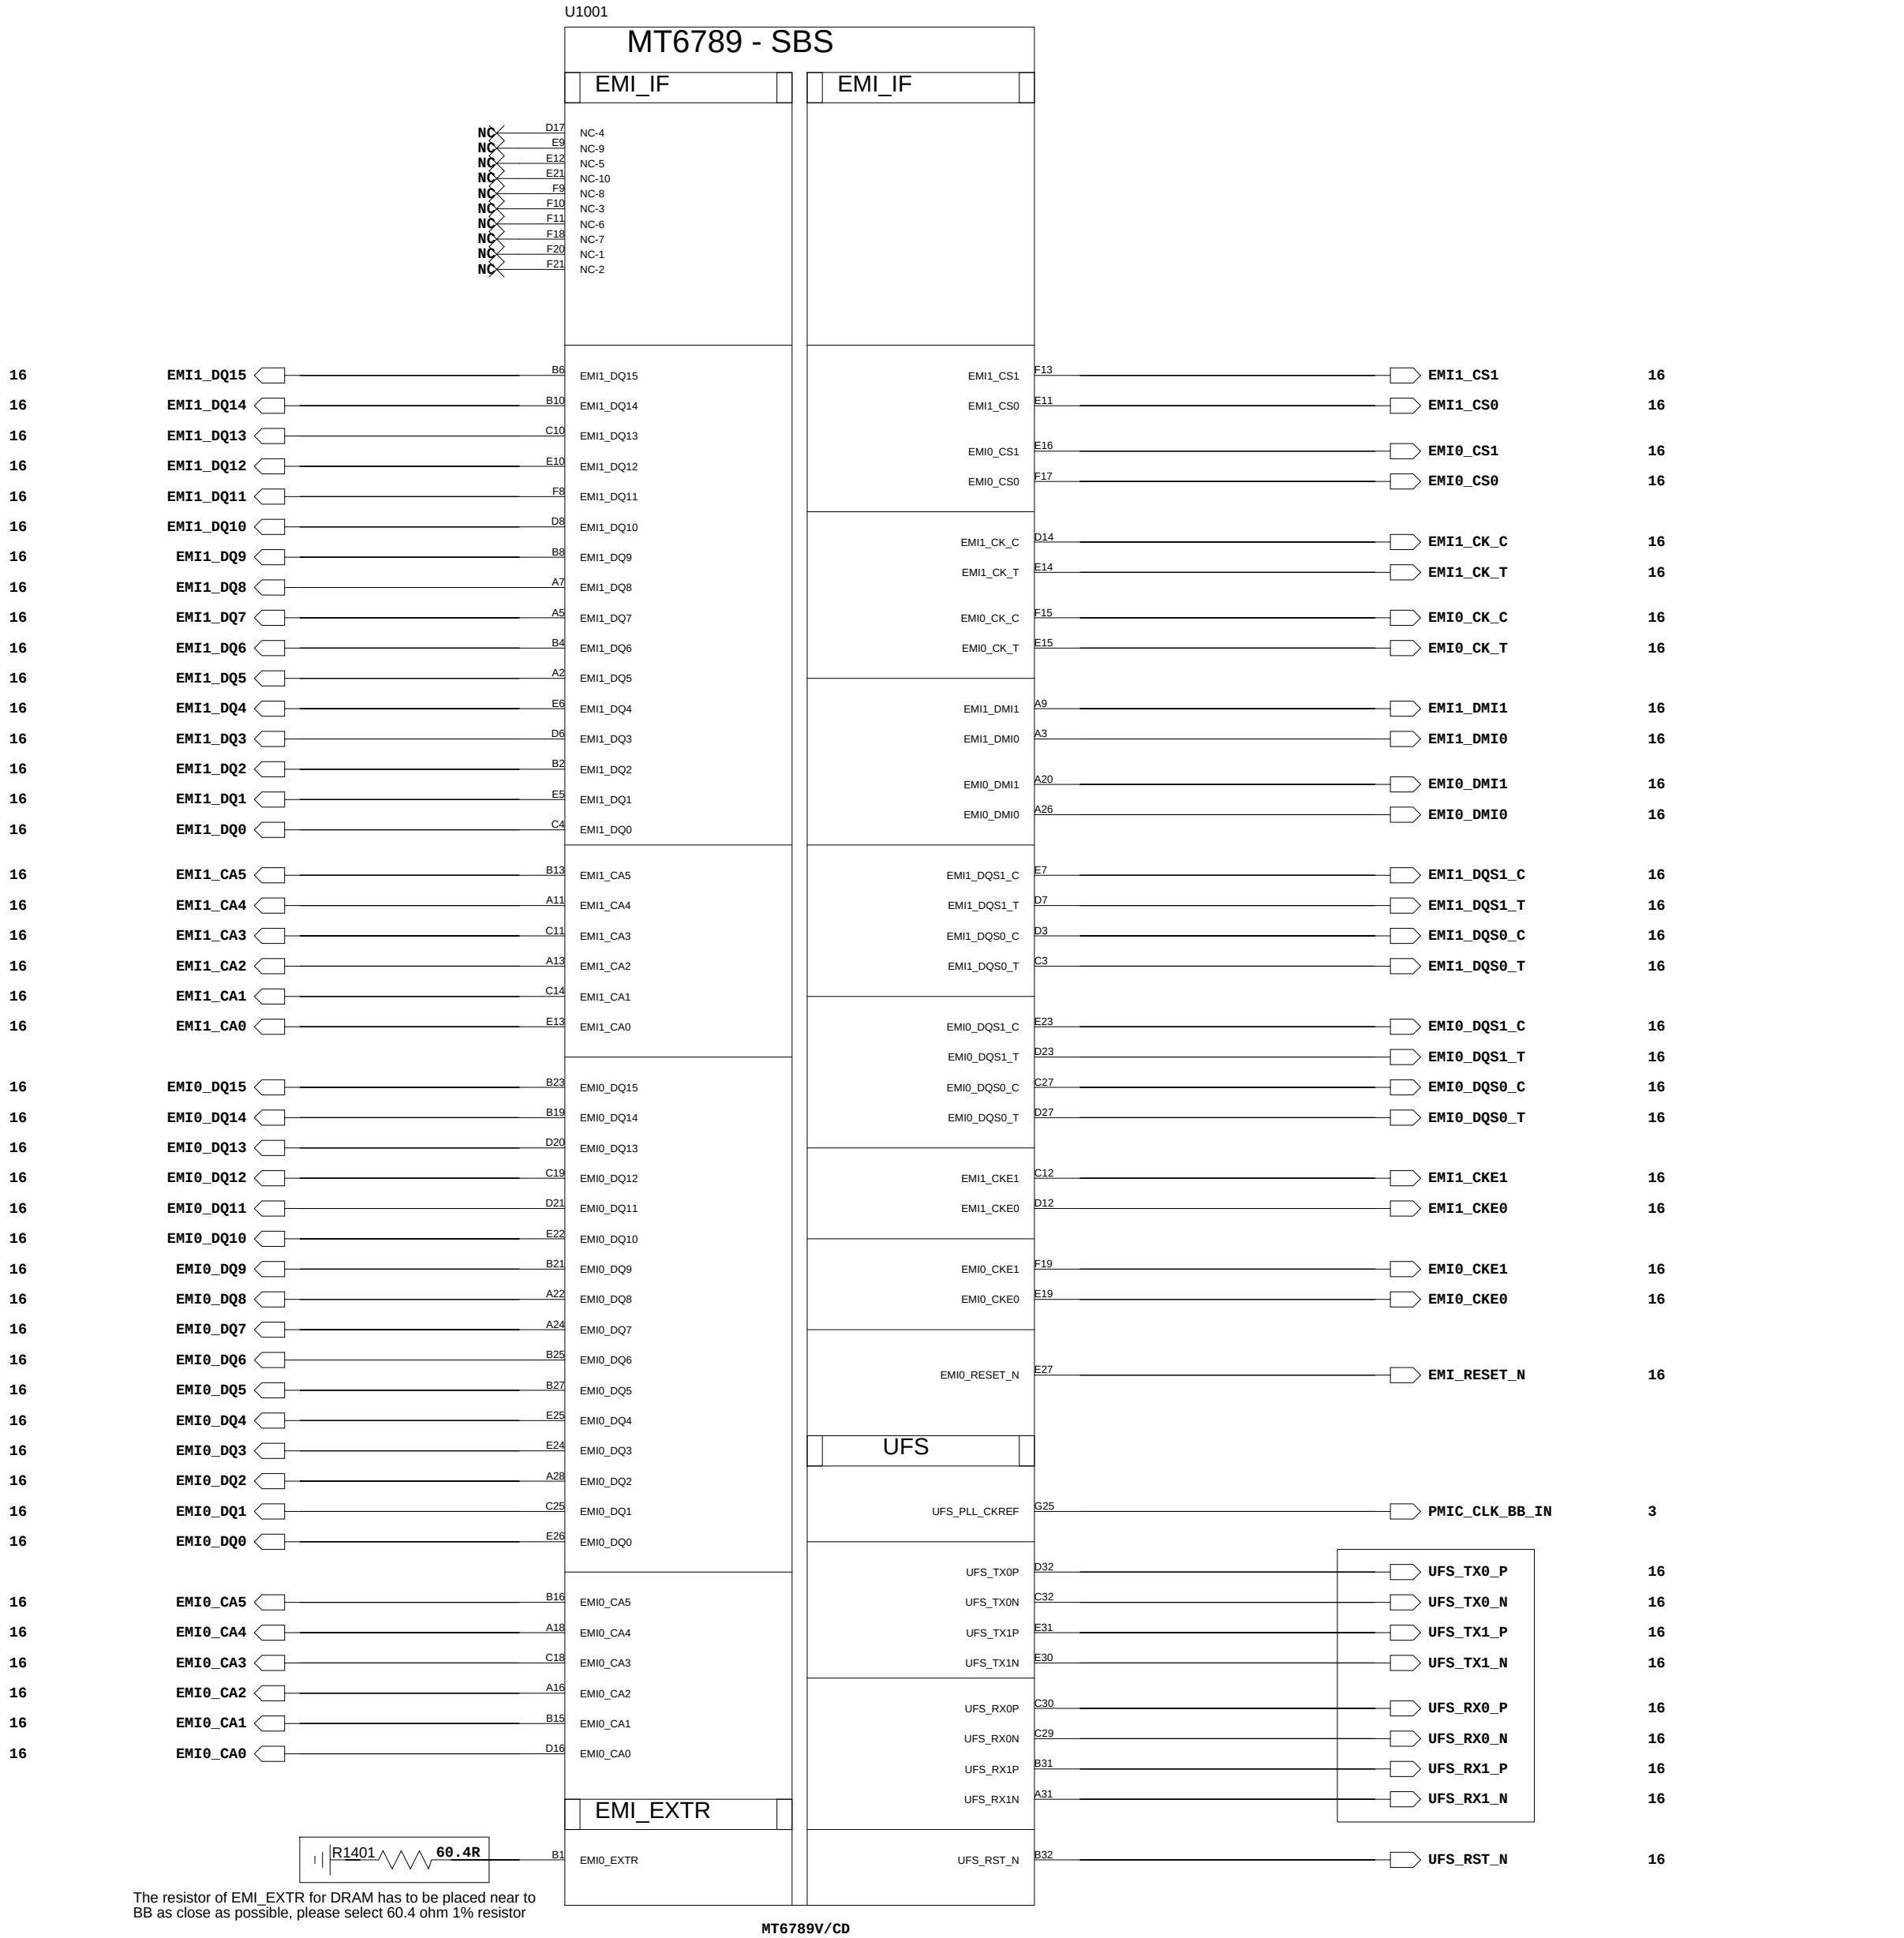

Schematic design notice of "14_BB_3_Interface" page:

Note 14-1: R4001 please select 60.4 ohm (1%) resistor

Note 14-2: Make sure TX/RX connection (T to in, R to out and P to t, N to c)

COMPANY: TRANSSION HOLDINGS

MODEL:G100

Modified Date: 18/07/2024:17:02

DRAWN

DATED

TITLE: 14_BB_III_DDR

VERSION:

SHEET: 5 OF 25

CHECKED

DATED

< >

Confidentiality


CONFIDENTIAL

POWER_MT6366_I

REVISION RECORD			
LTR	ECO NO:	APPROVED:	DATE:

PMU_BUCK


PMU_LDO

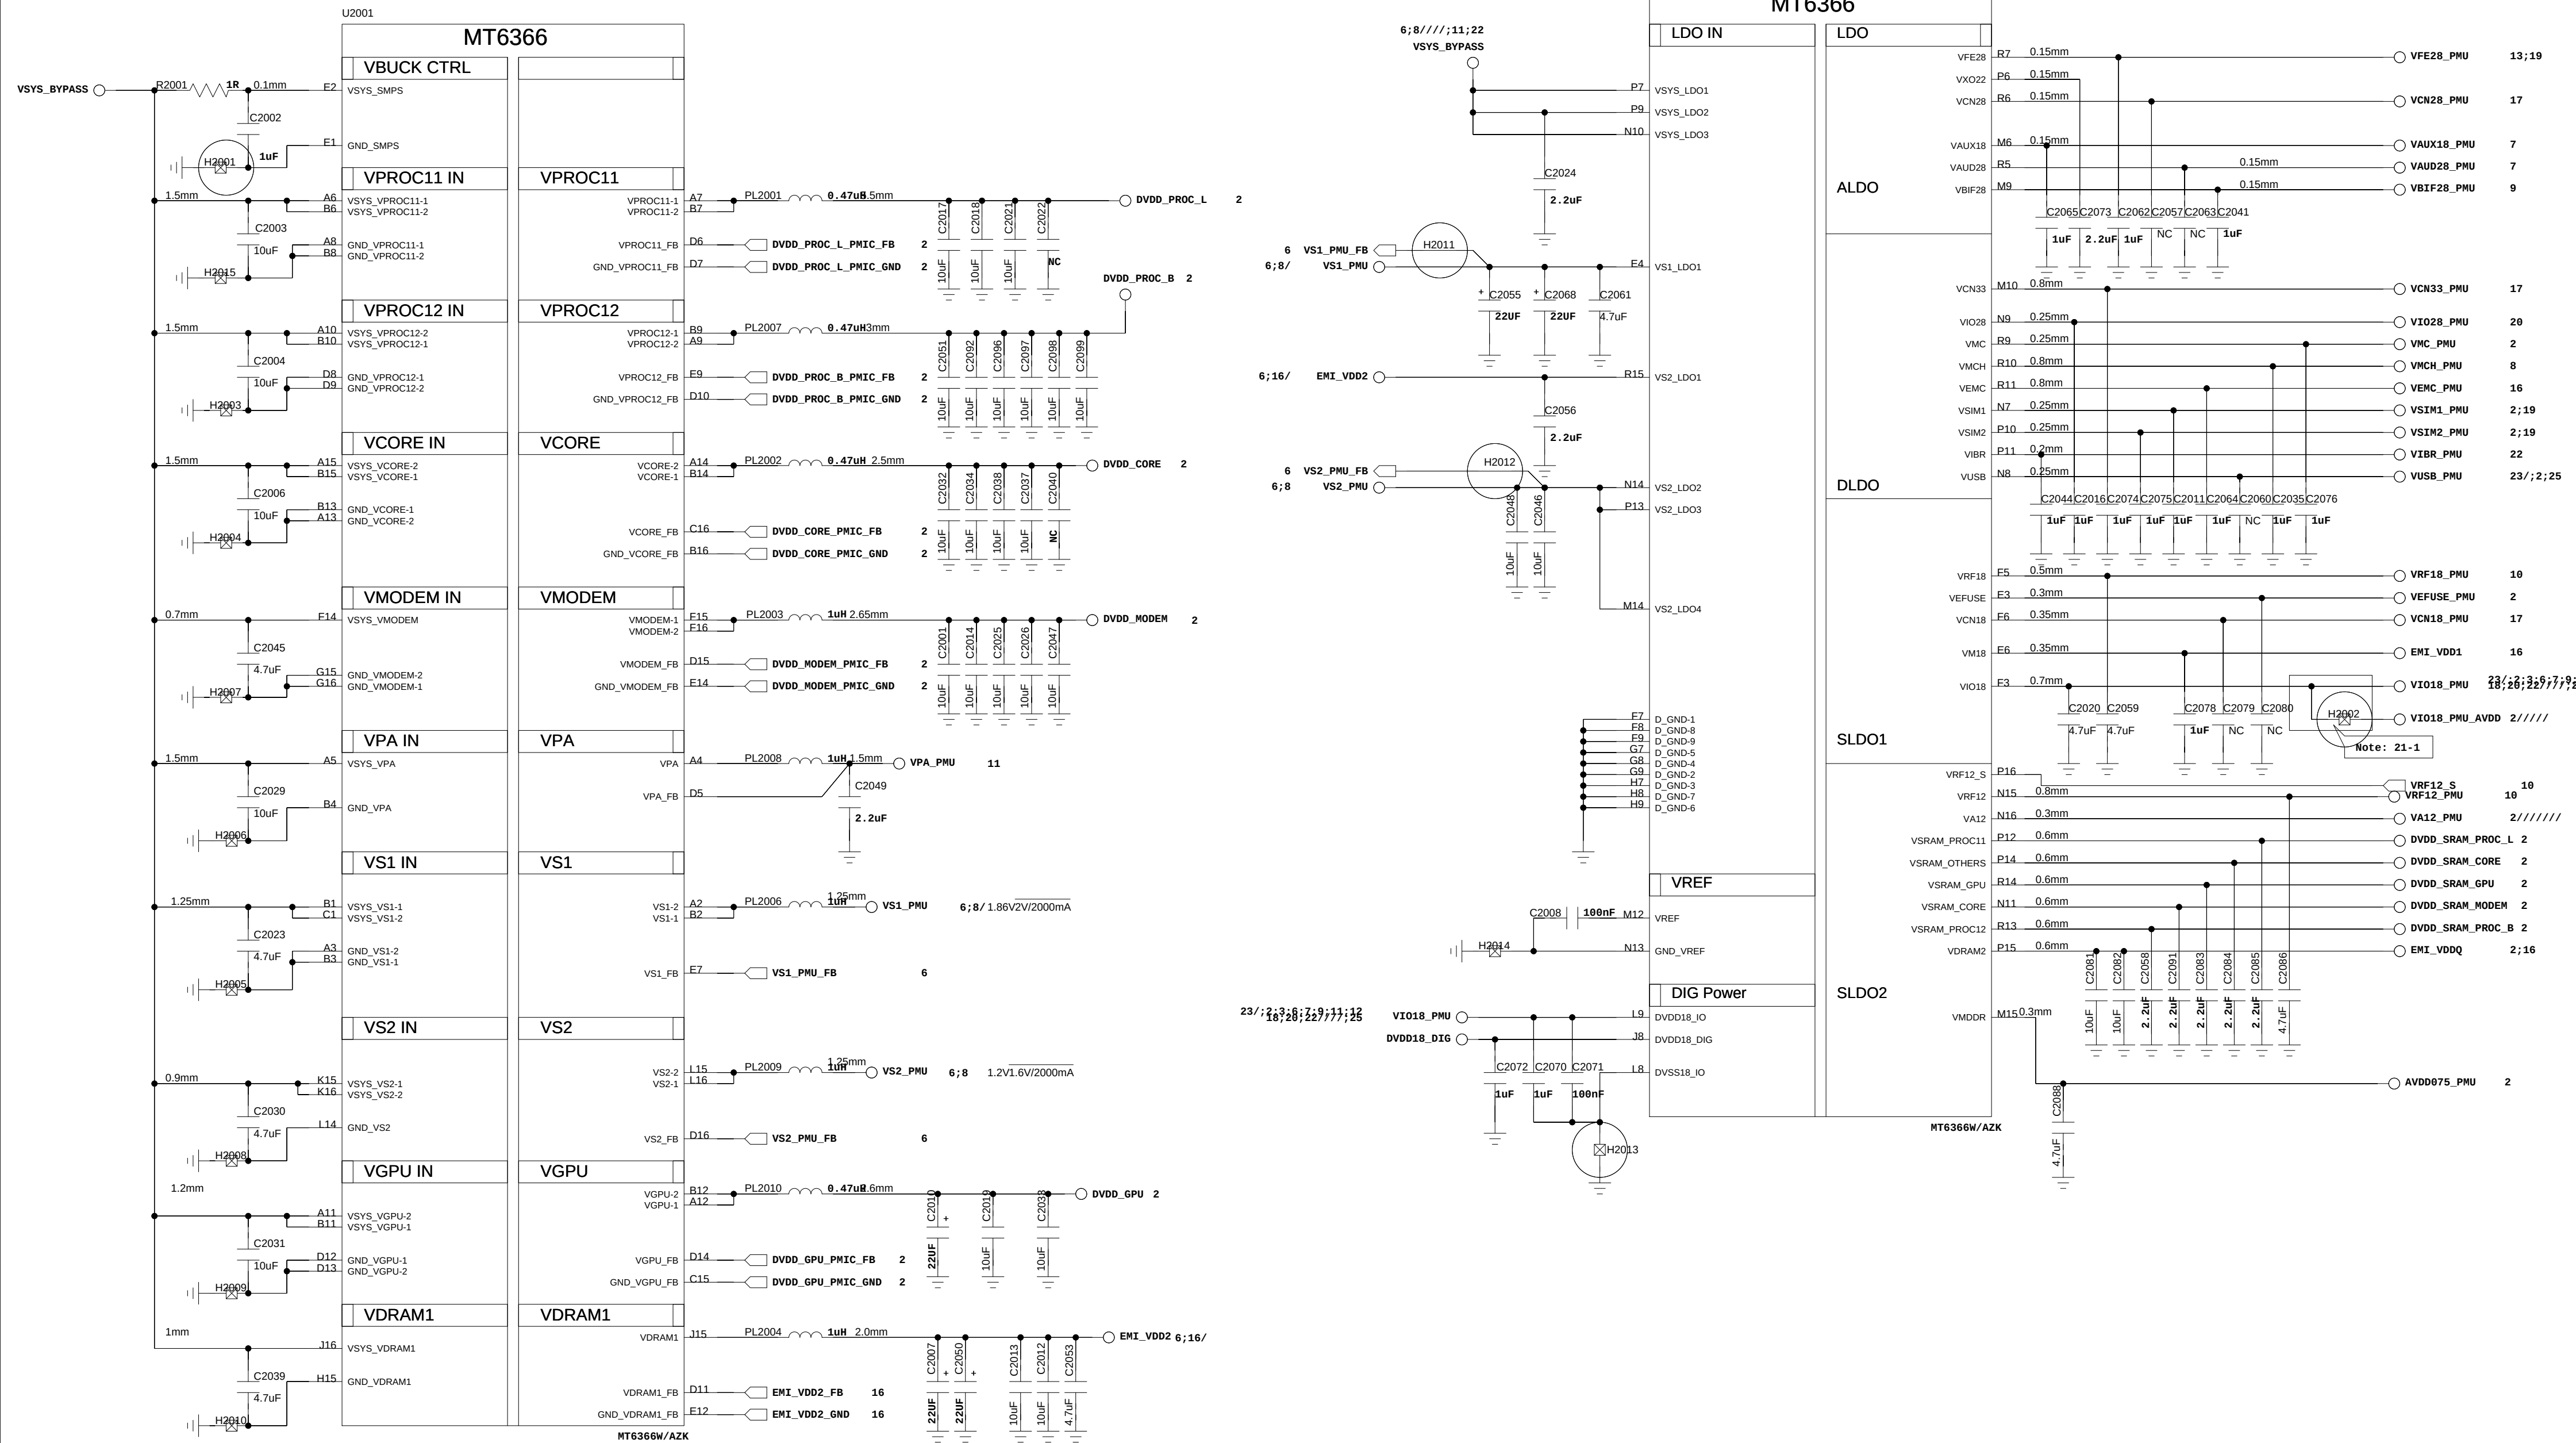

COMPANY: TRANSSION HOLDINGS				MODEL:G100		Modified Date: 24/07/2024:14:13	
DRAWN		DATED		TITLE: 20_POWER_MT6366_BUCK_LDO		VERSION:	SHEET: 6 OF 25
CHECKED		DATED	< >	Confidentiality	CONFIDENTIAL		

POWER_MT6366_II

REVISION RECORD			
LTR	ECO NO:	APPROVED:	DATE:

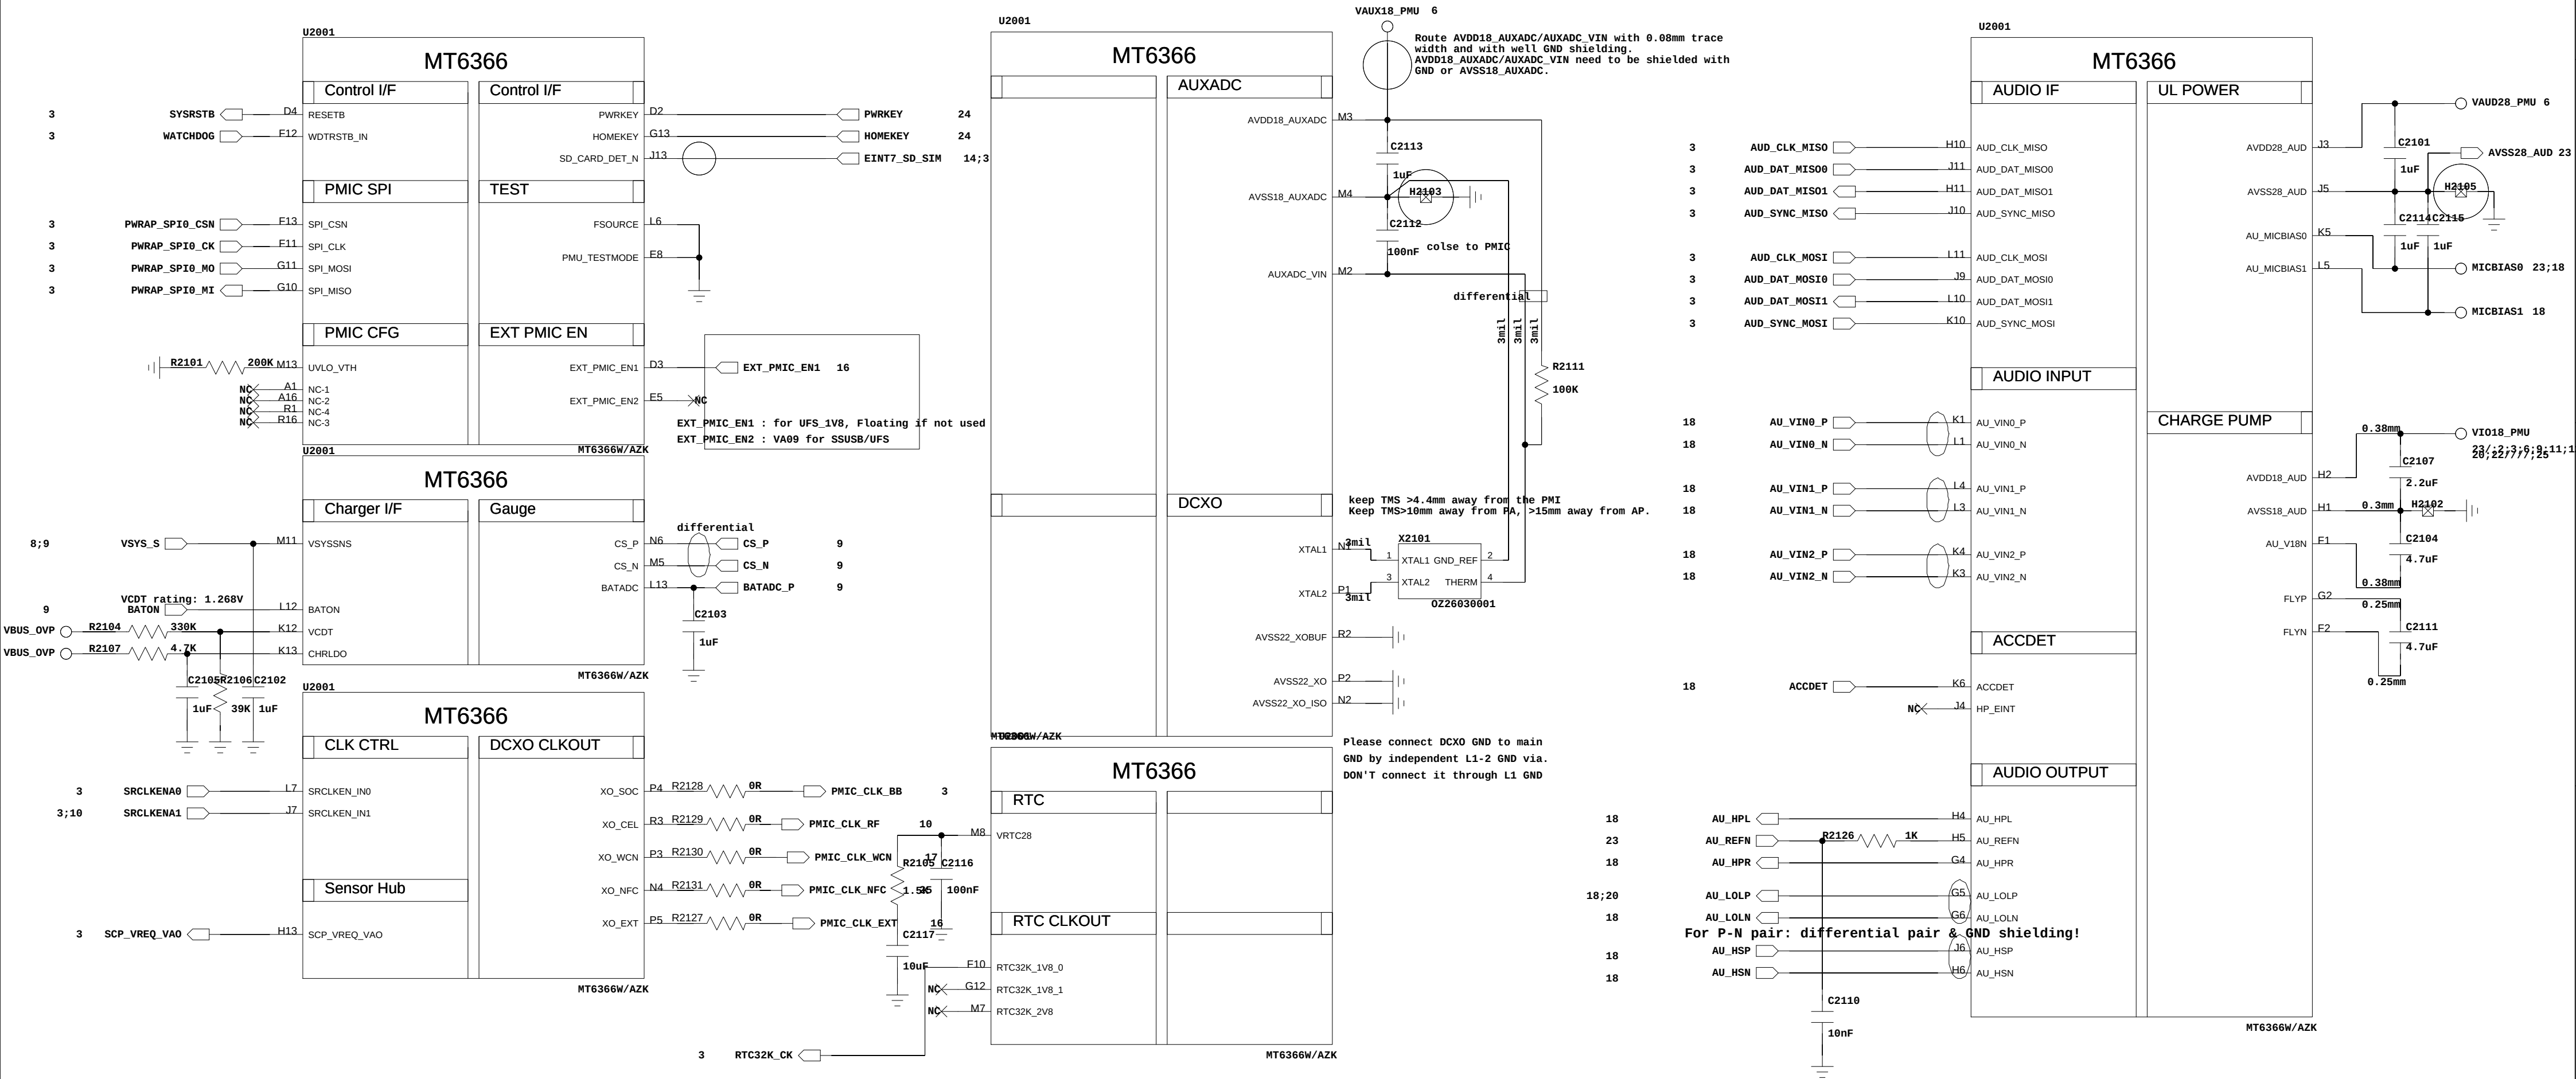


COMPANY: TRANSSION HOLDINGS				MODEL: G100		Modified Date: 24/07/2024:14:24	
DRAWN		DATED		TITLE: 21_POWER_MT6366_GENERAL_CLK		VERSION:	SHEET: 7 OF 25
CHECKED		DATED	< >	Confidentiality	CONFIDENTIAL		

POWER_THIRD-PARTY


CAMERA FLASH LED

AW36515:I2C ADDRESS:0xC6(Write)/0xC7(Read)


14601210

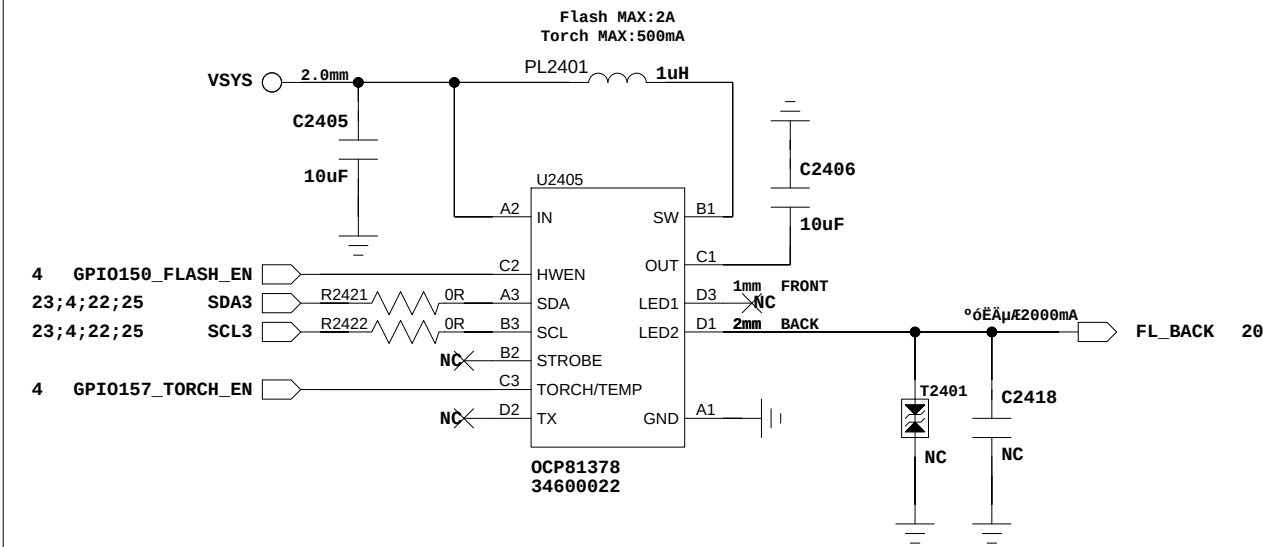

AMOLED POWER - -DCDC

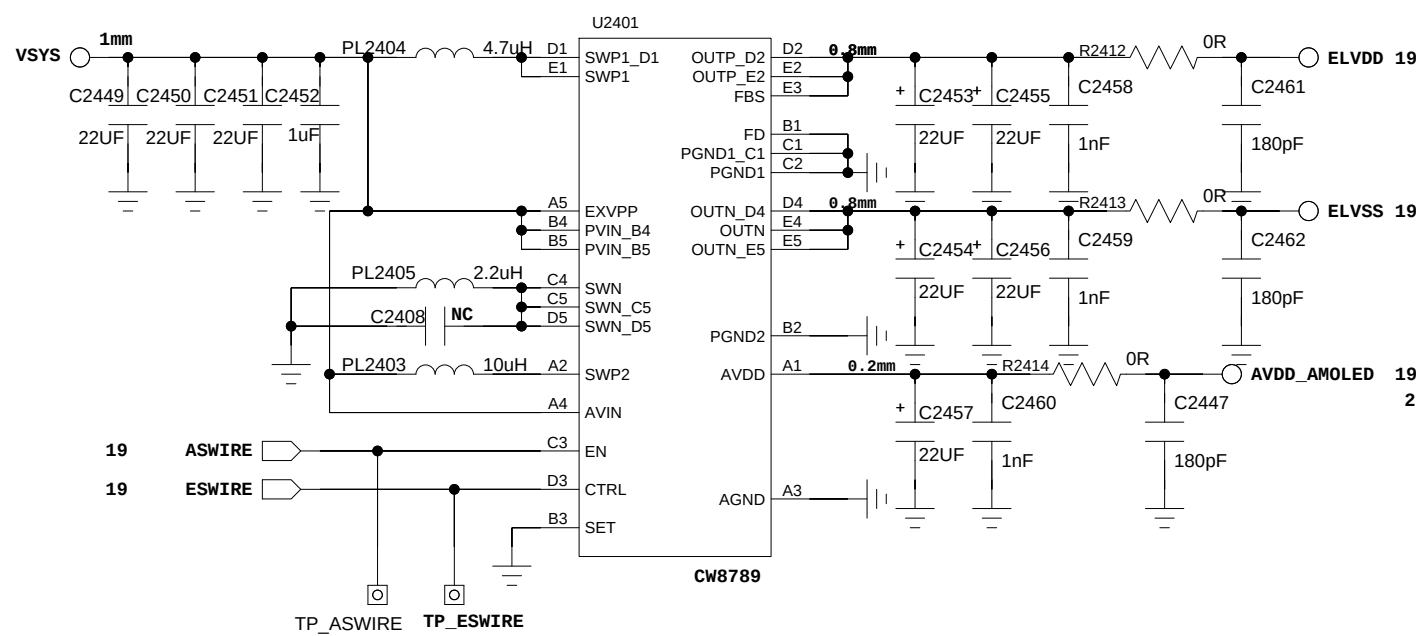

LCM_VCI_3V

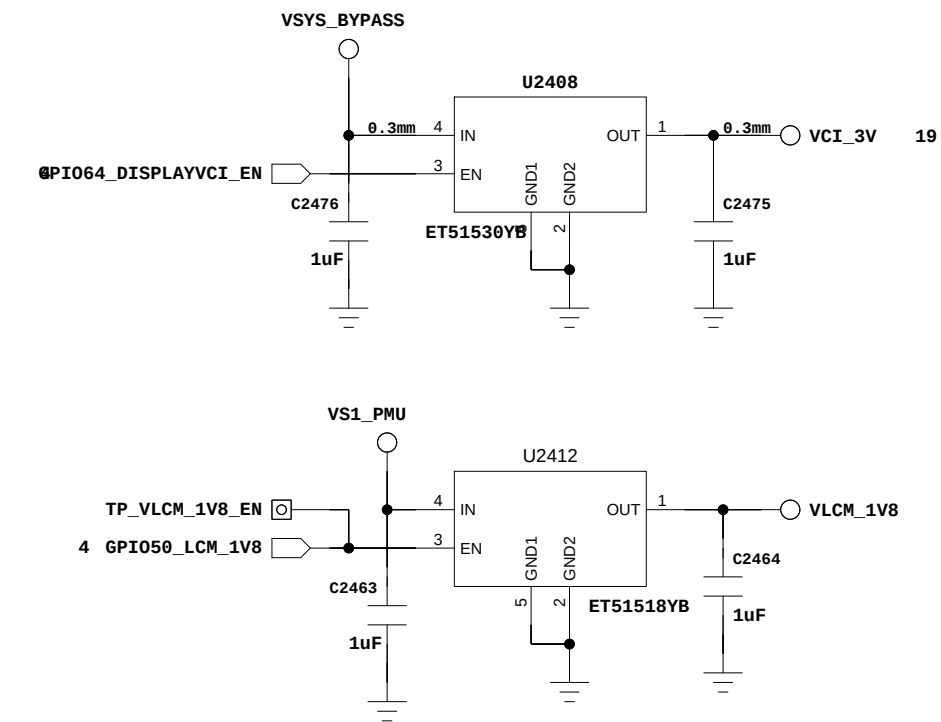

LCM_1.8V


4CH DVDD1 1V8

LCM_1.25V

4CH DVDD2 1V25


LDO_4CHANNEL

ET5904:I2C ADDRESS:0x50(Write)/0x51(Read)

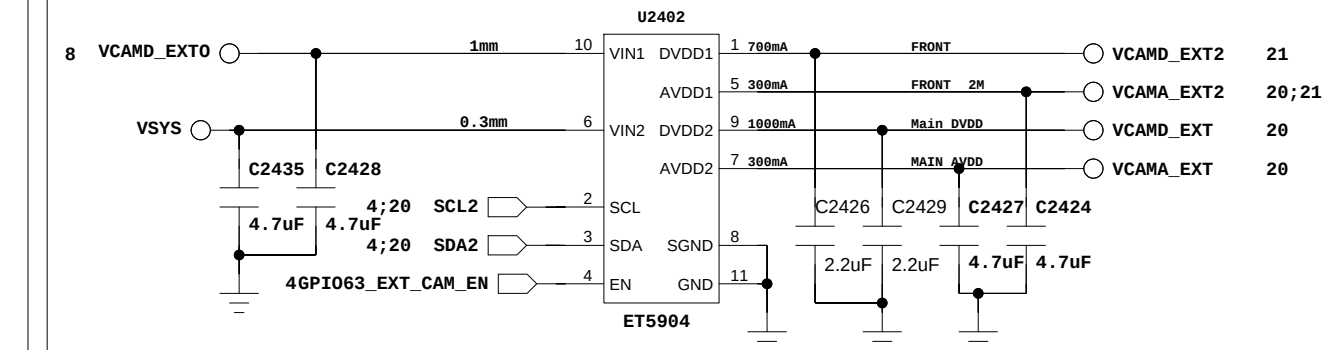


LDO_4CHANNEL

ET5904:I2C ADDRESS:0x50(Write)/0x51(Read)

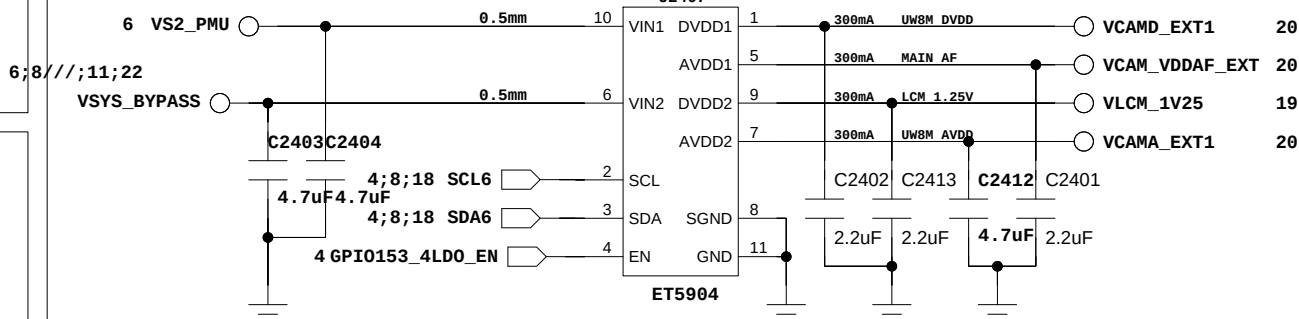


VCAM_DVDD

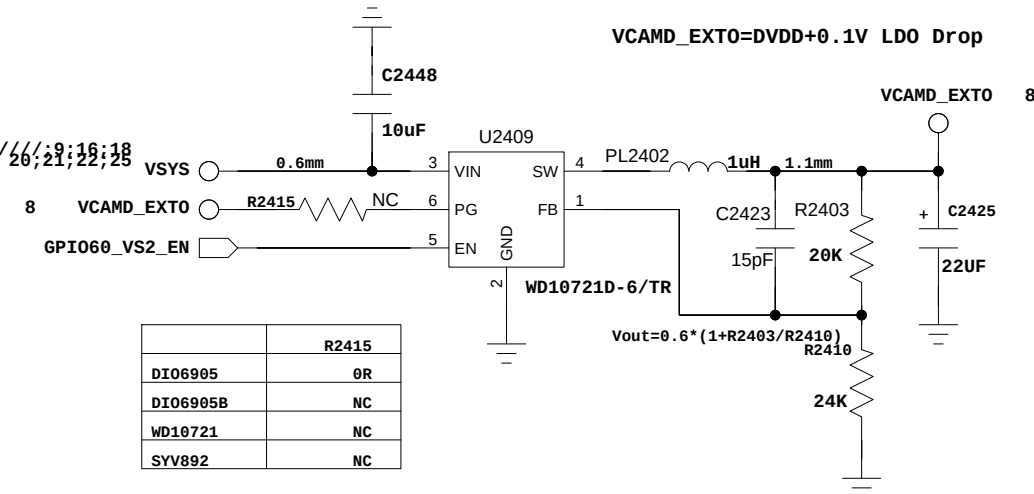


	R2415
DI06905	ØR
DI06905B	NC
WD10721	NC
SYV892	NC

VSYS_BYPASS

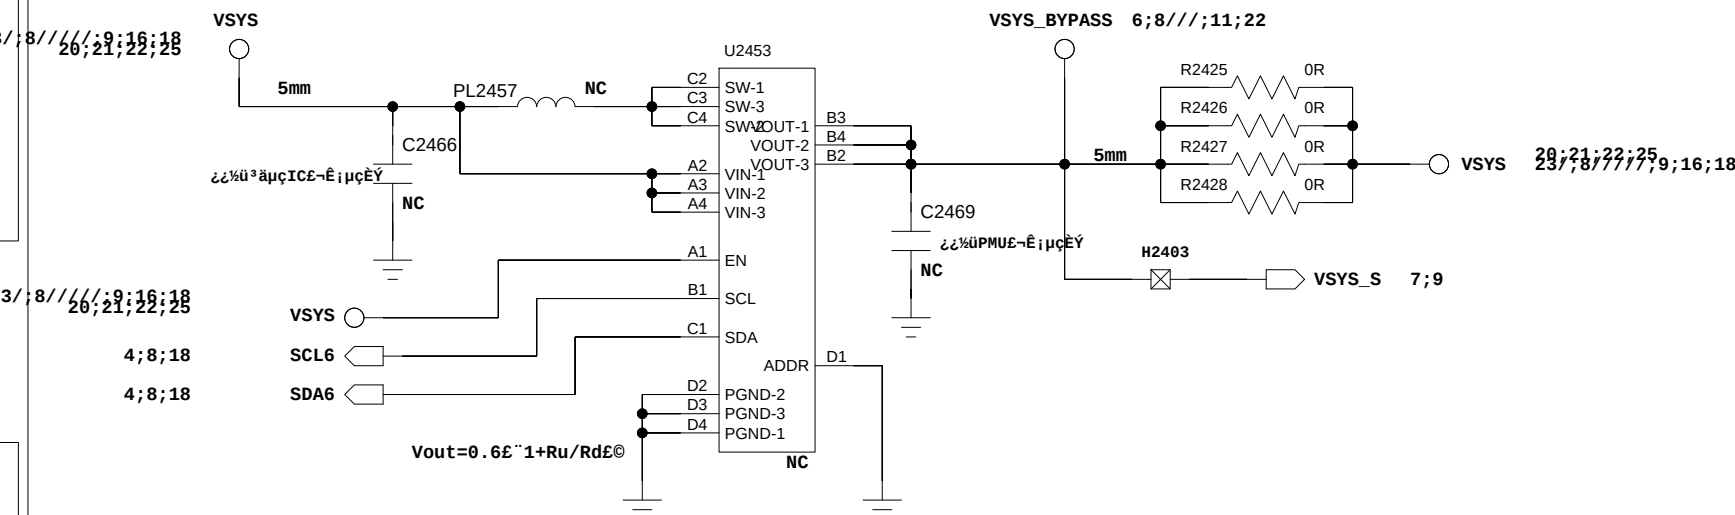
HL7603WL05:I2C ADDRESS:0xEA(Write)/0xEB(Read)

HL7603WL05:I2C ADDRESS ADDR = L, 0X75


MAIN_ACT_VDD_OIS

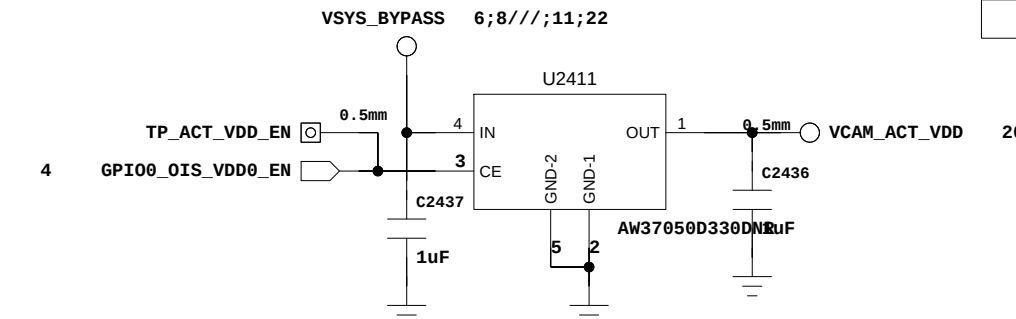


MAIN_VCAMA_1V8

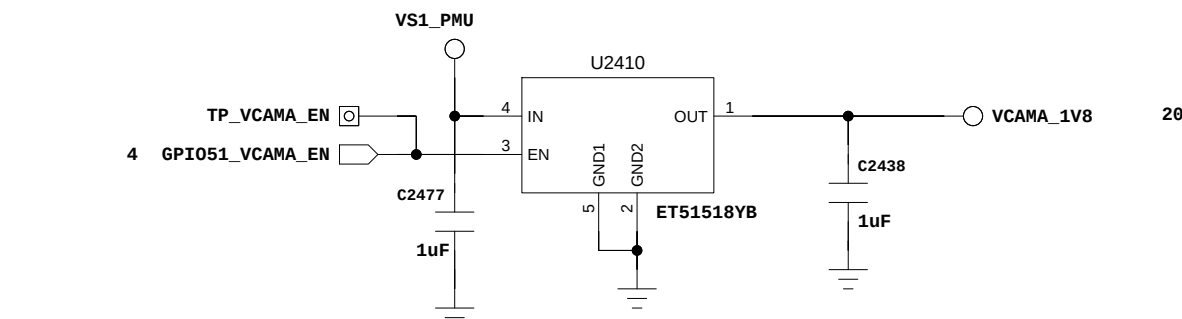


VCAMIO_EXT

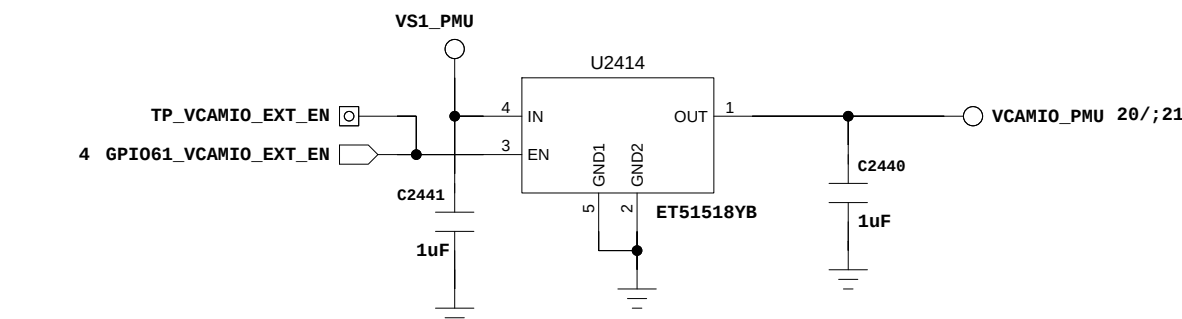


VCAM_VDDAF_EXT2_2.8V

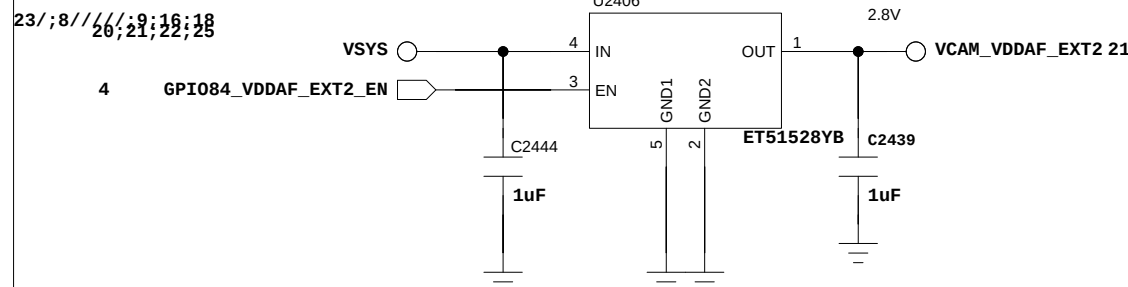

VFP_EXT_3.3V

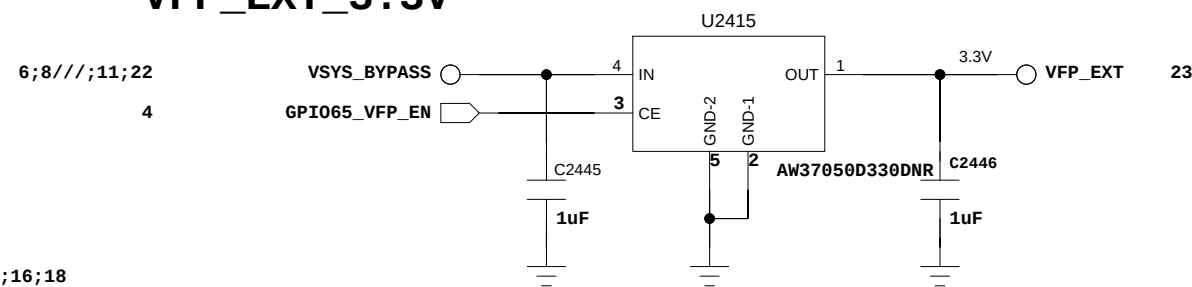

VTP_EXT_3.3V

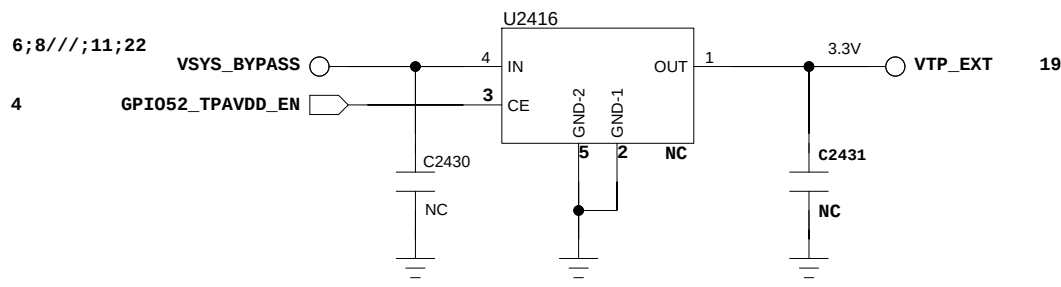


REVISION RECORD			
LTR	ECO NO:	APPROVED:	DATE:


COMPANY: TRANSSION HOLDINGS				MODEL:G100		Modified Date: 24/07/2024:14:20	
DRAWN		DATED		TITLE: 24_POWER_THIRD-PARTY_I		VERSION:	SHEET: 8 OF25
CHECKED		DATED	< >	Confidentiality	CONFIDENTIAL		

POWER_THIRD-PARTY_II


SW CHARGER (SW)

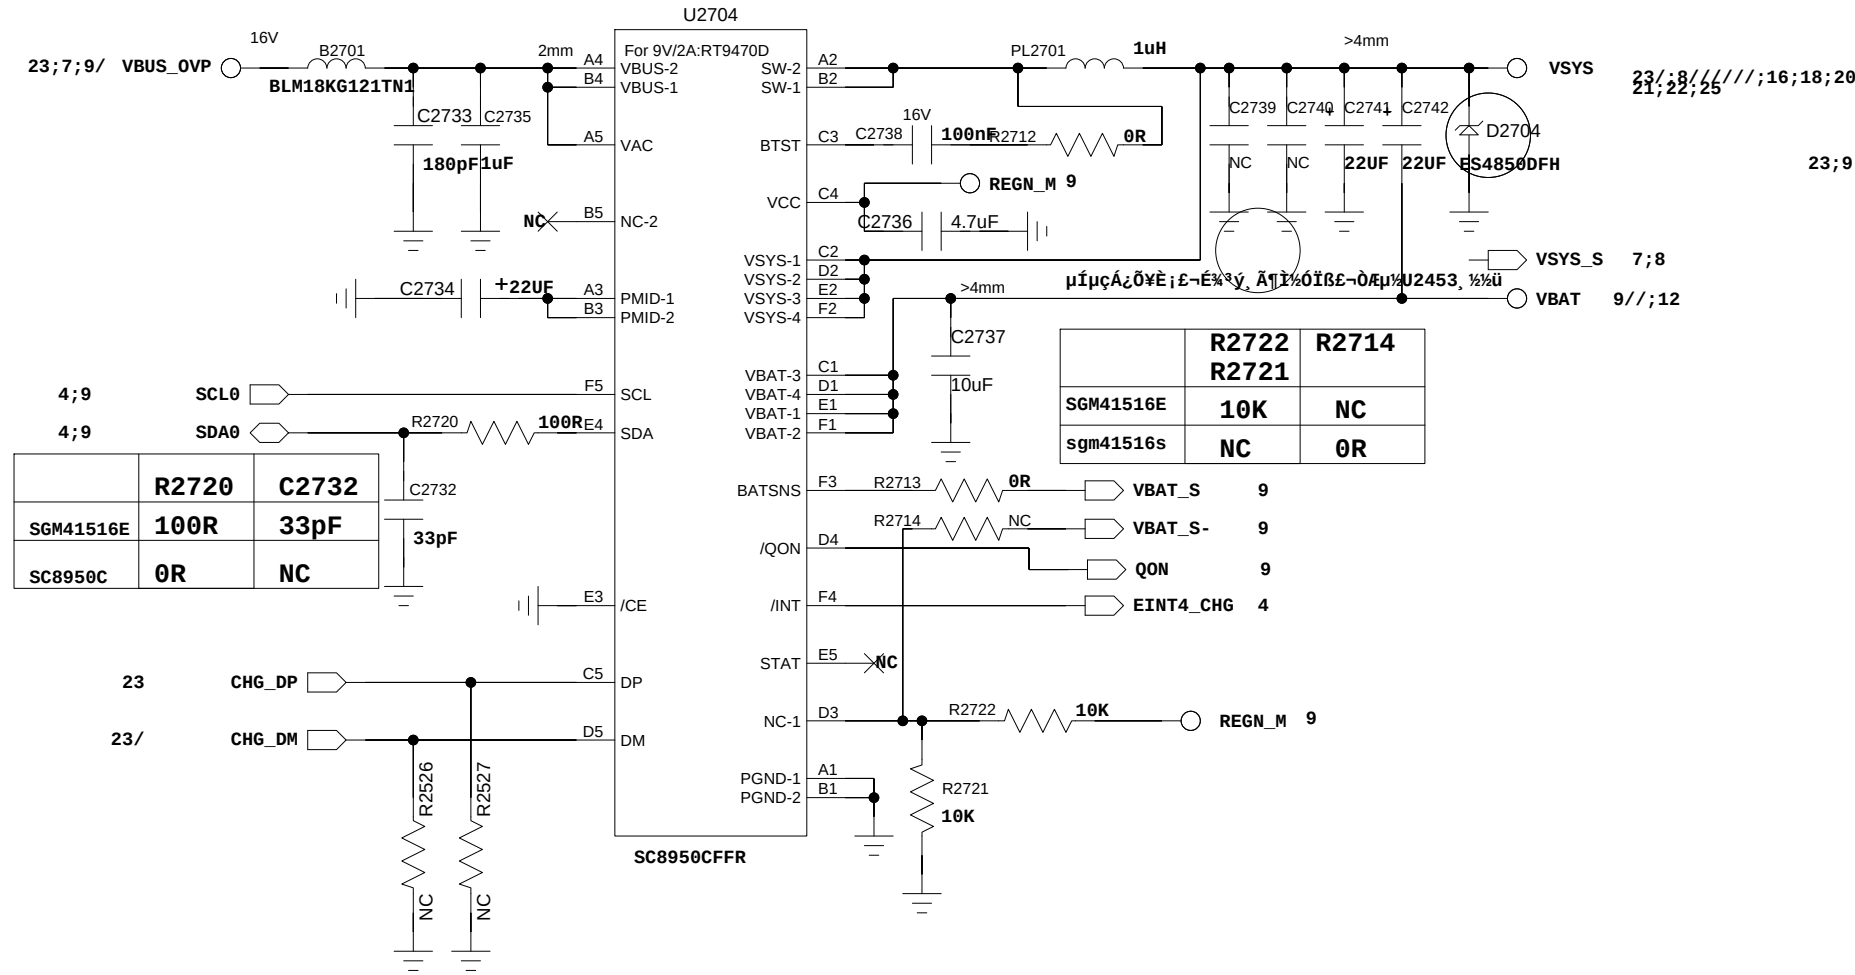


BATT - CON

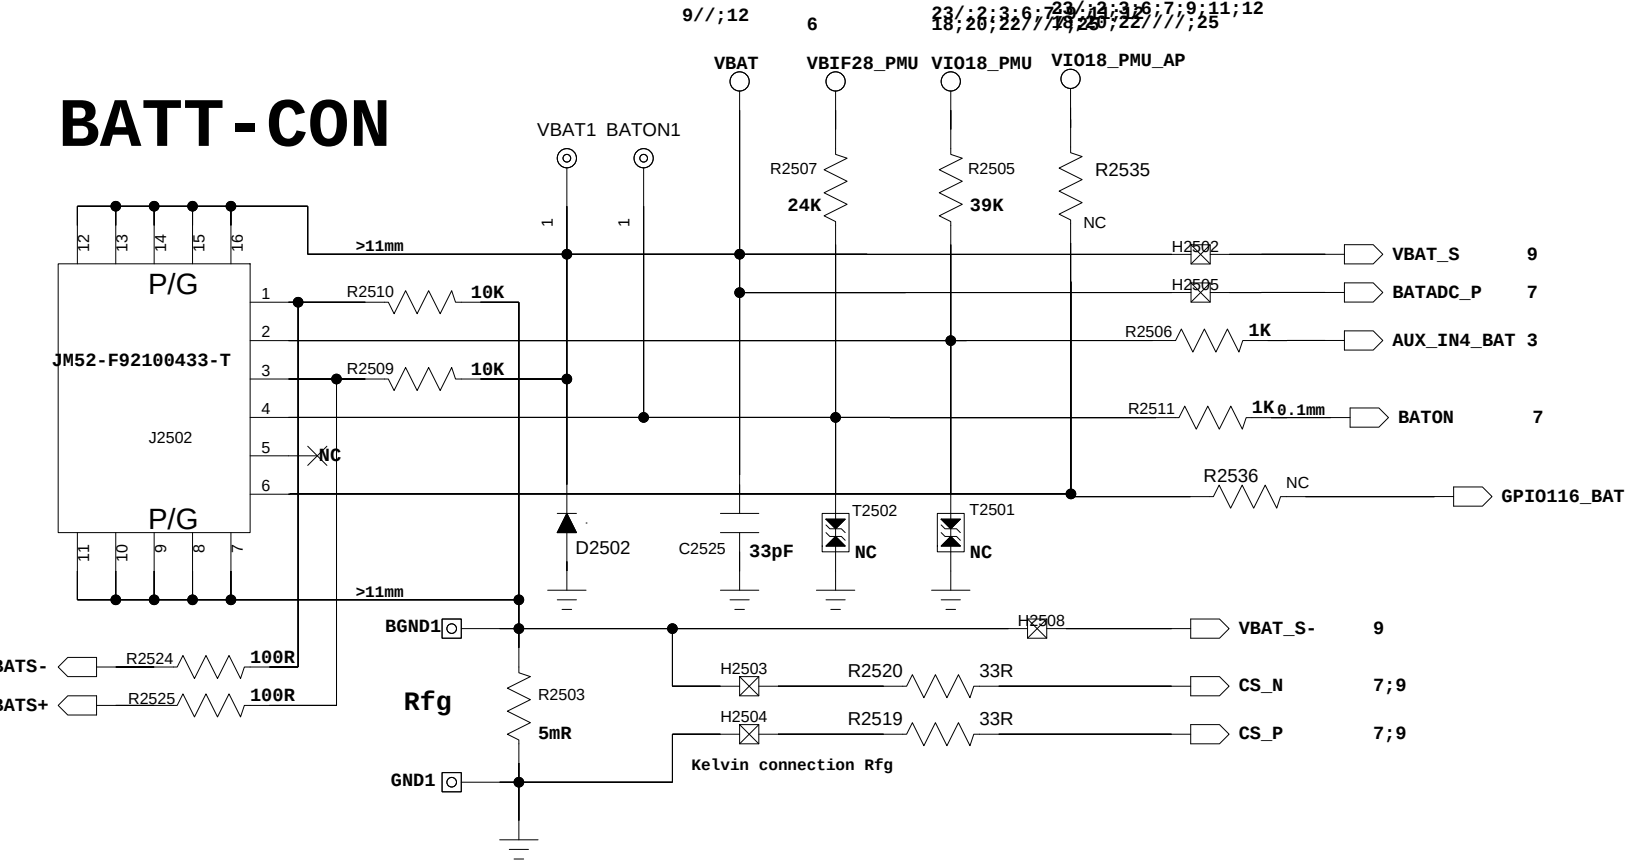


BATT - CON

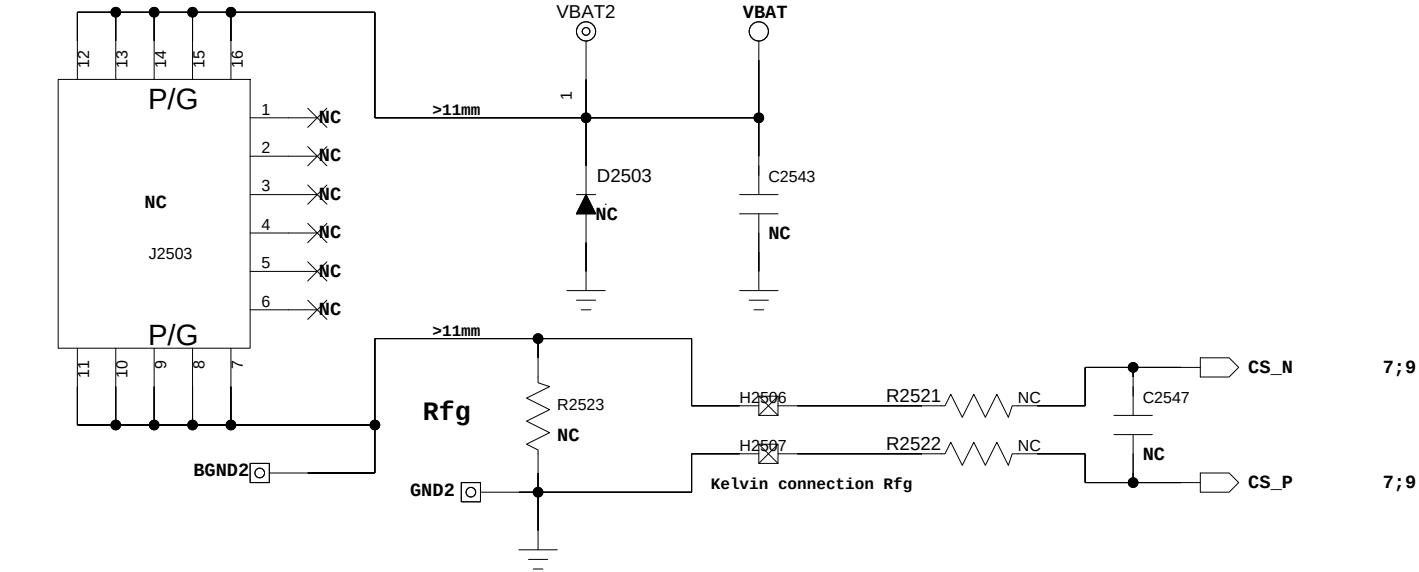

OVP

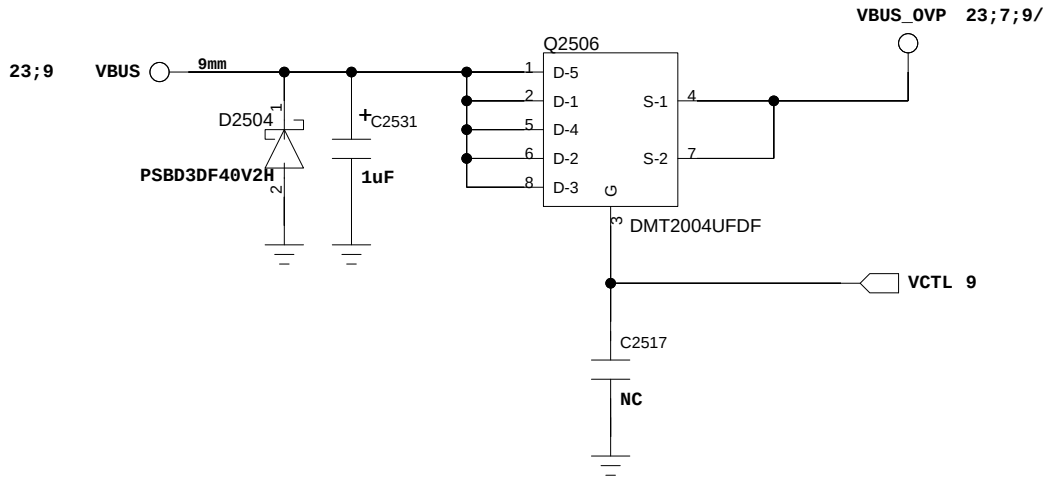


CHG - II

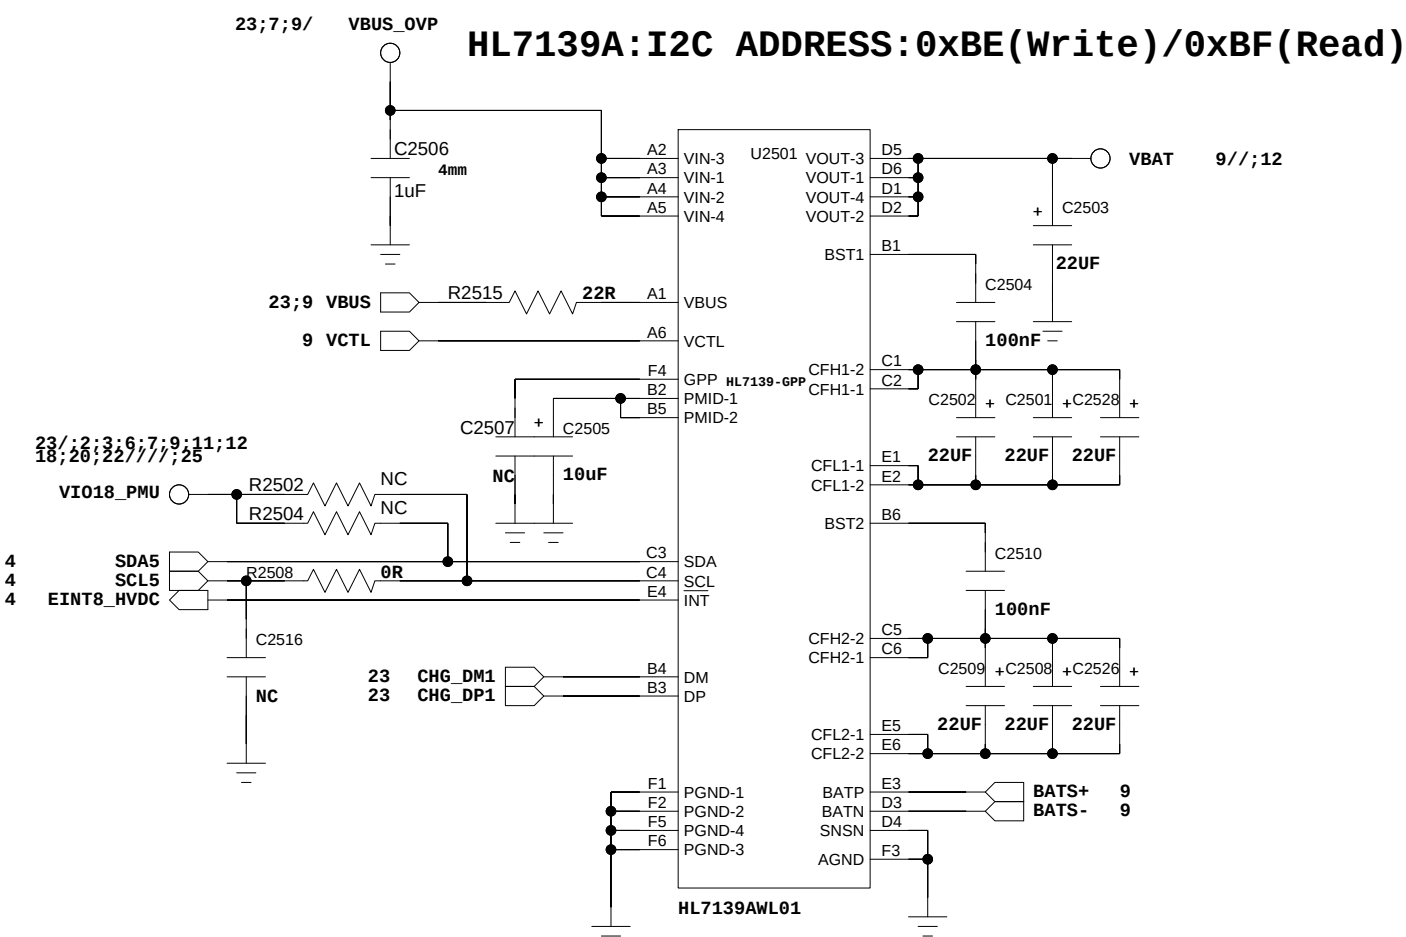

HL7139A I2C ADR 7bit
SNSN=Float:0x5F;SNSN=GND:0x5E;

SLAVE


HL7139A: I2C ADDRESS:0xBC(Write)/0xBD(Read)

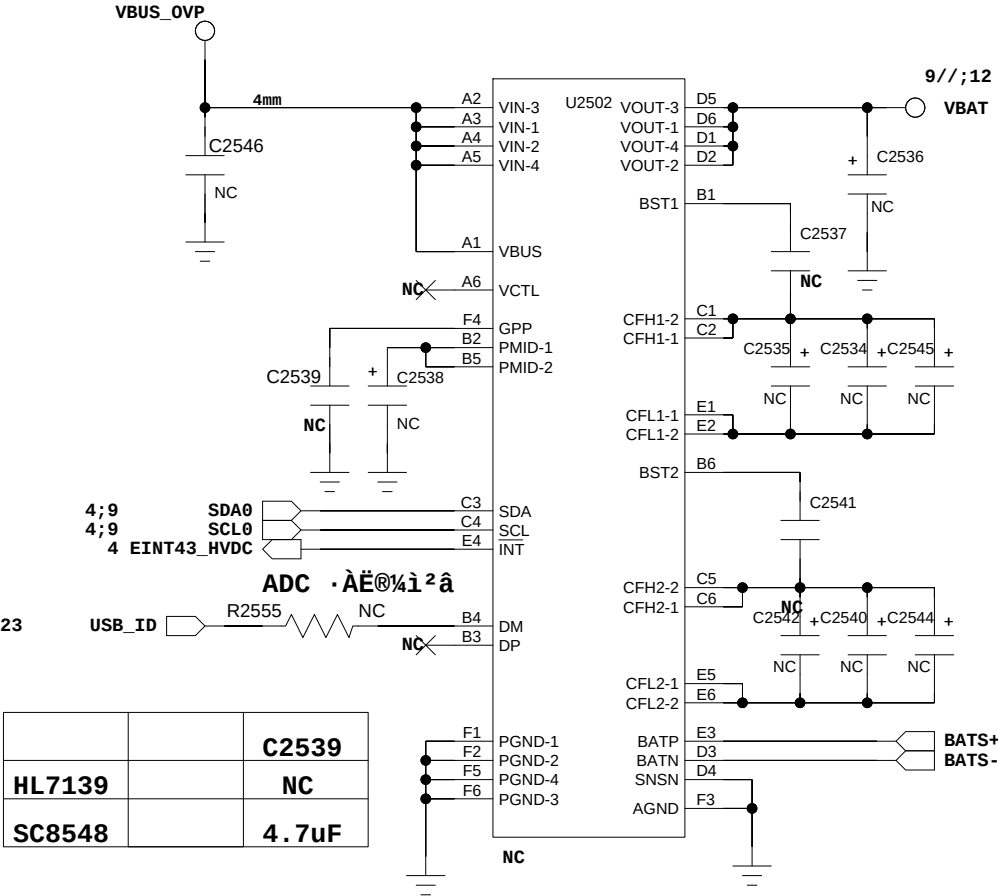

COMPANY: TRANSSION HOLDINGS				MODEL: G100		Modified Date: 18/09/2024:10:22	
DRAWN		DATED		TITLE: 25_POWER_THIRD-PARTY_II		VERSION:	SHEET: 9 OF 25
CHECKED		DATED	< >	Confidentiality	CONFIDENTIAL		


RF_MT6186M_PIN_OUT

REVISION RECORD			
LTR	ECO NO:	APPROVED:	DATE:

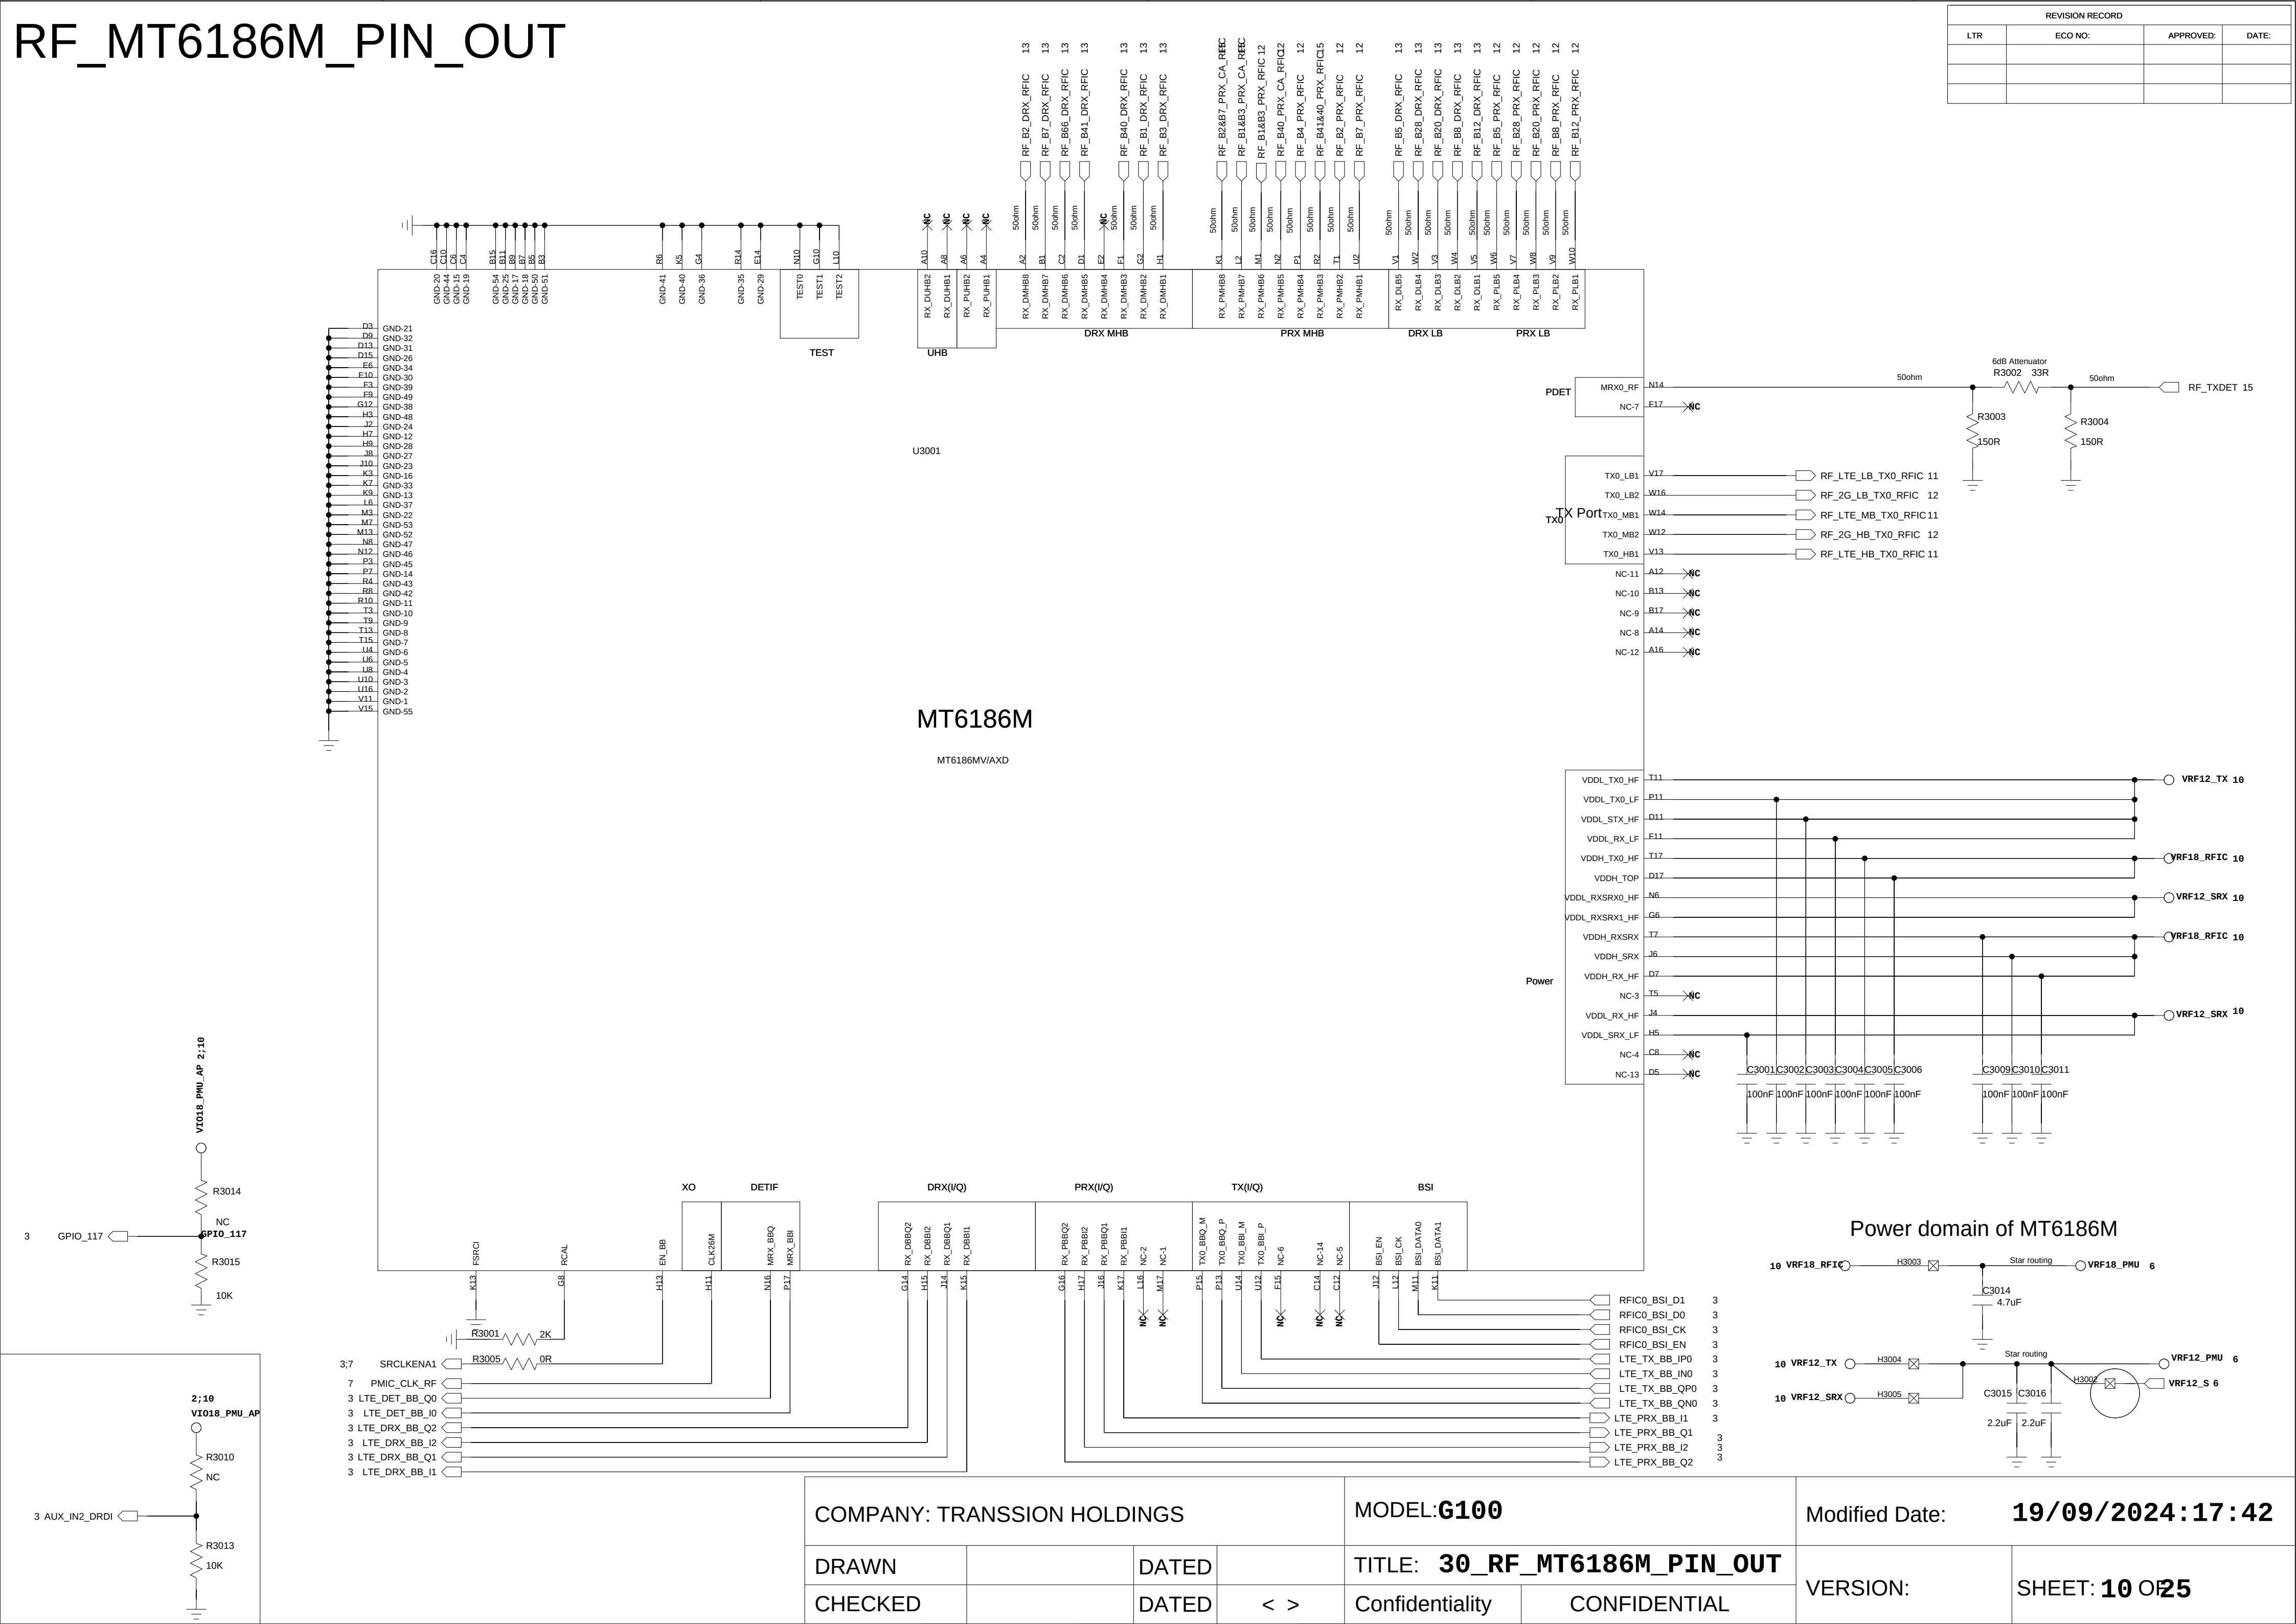

RF_MT6186M_RF_TX

REVISION RECORD			
LTR	ECO NO:	APPROVED:	DATE:

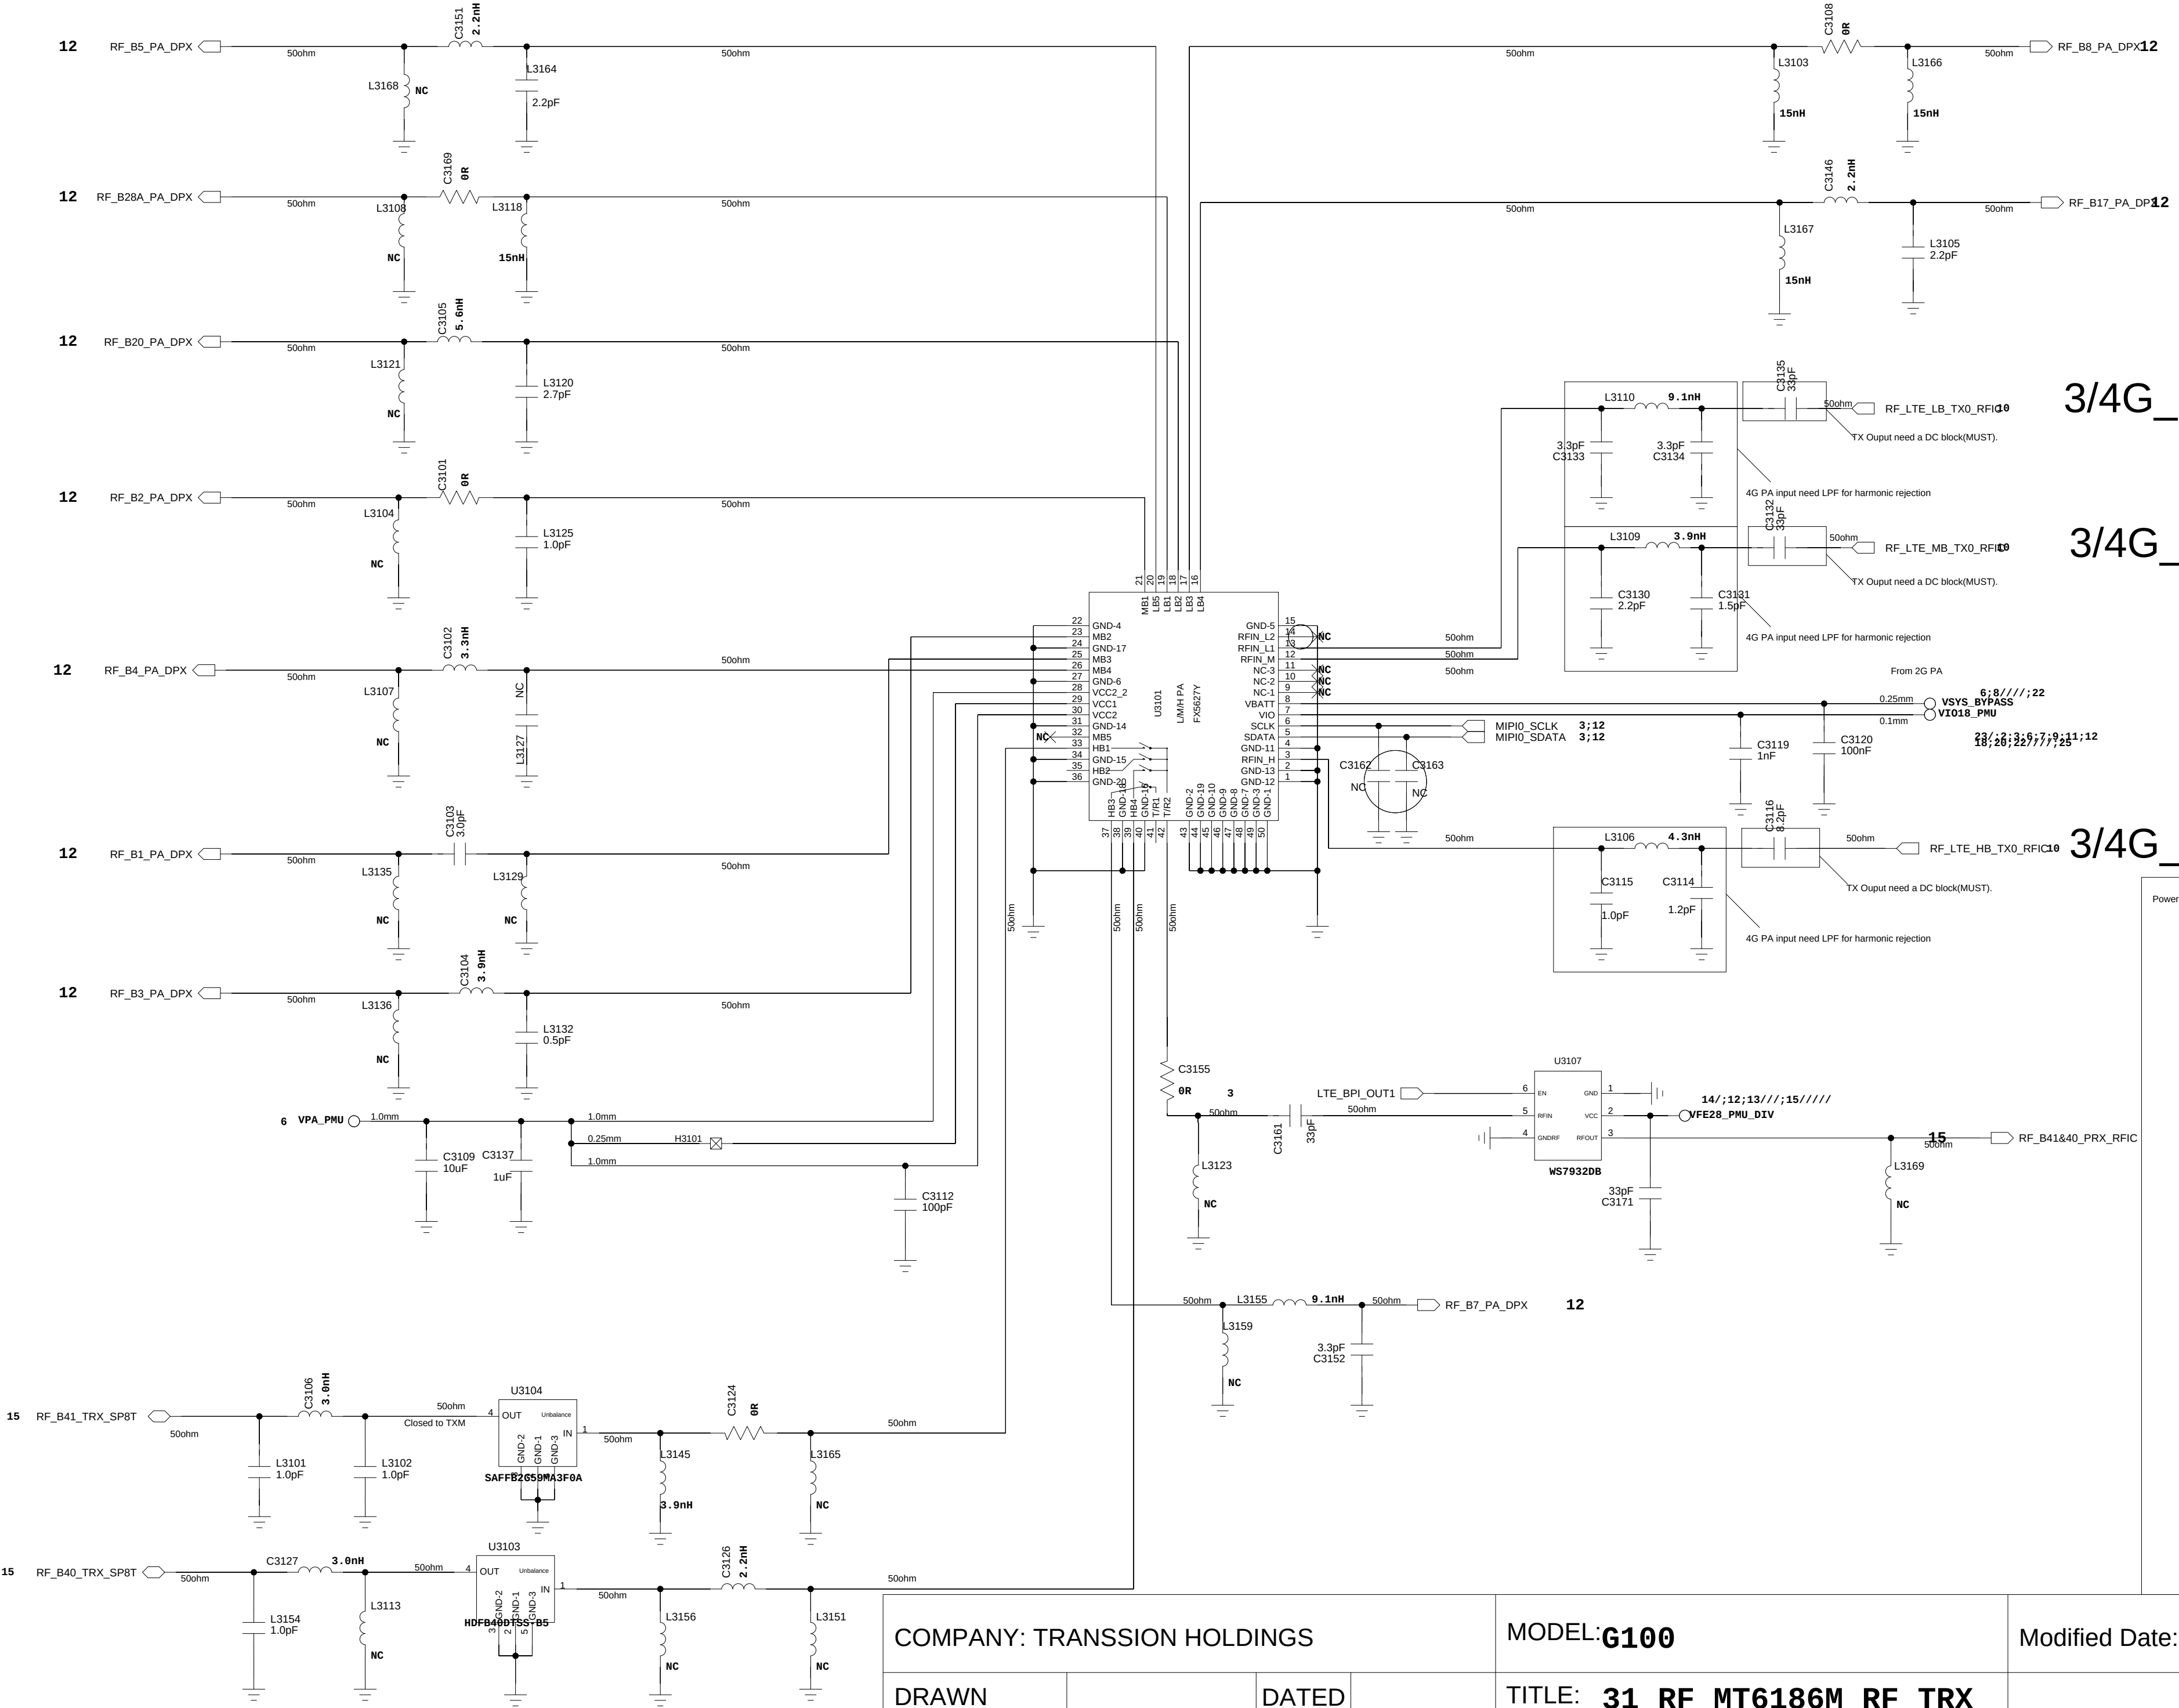


3/4G_PAIN_LB

3/4G_PAIN_MB

3/4G_PAIN_HB


Power

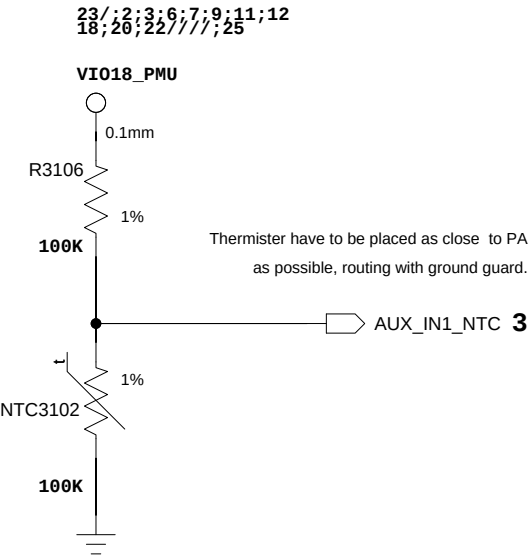


COMPANY: TRANSSION HOLDINGS				MODEL: G100		Modified Date: 18/09/2024:11:31	
DRAWN		DATED		TITLE: 31_RF_MT6186M_RF_TRX		VERSION:	SHEET: 11 OF 25
CHECKED		DATED	< >	Confidentiality	CONFIDENTIAL		

RF_MT6186M_RF_PRX


REVISION RECORD			
LTR	ECO NO:	APPROVED:	DATE:

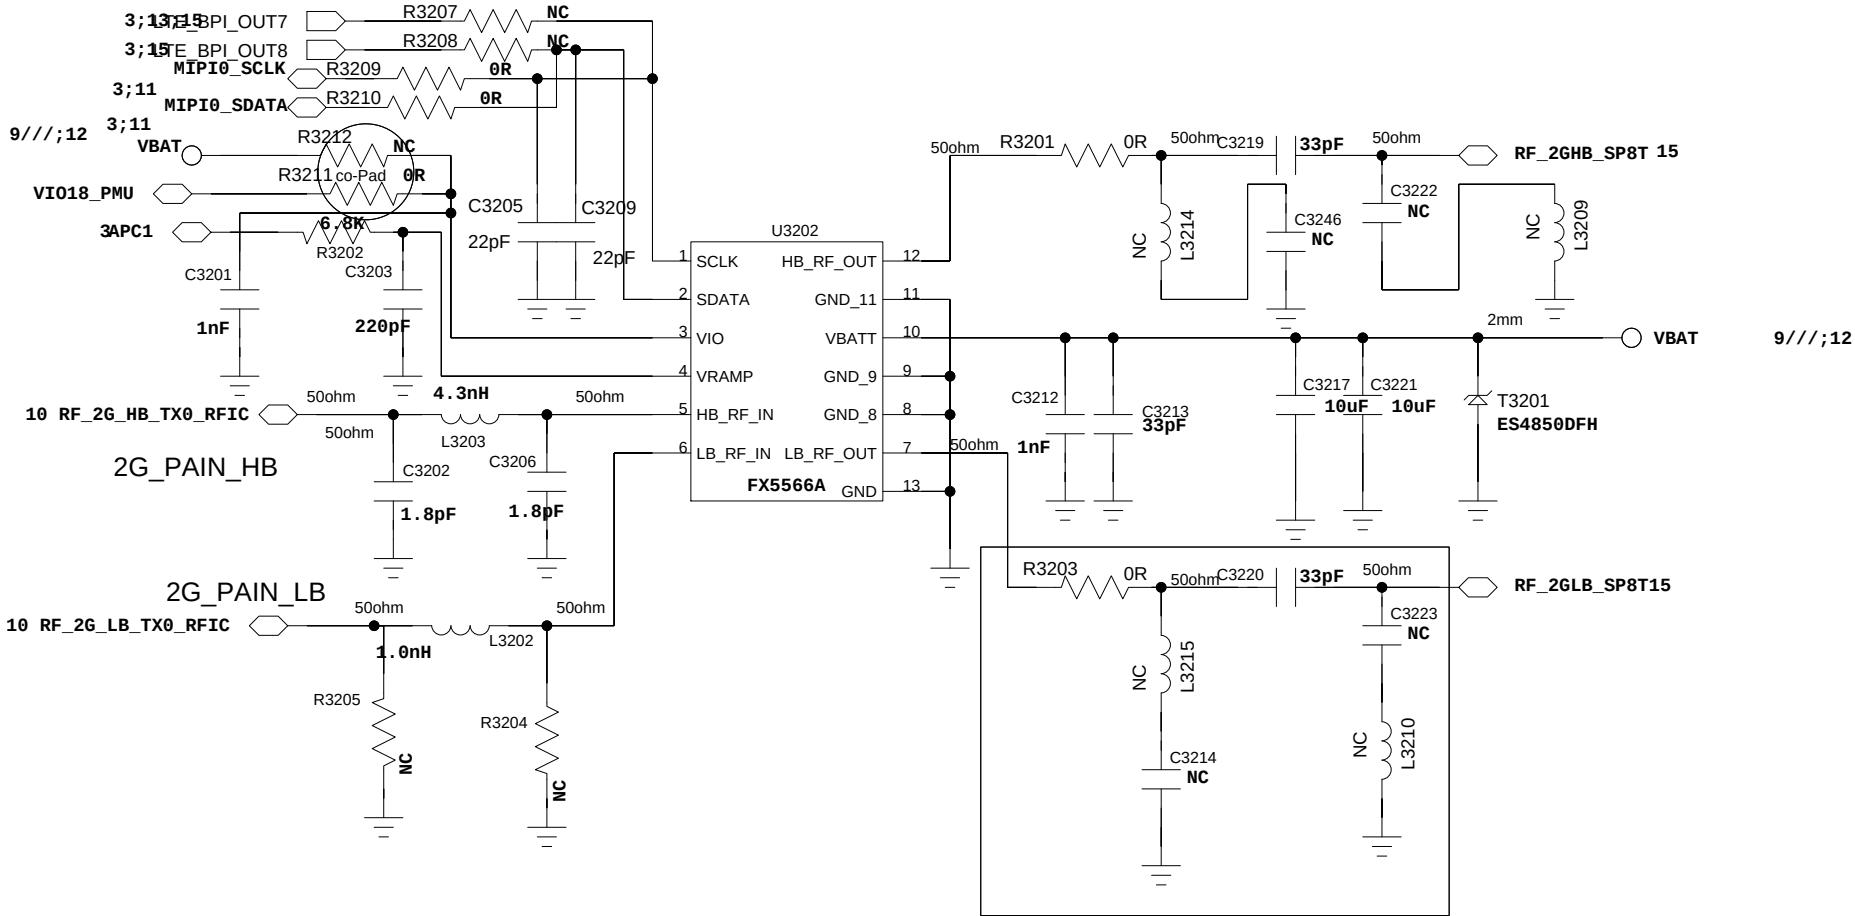


B20/NC_B13

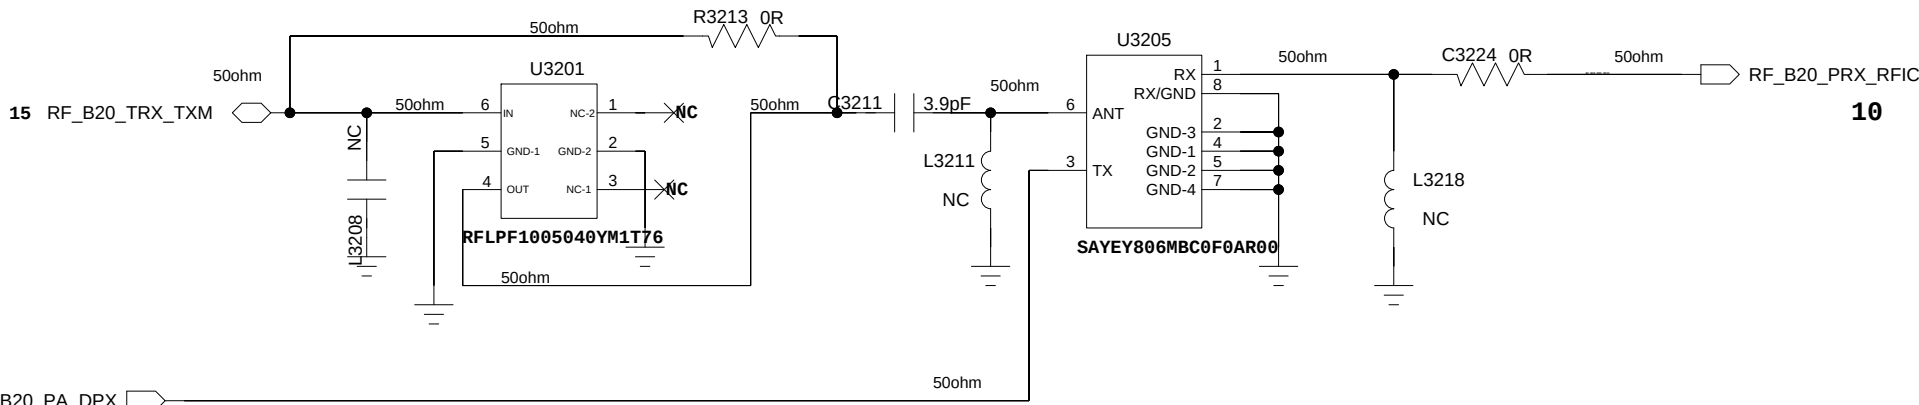


B2

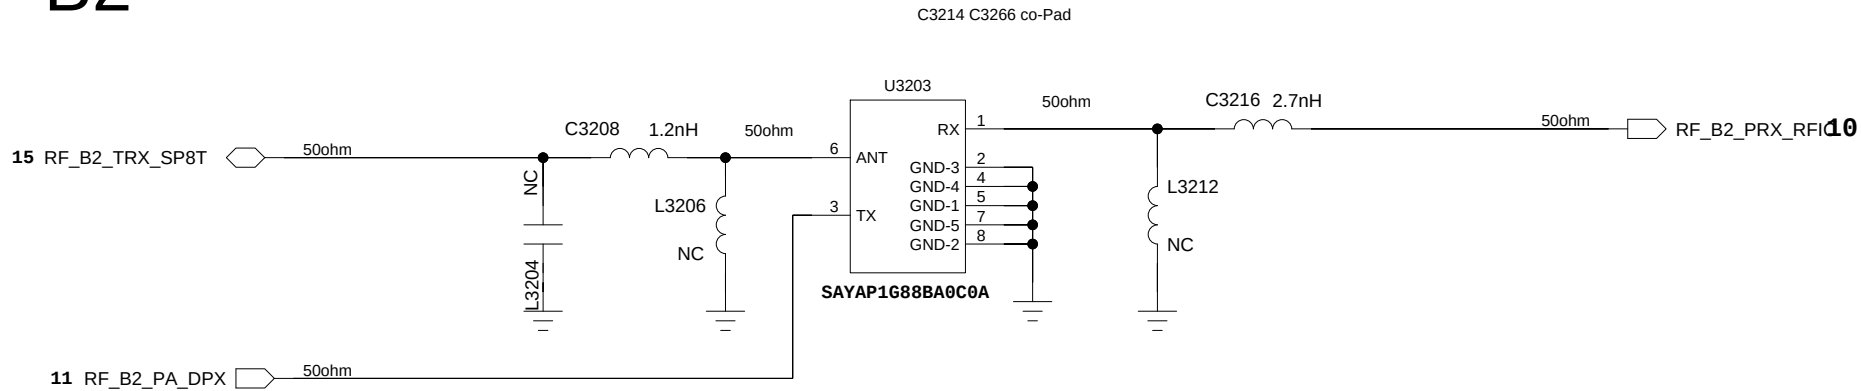


B7

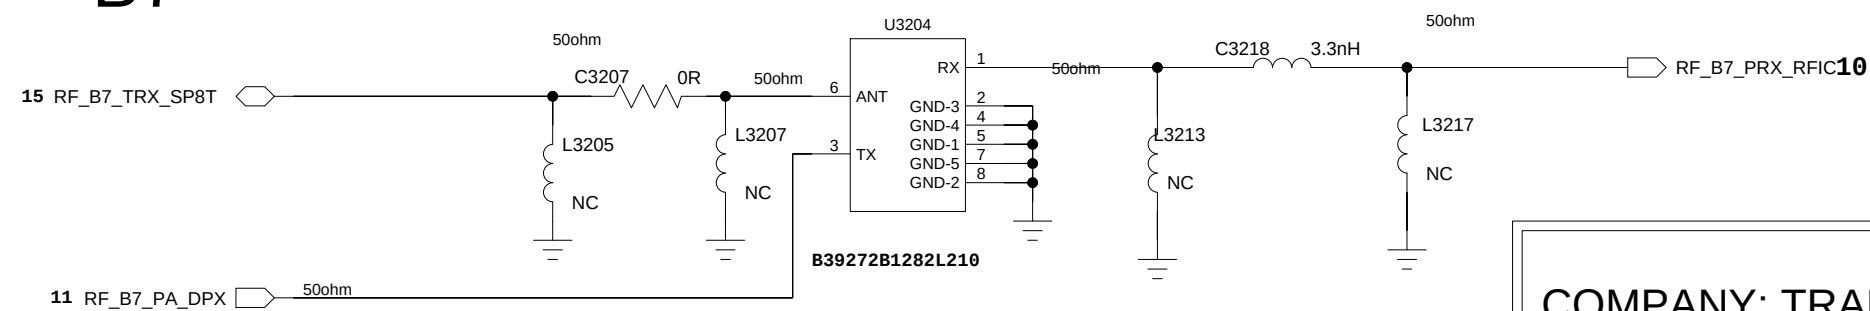


B5

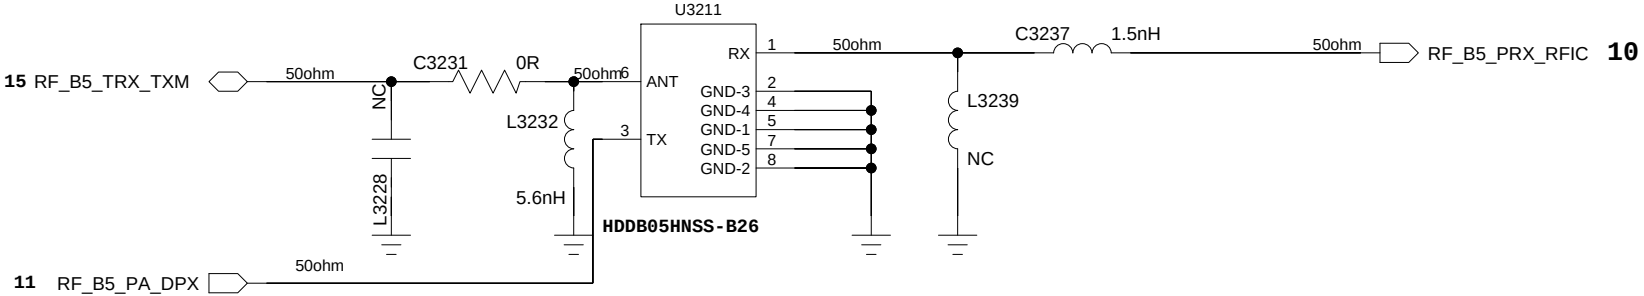


B8

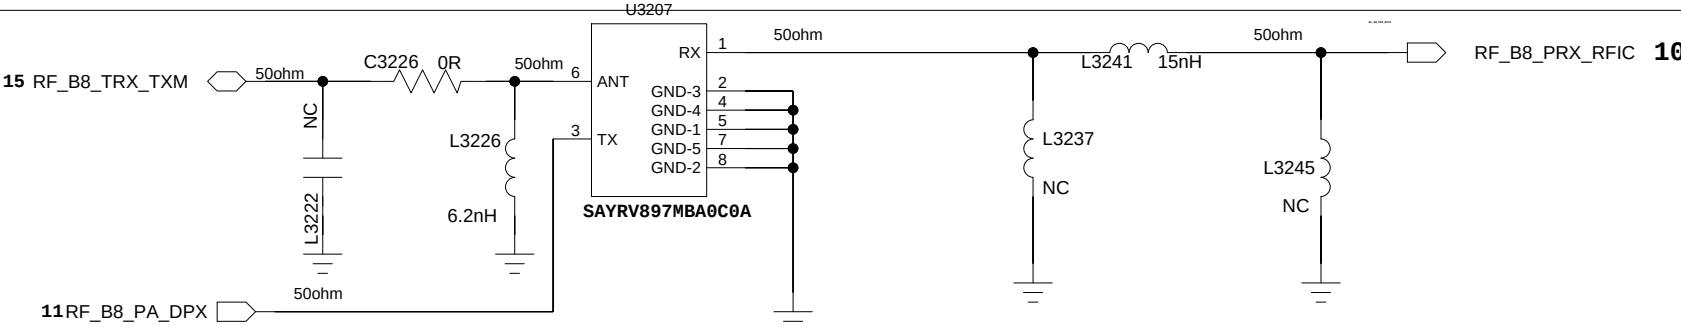


B28

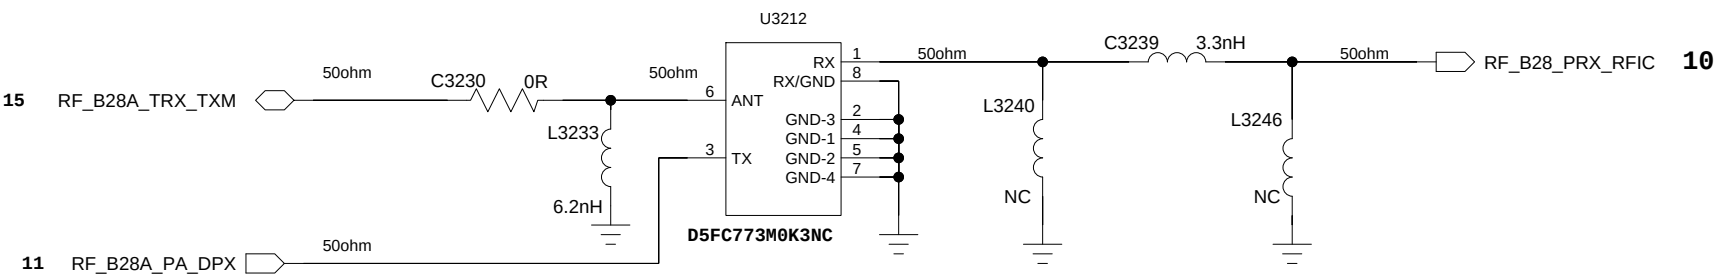


B12 & B17

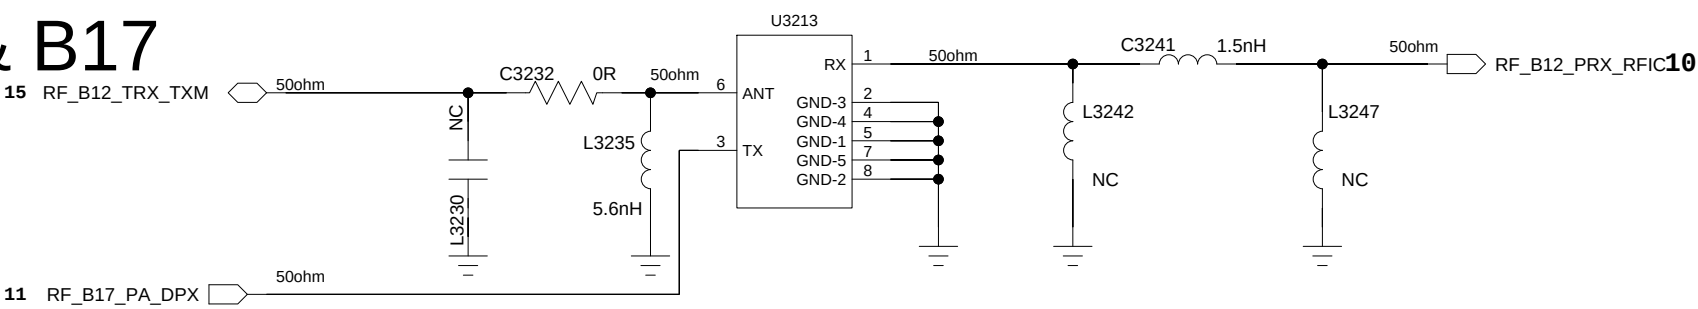


B1

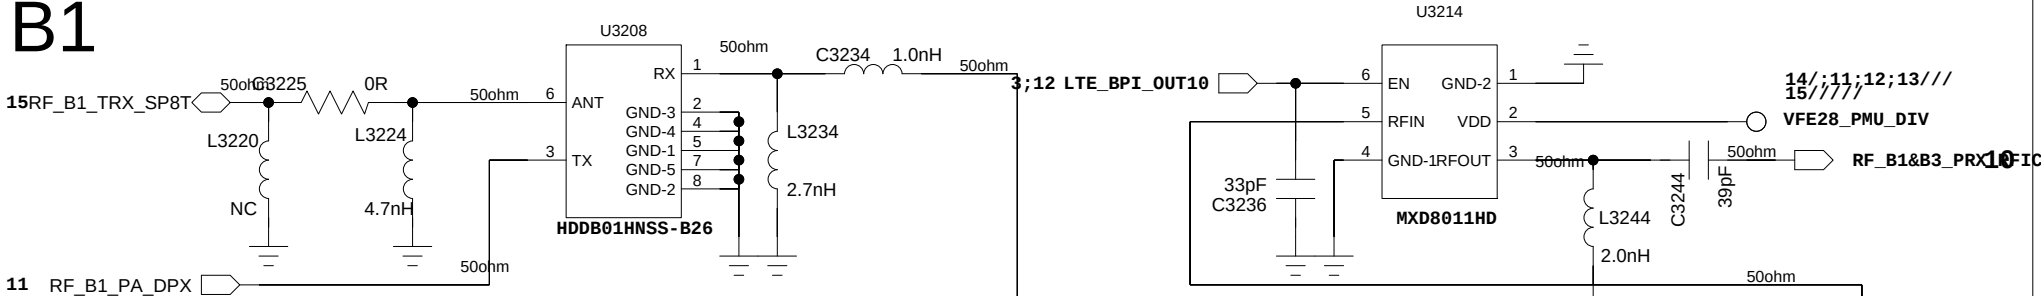

B3

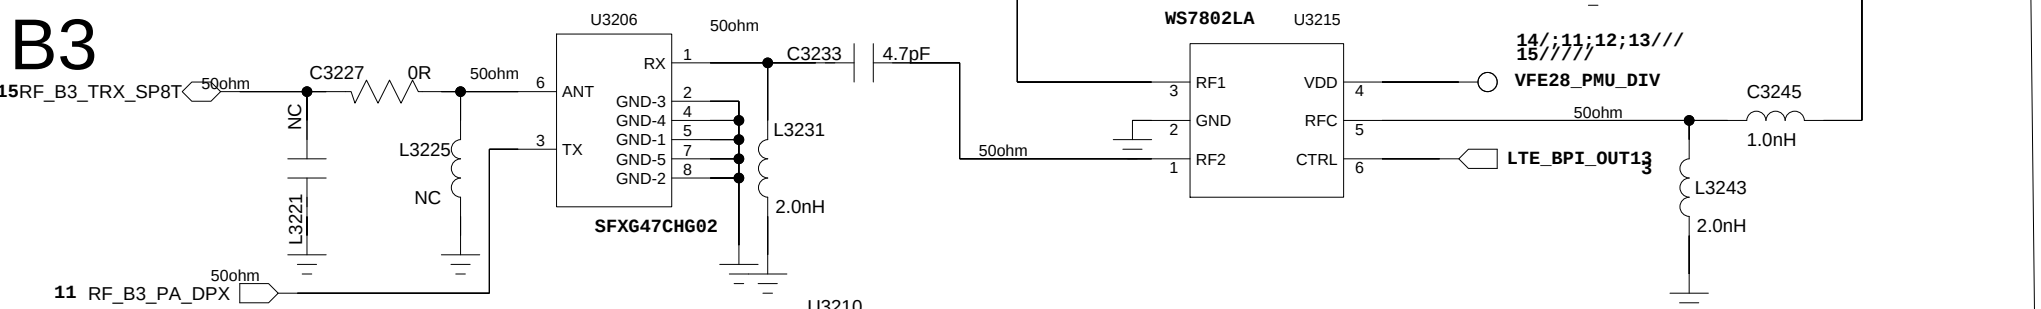

B4/B66/PCS1900

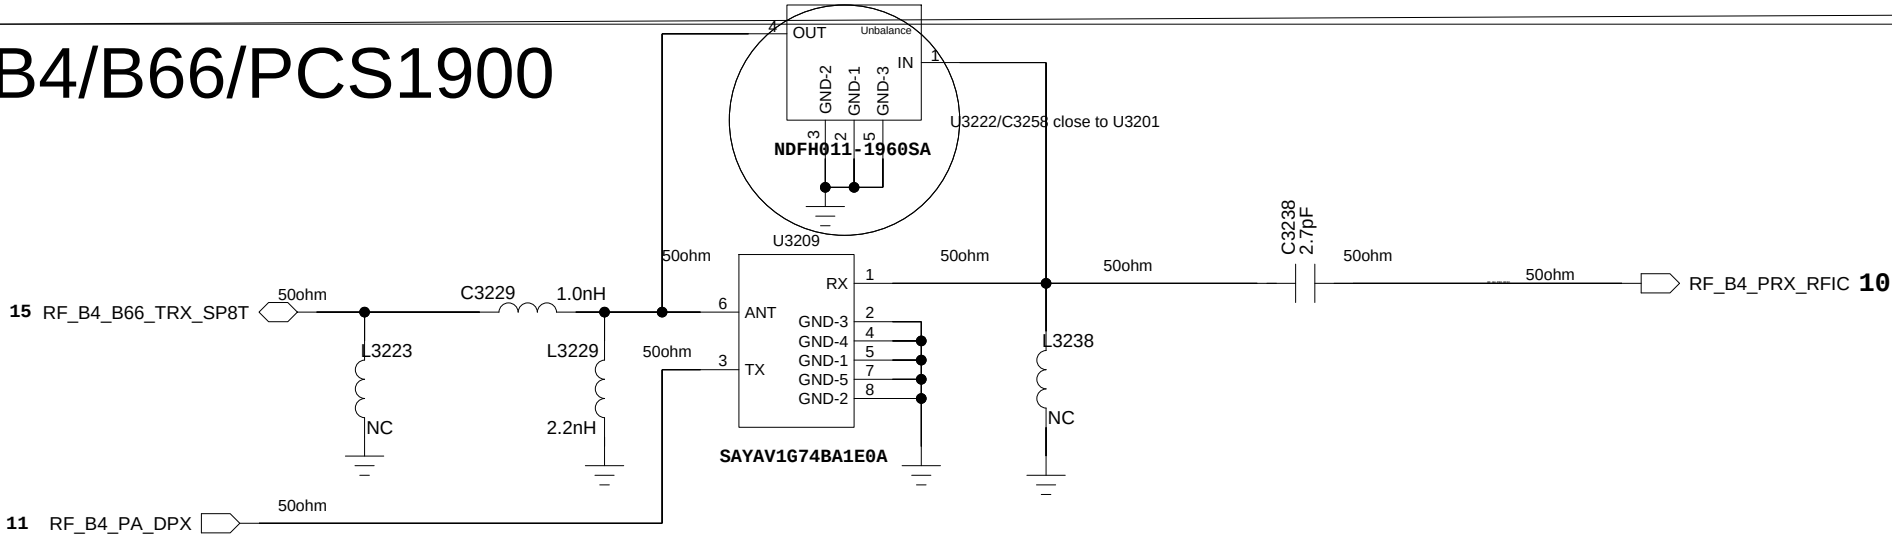

COMPANY: TRANSSION HOLDINGS

MODEL:G100

Modified Date:

27/07/2024:10:47

DRAWN

DATED

TITLE: 32_RF_MT6186M_RF_PRX

VERSION:

SHEET: 12 of 25

CHECKED

DATED


< >

Confidentiality


CONFIDENTIAL

RF_MT6186M_RF_DRX


SP8T_LB

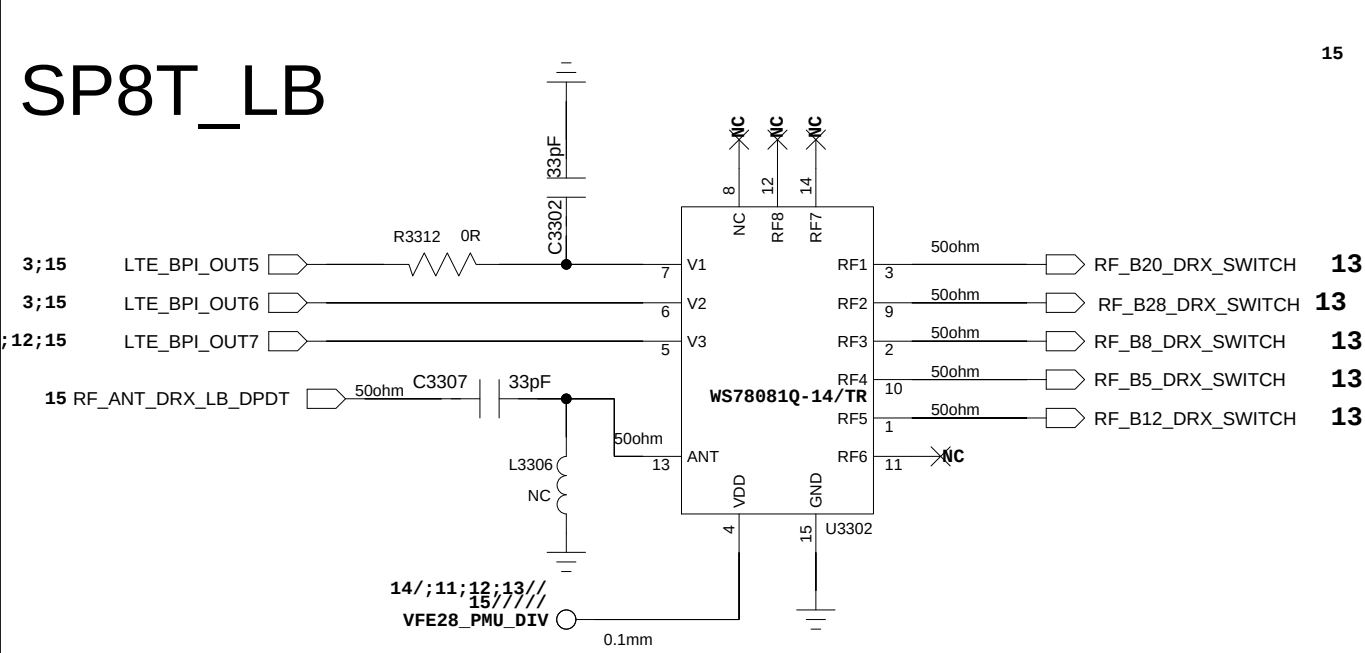


B20

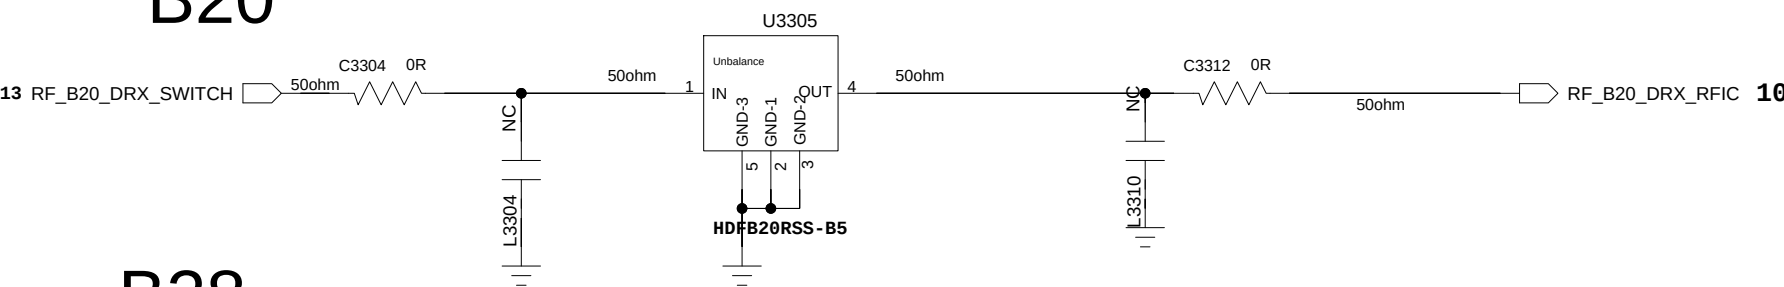


B28

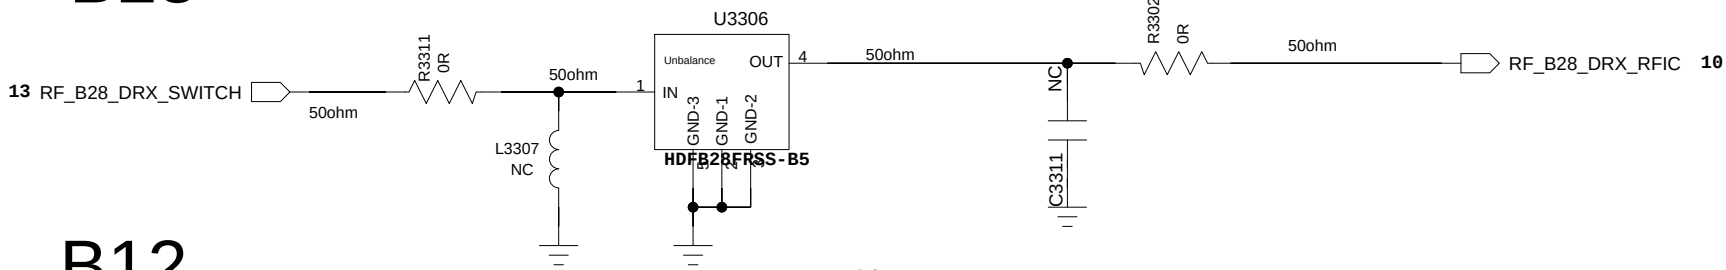


B12

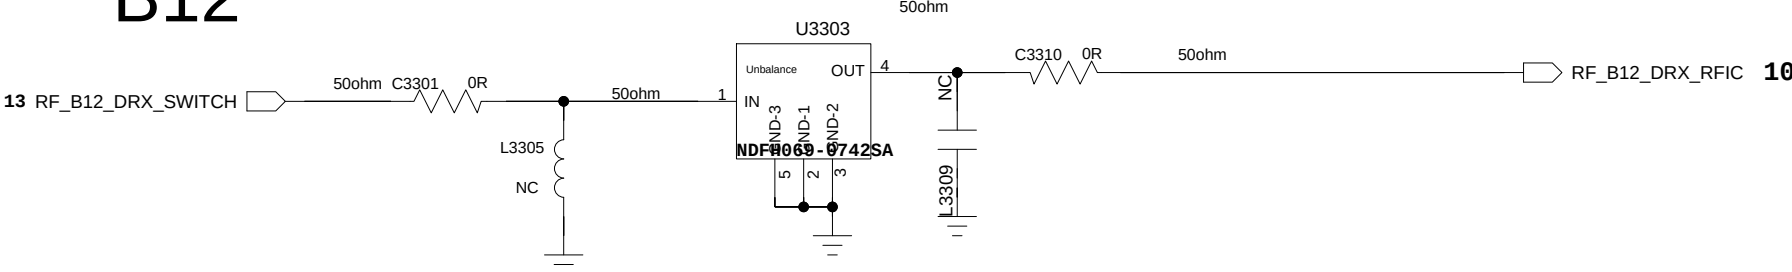


B5 DRX

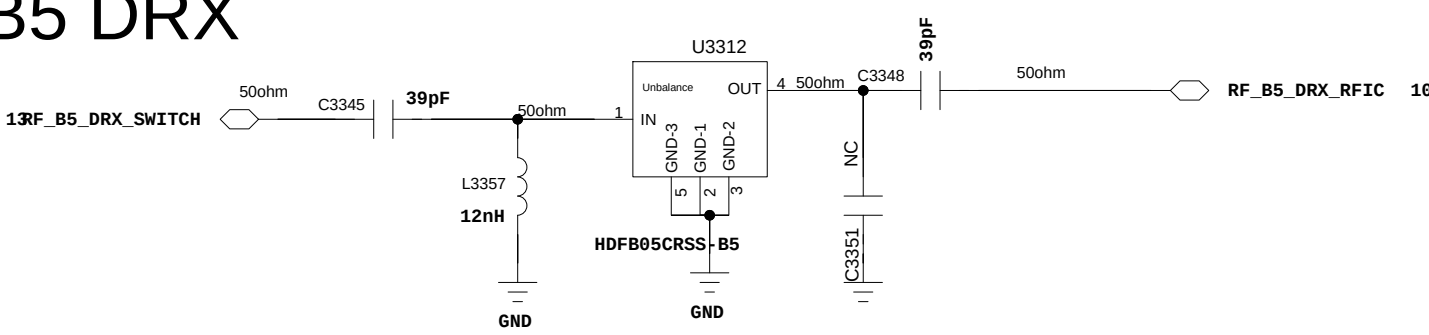


B8 DRX

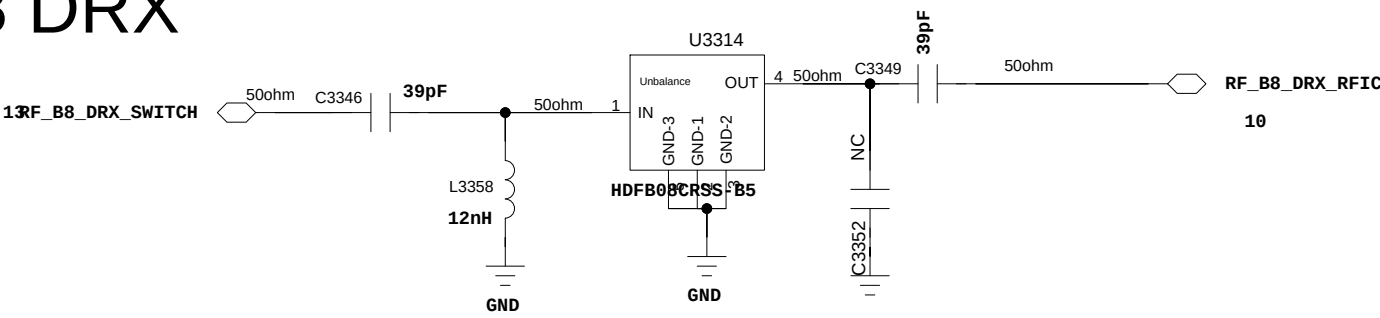


B41

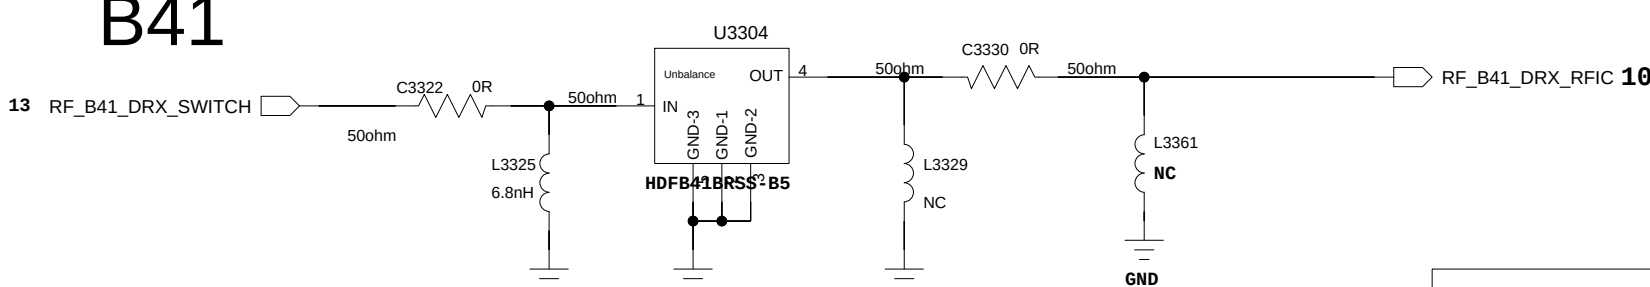


SP8T_MHB

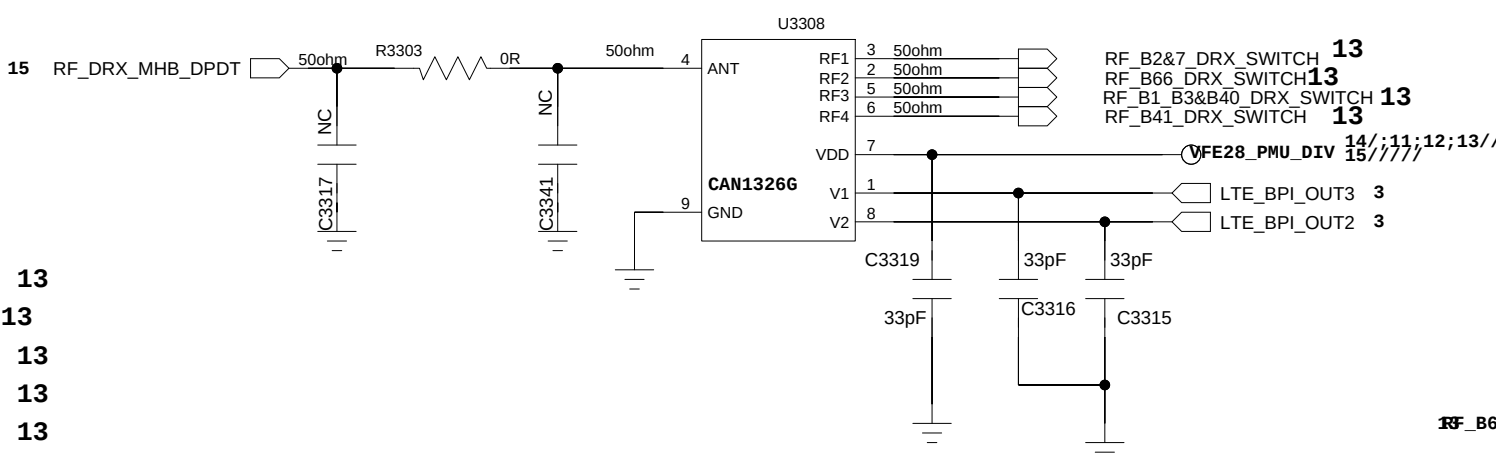


B1&B3&40

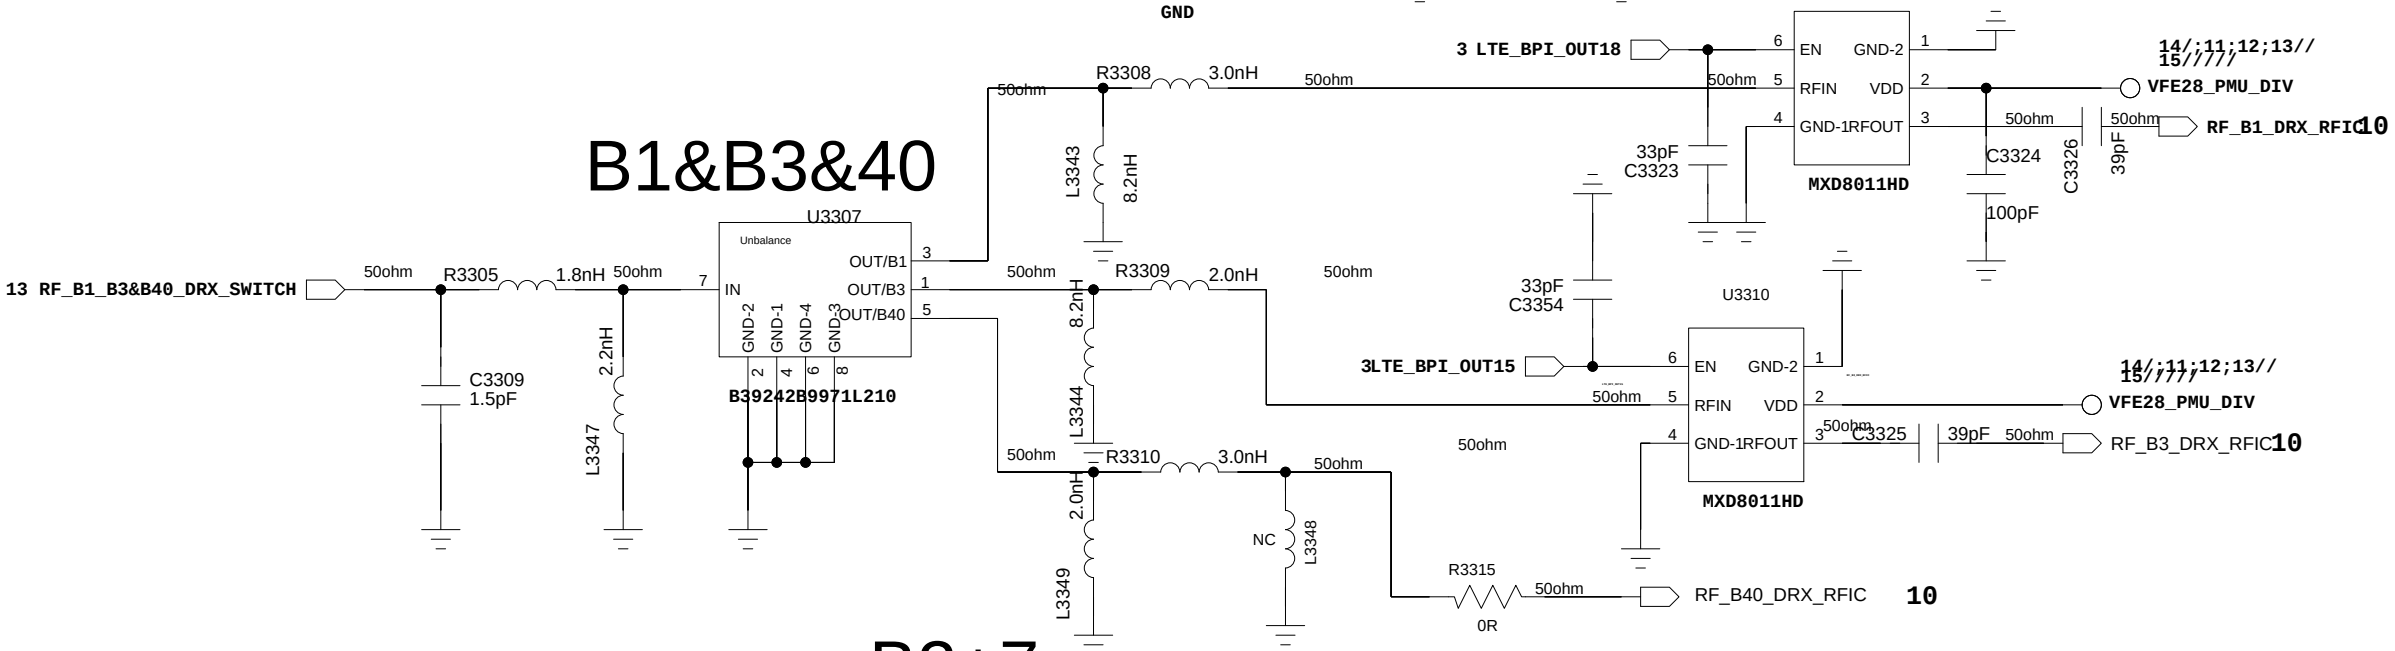

B2+7

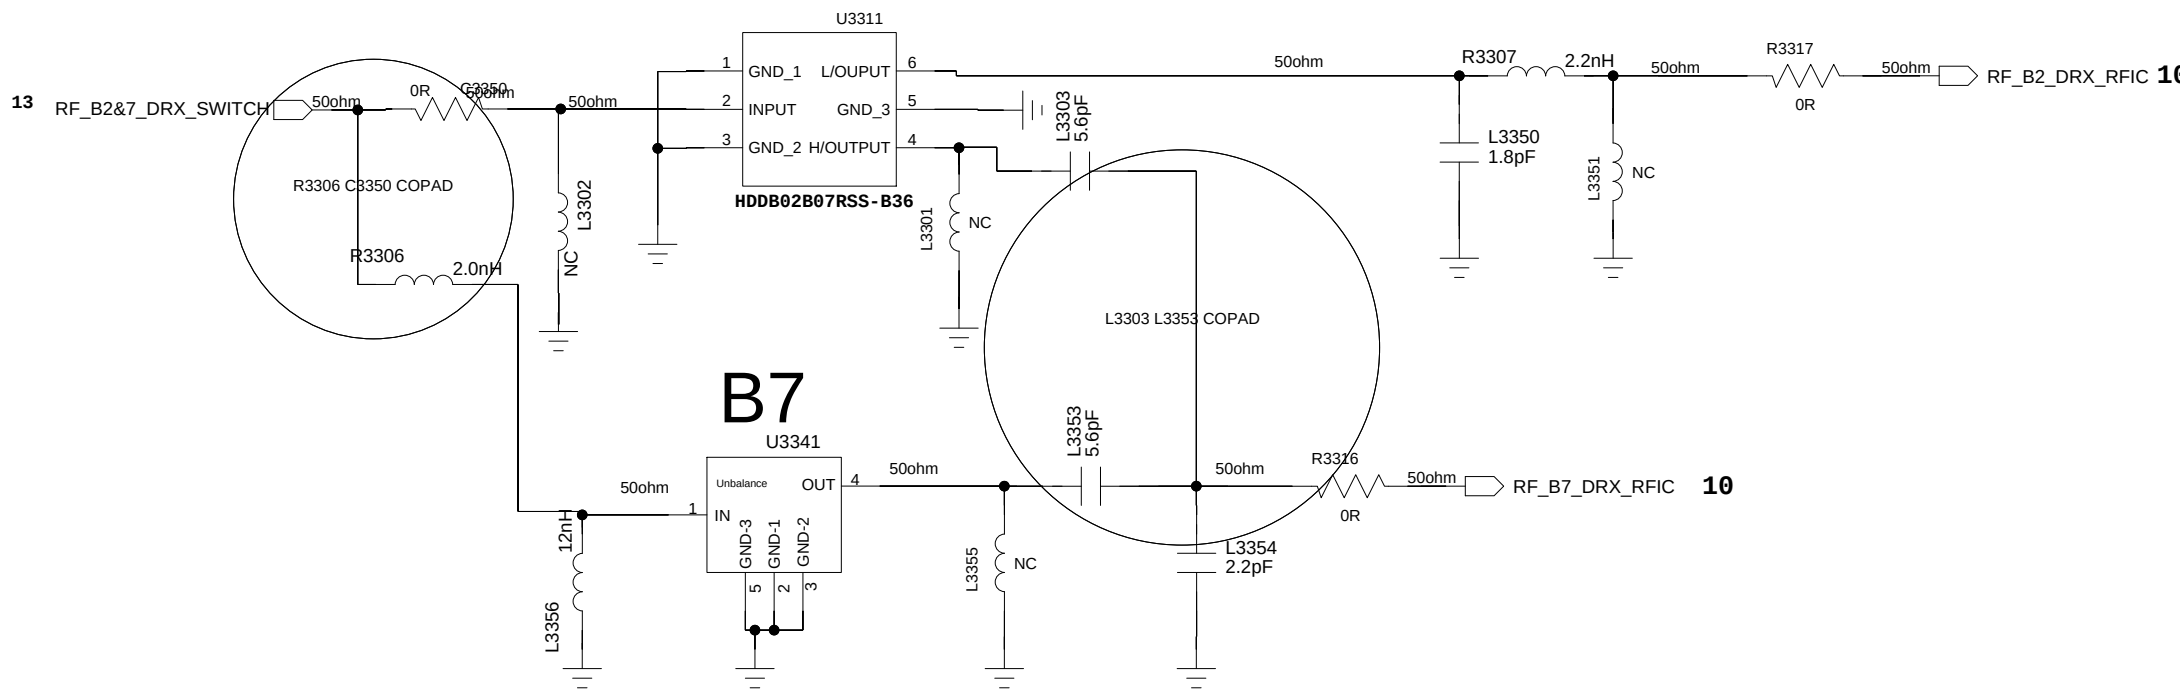

B7

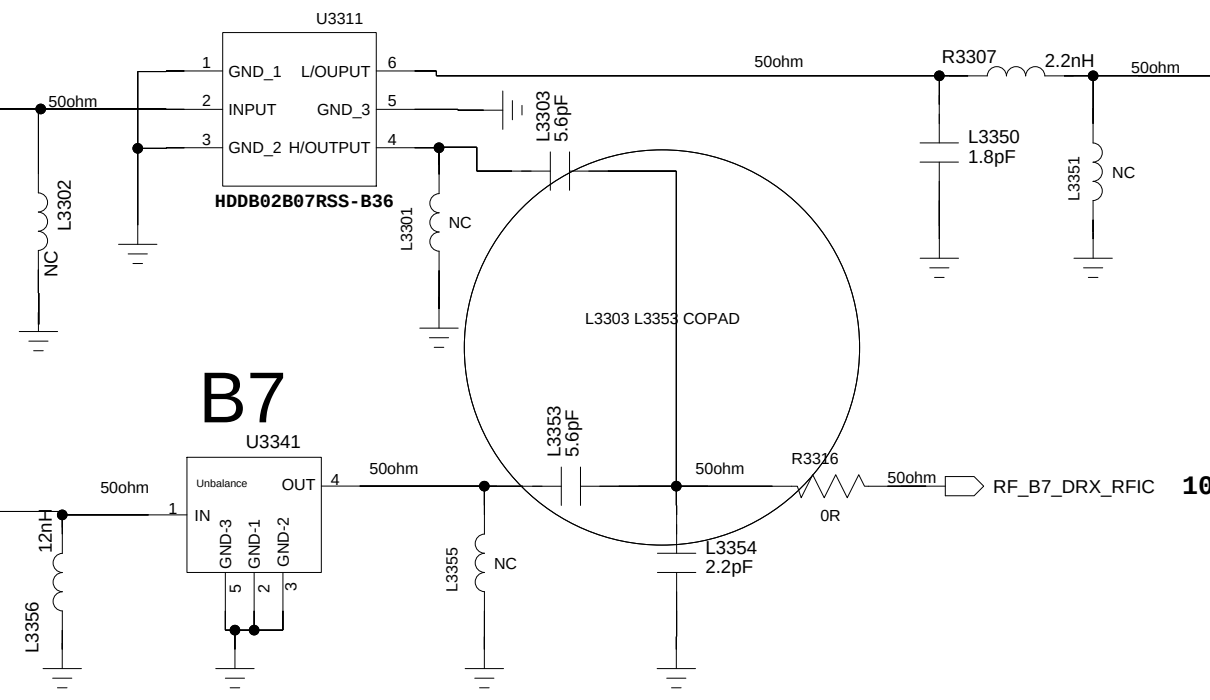


VC1613 control logic					SP8T control logic								REVISION RECORD						
VC1	VC2	RF1	RF2	RF3	SP6T control logic								LTR	ECO NO:	APPROVED:	DATE:			
H	L	Y	N	N	V1	V2	V3	RF1	RF2	RF3	RF4	RF5	RF6	RF7	RF8				
H	H	N	Y	N	L	L	L	Y	N	N	N	N	N	N	N	N			
N	H	N	N	Y	L	L	H	N	Y	N	N	N	N	N	N	N			
					L	H	L	N	N	Y	N	N	N	N	N	N			
					L	H	H	N	N	N	Y	N	N	N	N	N			
					H	L	L	N	N	N	N	Y	N	N	N	N			
					H	L	H	N	N	N	N	N	Y	N	N	N			
					H	H	L	N	N	N	N	N	N	N	Y	N			
					H	H	H	N	N	N	N	N	N	N	N	Y			

14;11;12;13//
VFE28_PMU_DIV

Power


<

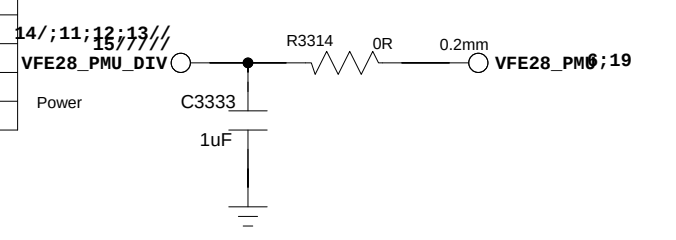

COMPANY: TRANSSION HOLDINGS				MODEL:G100		Modified Date: 18/09/2024:11:33	
DRAWN		DATED		TITLE: 33_RF_MT6186M_RF_DRX		VERSION:	SHEET: 13 OF 25
CHECKED		DATED	< >	Confidentiality	CONFIDENTIAL		

RF_MT6186M_RF_CA



REVISION RECORD			
LTR	ECO NO:	APPROVED:	DATE:

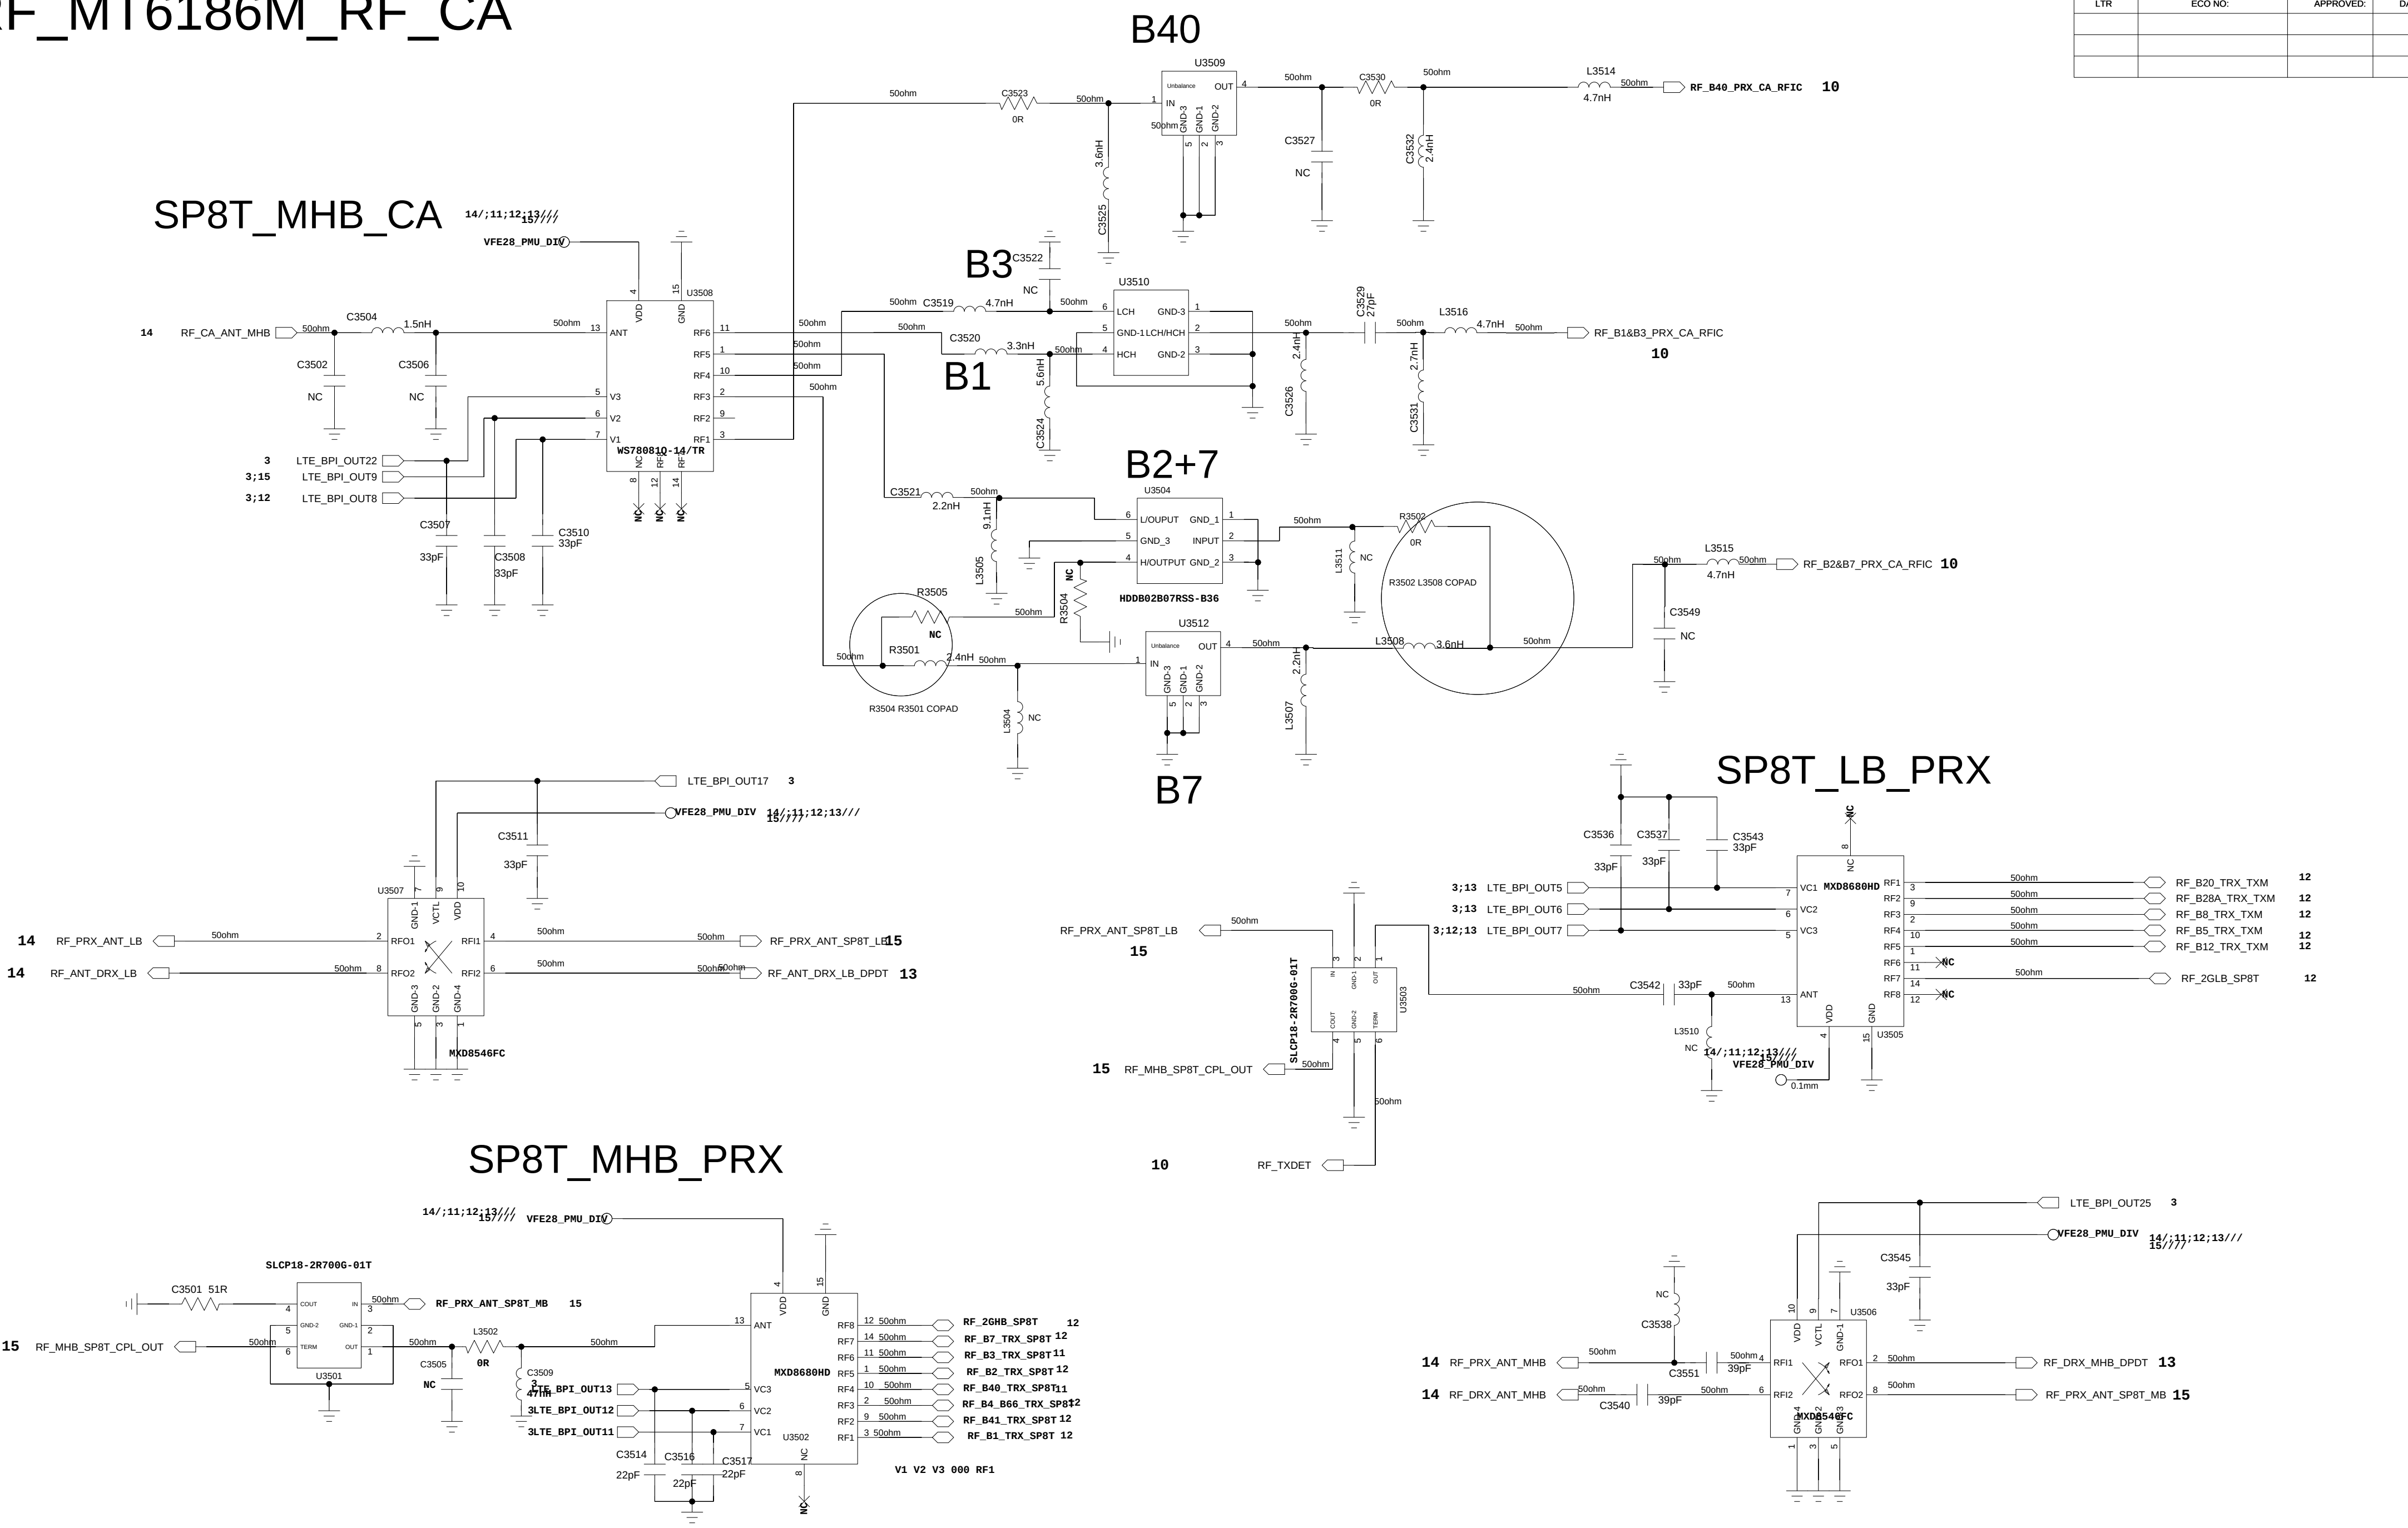

COMPANY: TRANSSION HOLDINGS				MODEL:G100		Modified Date: 18/09/2024:11:33	
DRAWN		DATED		TITLE: 35_RF_MT6186M_RF_MHB_CA		VERSION:	SHEET: 15 OF 25
CHECKED		DATED	< >	Confidentiality	CONFIDENTIAL		

MEM_DSC_LPDDR4x


REVISION RECORD			
LTR	ECO NO:	APPROVED:	DATE:

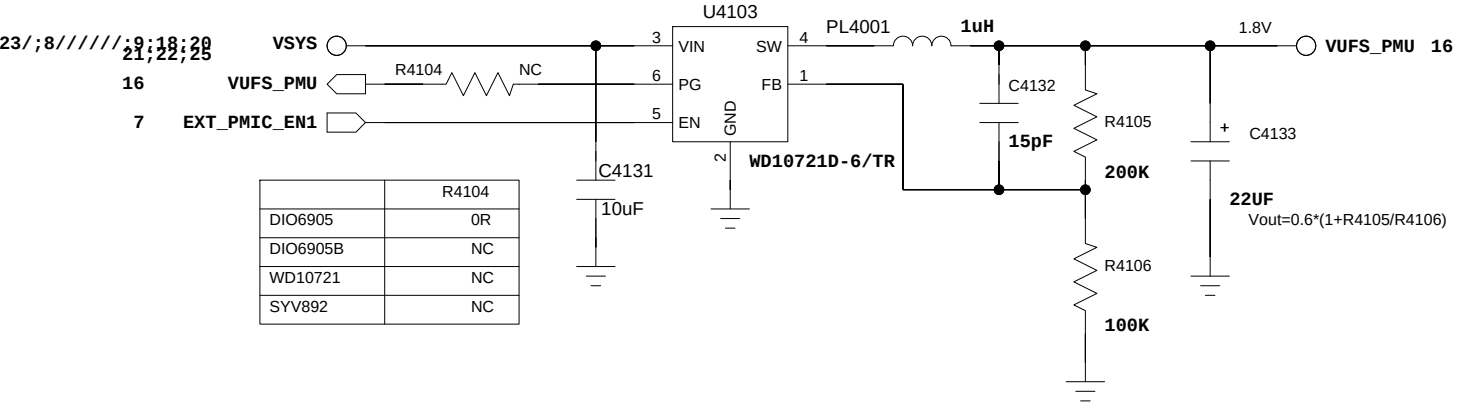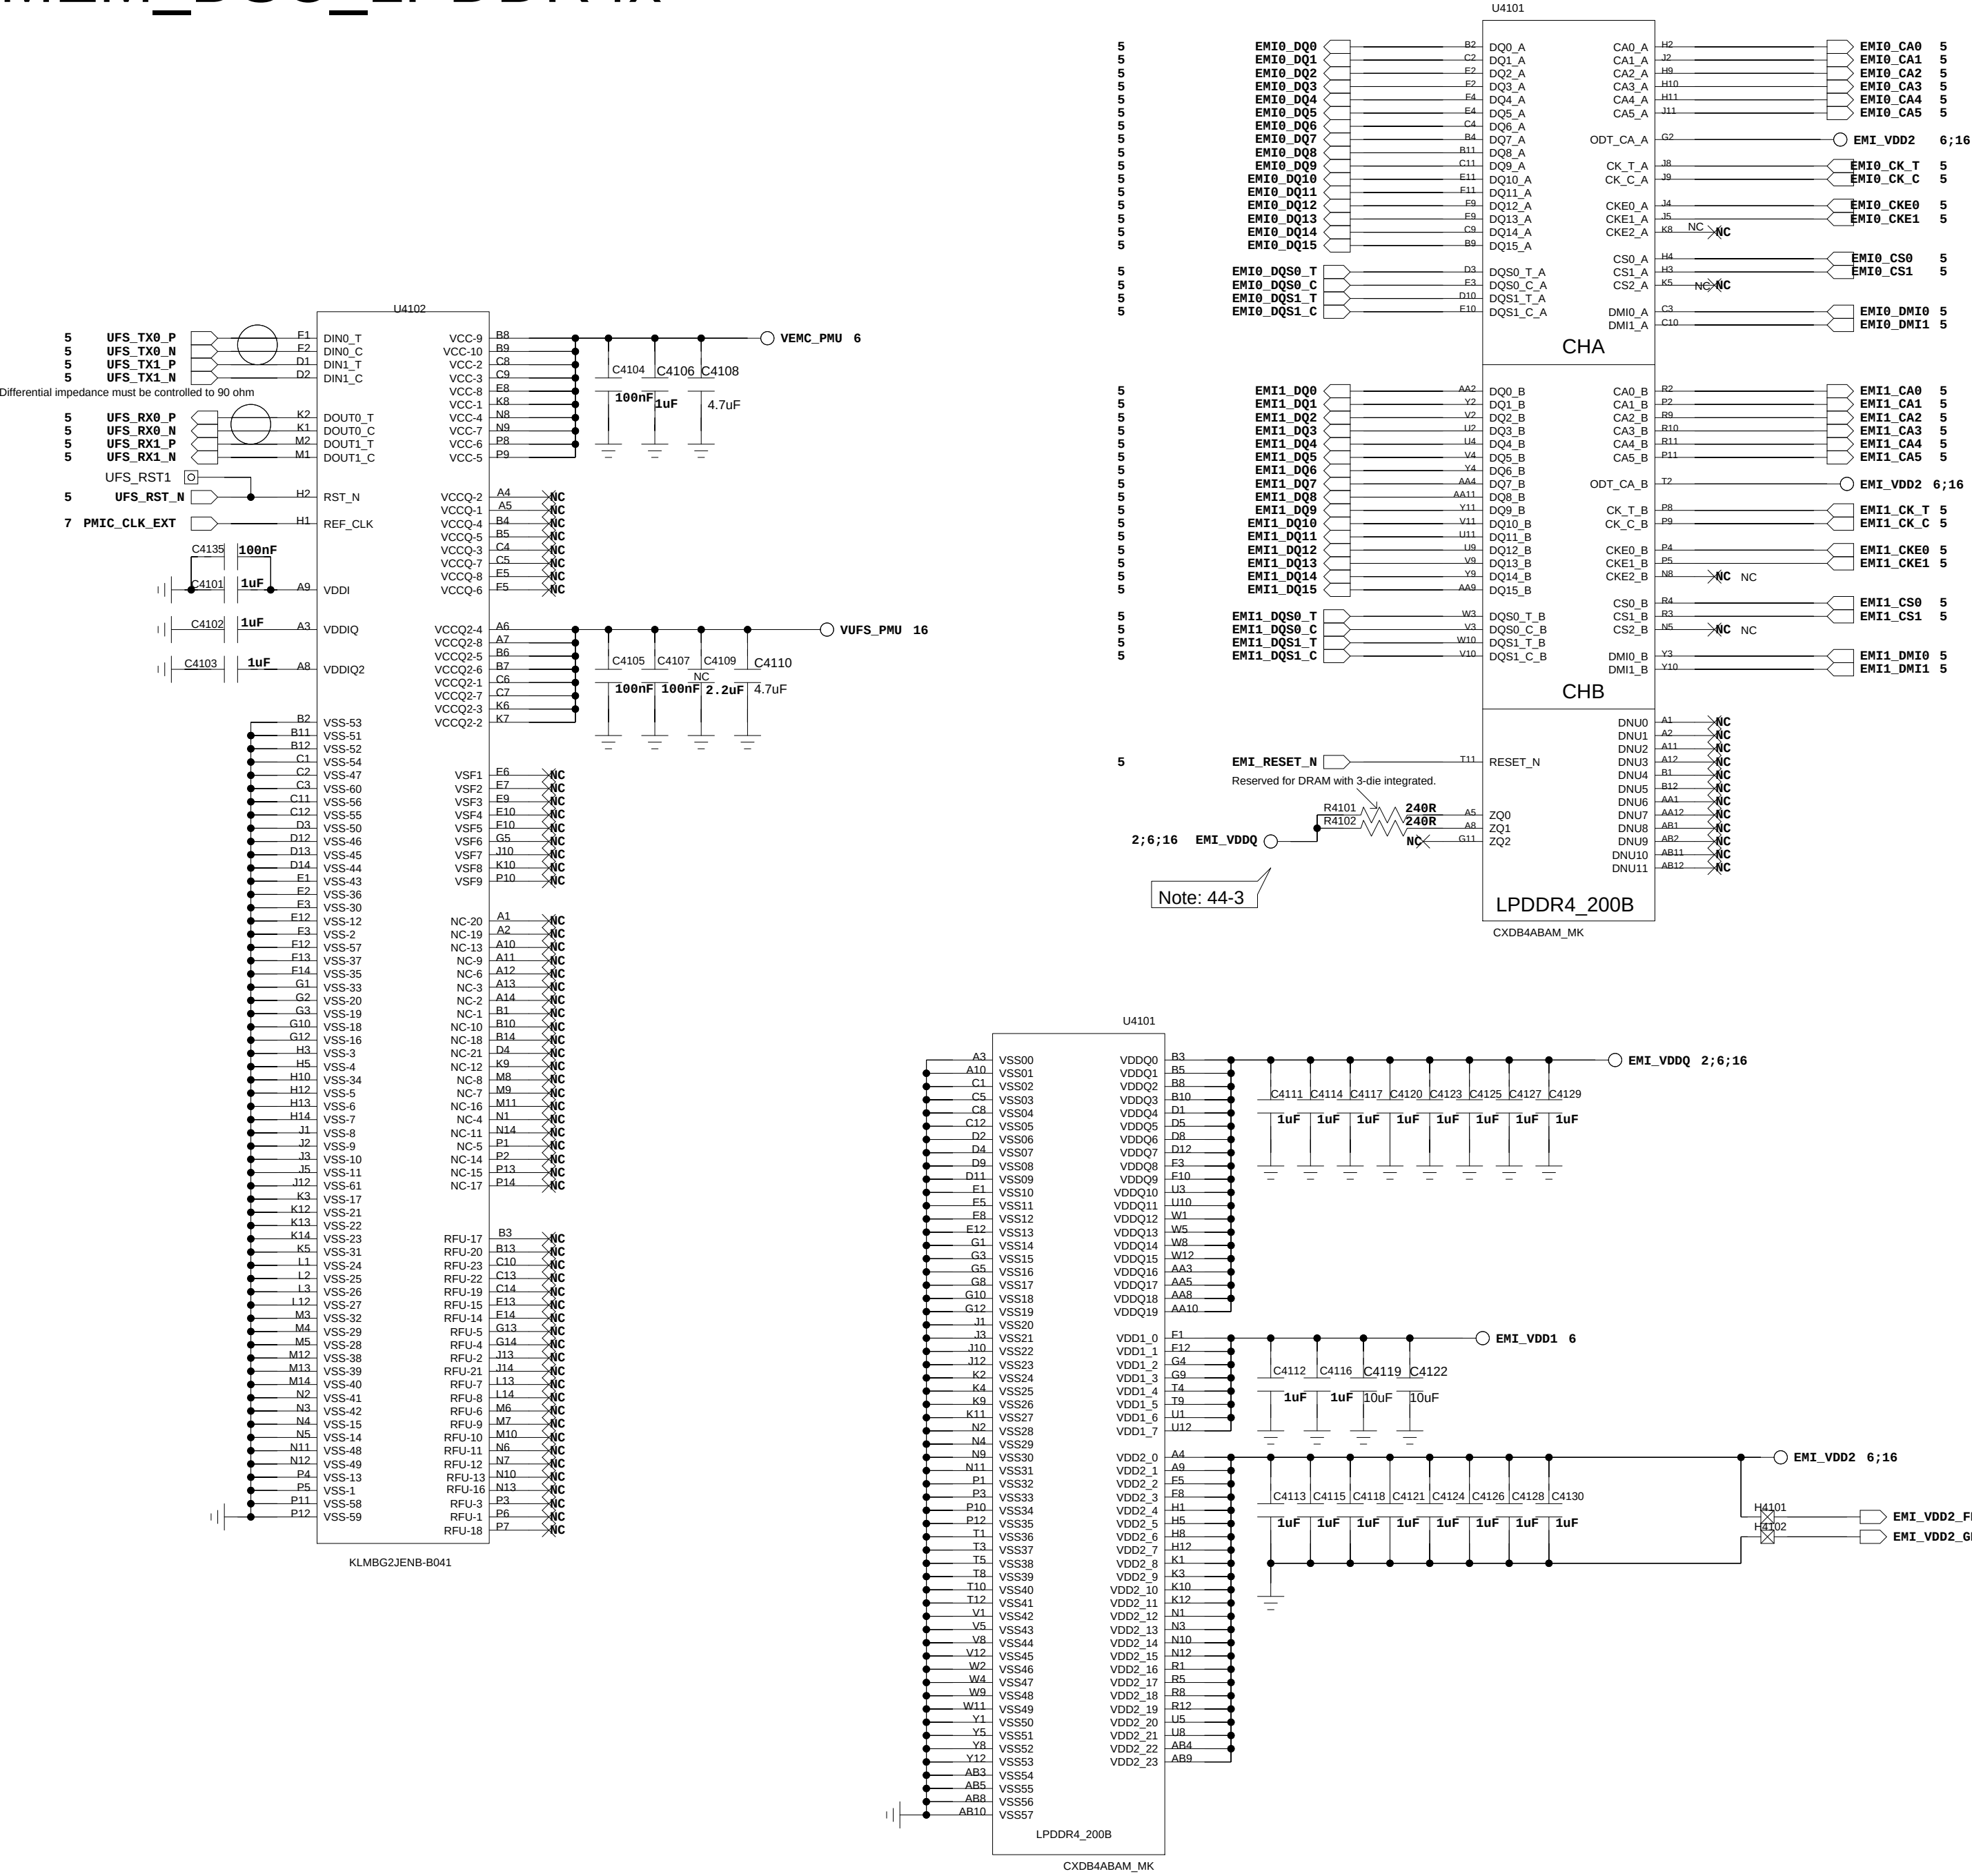


COMPANY: TRANSSION HOLDINGS				MODEL: G100		Modified Date: 06/08/2024:15:25	
DRAWN		DATED		TITLE: 41_MEMORY_DSC_LPDDR4X		VERSION:	SHEET: 16 OF 25
CHECKED		DATED	< >	Confidentiality	CONFIDENTIAL		

CONNECTIVITY_MT6631


ANT12(GPS L1)

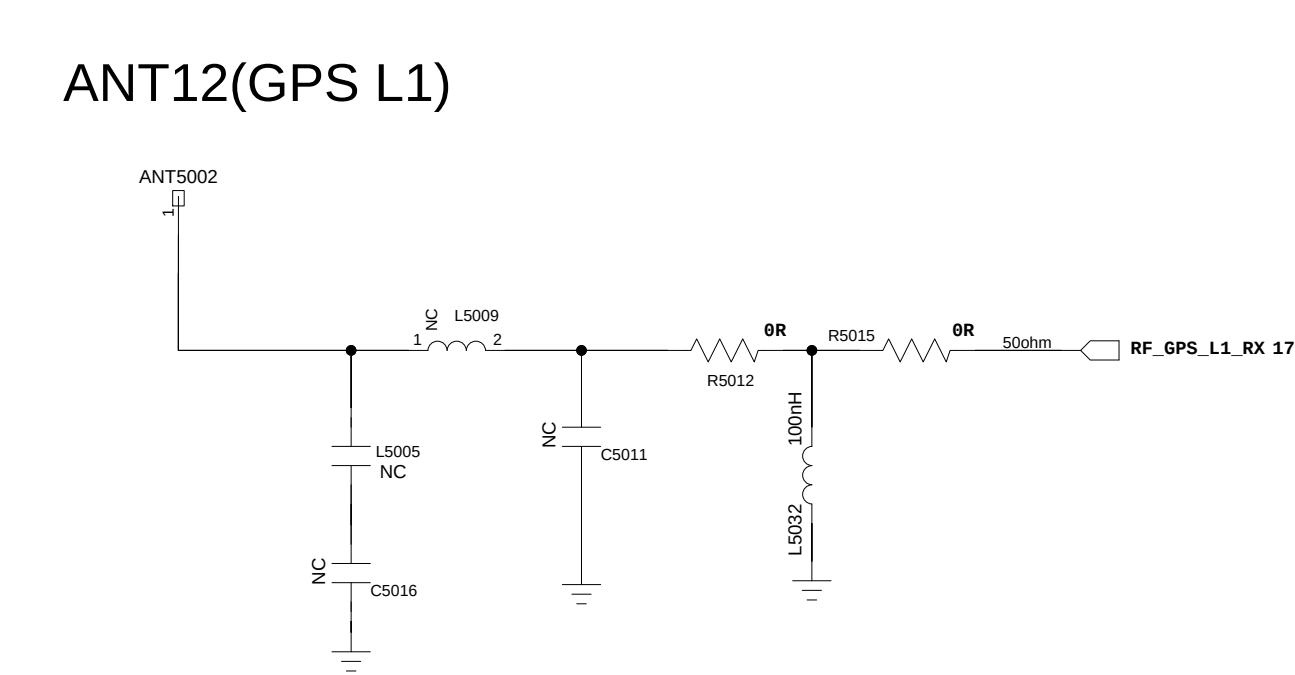



ANT14(WIFI 2.4G WAS)

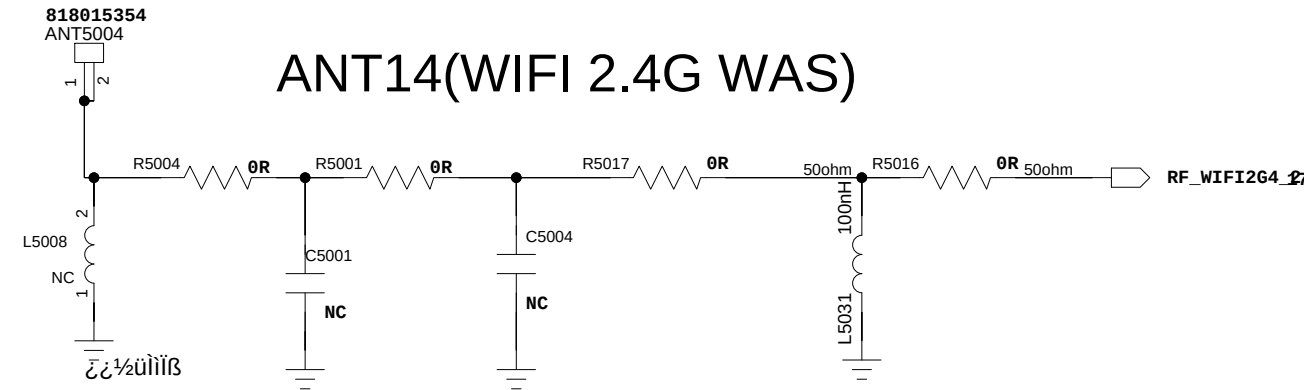

WIFI_SAWP

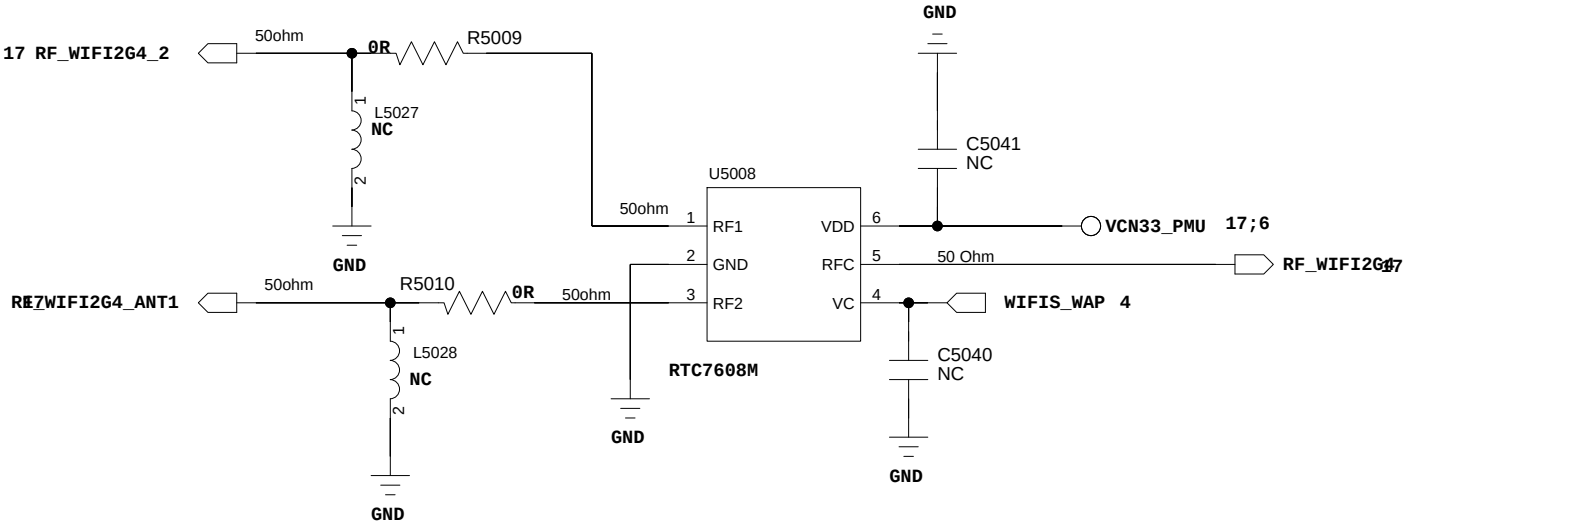


ANT13(WIFI2.4g+5G_MIMO1)

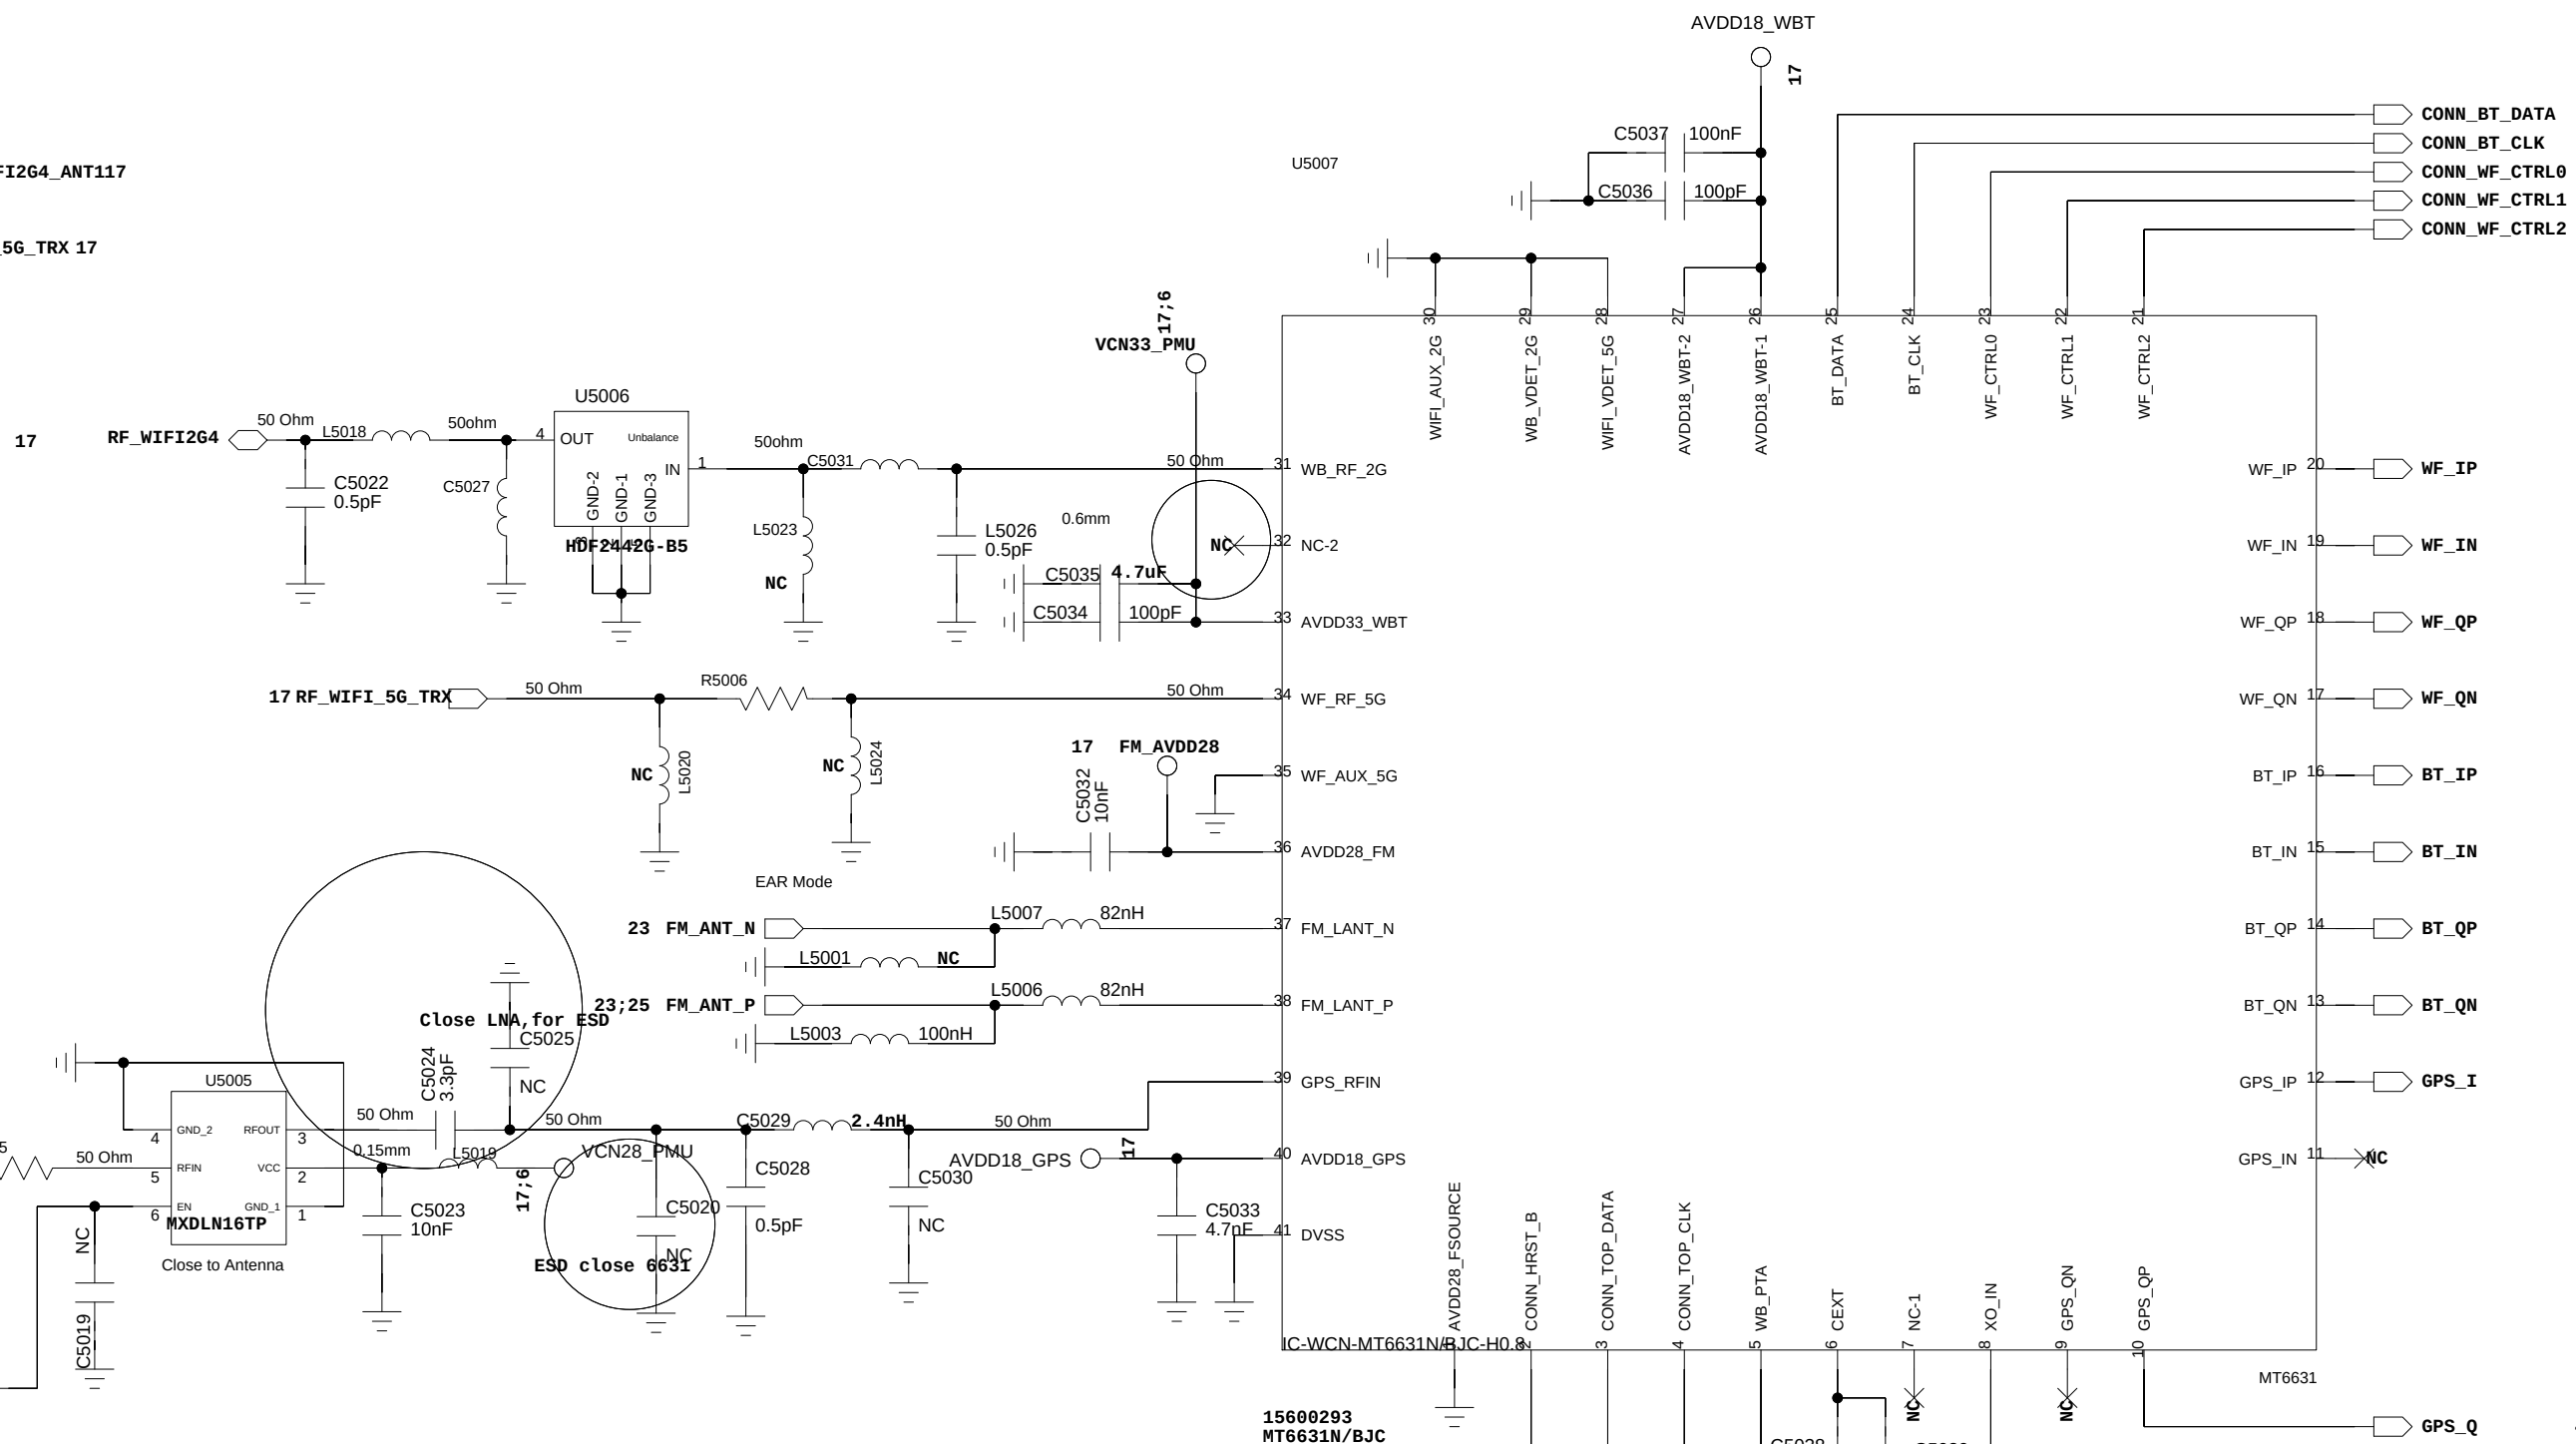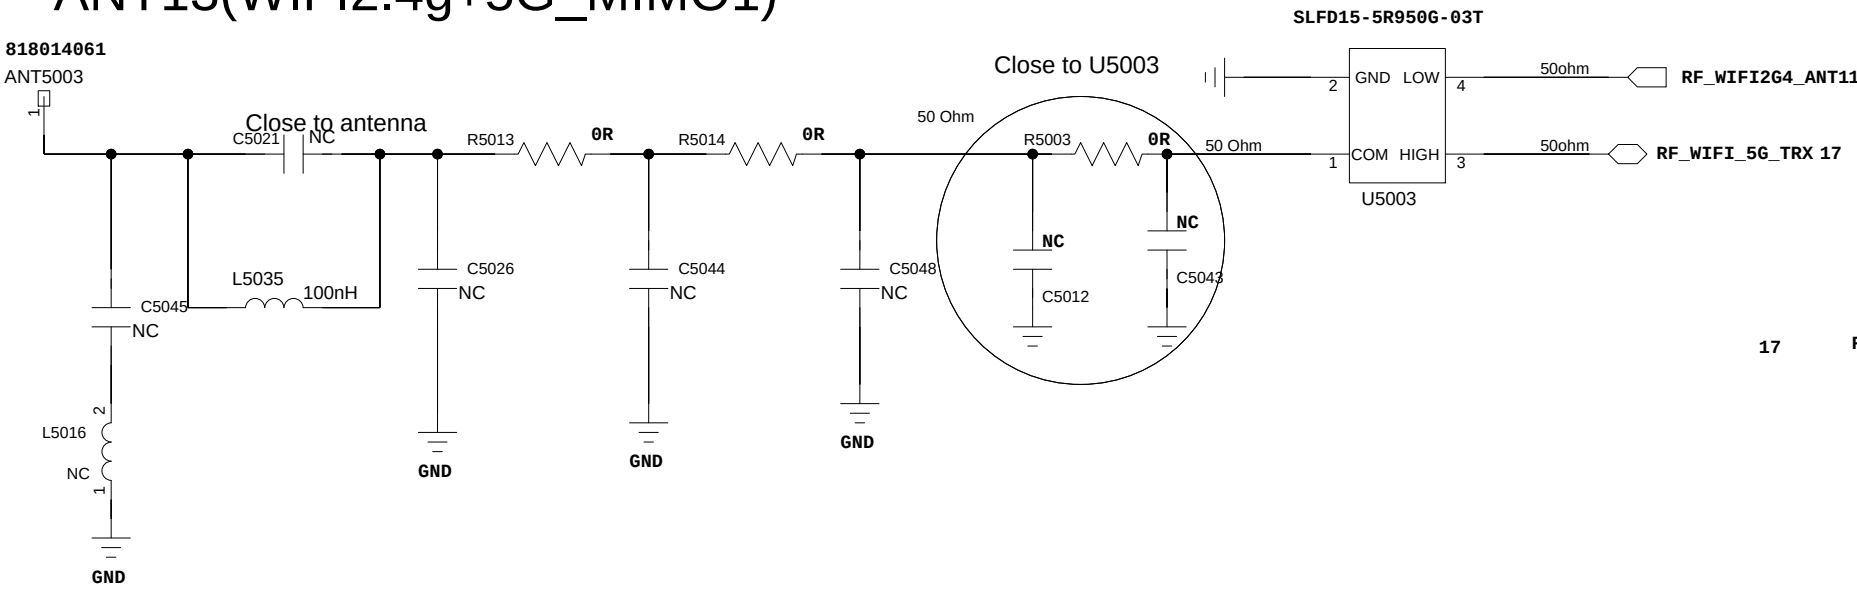

BOM-9:GPS-B13 Coex-Notch
DNI C5025,L5009 without B13

Power domain

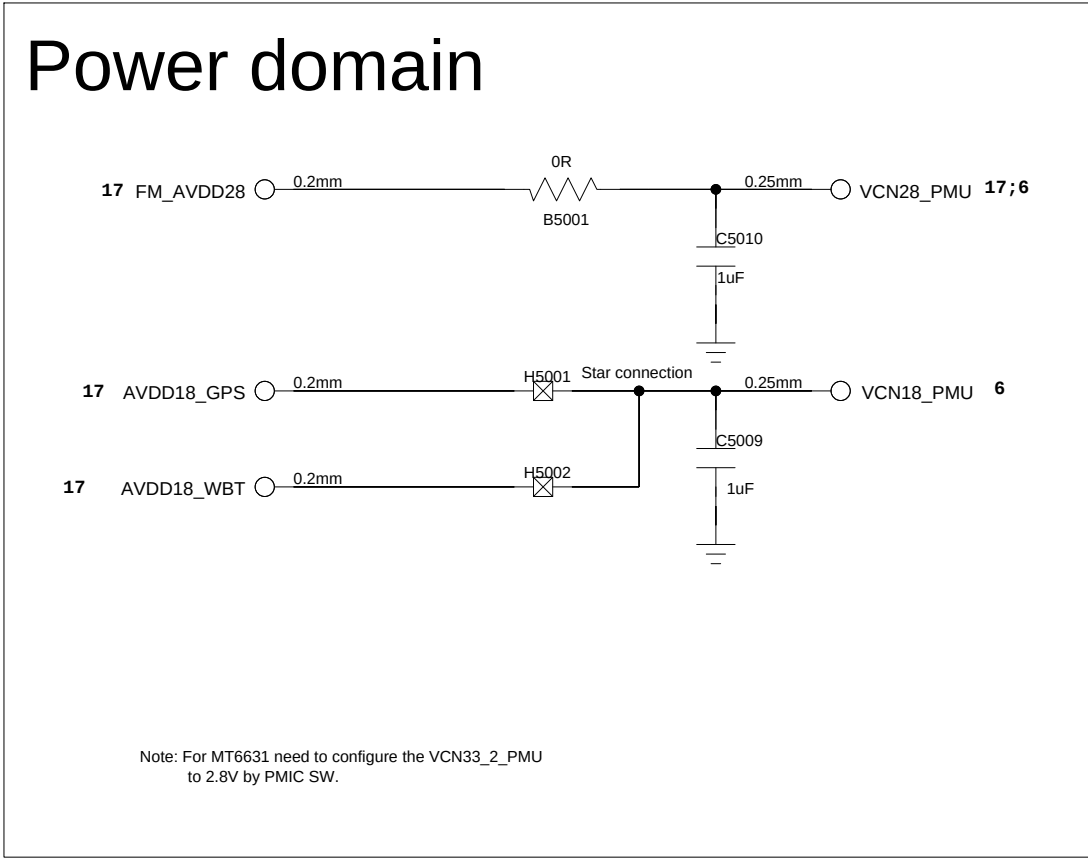


Note: For MT6631 need to configure the VC�33_2_PMU to 2.8V by PMIC SW.


COMPANY: TRANSSION HOLDINGS				MODEL:G100		Modified Date: 08/08/2024:09:53	
DRAWN		DATED		TITLE: 50_CONNECTIVITY_MT6631		VERSION:	SHEET: 17 OF 25
CHECKED		DATED	< >	Confidentiality	CONFIDENTIAL		

PERI_AUDIO_IO


Audio PA
FS1599N:I2C ADDRESS:0x6A(W)/0x6B(R)

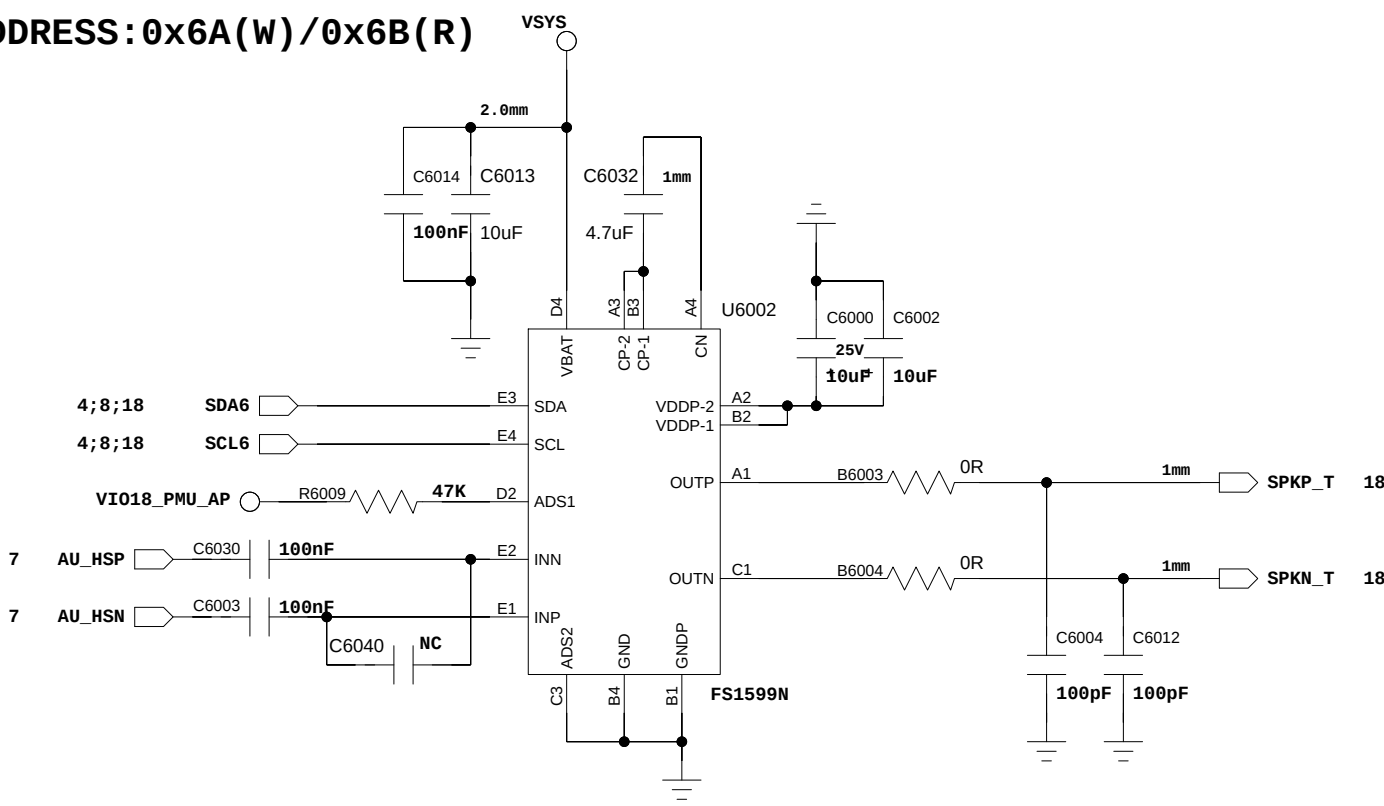


MAIN MIC
ACC Mode

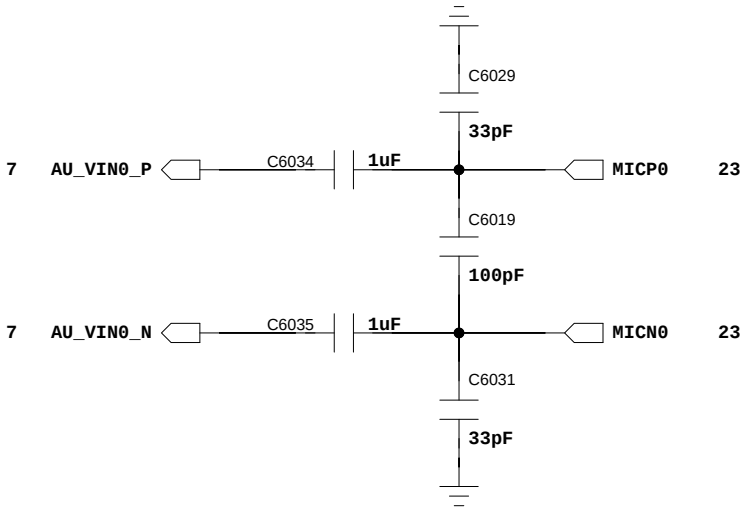


SPK & REC

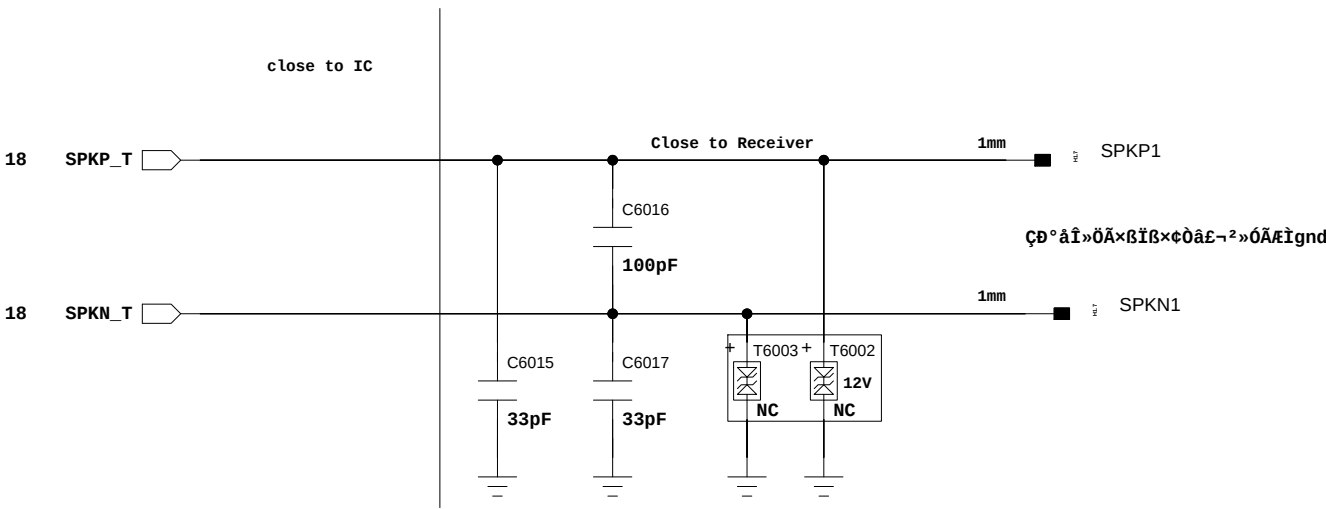


Audio PA
FS1599N:I2C ADDRESS:0x68(W)/0x69(R)

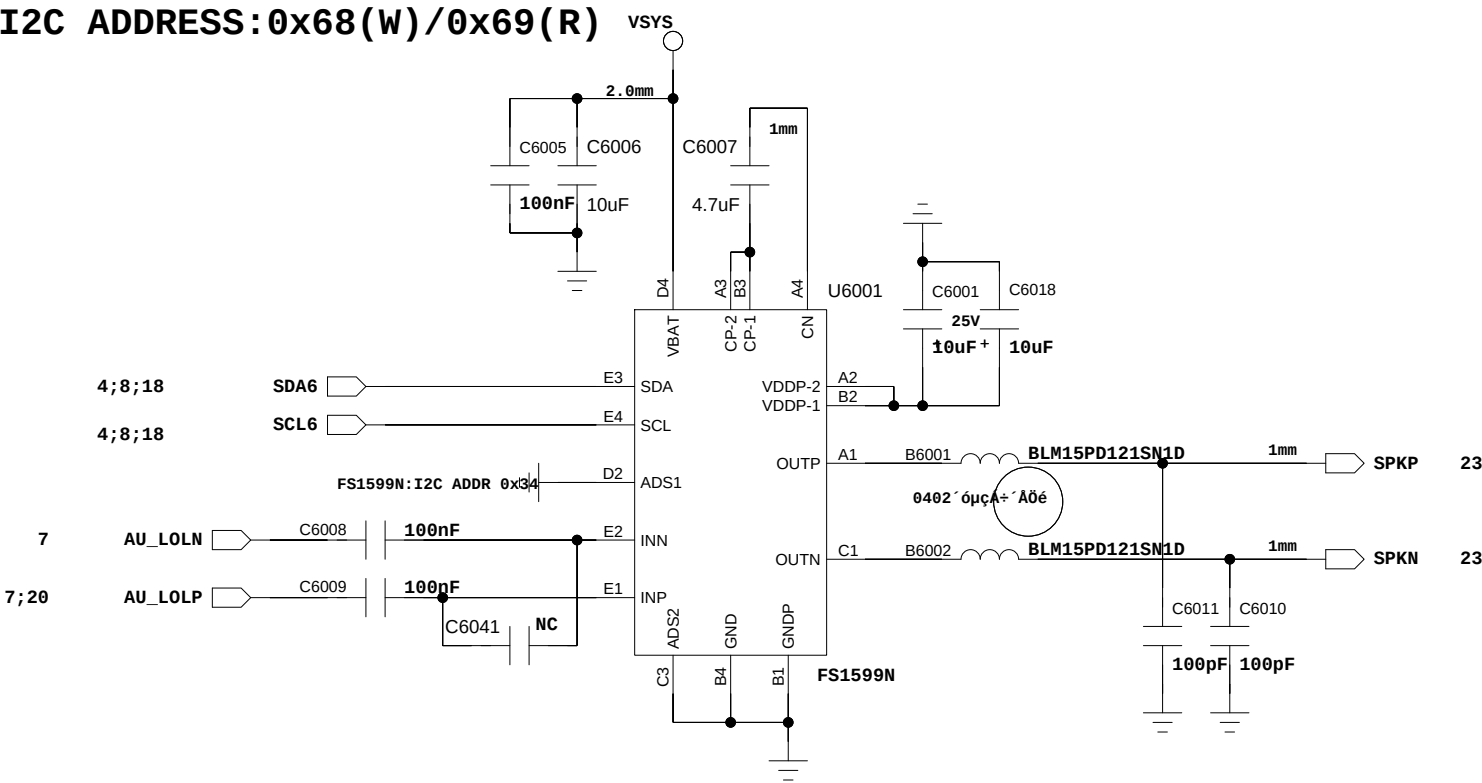


SUB MIC

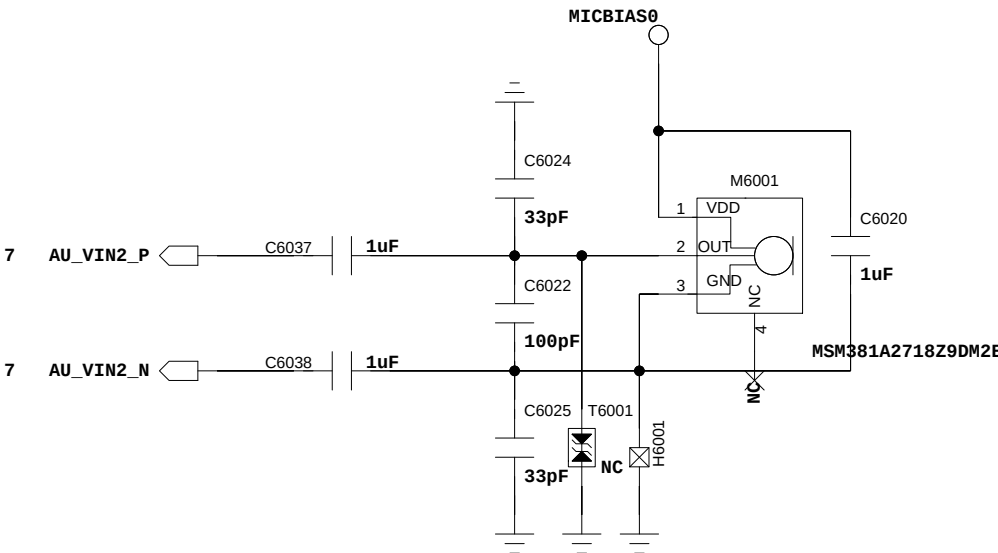

Earphone MICPHONE
ACC Mode

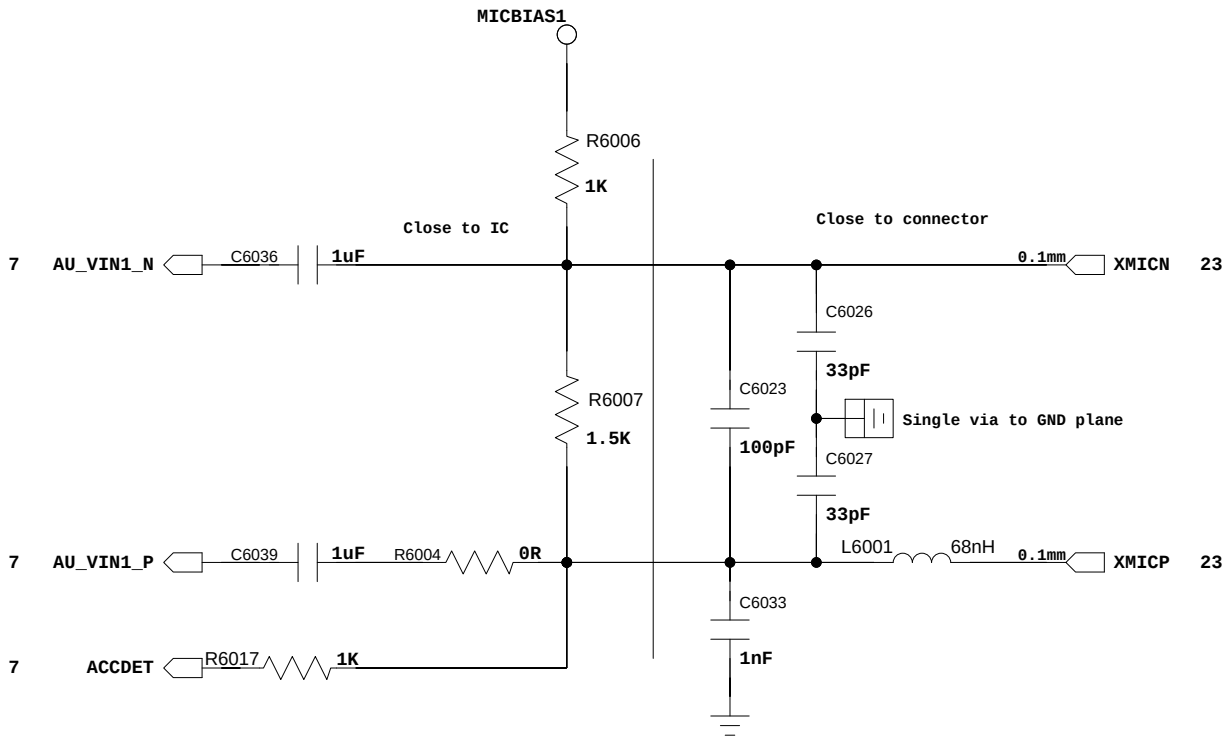

Earphone Receiver


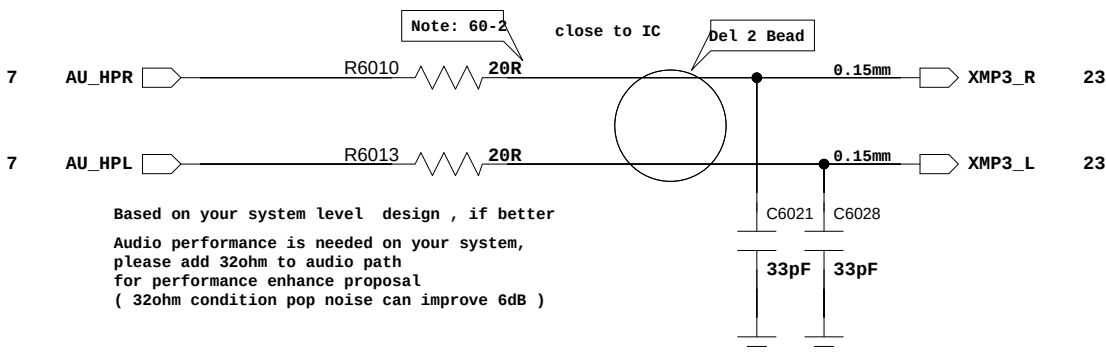


COMPANY: TRANSSION HOLDINGS				MODEL:G100		Modified Date: 29/07/2024:09:46	
DRAWN		DATED		TITLE: 60_PERI_AUDIO		VERSION:	SHEET: 18 OF 25
CHECKED		DATED	< >	Confidentiality	CONFIDENTIAL		

PERI_LCM_CTP_FP

LCD_CTP_INTERFACE

CTP (NT36525) I2C address: 0X01 (Write:0x02, Read:0x03)

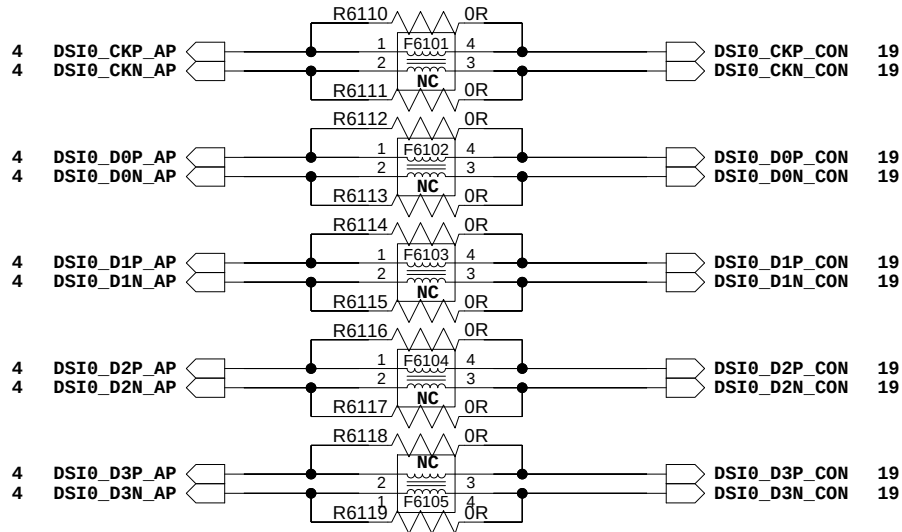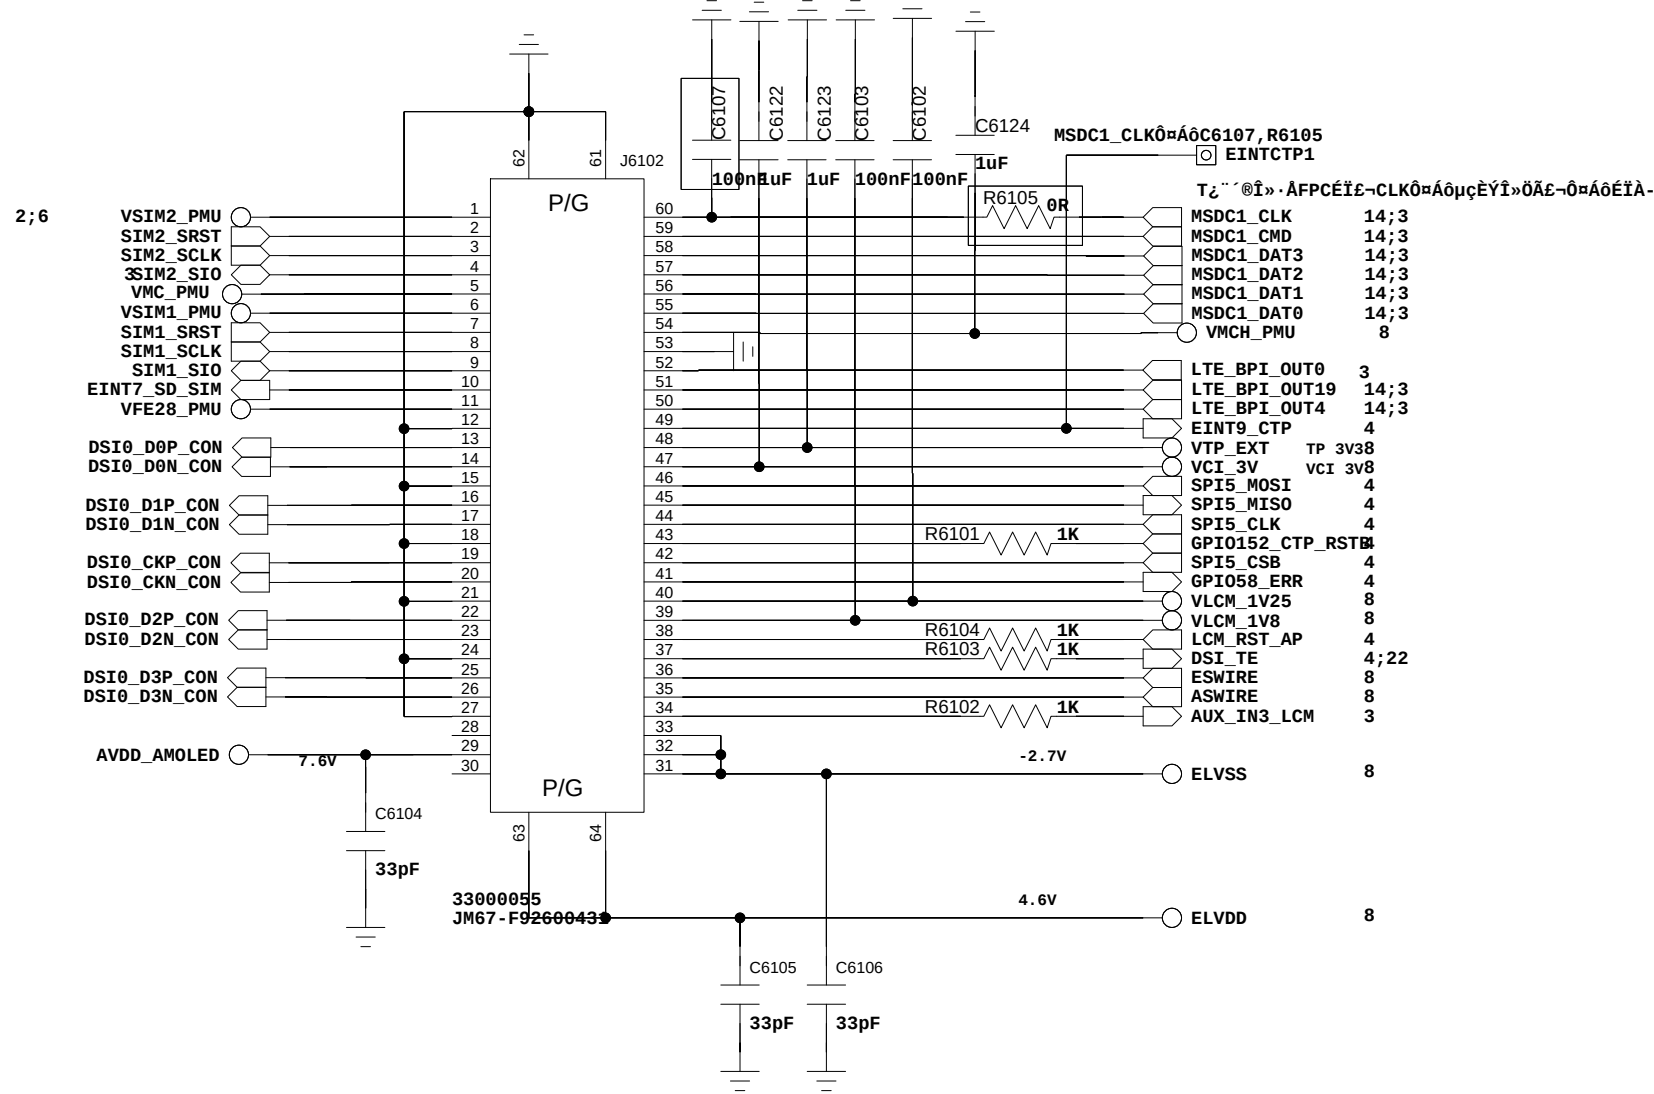

FINGER PRINT

Í"¹ýP64_EXCHµ½SUB¶Ě

REVISION RECORD			
LTR	ECO NO:	APPROVED:	DATE:

COMPANY: TRANSSION HOLDINGS				MODEL: G100		Modified Date: 09/08/2024:10:06	
DRAWN		DATED		TITLE: 61_PERI_LCM_CTP_IO		VERSION:	SHEET: 19 OF 25
CHECKED		DATED	< >	Confidentiality	CONFIDENTIAL		


REVISION RECORD			
LTR	ECO NO:	APPROVED:	DATE:

	SAP	SENSOR	I2C Address	VCAMA	VCAMD	VCAMIO	AFVDD(PIN6)	ACT_VDD	OIS_DOVDD
C-PHY	64H PKMS4078	IXM082-AAJHS-C AWB601CSR P2C4128F-D4H-MIR	Write: 0x20 Read: 0x21 Write: 0x19 Read: 0x1A Write: 0xA0 Read: 0xA1	0.8V 60.5mA	1.1V 524.48mA	1.8V 3.08mA	2.8V 100mA	3.3V 340mA	NC
C-PHY	50H 17201919	IXM096-AJHS-C AWB601CSR P2C4128F-D4H-MIR	Write: 0x20 Read: 0x21 Write: 0x18 Read: 0x19 Write: 0xA0 Read: 0xA1	0.8V 57.5mA	1.0V 587.6mA	1.8V 5.3mA	3.3V 100mA	3.3V 340mA	NC
C-PHY	50H 17201983	5XGKM5SP93-FGX9 AWB601CSR P2C4128F-D4H-MIR	Write: 0x20 Read: 0x21 Write: 0x18 Read: 0x19 Write: 0xA0 Read: 0xA1	0.2V 200mA	0.92V 950mA	1.8V 80mA	3.3V 100mA	3.3V 340mA	NC
0.8um OIS (IXM082)	50H		Write: 0x20 Read: 0x21 Write: 0x18 Read: 0x19 Write: 0xA0 Read: 0xA1						NC

SENSOR		VCAMA	VCAMD	VCAMIO	VCAMAF	I2C Address	SAP	PIN4
8M	GC88A8					Sensor Write:0x22 Read:0x23		
	CN3927VLC	2.8V 60mA	1.2V 150mA	1.8V 10mA	2.8V 125mA	VCM Write:0x18 Read:0x19	17201912	0R
	TD24C64-C1LP0TR					E2PROM Write:0xA9 Read:0xA1		

	SENSOR	I2C Address	VCAMA	VCAMD	VCAMIO	AFVDD
2M	GC02M1-C24Y0	Write:0x20 Read:0x22	2.8V 40mA		1.8V 70mA	
2M	GC02M1-C24YH	Write:0x20 Read:0x22	2.8V 40mA		1.8V 70mA	


ÉÁ¹âµ£;¢°ôïûµ£;¢flickersensor;¢ V
 STK31860:I2C address: Write:0X8A, Read:0X8B
 °ôïûµ£IC:AW2023 I2C address: Write:0x8A, Read:0x8B
 °ôïûµ£IC:°¼âÉÝ£@:AW2026:I2C address: Write:0XD4, Read:0XD5

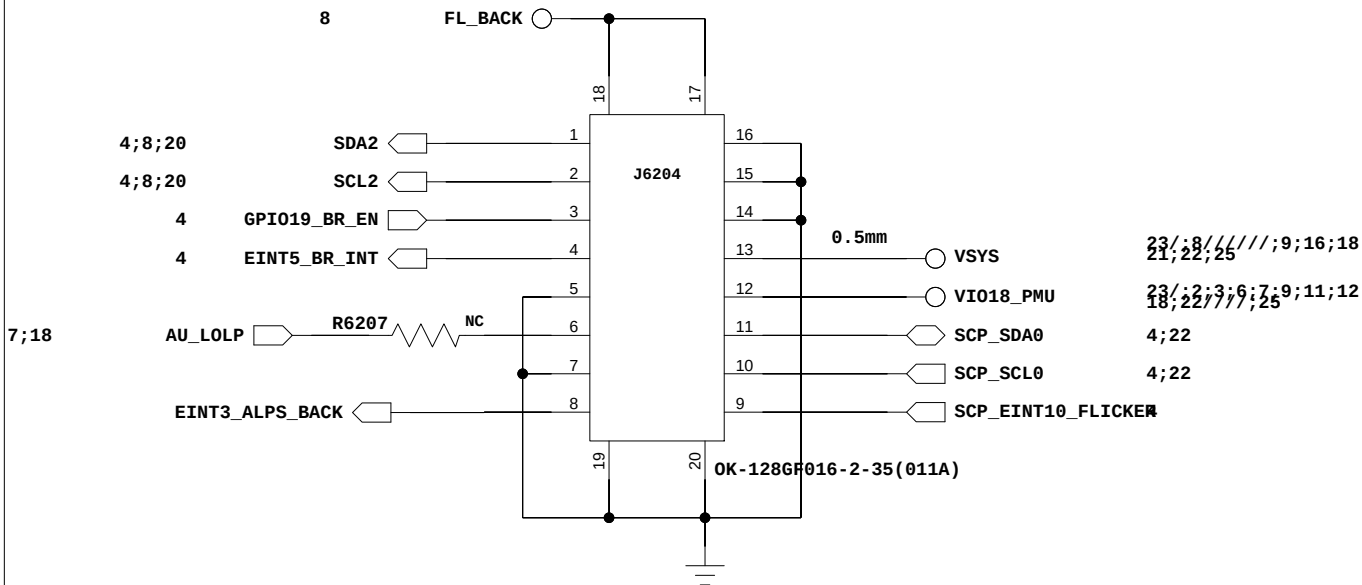




COMPANY: TRANSSION HOLDINGS				MODEL: G100		Modified Date: 24/07/2024:14:33	
DRAWN		DATED		TITLE: 62_PERI_CAMERA_I		VERSION:	SHEET: 20 OF 25
CHECKED		DATED	< >	Confidentiality	CONFIDENTIAL		

PERI_CAMERA_II

REVISION RECORD			
LTR	ECO NO:	APPROVED:	DATE:

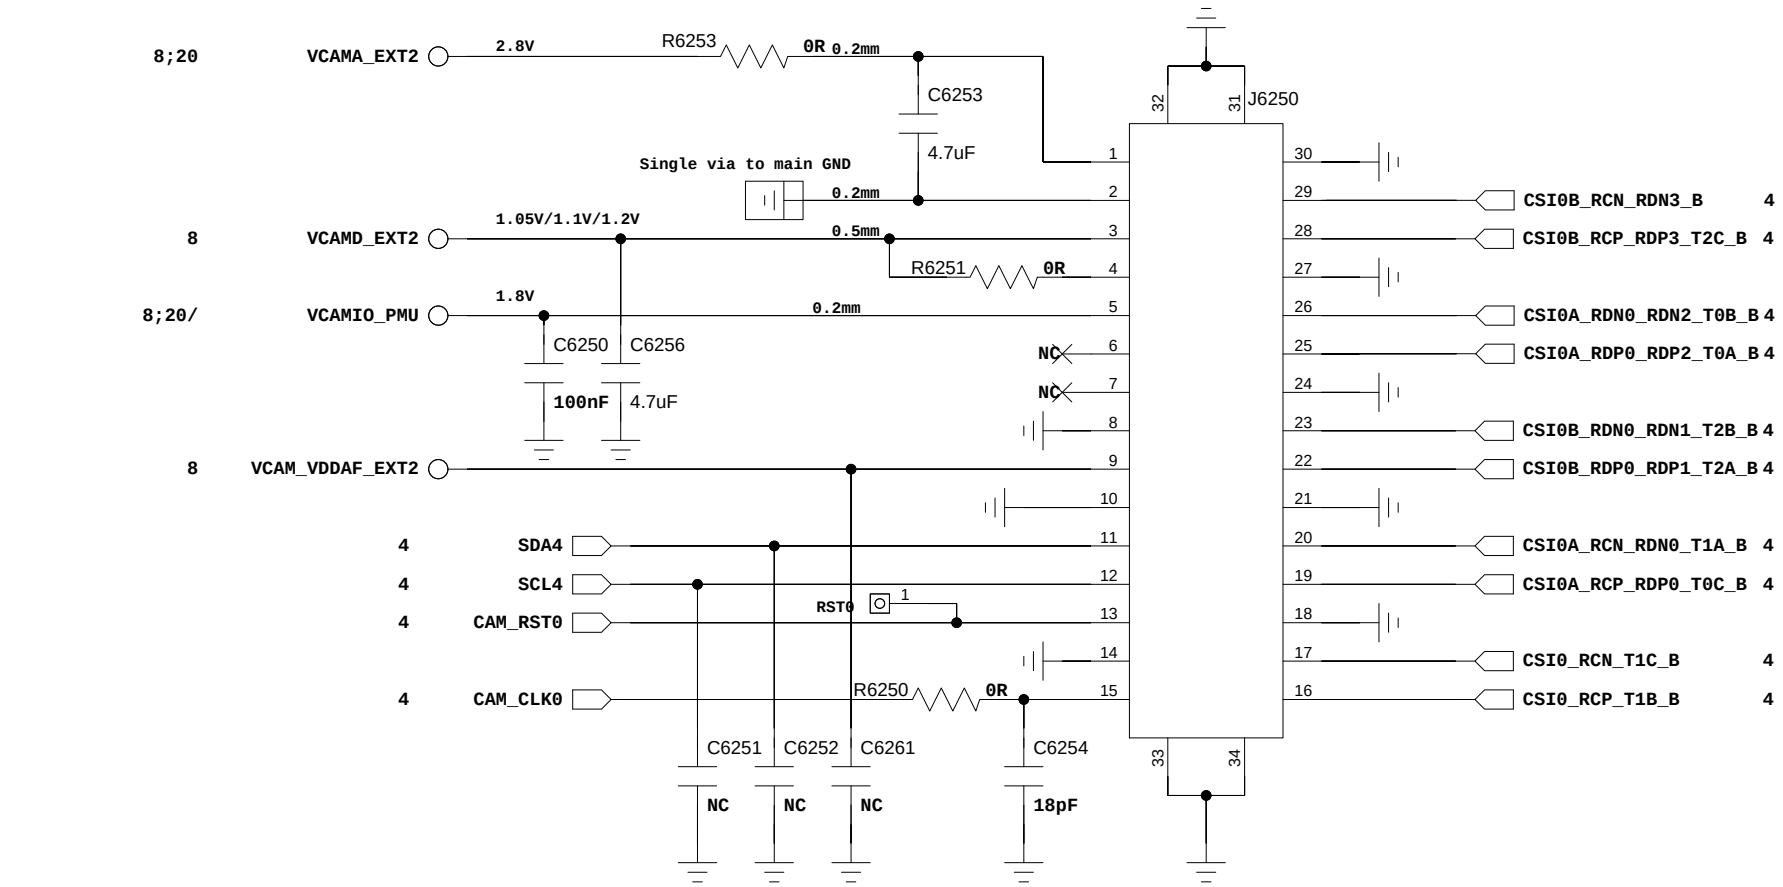

SENSOR	VCAMA	VCAMD	VCAMIO	VCAMAF	I2C Address	SAP	PIN4
50M S9KJ13Q03 C40930V P24C128F-D4H-MIR GC32E2-WA12A	2.8V 67.7mA	1.05V 260.7mA 8V 4mA	2.8V 105mA		Sensor Write:0xA Read:0xA VCH Write:0x18 Read:0x19 17201907 E2PROM Write:0xA2 Read:0xA3	0R	
32M P24C64F-A4H-MIR GC13A0-WA13A	2.8V XXmA	1.1V XXmA	1.8V XXmA	NC	Sensor Write:0x94 Read:0x95 E2PROM Write:0xA2 Read:0xA3	0R	
13M GT24P64E-2CSLI-TR 16M HI-1634Q P24C64E-CAH-MIR	2.8V 45mA	1.2V 115mA	1.8V 5mA		Sensor Write:0x72 Read:0x73 E2PROM Write:0xA2 Read:0xA3	0R	
16M OV16B10-GA5A GT24P64E-2CSLI-TR	2.8V 52mA	1.05V 200mA 1.8V 5mA			Sensor Write:0x6C Read:0x6D E2PROM Write:0xA2 Read:0xA3	0R	
8M GC8034-WC1X0	2.8V 35mA	1.25V 140mA 1.8V 10mA			Sensor Write:0x6E Read:0x6F201657	NC	
8M GC80A3-MADD0	2.8V 60mA	1.2V 150mA 1.8V 10mA			Sensor Write:0x24 Read:0x25201829	NC	
8M OV8856-GA4A-2A(0V)	2.8V 28mA	1.2V 95mA 1.8V 2.7mA			Sensor Write:0x6C Read:0x6D201831	NC	
8M SSK4H7YX03-FGX9	2.8V 30mA	1.2V 96.5mA 1.8V 43uA			Sensor Write:0x5A Read:0x5B201832	NC	

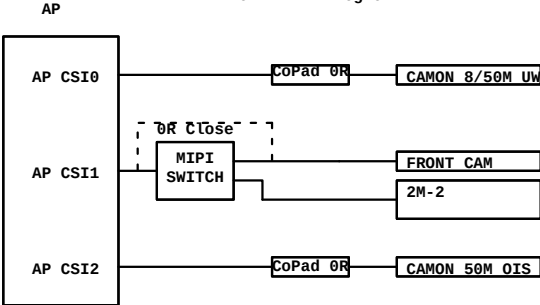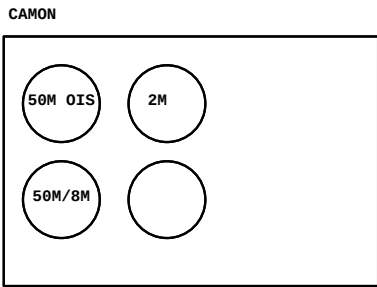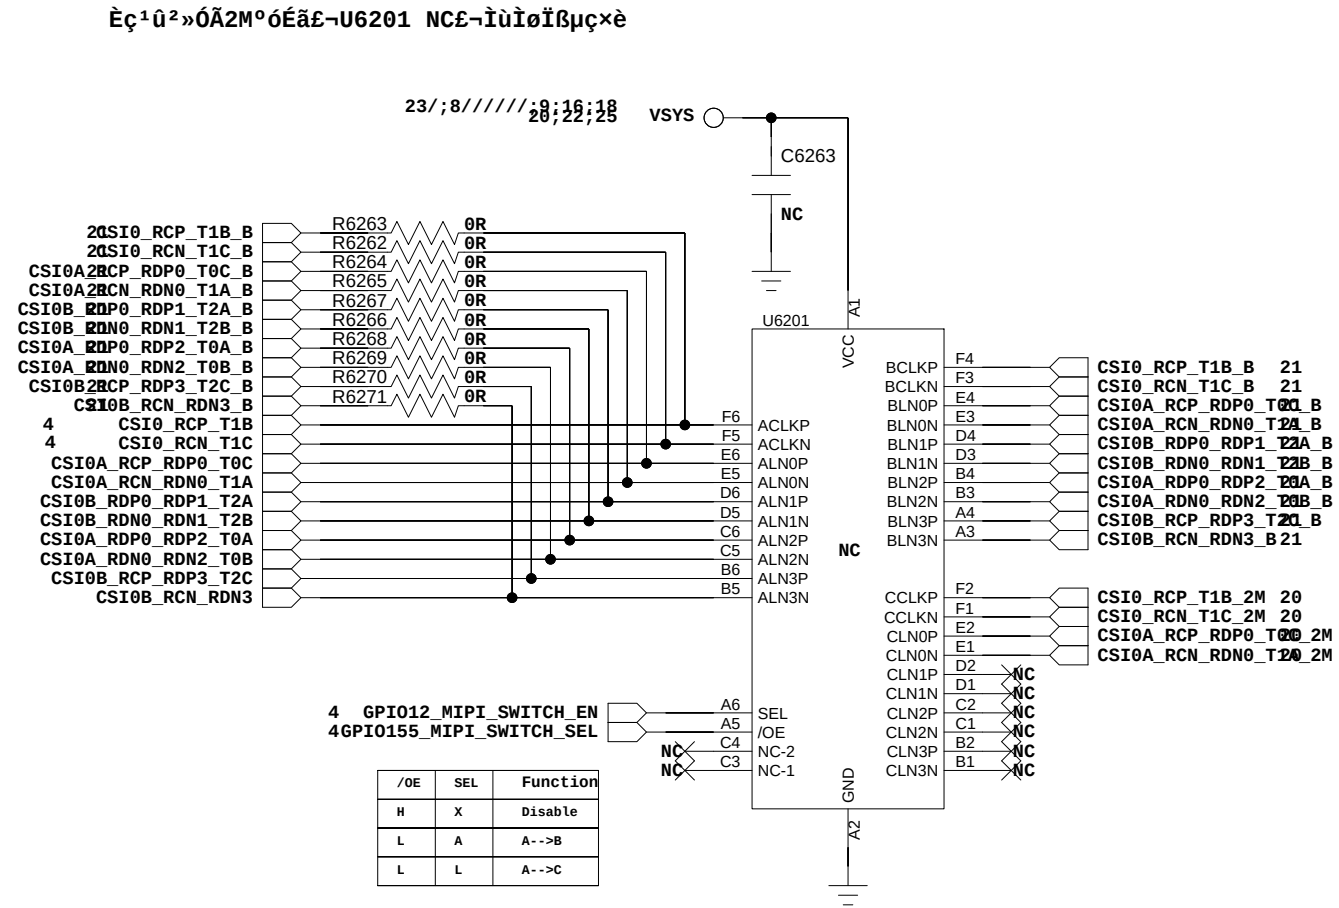

	Ö÷Éã	°óÉã1	°óÉã2	Ç°Éã
CAMAN	50M CSI2	50M/8M CSI0	2M CSI1-2lan	50M AF 32M CSI1-5lan
¼æËÝÄãÖÅ	50M CSI2	50M/8M CSI0	Q	50M AF 32M CSI1-5lan


+¿ª¹Ø

COMPANY: TRANSSION HOLDINGS				MODEL: G100		Modified Date: 24/07/2024:14:42	
DRAWN		DATED		TITLE: 62_PERI_CAMERA_II		VERSION:	SHEET: 21 OF 25
CHECKED		DATED	< >	Confidentiality	CONFIDENTIAL		


PERI_SENSORS

AL& PS Sensor

STK35F62:I2C address: Write:0x90, Read:0x91
STK3335-X:I2C address: Write:0x8C, Read:0x8D

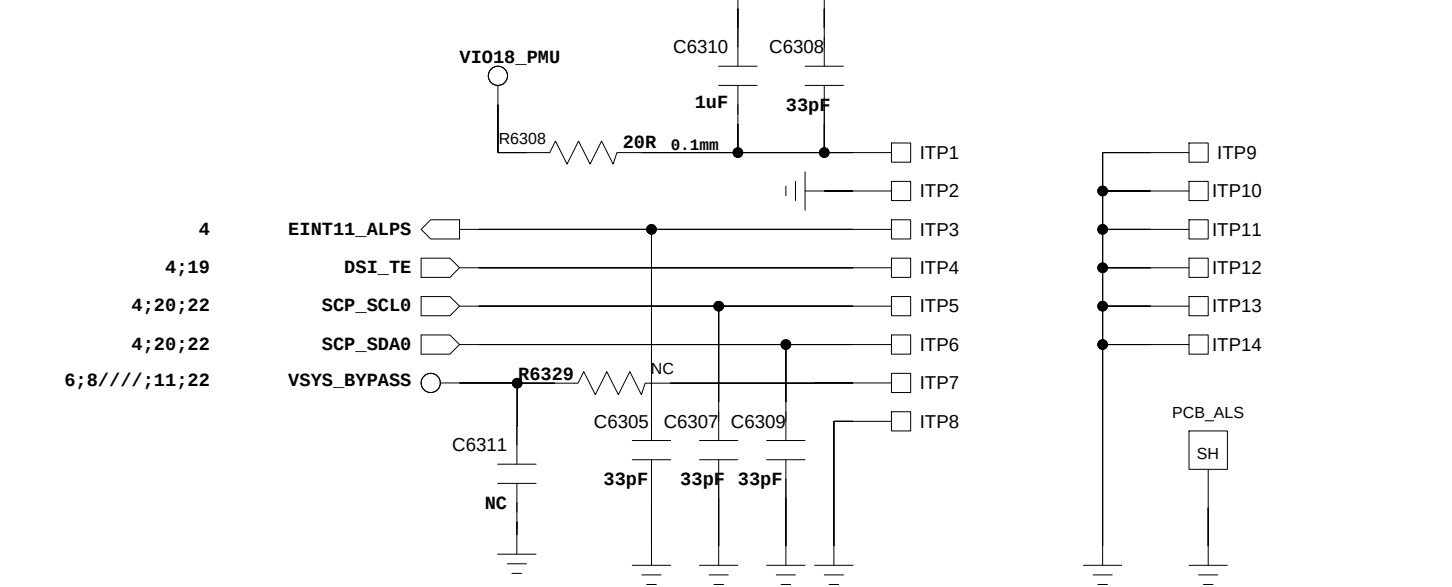


G-Sensor + Gyro Sensor

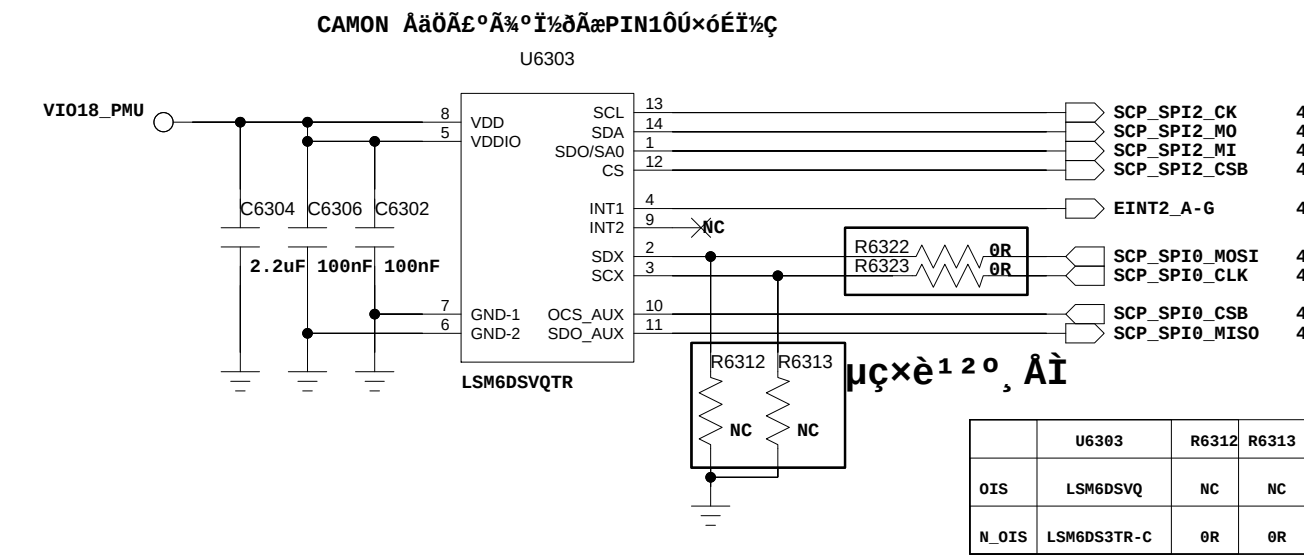


NTC

Thermistor to sense AP

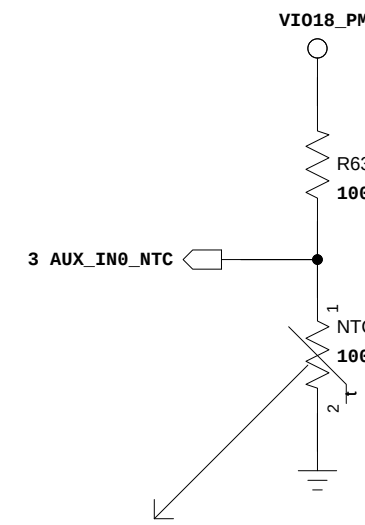

Thermistor to sense Charge

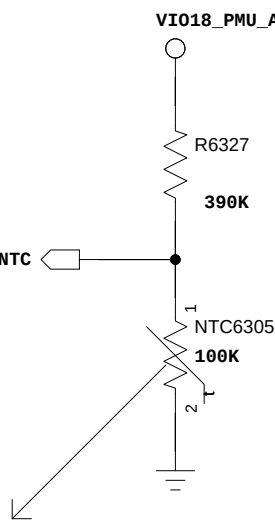


- 1. NTC6303 must keep a distance about 68 mm away from BB and far from other heat sources 10 mm at least.
- 2. The distance is the shortest distance from package edge to edge.

G-Sensor

MXC4005XC:ADDRESS:0x2A(Write)/0x2B(Read)


M-Sensor (COMPASS)

MMC5603:I2C ADDRESS:0x60(Write)/0x61(Read)
QMC6308:I2C ADDRESS:0x58(Write)/0x59(Read)

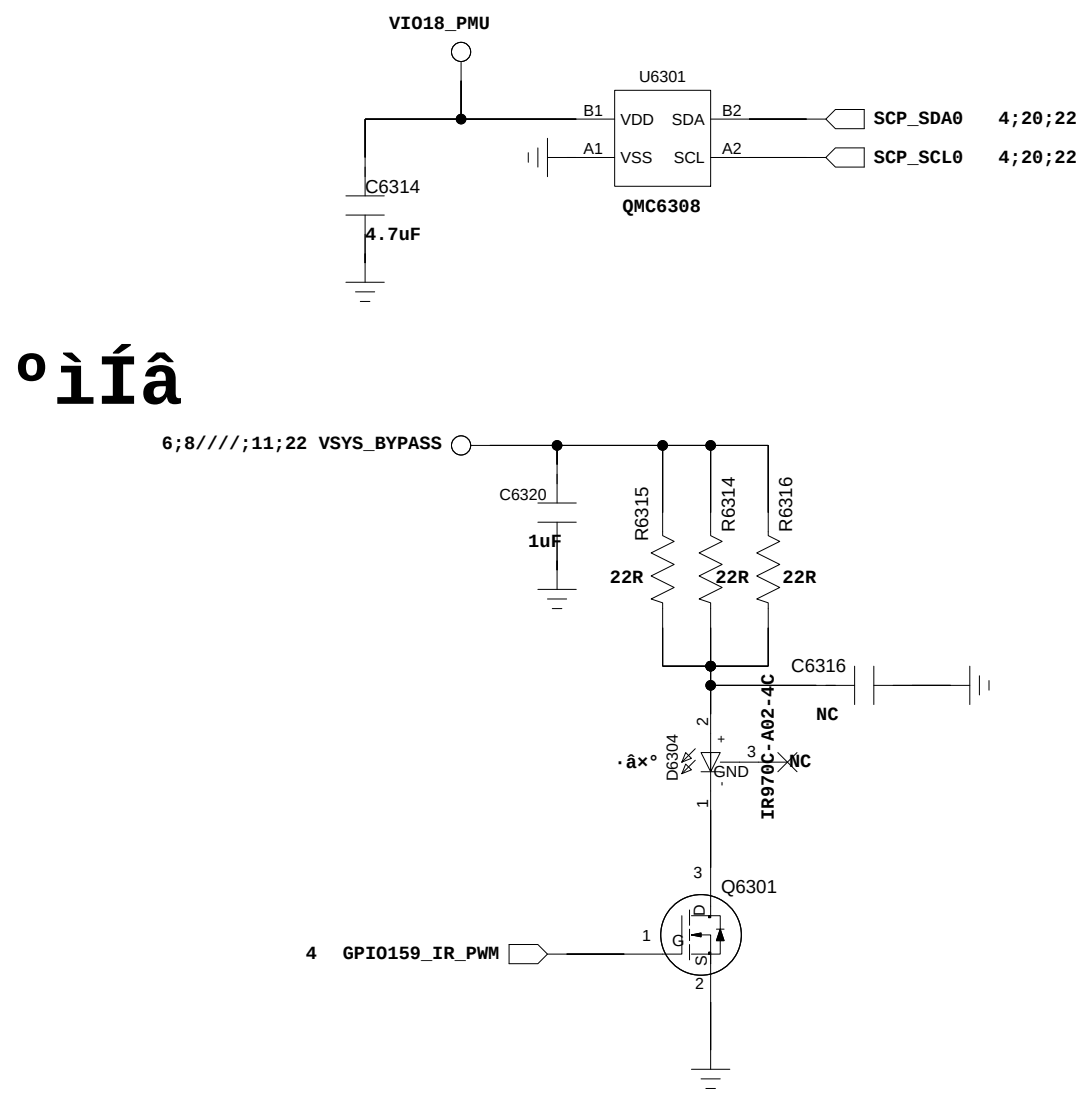

VIB Z Linear Motor Driver

AW86224FCR:I2C ADDRESS:0xB0(Write)/0xB1(Read)

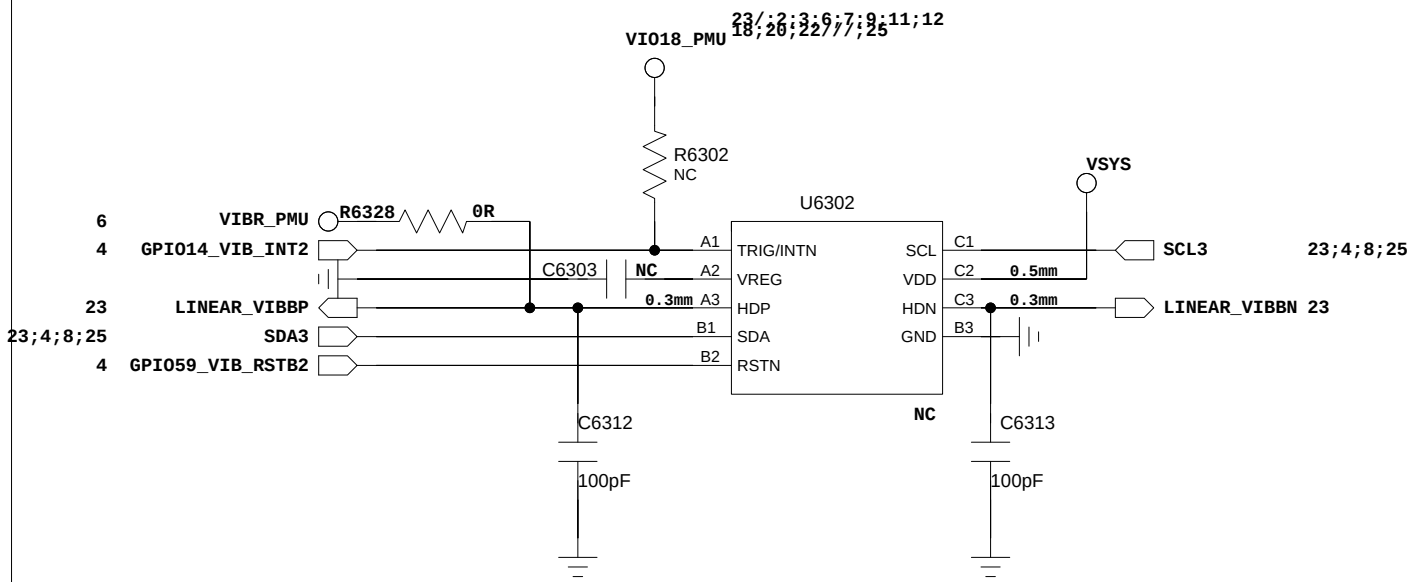

COMPANY: TRANSSION HOLDINGS

MODEL:G100

Modified Date: 28/10/2024:13:40

DRAWN

DATED

TITLE: 63_PERI_SENSORS

CHECKED

DATED

< >

Confidentiality

CONFIDENTIAL



VERSION:

SHEET: 22 OF 25

Exchange IO


ange IO£"SPK/MIC/TYPE C/VIB/SAR)

REVISION RECORD			
LTR	ECO NO:	APPROVED:	DATE:

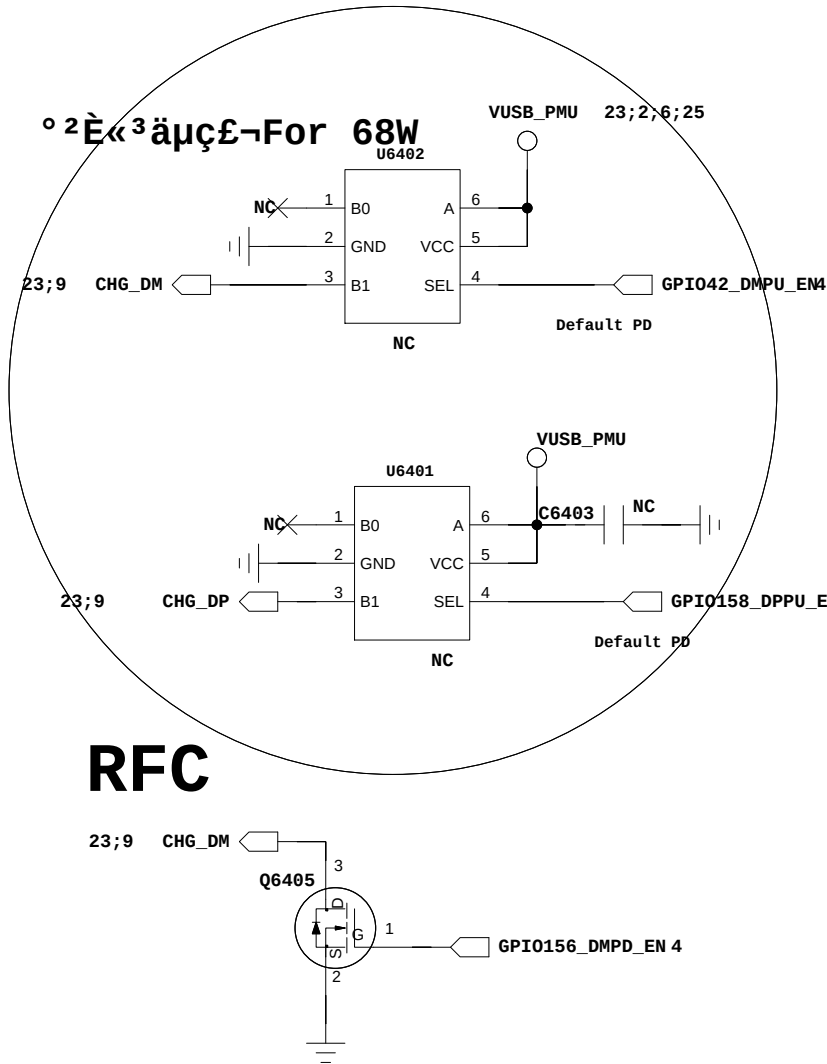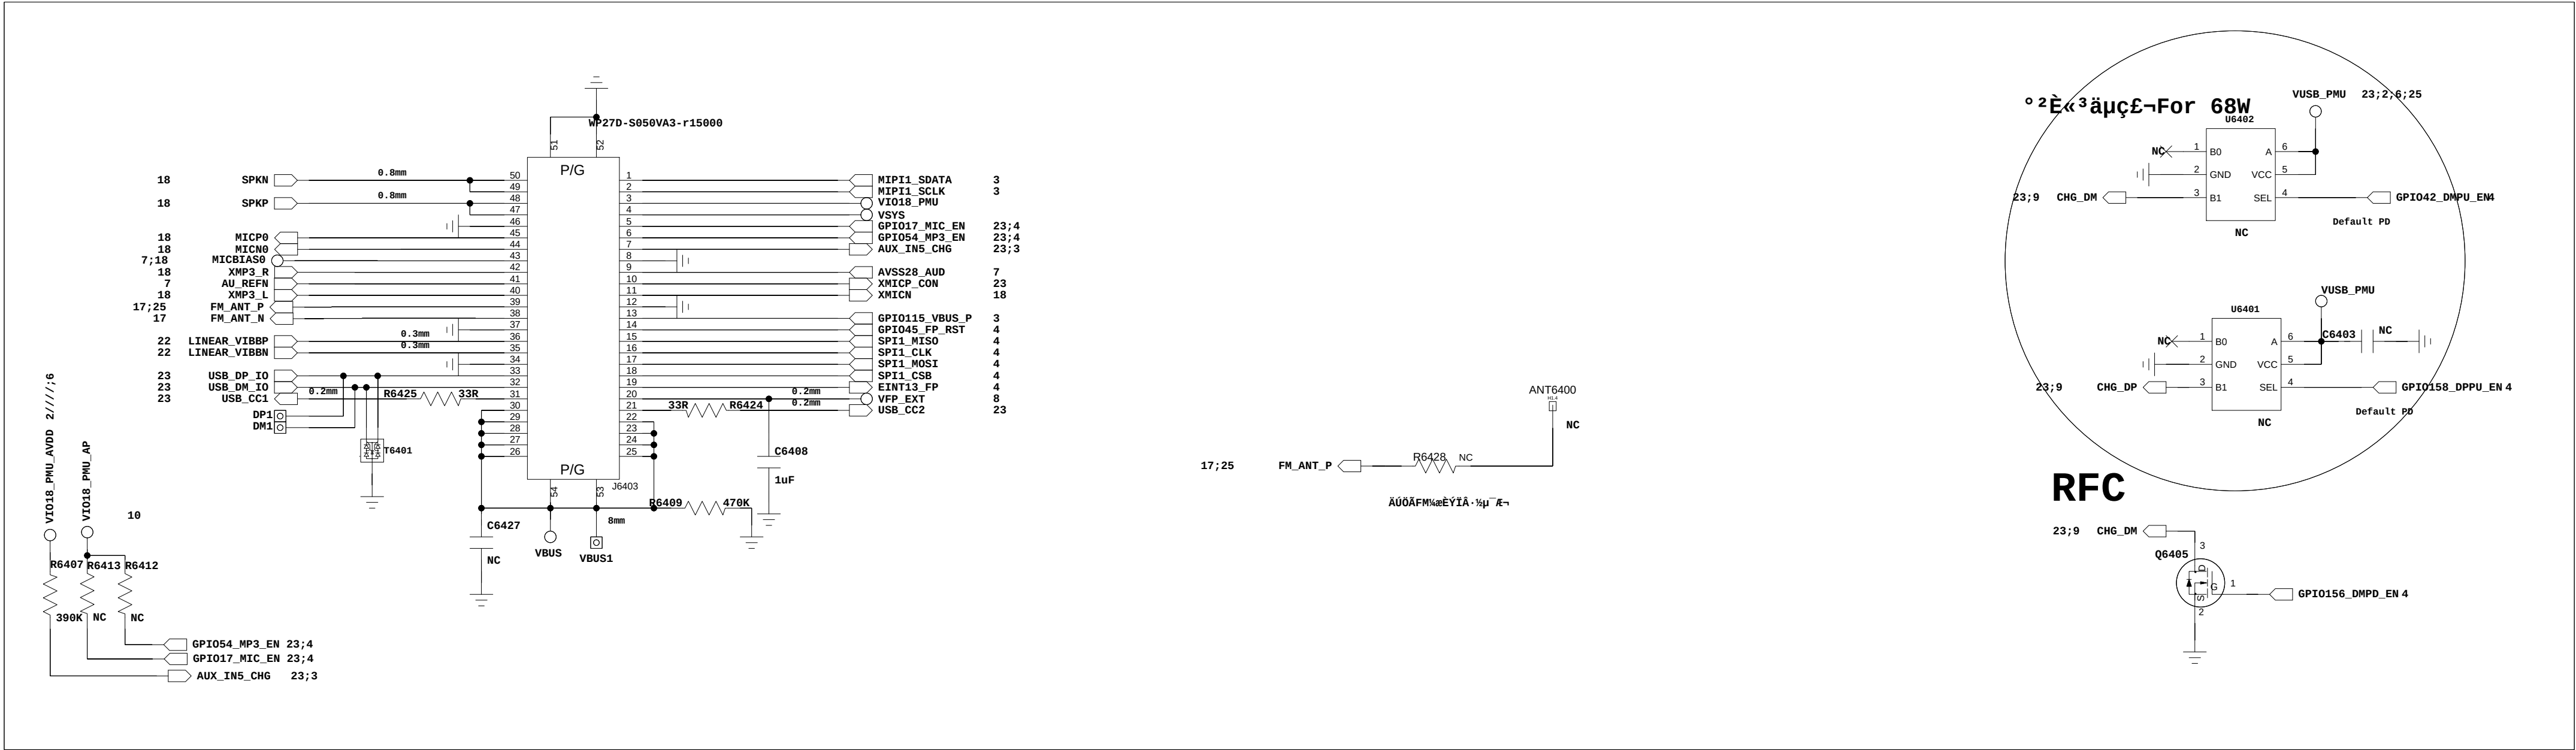


CC Logic


RT1715:I2C ADDRESS:0x9C(Write)/0x9D(Read)

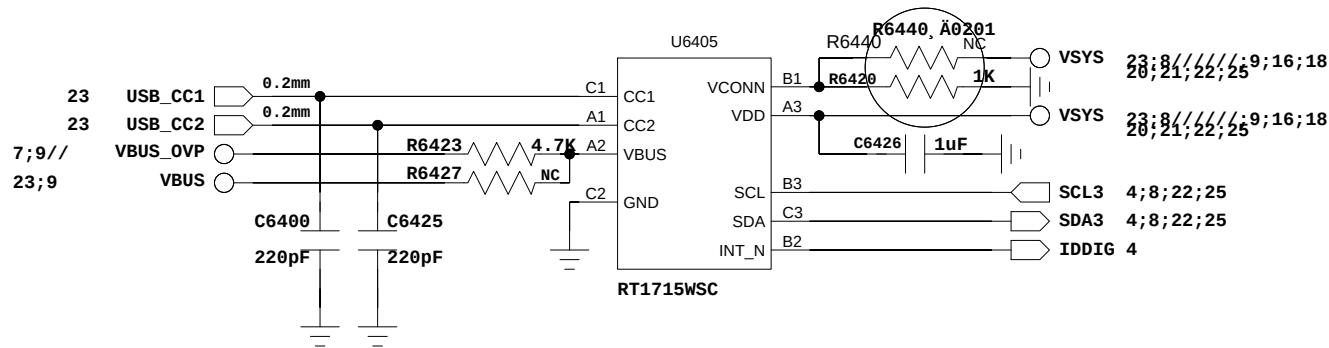

RUST

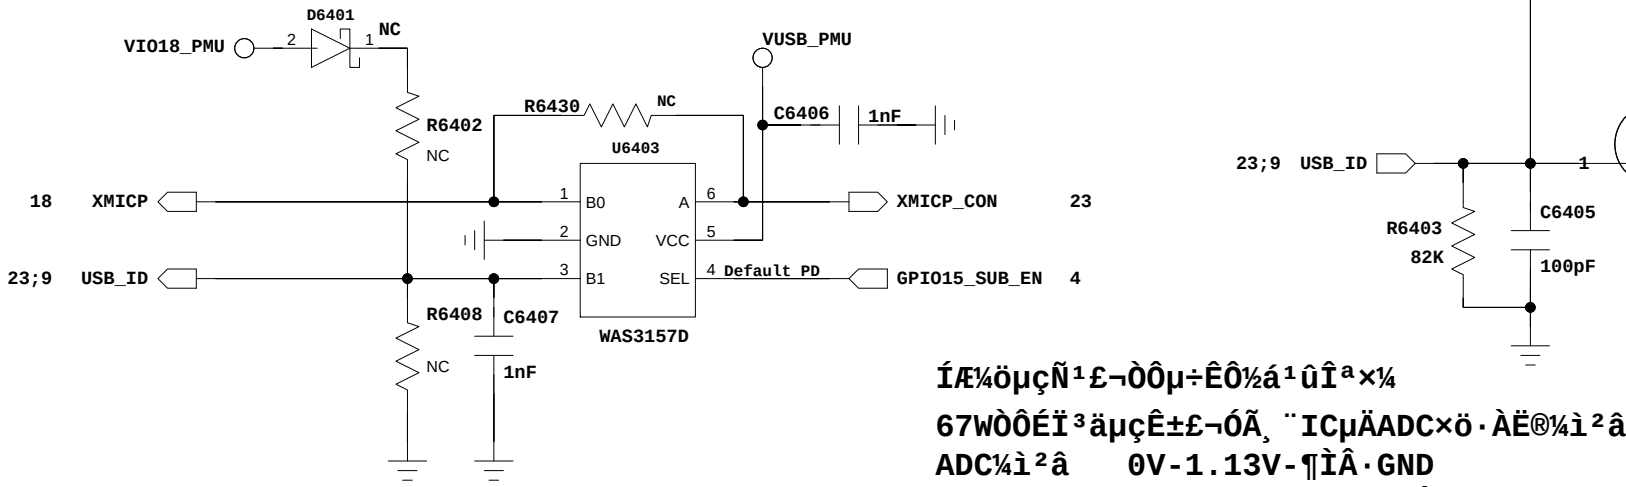

ADC%î²â 0V-1.13V-ηİÄ·GND
ADC%î²â 1.13V-1.43V -¿ªÄ·
ADC%î²â 1.43VððÊİ ηİÄ·VBUS

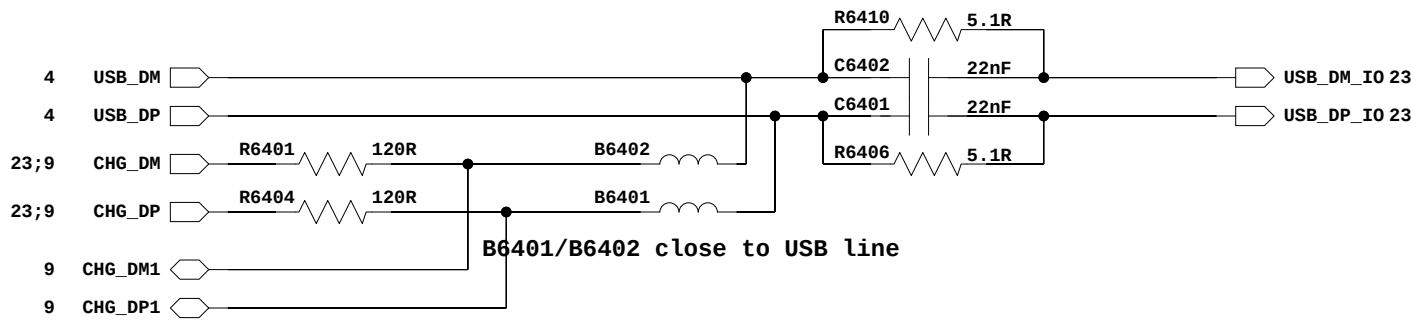

COMPANY: TRANSSION HOLDINGS

MODEL:G100

Modified Date: 28/10/2024:15:38

DRAWN

DATED

TITLE: 64_PERI_EXCH_IO

CHECKED

DATED

Confidentiality

CONFIDENTIAL

VERSION:

SHEET: 23 OF 25


REVISION RECORD			
LTR	ECO NO:	APPROVED:	DATE:

SIM1/2-SD-CARD

ON MAIN FPC PAGE 61

SIDEKEY

Place on the battery side

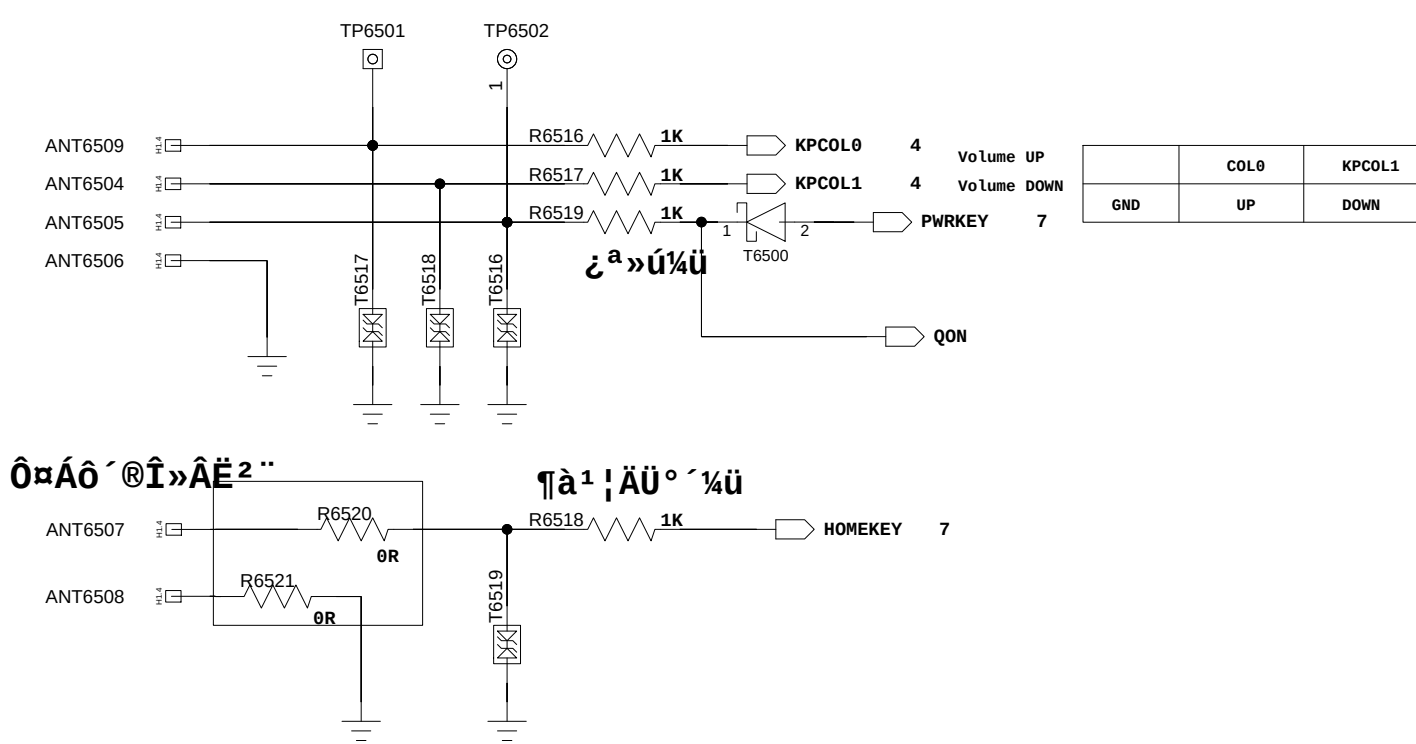

COMPANY: TRANSSION HOLDINGS				MODEL: G100		Modified Date: 17/09/2024:10:30	
DRAWN		DATED		TITLE: 65_SD_SIM_KEY		VERSION:	SHEET: 24 OF 25
CHECKED		DATED	< >	Confidentiality	CONFIDENTIAL		

