Features:
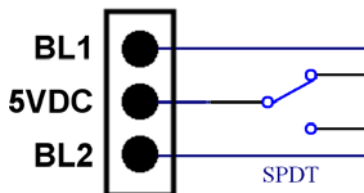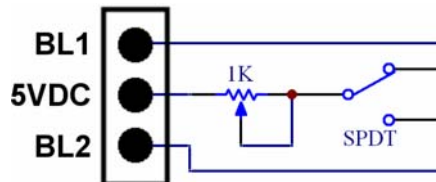
- Dual green and white backlighting.

- 5 green 7-segment displays.

- Black anodized aluminum bezel.

Connecting the Fuel Flow Display:

1. Set the ElectronFlux port to *Multiplexed* mode in Device Manager.

2. Connect the Fuel Flow display to the ElectronFlux port using a keyed 20 pin IDC cable.

3. Connect a backlight selector SPDT toggle switch to *JP4* on the Fuel Flow display as illustrated.

4. (Optional) Backlight intensity can be controlled through a 1K potentiometer as follows.

Visit www.betainnovations.ca for the availability of expansion modules and accessories.